

強制錐型滾筒

Taper Fixed Driven Roller




編號範例: TF 14T-2/P- RL250 S - 12/M8X20

① ② ③ ⑥ ⑦ ⑧

齒輪頭材質: P BC

軸心材質: Z S

14T-2(RS40鏈條) (亦可搭配其他齒輪、時規輪等等)

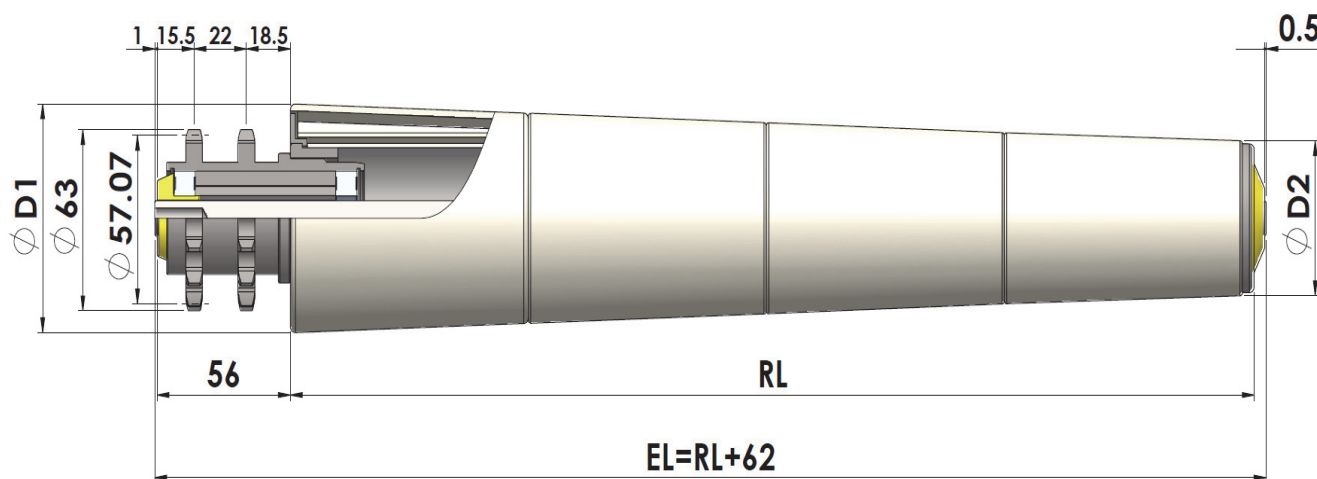

滾筒有效長 (RL)	外管管徑	外管	內管		軸心直徑(d)	
	D1 / D2	黑色 尼龍	鍍鋅	不鏽鋼	ø12	ø14
250	71.2 / 55.6	●	●	○	●	●
300	71.2 / 52.5	●	●	○	●	●
350	77.6 / 55.6	●	●	○	●	●
400	77.6 / 52.5	●	●	○	●	●
450	84.0 / 55.6	●	●	○	●	●
500	84.0 / 52.5	●	●	○	●	●
550	90.4 / 55.6	●	●	○	●	●
600	90.4 / 52.5	●	●	○	●	●
650	96.8 / 55.6	●	●	○	●	●
700	96.8 / 52.5	●	●	○	●	●
750	103.2 / 55.6	●	●	○	●	●
800	103.2 / 52.5	●	●	○	●	●
850	109.6 / 55.6	●	●	○	●	●
900	109.6 / 52.5	●	●	○	●	●

● : 標準品 ○ : 可訂製