
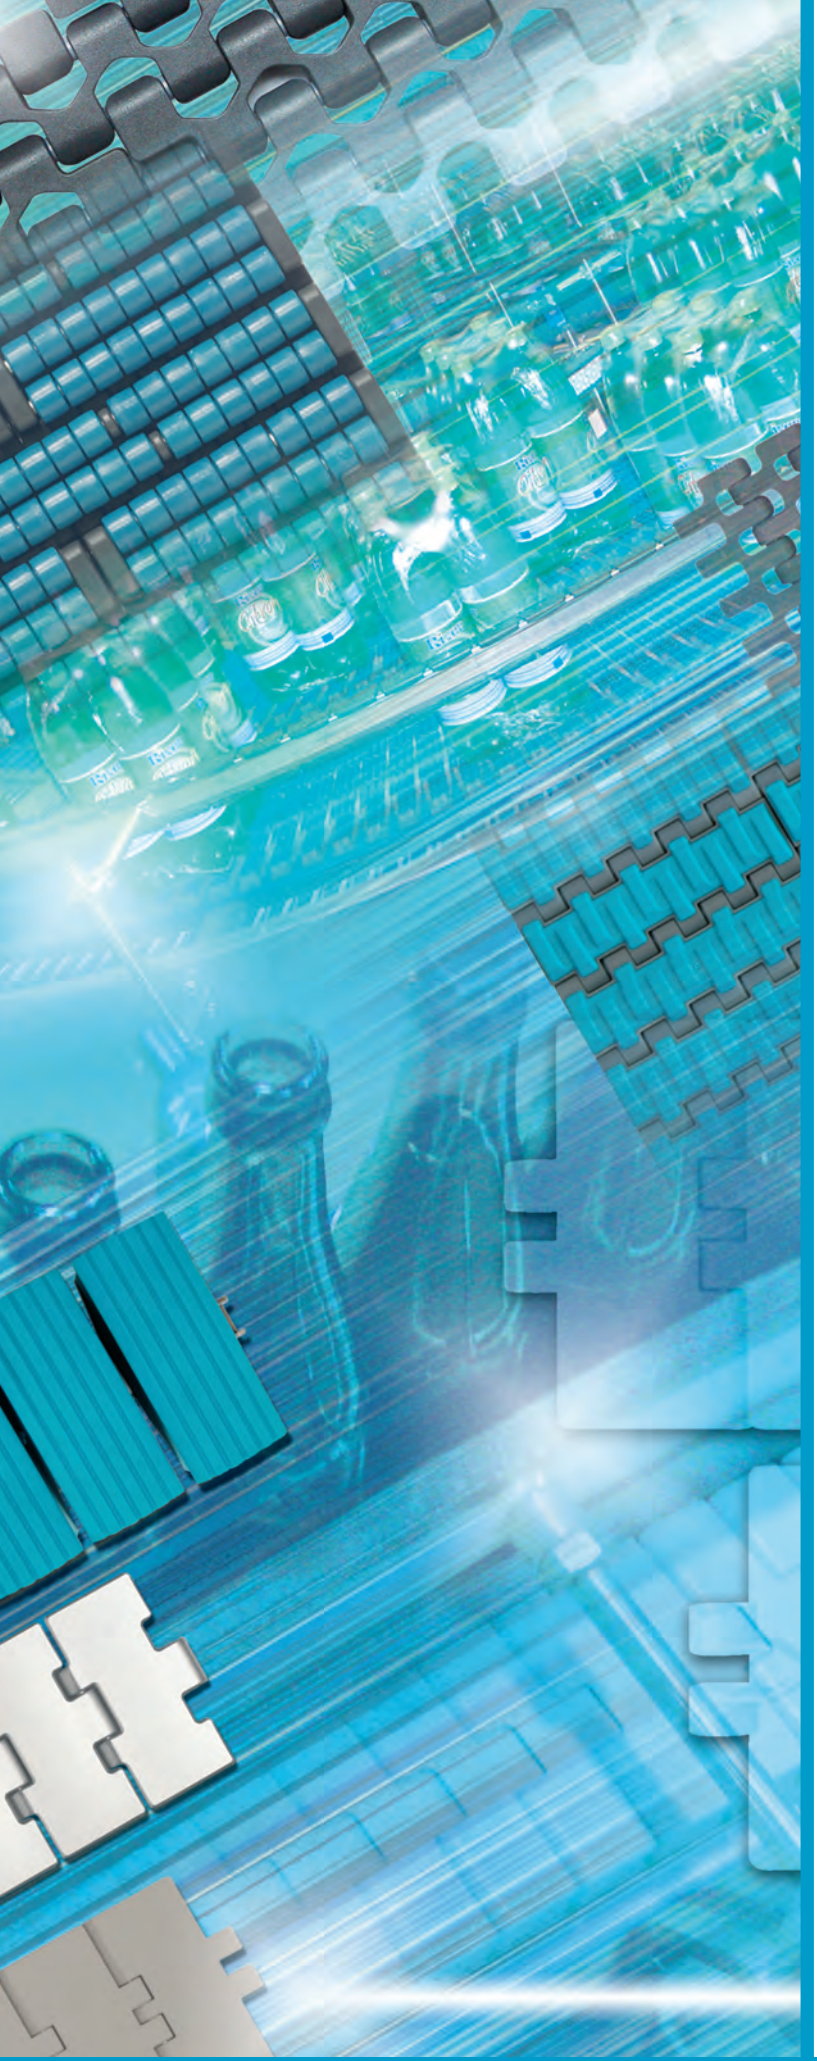


SYSTEM™ PLAST

Conveyor Chains & Belts

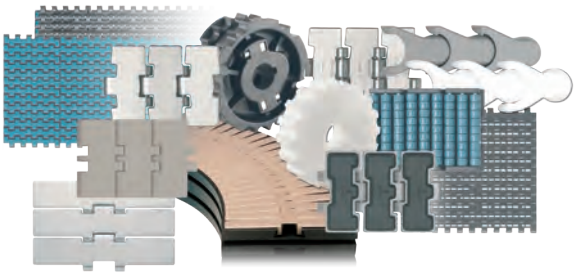

September 2012

EMERSON™
Industrial Automation

EMERSON. CONSIDER IT SOLVED.™

DESCRIPTION

Section	*Pages*
MATERIALS	4
PRODUCTION PROGRAM	9
CHAINS	15
BELTS	87
DUAL MAGNETIC CORNER TRACKS	196
SPROCKETS AND IDLER WHEELS	273
TURNING DISK	329
TECHNICAL INFORMATION	339
CHEMICAL RESISTANCE	342
CODE INDEX	345

USED SYMBOLS



INFO ABOUT MATERIALS USED



THIS PART IS USED FOR CHAINS ON PAGE...



CURVE MATERIAL



CORNER TRACKS



STRAIGHT TRACKS



NOSE BAR



SPROCKETS & IDLERS



SPROCKETS & IDLERS FOR SIZE...



SPROCKETS & IDLERS FOR SIZE...



TURNING DISK



CHEMICAL RESISTANCE



TECHNICAL INFORMATION

Quality and Service

When you are looking for a quality conveyor component, look at System Plast.

Your expectation, our standard.

Customers expect the best from System-Plast; we are committed to delivering nothing less. In every phase of our operation, from engineering, to production, to sales and assistance, System-Plast is committed to complying with the stringent standards of ISO 9001.

We put our Leadership on the line for you.
Our complete range of products combines stainless steel, carbon steel, aluminium and engineered plastics to achieve reliability, superior performance and a compact design.
As one of the world's leading suppliers of conveyor components, System Plast has a tradition of innovation that dates back to 1985 when we entered into this field.
System Plast Components have become the standard of design and performance to a wide range of industries, including conveyor manufacturing, material handling, power transmission, packaging and many more. In addition to manufacturing excellence, System Plast has earned a reputation for outstanding customer service, offering a full range of design, custom fabrication and support services.
We hope you will now take a moment to look through this comprehensive catalogue. Then, when you are ready to discuss your needs with the nearest System Plast representative, please consult the back cover of this catolog for further details about our sales network.
We are able and eager to assist you setting up a smooth running line.



The components you want, when and how you want them.

System Plast is ready and able to satisfy your needs with quick answers and delivery of standard or custom made products. Our customers around the world know that the shortest distance between a problem and its solution is to call us: innovations, research, engineering and production are always under a strict control to improve our service and products.

Call our engineering experts.

To order the products you have selected, or to get expert advice in choosing the right ones for your application, call System Plast's Application Engineering Department at (035) 83.51.301. We'll be happy to provide the information and advice you need. And we'll work to ensure prompt processing and delivery of your order.

 © System Plast S.r.l. , 2012 - All Rights Reserved



Via Guareschi, 2



Via San Giuseppe, 54

Application driven

Focus on application and improvements have been the driving force behind Research and Development at System Plast, the a leading global supplier of Conveyor Components.
The most important issues in the beverage and packaging industry are EFFICIENCY, NOISE REDUCTION, HYGIENE, TOTAL COST OF OWNERSHIP and LUBRICATION REDUCTION. The engineering team of System Plast has taken the issues as a challenge and developed a range of products around them, thus gaining the leading edge on the market by supporting the users in their corporate programs such as, Total Productive Maintenance.
System Plast is a solid partner for the beverage, food and packaging industry. Not only these state-of-the-art developments are important, but just as well that it has the largest available program of conveyor components, chains and belts.
The network of System Plast companies in Italy, Germany, France, UK, Netherlands, USA, Mexico, Brazil and China together with the worldwide network of exclusive distributors, services the clients - OEM's as well as end users, including the leading companies in the industry. The people in the field are trained with know-why and know-how and are strongly supported by the engineering team.

Largest range

System Plast delivers the largest range of chains, modular belts, components, bearings, feet.
Conveyor Line: massive, versatile range of conveyor parts like supports, clamps, brackets, guides in plastic and stainless steel; easy combinations for many applications.
Bearing Line: flange bearings in many types and shapes. Completely closed types available for wet environments. Long life versions for ease of maintenance.
Presso Line: the largest range of support feet available. The right choice for any application; from food processing to electrical cabinets.
Modular Plastic Belts: robust design for easy installation and maintenance. Not only the standard range, but special types for difficult products as well. Special materials for dry running, long life and low noise.
SlatBand Chains: chain is the main factor for efficiency of conveyors. System Plast has a wide range of high quality chains in plastic and stainless steel. Special materials for exceptional applications.

Steel chain materials

C45

Carbon Steel

This carbon steel material allows a higher yield load capability than stainless steel but is not corrosion resistant, so only suitable for dry environments.
The through hardened plate material provides for a uniform hardness.

Features: • Surface hardness: 44 HRC

Benefits: • High mechanical strength
• High abrasion resistance

STANDARD

Standard Stainless steel

AISI 430 Stainless steel material with good mechanical characteristics and corrosion resistance. An economical option for many conveying applications. Lower load and lower wear resistance capability than our higher grade stainless steel materials.

Features: • Standard stainless steel

Benefits: • Economic solution

EXTRA PLUS

Extra Plus Stainless Steel

High performance stainless steel, specially developed for high speed and heavy duty application. Offers excellent corrosion resistance and highest surface hardness.

Features: • Surface hardness of HRC 26-30
• Extremely flat and best surface finish
• High corrosion and wear resistance
• Highest ultimate yield loading capability

Benefits: • Typically used in glide liners and pressureless combiners and very long conveyors.
• For improved product stability

AUSTENITIC

Austenitic Stainless steel

AISI 304 Austenitic stainless steel which offers high corrosion and acid resistance properties.

Features: • Stainless steel with 18% chrome and 8% nickel

Benefits: • High corrosion and acid resistance material

Pin materials for steel & plastic chains

SPM

Standard PIN Material

Special Austenitic stainless steel with higher tensile strength and improved surface hardness. These pins are offered as standard in most stainless steel and plastic chains.

Features: • High wear, corrosion and acid resistance

Benefits: • Longer wear life

HB

Special PIN Material

Vacuum hardened stainless steel with exceptionally high wear resistance characteristics, good corrosion and chemical resistance, for high speed and or abrasive applications.

Benefits: • Ultimate abrasion resistance
• Outstanding wear life

PPM

Plastic PIN Material

Special reinforced acetal resin.

Benefits: • Suitable for metal detectors
• Easy disposal of chains after use

 © System Plast S.r.l. , 2012 - All Rights Reserved

Plastic chain materials

Several of our standard materials comply with food regulations 1282/2011 EC and FDA 21CFR 170.39.
Feel free to contact our Customer Service for a declaration.

D
W

Acetal Resin

It is an acetal based material which is used as an economical alternative to our LF acetal material. Acetal is an ideal material for conveyor chains as it offers high tensile + fatigue strengths, good co-efficient of friction and excellent wear resistance properties.
Colour: Grey (D) or White (W)

LF
LFG
LFW

Low Friction Acetal Resin

This material is commonly used in the market and offers an improved co-efficient of friction. It is also suitable for use in high speed applications.
Colour: Light Brown (LF), Dark Grey (LFG) or White (LFW)

NG
NGG
NGD

New Generation

Extra performance PBT with lowest coefficient of friction in our range, resulting in good strength and optimum wear resistance, reduced plate wear and reduced pitch elongation. Suitable for high speed and dry running applications. Available exclusively from System Plast.
Colour: Green (NG) - Light Grey (NGG) - Dark Grey (NGD)

Special plastic chain materials

On request and for adequate quantities chains may be produced in other materials such as:

XPG

Extra Performance

Extra performance Acetal with additives for an even lower co-efficient of friction than LF materials. Suitable for high speed applications and reduced lubrication.
Colour: Dark Brown (XPG)

AS

Anti-static acetal resin

Anti-static material with improved surface conductivity for greater protection against static electrical discharges. **Colour:** Black (AS)

HT

High temperature resistance

High temperature material for applications up to 140°C. **Colour:** Natural color.

CR

Chemical resistance

Reinforced polypropylene material for greater acid and chemical resistance. Polypropylene has lower mechanical strength than acetal.
Colour: White (CR, for chains)

AR

Abrasion resistance

Special wear resistant polyamide resin with improved abrasion resistance characteristics for conveying abrasive products like glass, cast iron.
Colour: Black (AR)

DK

Acetal resin with Delrin® Kevlar®

This material offers reduced friction and improved wear resistance compared to standard acetal. **Colour:** Dark grey (DK)

Delrin® and Kevlar® are registered trade marks of DuPont™

Plastic belt materials

Several of our standard materials comply with food regulations 1282/2011 EC and FDA 21CFR 170.39.
Feel free to contact our Customer Service for a declaration.

LFG
LFB
LFW

Low Friction Acetal Resin

This material is commonly used in the market and offers an improved co-efficient of friction.
It is also suitable for use in high speed applications.
Colour: Dark grey (LFG), Blue (LFB) or White (LFW).

NGG

New Generation

Extra performance PBT with lowest coefficient of friction in our range, resulting in good strength and optimum wear resistance, reduced plate wear and reduced pitch elongation. Suitable for high speed and dry running applications. Available exclusively from System Plast.
Colour: Light Grey (NGG)

Special plastic belt materials

On request and for adequate quantities belts may be produced in other materials such as:

AS/POM-AS

Anti-static acetal resin

Anti-static material with improved surface conductivity for greater protection against static electrical discharges. **Colour:** Black (AS)

XPG

Extra Performance

Extra performance additivated Acetal with a lower co-efficient of friction than LF materials. Suitable for high speed applications and reduced lubrication. **Colour:** Dark Brown (XPG)

PP
PPW
PPG
PPLG

Chemical resistance

Polypropylene material for greater and chemical and temperature resistance. Polypropylene has lower mechanical strength than acetal. For belts (PP) the pins and clips are also made of Polypropylene. **Colour:** Beige (PP), White (PPW), Dark Grey (PPG), Light Grey (PPLG).

DK

Acetal resin with Delrin® Kevlar®

This material offers reduced friction and improved wear resistance compared to standard acetal. **Colour:** Dark Grey (DK)

Delrin® and Kevlar® are registered trade marks of DuPont™

HT

High temperature resistance

High temperature material for applications up to 140°C.

POM-EC

Electrically conductive acetal resin

Due to the very low surface resistivity, this material can be considered electrically conductive.
Colour: Black.

PP-FR-EC

Flame Retardant, Electrically Conductive Polypropylene

Flammability according to UL94 is classified as V0. Due to the very low surface resistivity, this material can be considered electrically conductive. **Colour:** Black

Special colours

On request and for adequate quantities chains and belts may be produced in other colours.

 © System Plast S.r.l. , 2012 - All Rights Reserved

Pin materials for belts

PBT

PBT

Most commonly used pin material in System Plast belts. It is used in all belts made of LFG, XPG, AS and DK acetal material. The combination of these materials offers a low noise operation.

POM

POM

Polyacetal pins are used in all belts made of NGG material. This pin material gives optimum strength.

PP

PP

Polypropylene pins are used in all belts made of PP material. The pin material is adapted to the high temperature and high chemical resistance of the belt material.

Rubber materials

TPR

TPR

TPR is used for VG chains and belts and for some gripper chains. TPR is a SEBS type rubber, which provides an optimum bonding on the plastic base material.

NBR

NBR

NBR rubber is used for our gripper chains.
It offers a soft grip and a good resistance against oils.

EPDM

EPDM

EPDM rubber is used for our gripper chains.
It offers good weather and chemical resistance, although contact with oils, gasoline and concentrated acids must be avoided.

EPDM-PP

EPDM-PP

EPDM-PP rubber is used for our gripper chains.
It offers improved chemical resistance and can be used at higher temperatures.
Resistance against steam is good.

 © System Plast S.r.l. , 2012 - All Rights Reserved

STEEL CHAINS

STRAIGHT


Flat top


Page 16

812 - 815

Page 17

SPEED LINE 812L - 815L

Page 18

800 - 802 - 805

Page 18

8157

Page 19

515

Rubber top

Page 26


815 VG


Page 26


815 VG MINI

Page 27

815 TAB VG

Page 27

805 VG

Page 28

8157 VG

Page 28

8157 TAB VG

SIDEFLEXING

Flat top

Page 20

881

Page 20

881O

Page 21

881 TAB

Page 21

881O TAB

Page 22

881 M - 881 MO

Page 23

SPEED LINE L 881 MO

Page 23

8857 M


Page 24

8857 TAB

Plate top
(base rollers chain)

Page 24

1874


Rubber top

Page 29

881 VG

Page 29

881 TAB VG

Page 30

8857 M VG

Page 30

881 MO VG

Gripper

Page 66

1874 GV

CHAINS & BELTS PRODUCTION PROGRAM

PLASTIC CHAINS

STRAIGHT

Flat top

Page 32

820 - 820 J

Page 33


828

Page 33

831

Page 34

SK 38

Page 34

821


Page 35

8257

Plate top (base roller chain)

Page 68

843


Page 69

845

Page 70


863

Rubber top


Page 54

821 VG


Page 54

831 VG

Page 55

8257 VG

LBP

Page 46

LBP 821

Page 47

LBP 8257

Page 48

LBP 831

SIDEFLEXING

Flat top

Page 36

879 - 880

Page 37

879 J - 880 J

Page 38


879 TAB - 880 TAB

Page 39

879 M - 880 M

Page 40

878 TAB

Page 41

882 BEVEL

Page 42

882 TAB


Page 43

882 M

Plate top (base roller chain)

Page 71

1843

Page 71

1863

Page 72

1873

Page 73

1883

 © System Plast S.r.l. , 2012 - All Rights Reserved

PLASTIC CHAINS

SIDEFLEXING

Rubber top

Page 56

878 TAB VG

Page 56


879 TAB VG


Page 57

879 M VG

Page 57

882 TAB VG

Page 58

882 M VG

Page 59

1873 VG

LBP

Page 49


LBP 878 TAB

Page 49

LBP 879 M

Page 50 - 51

LBP 882 TAB

Page 52

LBP 882 M

Gripper

Page 62 - 63

878 TAB GS

Page 64 - 65

1873 GS

Multiflex

Page 76

1700-1702

Page 76

HMGK 50 FN
HMGK 50

Page 77

HMGK 50 MS

Page 77


HMGK 50 P

Page 77

1701 TAB
1701 TAB OP

Page 78

1701 TAB OP M
1702 M

Page 79

HMGK 50 TAB P

Page 80

HMGK 50 H

Page 80

HMGK 50 TAB H

Multiflex

Page 81

7000 - 7000 TAB

Page 81

7001 - 7001 TAB


Page 82

7005 - 7005 TAB

Page 79

1706 NEW

Crate conveyor

Page 83

CC 600 - CC 600 TAB

Page 83

CC 600 P

Page 83

CC 600 TAB P

Page 84

CC 600 F
CC 631 TAB

Page 84

CC 1400 V

Page 84

CC 1400 V TAB

Page 85

CC 1400

Page 85

CC 1400 TAB

Page 85

CC 1431 TAB

CHAINS & BELTS PRODUCTION PROGRAM

STRAIGHT RUNNING BELTS - 8.7 mm thick

½ INCH PITCH

Metric widths


Flat top

Page 90




One track belts series 2120

Page 92 - 96



Modular belts series 2120


Page 91 + 98 - 99



Belts with transfer wing series 2120


Flush grid

Page 92 - 96



Modular belts series 2120


Page 97



Modular belts series 2122


Grip belt

Page 89




One track belts series 2120

Page 100 - 102



Modular belts series 2120


Page 103 - 105



Side indent series 2120

LBP belt

Page 106 - 108



Modular belts series 2120

with Guide bar

Page 109




Belts with guide bar series 2120

Imperial w.

Flat top

Page 110




Imperial widths series 2121

¾ INCH PITCH

Imperial w.

Flat top

Page 114



One track belts series 2190

Page 115



Modular belts series 2190

 © System Plast S.r.l. , 2012 - All Rights Reserved


STRAIGHT RUNNING BELTS - 8.7 mm thick

¾ INCH PITCH

Imperial w.

Flush grid

Page 116



One track belts series 2190

Page 117




Modular belts series 2190

1 INCH PITCH

Metric widths

Flat top

Page 120



One track belts series 2250

Page 122 - 126



Modular belts series 2250

Page 121 + 127 - 128



Belts with transfer wing series 2250

Flush grid

Page 129



One track belts series 2250

Page 131 - 135



Modular belts series 2250


Page 130



Belts with transfer wing series 2250


Grip belt

Page 138 - 140



Modular belts series 2250

Page 141 - 143



Belts with side indent series 2250

LBP belt

Imperial widths

Flat top

Page 148



Modular belts series 2253

Perforated top

Roller top

Page 146-147




NEW

Modular belts series 2253RT

HEAVY DUTY 12.7 mm thick - 1 inch pitch

Page 150




One track belts series 2251

Page 152 - 156




Modular belts series 2251

Page 151




Belts with transfer wing series 2251

Page 163 - 165



Modular belts series 2251

Page 166 - 168




Belts with side indent series 2251

Page 169 - 171



Modular belts series 2251

Page 160



One track belts series 2252

Page 161



Modular belts series 2252

Page 162



Modular belts series 2252

CHAINS & BELTS PRODUCTION PROGRAM

STRAIGHT BELTS

2 INCH PITCH

Imperial width

Page 174 - 175



RR2500

Page 176



NEW

2508 Heavy duty

2 ½ INCH PITCH

Metric width

Page 177



NEW

2630 Extra Heavy duty


SIDEFLEXING BELTS

½ INCH PITCH

Metric width

Flat top

Page 183



Magnetic system 2120 M

2 INCH PITCH


Metric width

1 INCH PITCH

Imperial w.

Flush grid

Page 186 - 187



Modular belts series Standard 2256

Page 188 - 189



NEW

Modular belts series 2256VG

2 ½ INCH PITCH

Metric width


SIDEFLEXING BELTS

1 ¼ INCH PITCH

Metric width


Flush grid

Page 190 + 195



Modular belts series Standard 2351

Page 191 + 195



Modular belts series Heavy Duty Standard 2451

Page 192 + 195




Modular belts series Small Radius 2551

Page 193 + 195



Modular belts series Heavy Duty Small Radius 2651

Page 194 + 195



NEW

Modular belts series 2351VG

SIDEFLEXING CHAINBELTS

1 INCH PITCH

Metric width

Flat top

Page 180



series 2250 M FT 8.7 mm thick

Page 181



series 2260 M FT 8.7 mm thick

Page 181



series 2250 TAB FT 8.7 mm thick

Page 182



series 2251 M FT 12.7 mm thick

Page 182



series 2251 TAB FT 12.7 mm thick

1 INCH PITCH

Metric width

Flush grid

Page 180



series 2250 M FG

 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING STEEL CHAINS

Series	*Pages*
812/815 - 812L/815L	
800/802/805 - 8157 - 515	**16 → 19**


SIDEFLEXING STEEL CHAINS


Series	*Pages*
881 - 881O - 881 TAB - 881O TAB	
881M - 881 MO - L881 MO - 8857M	
8857 TAB - 1874	**20 → 24**

ALL OUR STEEL CHAINS OFFER:

- ***HIGH WORKING LOAD***
- ***HIGH WEAR RESISTANCE***
- ***EXCELLENT SURFACE FINISH***
- ***OPTIMUM PERFORMANCE***
- ***CONSISTENT HIGH QUALITY***



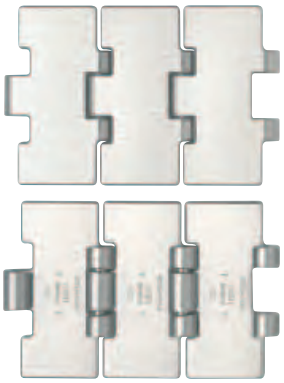

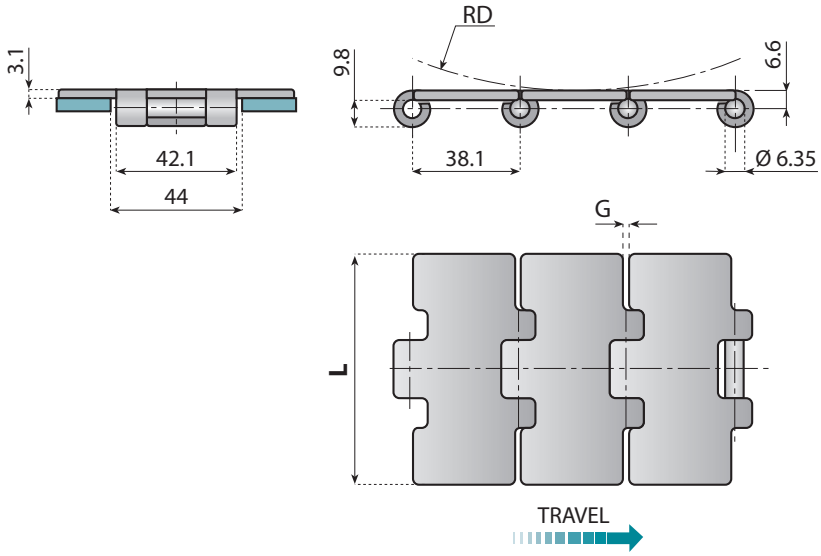

Advantages:
- Complete program to cover all applications
- All materials
- All sizes

MATERIAL Pages 4⇨7
Pages 274⇨278
Pages 340⇨343


Chain - Ref.	Code	Material	Max. working load	Finish µm	Flatness (max) mm	Polished hinges	Width L		G mm	RD mm	Weight Kg/m
							mm	inch			
S 815 K300	**10301**	**C 45**	12.000	-	-	no	76.2	3	1.8	150	2.5
S 815 K325	**10302**						82.5	3 ¼			2.6
S 815 K350	**10303**						88.9	3 ½			2.7
S 815 K400	**10304**						101.6	4			3.0
S 815 K450	**10305**						114.3	4 ½			3.3
S 815 K600	**10306**						152.4	6			4.2
S 815 K750	**10307**						190.5	7 ½			5.1
SS 812 K325	**10001**	**STANDARD**	5.400	0.6	0.15	no	82.5	3 ¼	1.8	150	2.6
SSR 812 K325	**10007**						82.5	3 ¼	2.8	75	2.5
SS 812 K330	**10034**						83.8	3 19/64	1.8	150	2.6
SS 812 K350	**10002**						88.9	3 ½			2.7
SS 812 K400	**10003**				0.2		101.6	4			3.0
SS 812 K450	**10004**						114.3	4 ½			3.3
SS 812 K600	**10005**				0.3		152.4	6			4.2
SS 812 K750	**10006**						190.5	7 ½			5.1
SSE 815 K300	**10033**	**EXTRA PLUS**	6.000	0.3	0.15	no	76.2	3	1.8	150	2.5
SSE 815 K325	**10009**						82.5	3 ¼			2.6
SSE 815 K330	**10032**						83.8	3 19/64			2.6
SSE 815 K350	**10010**						88.9	3 ½			2.7
SSE 815 K400	**10011**				0.2		101.6	4			3.0
SSE 815 K450	**10012**						114.3	4 ½			3.3
SSE 815 K600	**10013**				0.3		152.4	6			4.2
SSE 815 K750	**10014**						190.5	7 ½			5.1
SSE 815 K325 HB	**10036**	**EXTRA PLUS HB**	6.000	0.3	0.15	no	82.5	3 ¼	1.8	150	2.5
SSE 815 K330 HB	**10037**						83.8	3 19/64			2.6
SSA 815 K325	**10016**	**AUSTENITIC**	5.300	0.3	0.15	no	82.5	3 ¼	1.8	150	2.6
SSA 815 K330	**10035**						83.8	3 19/64			2.6
SSA 815 K350	**10017**						88.9	3 ½			2.7
SSA 815 K400	**10018**				0.2		101.6	4			3.0
SSA 815 K450	**10019**						114.3	4 ½			3.3
SSA 815 K600	**10020**				0.2		152.4	6			4.2
SSA 815 K750	**10021**						190.5	7 ½			5.1

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved



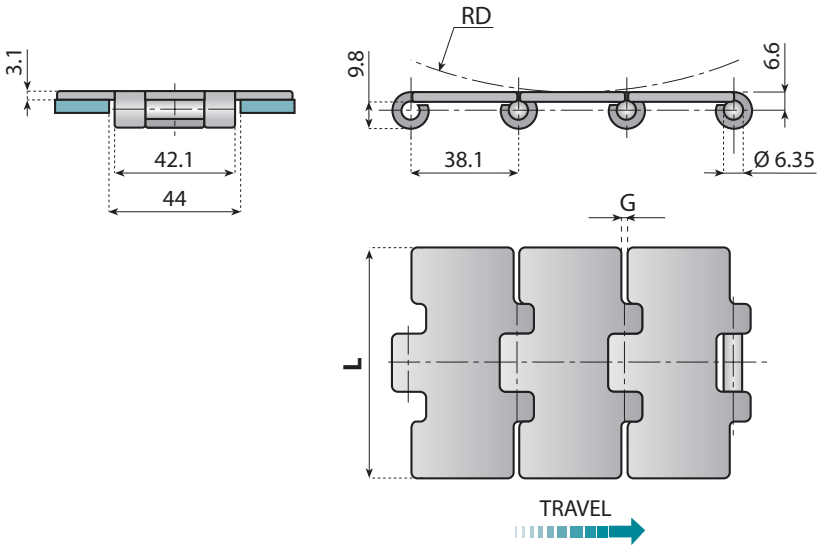

Advantages:
- The best choice for the most demanding applications, like pressureless combiners and high speed applications
- Improved flatness
- Optimum product stability

MATERIAL Pages 4⇨7 Pages 274⇨278 Pages 340⇨343

812L - 815L STRAIGHT RUNNING CHAINS SINGLE HINGE

Chain - Ref.	Code	Material	Max. working load	Finish µm	Flatness (max) mm	Polished hinges	Width L		G mm	RD mm	Weight Kg/m
							mm	inch			
SSL 812 K325	**10001L**	**STANDARD**	5.400	0.6	0.1	no	82.5	3 ¼	1.5	150	2.55
SSEL 815 K325	**10009L**	**EXTRA PLUS**	6.000	0.3							
SSEL 815 K325 HB	**10036L**	**EXTRA PLUS HB**									


815L SPEED - LINE STRAIGHT RUNNING CHAINS SINGLE HINGE


Chain - Ref.	Code	Material	Max. working load	Finish µm	Flatness (max) mm	Polished hinges	Width L		G mm	RD mm	Weight Kg/m
							mm	inch			
SPSL 815 K325	**10085L**	**EXTRA PLUS**	6.000	0.2	0.1	yes	82.5	3 ¼	1.5	150	2.55
SPSL 815 K330	**10086L**						83.8	3 19/64			2.60
SPSL 815 K325 HB	**10095L**	**EXTRA PLUS HB**		0.2			82.5	3 ¼			2.55
SPSL 815 K330 HB	**10096L**						83.8	3 19/64			2.60

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

800 - 802 - 805 STRAIGHT RUNNING CHAINS DOUBLE HINGE

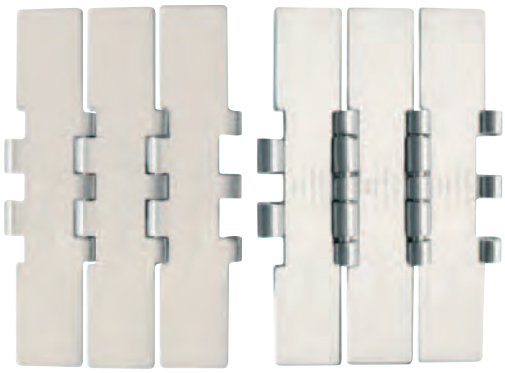

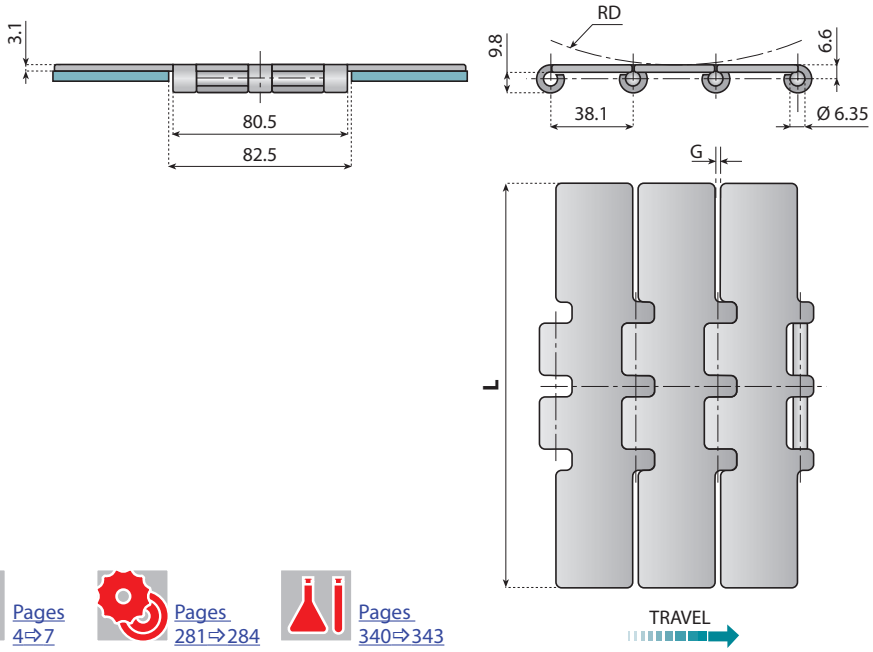



Advantages:
- Very high strength.
- For heavy duty applications.

MATERIAL Pages 4⇨7
Pages 281⇨284
Pages 340⇨343

Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		G	RD	Weight
					mm	inch	mm	mm	Kg/m
S 800 K750	**10050**	**C45**	28.000	not applicable	190.5	7 ½	1.8	150	5.8
SR 800 K750	**10060**						2.8	75	5.7
SS 802 K750	**10051**	**STANDARD**	10.300	0.6			1.8	150	5.8
SSR 802 K750	**10061**						2.8	75	5.7
SSE 805 K750	**10052**	**EXTRA PLUS**	15.000	0.3			1.8	150	5.8
SSER 805 K750	**10062**						2.8	75	5.7
SSE 805 K750 HB	**10055**	**HB**	15.000	0.3			1.8	150	5.8
SSA 805 K750	**10053**	**AUSTENITIC**	9.600	0.3			1.8	150	5.8

8157 STRAIGHT RUNNING CHAINS HEAVY DUTY SINGLE HINGE

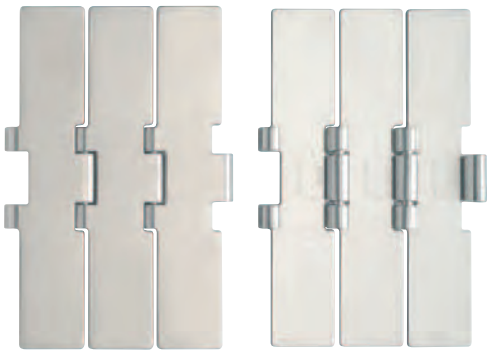

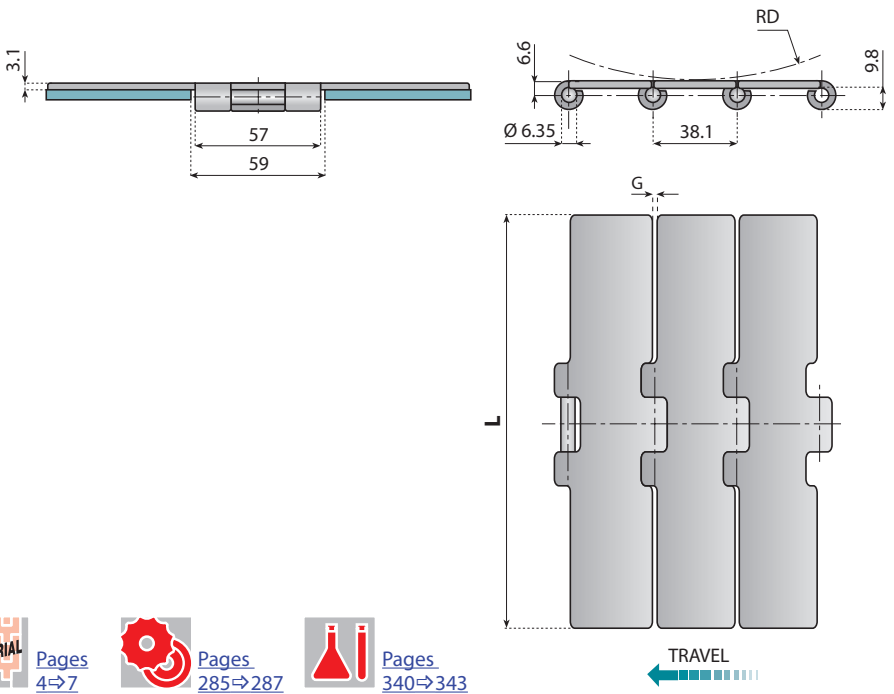

Advantages:
- High strength
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and rubber top chains

MATERIAL Pages 4⇨7
Pages 285⇨287
Pages 340⇨343

Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		G	RD	Weight
					mm	inch	mm	mm	Kg/m
SSE 8157 K750	**10054**	**EXTRA PLUS**	10.400	0.3	190.5	7 ½	1.8	150	5.60
SSE 8157 K750 HB	**10059**	**HB**							


Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING CHAINS SINGLE HINGE - Pitch 25.4 mm (1”) 515



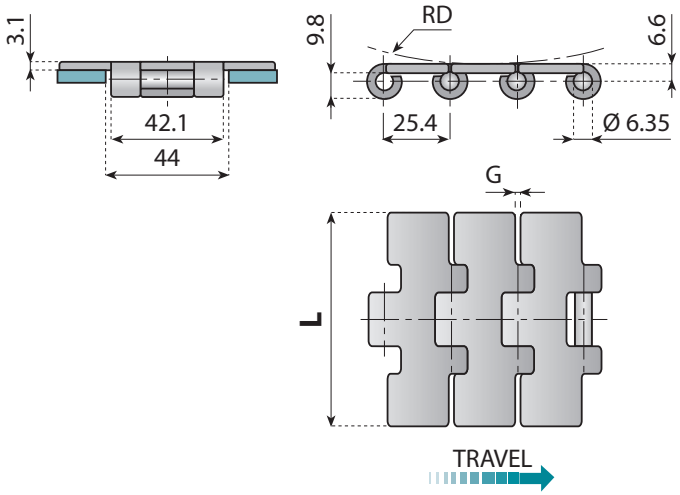

Advantages:
- Small pitch offering short product transfers

MATERIAL Pages 4⇨7
Page 288
Pages 340⇨343


Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		G mm	RD mm	Weight Kg/m
					mm	inch			
SSE 515 K217	**10040**				55.0	2 11/64			2.3
SSE 515 K236	**10041**				60.0	2 27/64			2.4
SSE 515 K250	**10042**				63.5	2 ½			2.5
SSE 515 K283	**10043**	**EXTRA**	5.200	0.3	72.0	2 27/32	1.6	100	2.7
SSE 515 K325	**10044**				82.5	3 ¼			2.9
SSE 515 K350	**10045**				88.9	3 ½			3.0
SSE 515 K400	**10046**				101.6	4			3.3

Standard length: 120 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

881 SIDEFLEXING CHAINS - BEVEL SYSTEM



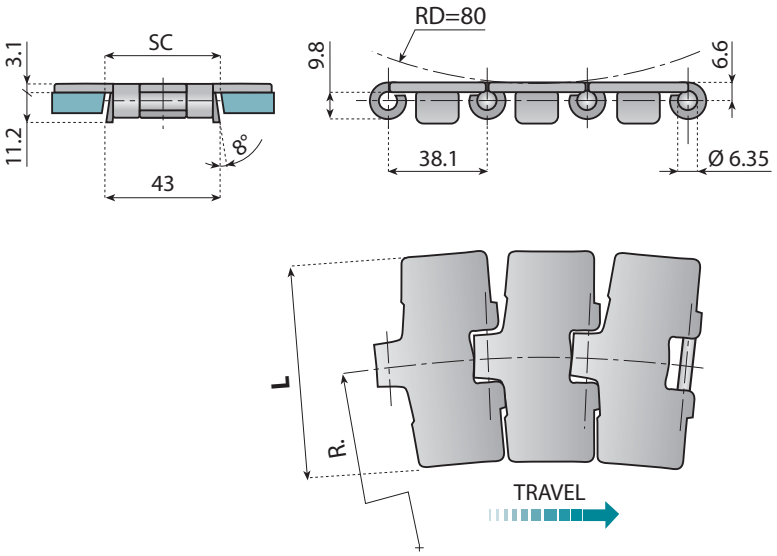


MATERIAL Pages 4⇨7 | Pages 257+261 | Pages 265+268 | Pages 289⇨292 | Pages 340⇨343

Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	SC		Weight Kg/m
					mm	inch		Straight	Curving	
SSE 881 K325	**10101**	**EXTRA**	4.850	0.3	82.5	3 ¼	500	44.5	41.5	3.00
SSE 881 K450	**10102**				114.3	4 ½				3.70
SSE 881 K750	**10103**				190.5	7 ½				5.50
SSA 881 K325	**10107**	**AUSTENITIC**	4.500		82.5	3 ¼				3.00
SSA 881 K450	**10108**				114.3	4 ½				3.70
SSA 881 K750	**10109**				190.5	7 ½				5.50

881O SIDEFLEXING CHAINS - BEVEL SYSTEM



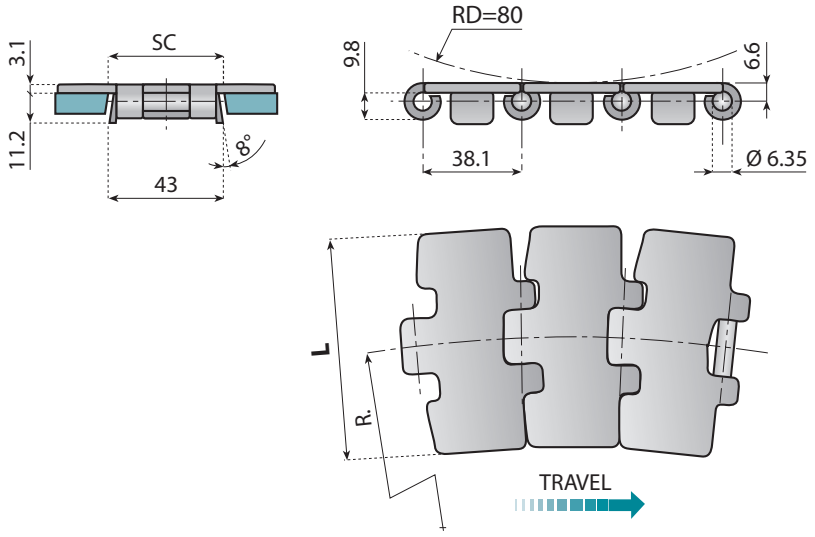

The enlarged surface of our 8810 series offers improved product support compared to the 881 series.

MATERIAL Pages 4⇨7 | Pages 257+261 | Pages 265+268 | Pages 289⇨292 | Pages 340⇨343

Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	SC		Weight Kg/m
					mm	inch		Straight	Curving	
SSE 881O K325	**10400**	**EXTRA PLUS**	6.000	0.3	82.5	3 ¼	500	44.5	41.5	3.00
SSE 881O K350	**10406**				88.9	3 ½				3.20
SSE 881O K450	**10401**				114.3	4 ½				3.70
SSE 881O K750	**10402**				190.5	7 ½				5.50
SSS 881O K325	**10407**			0.2 ▼▼▼ SUPER FINISH	82.5	3 ¼				3.00
SSS 881O K350	**10408**				88.9	3 ½				3.20


Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

SIDEFLEXING CHAINS - TAB SYSTEM — 881 TAB



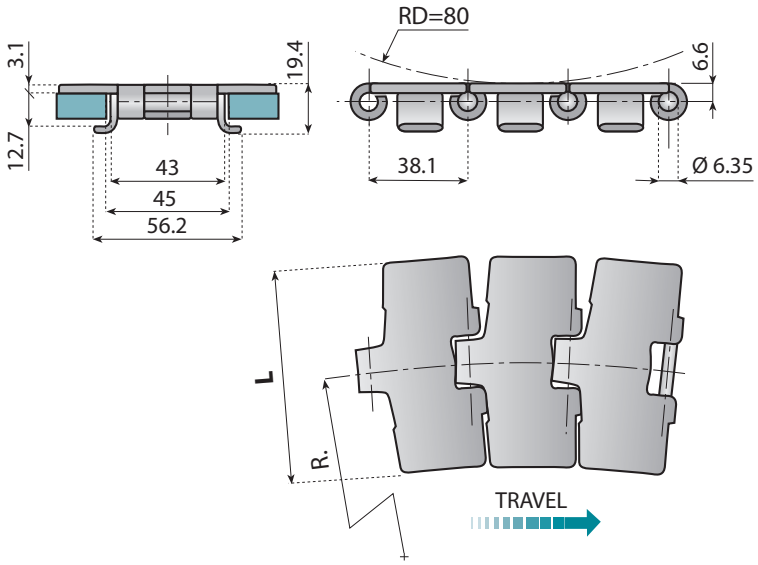


MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 265+267 | Pages 289⇨292 | Pages 340⇨343

Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	Weight Kg/m
					mm	inch		
SSE 881 TAB K325	**10104**	**EXTRA**	4.850	0.3	82.5	3 ¼	500	3.00
SSE 881 TAB K450	**10105**				114.3	4 ½		3.70
SSE 881 TAB K750	**10106**				190.5	7 ½		5.50
SSA 881 TAB K325	**10110**	**AUSTENITIC**	4.500		82.5	3 ¼		3.00
SSA 881 TAB K450	**10111**				114.3	4 ½		3.70
SSA 881 TAB K750	**10112**				190.5	7 ½		5.50

SIDEFLEXING CHAINS - TAB SYSTEM — 881O TAB



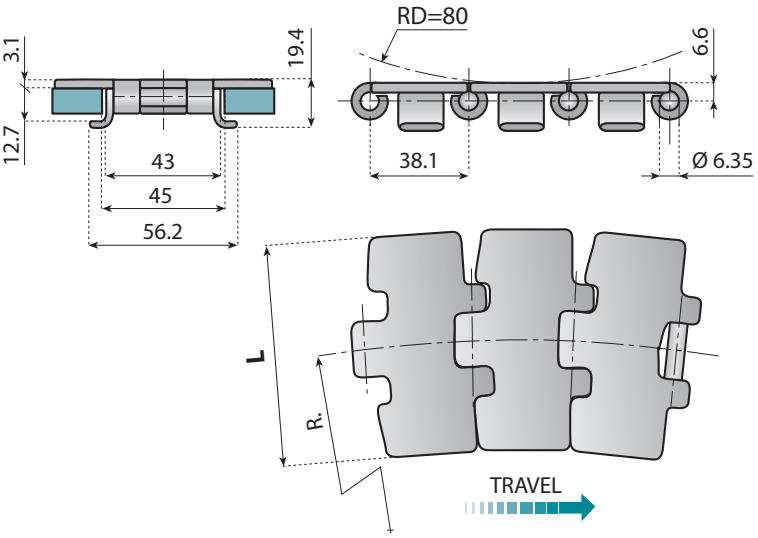

The enlarged surface of our 8810 series offers improved product support compared to the 881 series.


MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 265+267 | Pages 289⇨292 | Pages 340⇨343


Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	Weight Kg/m
					mm	inch		
SSE 881O TAB K325	**10403**	**EXTRA PLUS**	6.000	0.3	82.5	3 ¼	500	3.00
SSE 881O TAB K350	**10420**				88.9	3 ½		3.20
SSE 881O TAB K450	**10404**				114.3	4 ½		3.70
SSE 881O TAB K750	**10405**				190.5	7 ½		5.50


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

881 M - 881 MO SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM

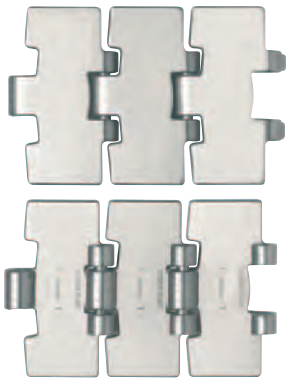

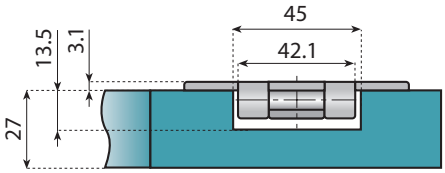

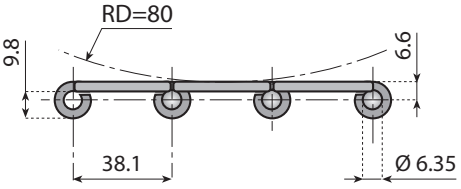

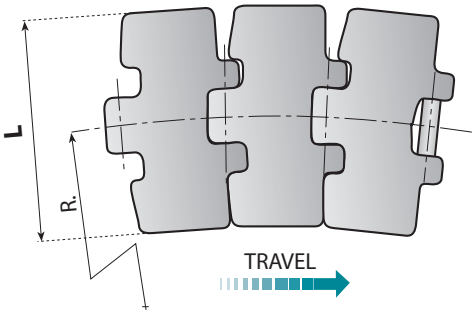

Characteristics:

- The chains series 881 M and 8857 M are securely retained in the curve by magnets located under the hinge of the chain in the upper part of curve. As there are no TAB or BEVEL shoes on these chains they can be easily removed from the curve for maintenance or for cleaning, without dismantling the chain.
- The enlarged surface of our 881 MO series offers improved product support compared to the 881 M series.

Advantages:

- Optimum flatness of chains in curves
- Less power consumption
- For high speed lines
- Best product transfer along as well as across the running direction

On request and for adequate quantities these chains can be produced in:

C45
Through Hardened Carbon Steel

Note:
Pin in Ferritic Stainless Steel.

MATERIAL Pages 4⇨7 | Pages 202⇨220 | Page 268 | Pages 274⇨278 | Pages 340⇨343


Chain - Ref.	Code	Material	Flatness (max) mm	Polished hinges	Max. working load	Finish µm	Width L		R min.	Weight Kg/m
							mm	inch		
SS 881 MO K325	**10208**	**STANDARD**	0.15	yes	5.400	0.6	82.5	3 ¼	500	2.60
SS 881 MO K330	**10209**						83.8	3 19/64		2.65
SS 881 M K450	**10211**		0.2				114.3	4 ½	457	3.10
SS 881 M K750	**10212**		0.3				190.5	7 ½		4.90
SSE 881 MO K325	**10206**	**EXTRA PLUS**	0.15		6.000	0.3	82.5	3 ¼	500	2.60
SSE 881 MO K330	**10207**						83.8	3 19/64		2.65
SSE 881 M K450	**10201**		0.2				114.3	4 ½	457	3.10
SSE 881 M K750	**10203**		0.3				190.5	7 ½		4.90
SSE 881 MO K325 HB	**10213**	**EXTRA PLUS HB**	0.15		6.000	0.3	82.5	3 ¼	500	2.60
SSE 881 MO K330 HB	**10214**						83.8	3 19/64		2.65


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

(SPEED - LINE) SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM L881 MO




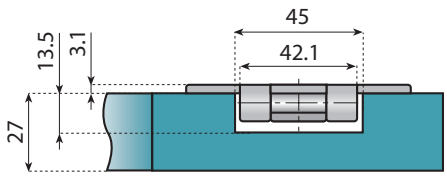

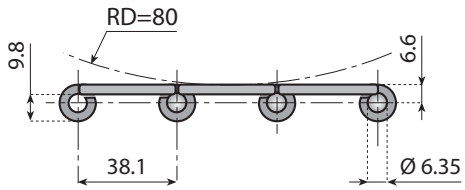

MATERIAL Pages 4⇨7
Pages 202⇨220
Pages 268
Pages 274⇨278
Pages 340⇨343

Advantages:
- All advantages of the magnetic system
- The best choice for the most demanding applications, like pressureless combiners and high speed applications
- Improved flatness
- Optimum product stability

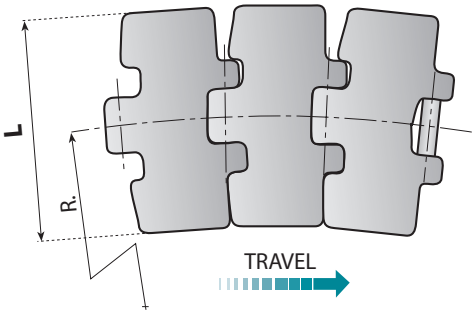


L881 MO SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM


Chain - Ref.	Code	Material	Flatness (max) mm	Polished hinges	Max. working load	Finish µm	Width L		R min.	Weight Kg/m
							mm	inch		
SSL 881 MO K325	**10208L**	**STANDARD**	0.1	yes	5.400	0.6	82.5	3 ¼	500	2.50
SSEL 881 MO K325	**10206L**	**EXTRA PLUS**			6.000	0.3				
SSEL 881 MO K325 HB	**10213L**	**EXTRA PLUS HB**								


L881 MO SPEED - LINE SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM

Chain - Ref.	Code	Material	Flatness (max) mm	Polished hinges	Max. working load	Finish µm	Width L		R min.	Weight Kg/m
							mm	inch		
SPSL 881 MO K325	**10255L**	**EXTRA PLUS**	0.1	yes	6.000	0.2 SUPER FINISH	82.5	3 ¼	500	2.50
SPSL 881 MO K330	**10256L**						83.8	3 19/64		2.55
SPSL 881 MO K325 HB	**10265L**	**EXTRA PLUS HB**					82.5	3 ¼		2.50
SPSL 881 MO K330 HB	**10266L**						83.8	3 19/64		2.55


SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM - HEAVY DUTY 8857M

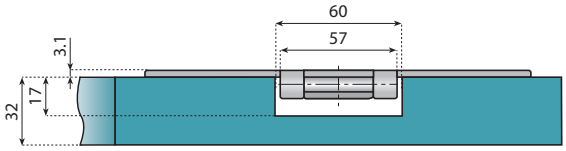



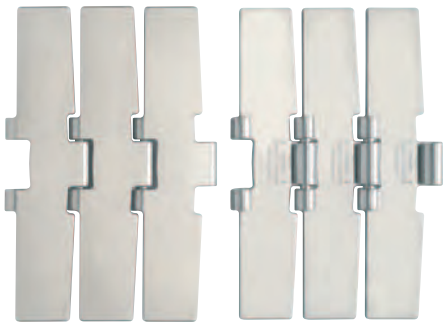

Advantages:
- All advantages of the magnetic system
- High strength
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and rubber top chains.

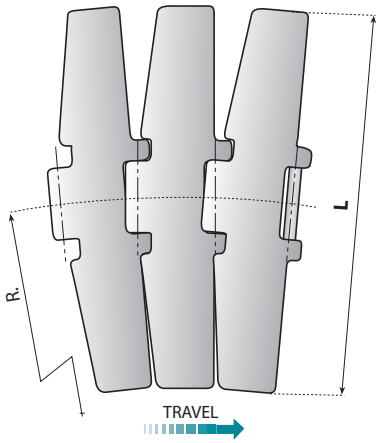


MATERIAL Pages 4⇨7
Pages 221⇨224
Pages 269
Pages 285⇨287
Pages 340⇨343


Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	Weight Kg/m
					mm	inch		
SSE 8857 M K750	**10204**	**EXTRA PLUS**	10.400	0.3	190.5	7 ½	750	5.30
SSE 8857 M K750 HB	**10218**	**HB**						


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

8857 TAB SIDEFLEXING CHAINS - HEAVY DUTY

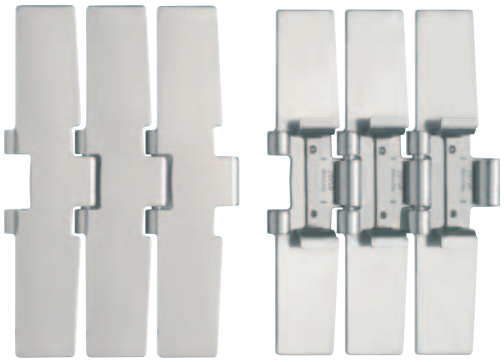

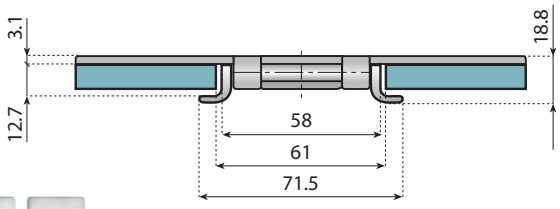

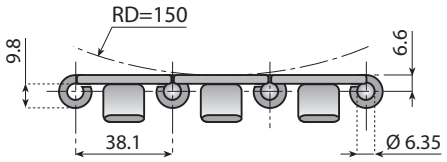

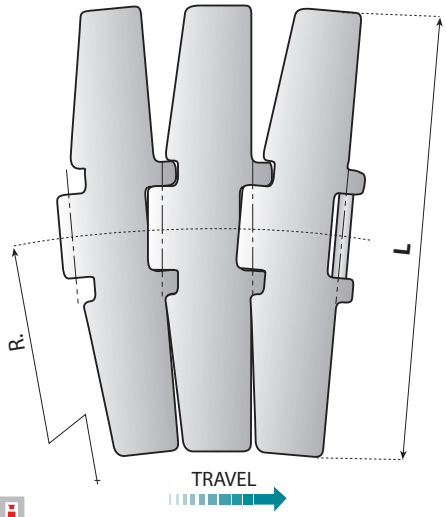

Advantages:
- High strength


MATERIAL Pages 4⇨7 | Page 274 | Pages 340⇨343


Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	Weight Kg/m
					mm	inch		
SSE 8857 TAB K750	**10219**	**EXTRA PLUS**	10.400	0.3	190.5	7 ½	750	6.10
SSE 8857 TAB K750 HB	**10220**	**HB**						


Standard length: 80 pitches (10 ft. - 3.048 m)

1874 SIDEFLEXING PLATE TOP CHAINS WITH BASE ROLLER CHAINS 19.05 mm (¾ ") PITCH





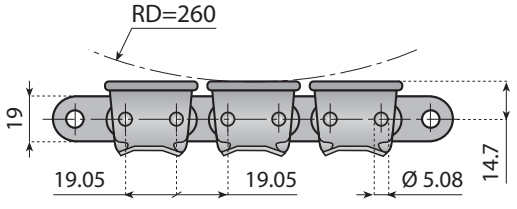

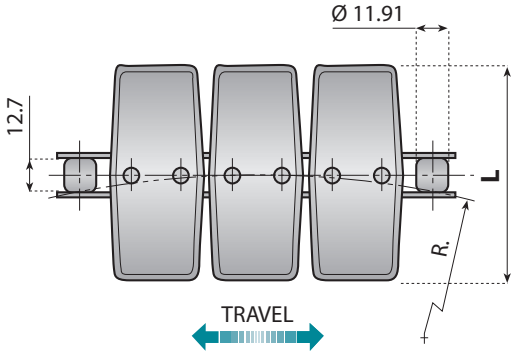

Advantages:
- High speed
- Very high loads
- Longer conveyors
- Flights removeable
- Lower noise
- No chain elongation

Roller chain Material	Connection Joint Code Link
C45	211115
AUSTENITIC	211116

MATERIAL Pages 4⇨7 | Page 260 | Page 267 | Page 308 | Pages 340⇨343

Chain - Ref.	Code	Material		Max. working load	Finish µm	Width L		R min.	Weight Kg/m
		Plate	Roller chain			mm	inch		
1874 K325	**11830**	**C45**	**C45**	27.000	0.6	82.5	3 ¼	380	4.2
1874 SS K325	**11831**	**EXTRA**	**AUSTENITIC**	21.000					
1874A K325	**11832**		**C45**	27.000					

Standard length: 160 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING STEEL CHAINS with high friction surface

Series	*Pages*
815 VG - 815 VG MINI - 815 TAB VG	
805 VG - 8157 VG - 8157 TAB VG	26 → 28


SIDEFLEXING STEEL CHAINS with high friction surface


Series	*Pages*
881 VG - 881 TAB VG	
8857 M VG - 881 MO VG	29 → 30

ALL OUR STEEL CHAINS OFFER:

- ***HIGH RESISTANCE TO WEAR AND TEAR***
- ***WORKING TEMPERATURE FROM -30° TO +120°C***
- ***HIGH RESISTANCE TO OIL, GREASE AND ACIDS***
- ***INCLINES UP TO MAX 20°***

815 VG STRAIGHT RUNNING CHAINS SINGLE HINGE WITH RUBBER PADS

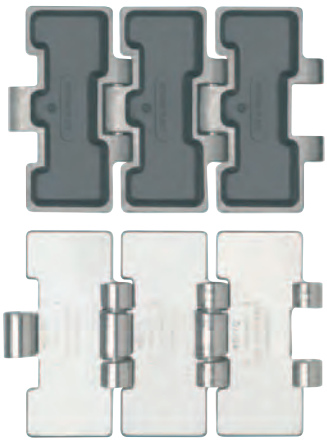

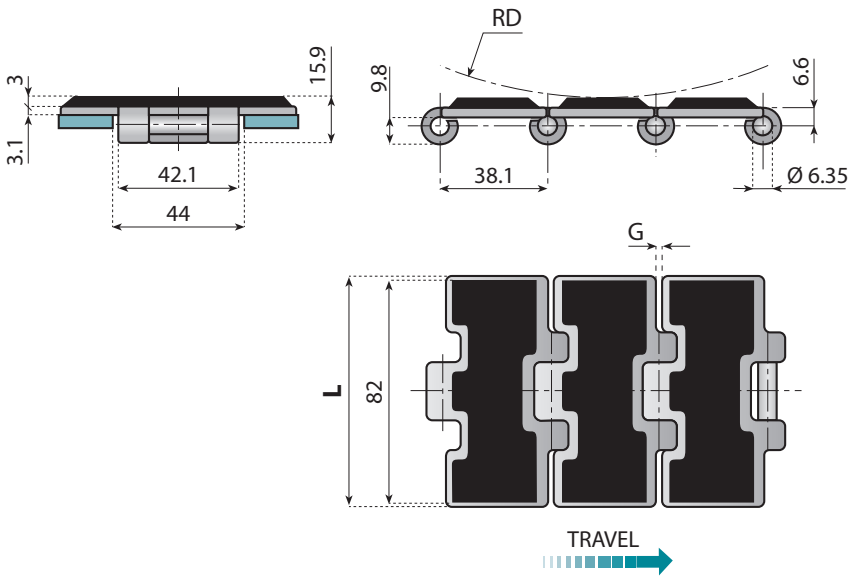



Characteristics:
Flat top chains with
vulcanized NBR rubber.

MATERIAL Pages 4⇨7 Pages 274⇨278 Pages 340⇨343

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSER 815 K325 VG	**10500**	**EXTRA PLUS**	**NBR**	6.000	82.5	3 ¼	2.8	75	2.8

815 VG MINI STRAIGHT RUNNING CHAINS MINI HINGE WITH RUBBER PADS

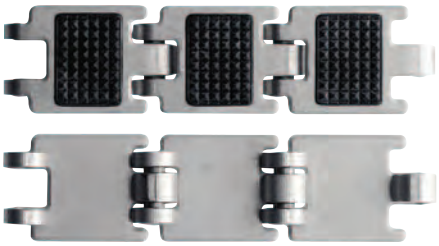

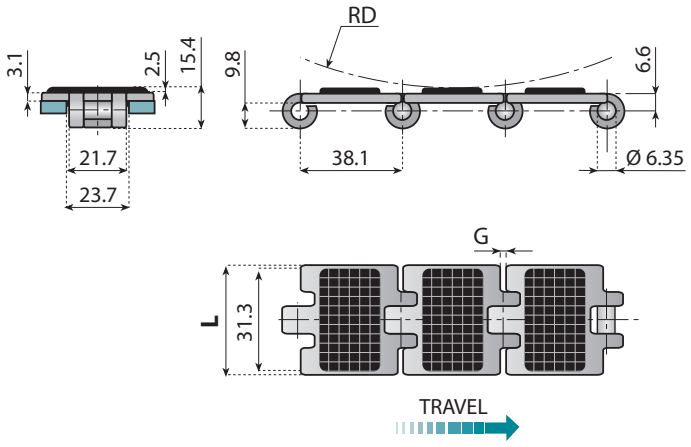

Characteristics:
Flat top chains with
vulcanized NBR rubber.

MATERIAL Pages 4⇨7 Pages 278⇨279 Pages 340⇨343


Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSER 815 K125 VG	**10072**	**EXTRA PLUS**	**NBR**	4.000	31.8	1 ¼	2.8	75	1.20


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING CHAINS SINGLE HINGE WITH TABS AND RUBBER PADS 815 TAB VG

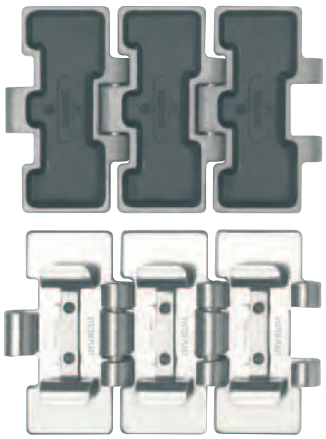



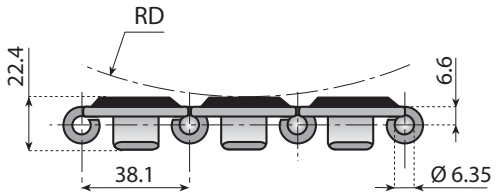

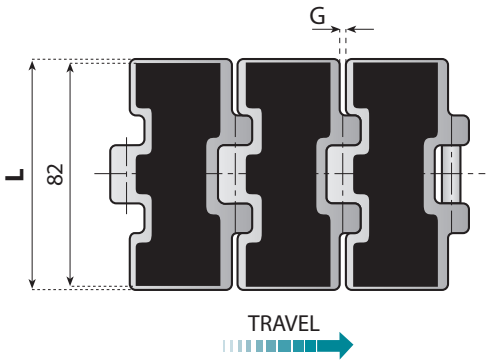



Characteristics:
Flat top chains with vulcanized NBR rubber.
Tabs reduce friction on the return section of the conveyor.


MATERIAL Pages 4⇨7 | Pages 265+267 | Pages 289⇨292 | Pages 340⇨343


Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSER 815 TAB K325 VG	**10510**	**EXTRA PLUS**	**NBR**	6.000	82.5	3 ¼	2.8	75	3.4

STRAIGHT RUNNING CHAINS DOUBLE HINGE WITH RUBBER PADS 805 VG

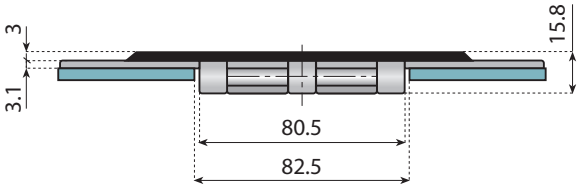

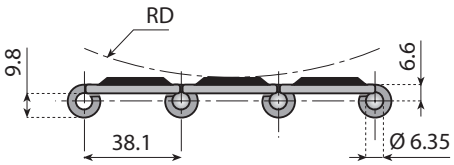

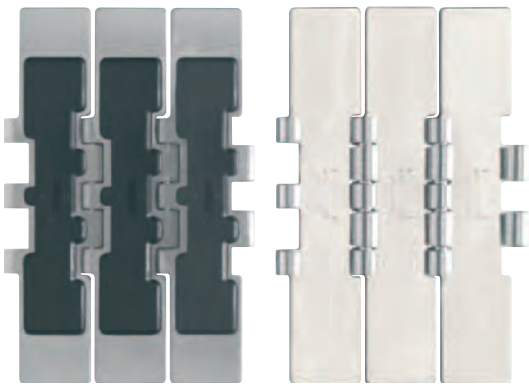

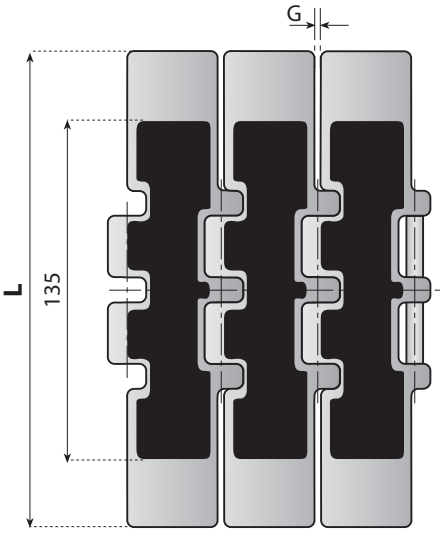


Characteristics:
Flat top chains with vulcanized NBR rubber.

MATERIAL Pages 4⇨7 | Pages 281⇨284 | Pages 340⇨343

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSE 805 K750 VG	**10502**	**EXTRA PLUS**	**NBR**	15.000	190.5	7 ½	1.8	150	6.2

8157 VG STRAIGHT RUNNING CHAINS - HEAVY DUTY SINGLE HINGE WITH RUBBER PADS



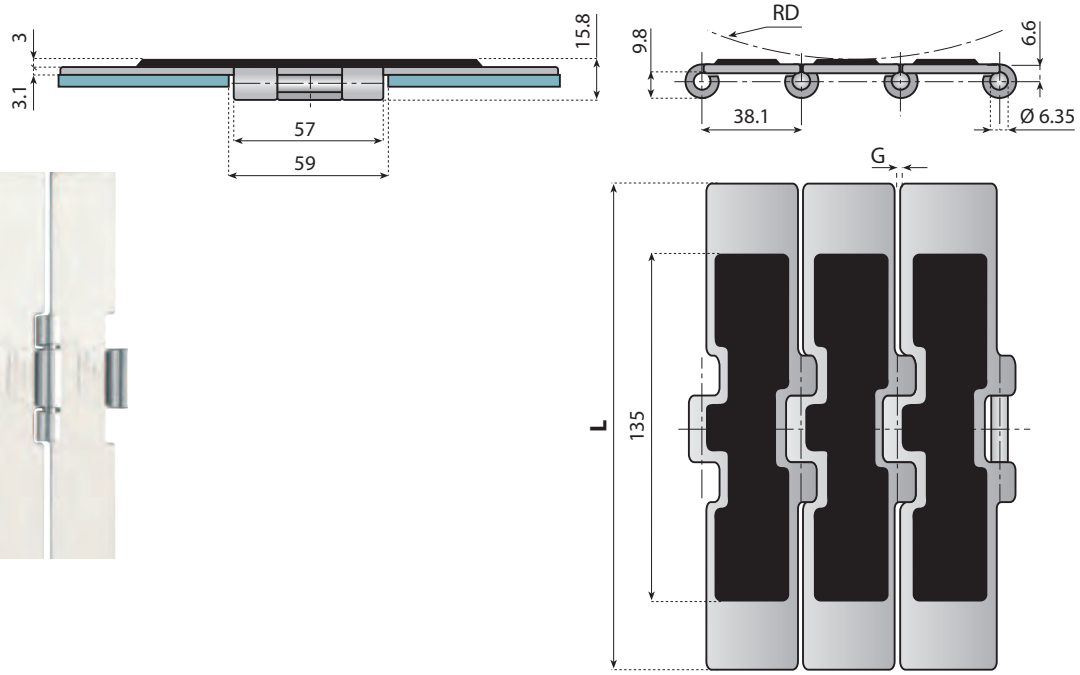



Characteristics:
Flat top chains with vulcanized NBR rubber.

MATERIAL Pages 4⇨7 | Pages 285⇨287 | Pages 340⇨343

Chain - Ref.	Code	Material		Max. working load	Width L		G	RD	Weight
		Chain	Rubber		mm	inch	mm	mm	Kg/m
SSE 8157 K750 VG	**10512**	**EXTRA PLUS**	**NBR**	10.400	190.5	7 ½	1.8	150	6.0
SSE 8157 K750 HB - VG	**10515**	**HB**							

8157 TAB VG STRAIGHT RUNNING CHAINS - HEAVY DUTY SINGLE HINGE WITH RUBBER PADS

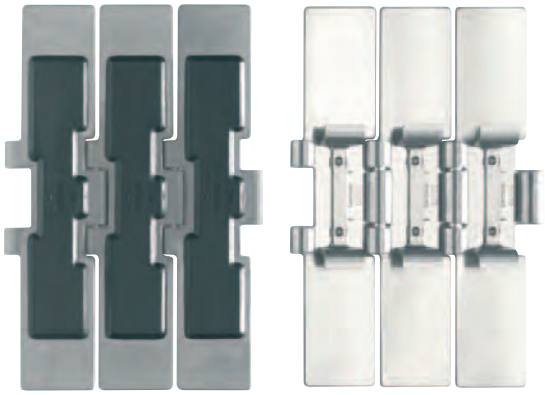

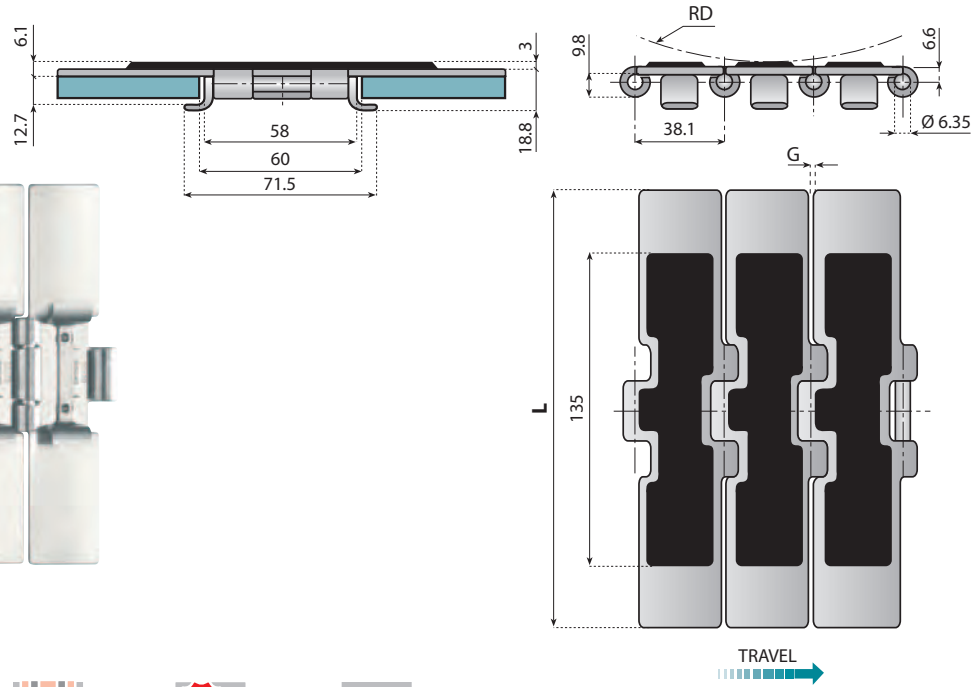

Characteristics:
Flat top chains with vulcanized NBR rubber.
Tabs reduce friction on the return section of the conveyor.

MATERIAL Pages 4⇨7 | Page 274 | Pages 340⇨343

Chain - Ref.	Code	Material		Max. working load	Width L		G	RD	Weight
		Chain	Rubber		mm	inch	mm	mm	Kg/m
SSE 8157 TAB K750 VG	**10514**	**EXTRA PLUS**	**NBR**	10.400	190.5	7 ½	1.8	150	7.5
SSE 8157 TAB K750 HB - VG	**10513**	**HB**							


Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

SIDEFLEXING CHAINS WITH RUBBER PADS 881 VG



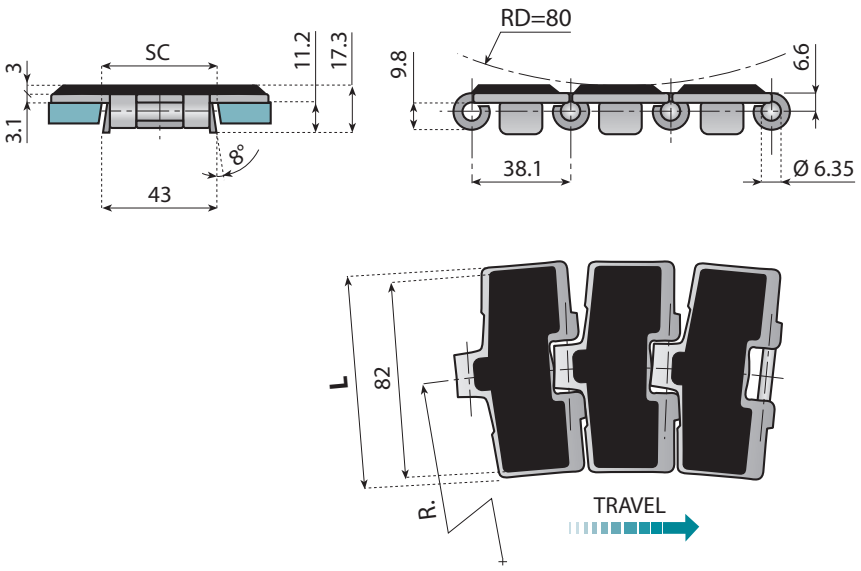


Characteristics:
Sideflexing chains with vulcanized NBR rubber.

MATERIAL Pages 4⇨7 | Pages 257+261 | Pages 265+268 | Pages 289⇨292 | Pages 340⇨343

Chain - Ref.	Code	Material		Max. working load	Width L		R min.	SC		Weight Kg/m
		Chain	Rubber		mm	inch		Straight	Curving	
SSE 881 K325 VG	**10504**	**EXTRA**	**NBR**	4.850	82.5	3 ¼	500	44.5	41.5	3.1

SIDEFLEXING CHAINS WITH RUBBER PADS 881 TAB VG



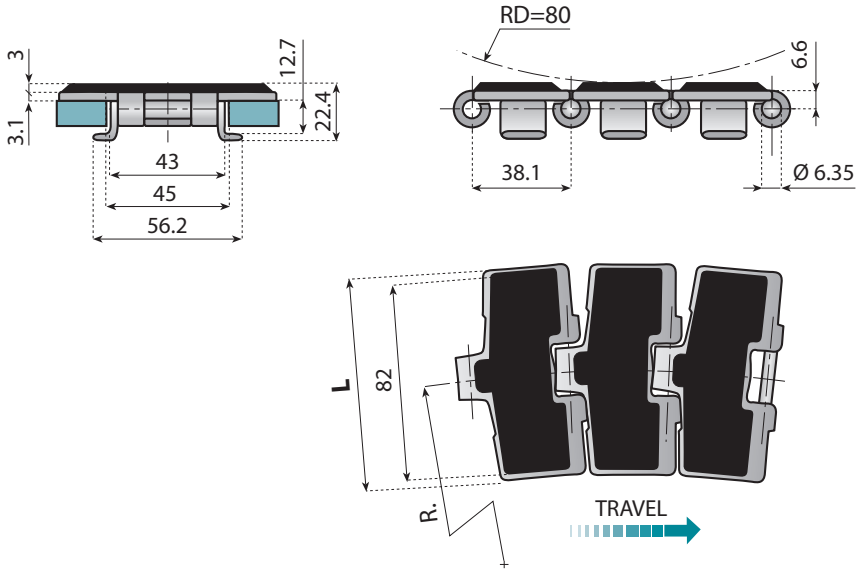

Characteristics:
Sideflexing chains with vulcanized NBR rubber.
Tabs reduce friction on the return section of the conveyor.

MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 265+267 | Pages 289⇨292 | Pages 340⇨343


Chain - Ref.	Code	Material		Max. working load	Width L		R min.	Weight Kg/m
		Chain	Rubber		mm	inch		
SSE 881 TAB K325 VG	**10503**	**EXTRA**	**NBR**	4.850	82.5	3 ¼	500	3.1


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

881 MO VG — SIDEFLEXING MAGNETIC CHAINS WITH RUBBER PADS



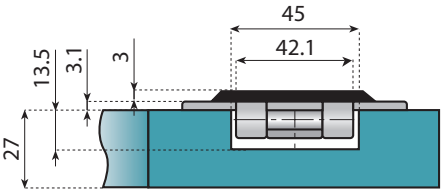

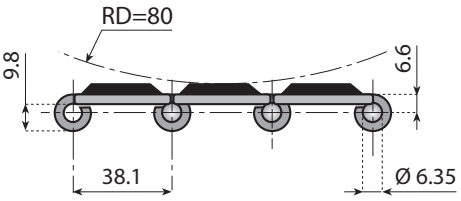

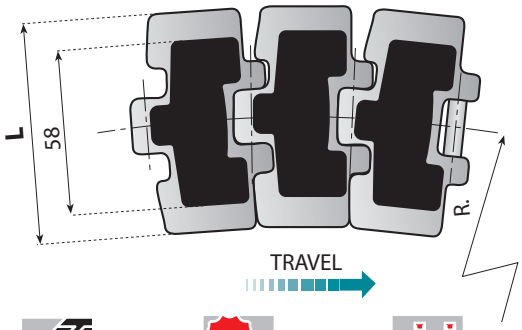



Characteristics:
Sideflexing chains with
vulcanized NBR rubber.
All advantages of the magnetic system.
High strength.


MATERIAL Pages 4⇨7 | Pages 257+261 | Pages 265+268 | Pages 289⇨292 | Pages 340⇨343


Chain - Ref.	Code	Material		Max. working load	Width L		R min.	Weight Kg/m
		Chain	Rubber		mm	inch		
SSE 881 MO K325 VG	**10225**	**EXTRA PLUS**	**NBR**	6.000	82.5	3 ¼	500	2.6

8857 M VG — SIDEFLEXING MAGNETIC CHAINS WITH RUBBER PADS

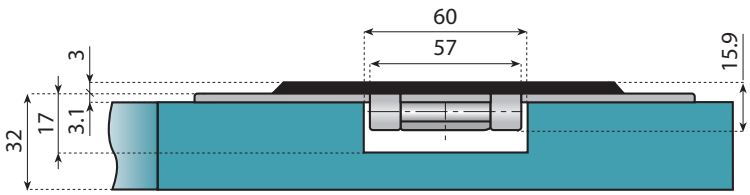

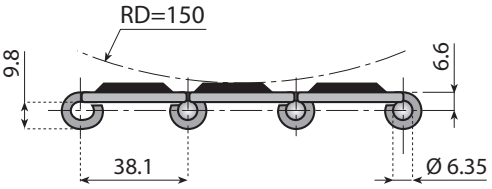

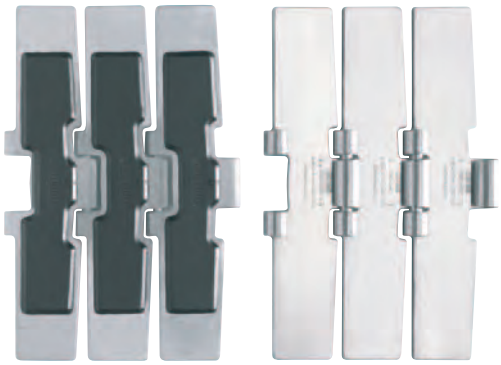

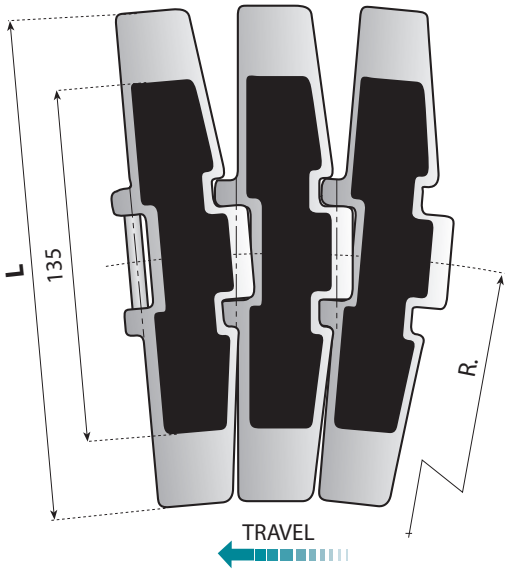

Characteristics:
Sideflexing chains with vulcanized NBR rubber

Advantages:
- All advantages of the magnetic system
- High strength
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and flat top chains.

ON REQUEST,
THIS CHAIN TYPE IS ALSO AVAILABLE WITH TABS.

MATERIAL Pages 4⇨7 | Page 216 | Pages 285⇨287 | Pages 340⇨343

Chain - Ref.	Code	Material		Max. working load	Width L		R min.	Weight Kg/m
		Chain	Rubber		mm	inch		
SSE 8857 M K750 VG	**10511**	**EXTRA PLUS**	**NBR**	10.400	190.5	7 ½	750	5.7
SSE 8857 M K750 HB VG	**10516**	**HB**						

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING PLASTIC CHAINS

Series	*Pages*
820/820J - 828 - 831 - SK 38	
821 - 8257	32 → 35

SIDEFLEXING PLASTIC CHAINS


Series	*Pages*
878 TAB - 879 - 879 M - 879 J- 879 TAB	
880 - 880 M - 880 J - 880 TAB - 882	
882 M - 882 TAB - 882 BEVEL	36 → 43


ALL OUR PLASTIC CHAINS OFFER:

- *LOW FRICTION COEFFICIENT*
- *LOW NOISE LEVEL*
- *LOW HORSEPOWER REQUIREMENTS*
- *HIGH WORKING LOAD*
- *EXCELLENT FLAT SURFACE*
- *DRY RUNNING POSSIBILITY*

APPLICATIONS:

- *FOOD AND BEVERAGE INDUSTRY: CONVEYING LINES FOR PET BOTTLES, ALUMINIUM CANS, STEEL CANS. PACKAGING LINES (PET BOTTLE PACKS IN HEAT SHRINK FILM, PAPER BOARD BOXES, CANS IN HEAT SHRINK FILM).*
- *PHARMACEUTICAL INDUSTRY.*
- *GENERAL PURPOSE CONVEYING APPLICATIONS.*

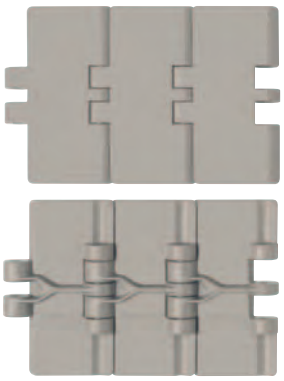

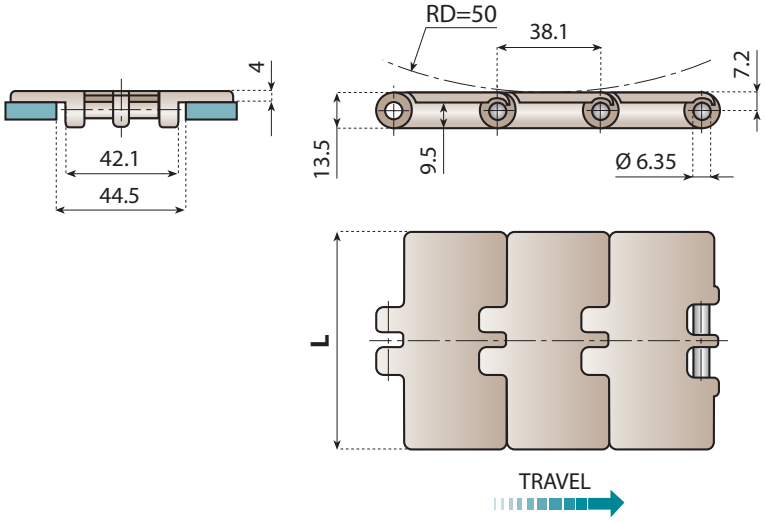

Pages 4⇨7
Pages 293⇨296
Pages 340⇨343

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance

Pin material:
Austenitic steel (SPM) or plastic pin (PPM).


Chain - Ref.	Code	Material plate	Pin material	Breaking load N	Width L		Weight Kg/m
					mm	inch	
LF 820 K250	**11602**	**LF** Brown	**SPM**	5.000	63.5	2 ½	0.79
LF 820 K325	**11362**				82.5	3 ¼	0.85
LF 820 K330	**11359**				83.8	3 19/64	0.87
LF 820 K350	**11603**				88.9	3 ½	0.89
LF 820 K400	**11365**				101.6	4	0.95
LF 820 K450	**11368**				114.3	4 ½	1.03
LF 820 K600	**11371**				152.4	6	1.25
LF 820 K750	**11374**				190.5	7 ½	1.47
NG 820 K250	**11150**	**NG** Green		4.000	63.5	2 ½	0.79
NG 820 K325	**11151**				82.5	3 ¼	0.85
NG 820 K330	**11157**				83.8	3 19/64	0.87
NG 820 K350	**11152**				88.9	3 ½	0.89
NG 820 K400	**11153**				101.6	4	0.95
NG 820 K450	**11154**				114.3	4 ½	1.03
NG 820 K600	**11155**				152.4	6	1.25
NG 820 K750	**11156**				190.5	7 ½	1.47
LF 820 J K325	**11362UL**	**LF** Brown	**PPM**	2.200	82.5	3 ¼	0.81
LF 820 J K450	**11368UL**				114.3	4 ½	0.99
LF 820 J K750	**11374UL**				190.5	7 ½	1.43
NG 820 J K325	**11151UL**	**NG** Green		1.700	82.5	3 ¼	0.81
NG 820 J K450	**11154UL**				114.3	4 ½	0.99
NG 820 J K750	**11156UL**				190.5	7 ½	1.43

Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved


STRAIGHT RUNNING CHAINS 828

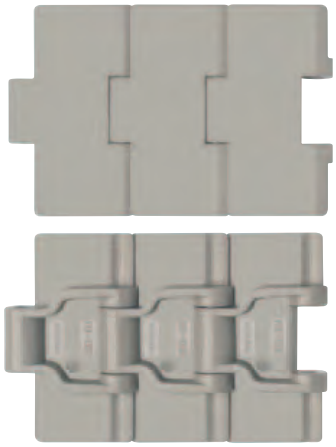

- HIGH LOAD CAPACITY
- ZERO GAP



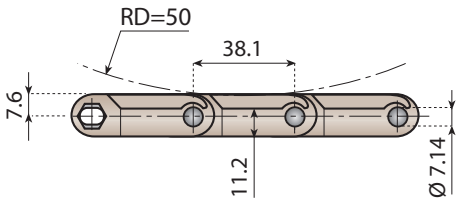

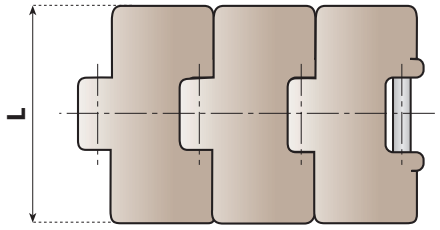

TRAVEL

Features:

Standardization
- Identical sprockets as sideflexing chains
- Standard conveyor construction

High load capacity
- Particularly suitable for accumulation tables as well as for pressure-less combiners

Improved product stability
- Reduced gap between adjacent tracks
- Better topplate flatness in the hinge area

Pin material: Austenitic Steel

Pages 4⇨7

Pages 300⇨301


Pages 340⇨343

On request and for adequate quantities these chains can be produced in:


AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance


Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 828 K325	**11130**	**LF** Brown	6.000	82.5	3 ¼	1.10
LF 828 K330	**11131**			83.8	3 19/64	1.15
NG 828 K325	**11134**	**NG** Green	5.000	82.5	3 ¼	1.10
NG 828 K330	**11135**			83.8	3 19/64	1.15

STRAIGHT RUNNING CHAINS 831

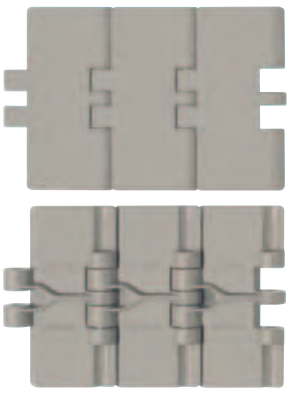

TOP PLATE
THICKNESS 4.8 mm



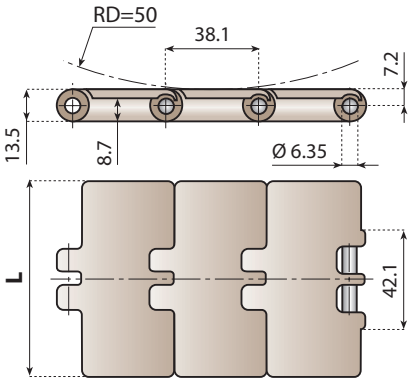

TRAVEL

Note:
The 831 series has a thicker top plate (4.8 mm) giving much more wear life.
It also simplifies conveyor design when matching chains from the series 821 - 879 - 882 - 8257 - 882 M

Pages 4⇨7

Pages 293⇨296

Pages 340⇨343

On request and for adequate quantities these chains can be produced in:


AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance


Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 831 K325	**11607**	**LF** Brown	5.000	82.5	3 ¼	1.04
LF 831 K450	**11608**			114.3	4 ½	1.29
LF 831 K750	**11609**			190.5	7 ½	1.82
NG 831 K325	**11160**	**NG** Green	4.000	82.5	3 ¼	1.04
NG 831 K450	**11161**			114.3	4 ½	1.29
NG 831 K750	**11162**			190.5	7 ½	1.82

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

SK 38 STRAIGHT RUNNING CHAINS MINI SINGLE HINGE

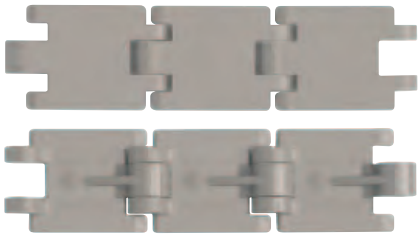

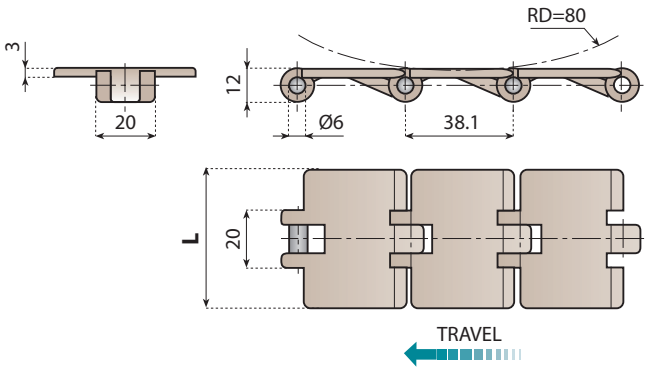

Applications:
- Exclusive mini hinge plastic chain for use in applications where space is restricted
- Ideal for conveying containers in the cosmetic or pharmaceutical industries

Pin material: Austenitic Steel


On request and for adequate quantities these chains can be produced in:


D
Grey Acetal Resin

MATERIAL Pages 4⇨7 | Pages 278⇨280 | Pages 340⇨343

Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
SK 38 K32 LF	**11410**	**LF** Brown	2.000	32.0	1 ¼	0.25
SK 38 K50 LF	**11411**			50.8	2	0.35
SK 38 K32 NG	**11414**	**NG** Green	1.700	32.0	1 ¼	0.25
SK 38 K50 NG	**11415**			50.8	2	0.35

821 STRAIGHT RUNNING CHAINS DOUBLE HINGE

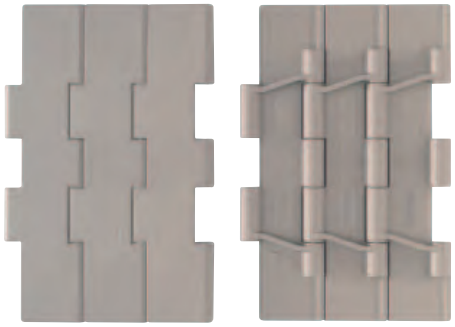

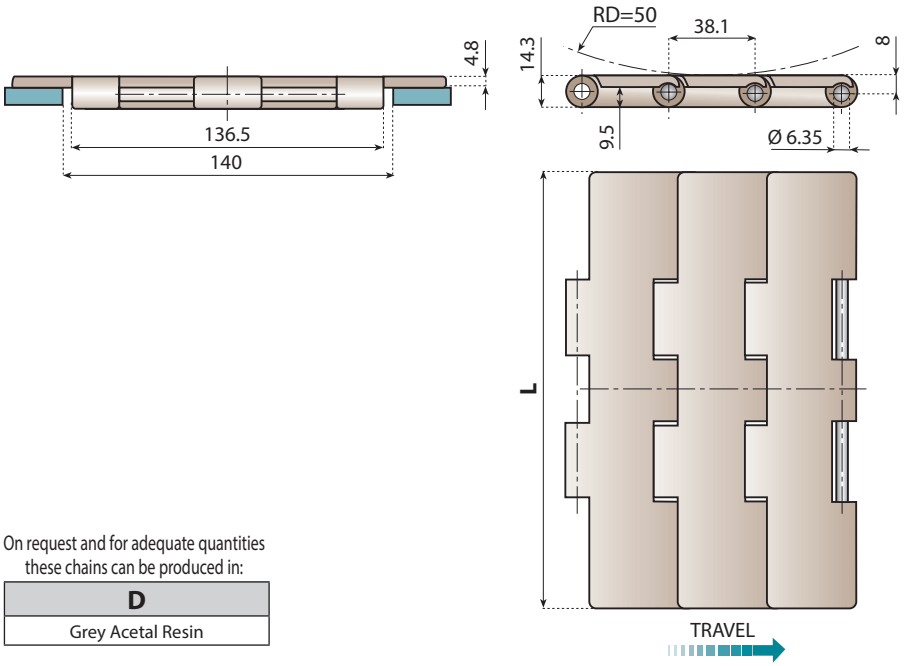

These chains have a double hingle and double reinforcing bars, for a high strength.

Pin material: Austenitic Steel

On request and for adequate quantities these chains can be produced in:

D
Grey Acetal Resin

MATERIAL Pages 4⇨7 | Pages 297⇨299 | Pages 340⇨343


Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 821 K750	**11002**	**LF** Brown	8.300	190.5	7 ½	2.59
LF 821 K1000	**11004**			254.0	10	3.08
LF 821 K1200	**11006**			304.8	12	3.35
NG 821 K750	**11170**	**NG** Green	7.800	190.5	7 ½	2.59
NG 821 K1000	**11171**			254.0	10	3.08
NG 821 K1200	**11172**			304.8	12	3.35


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING CHAINS HEAVY DUTY SINGLE HINGE 8257

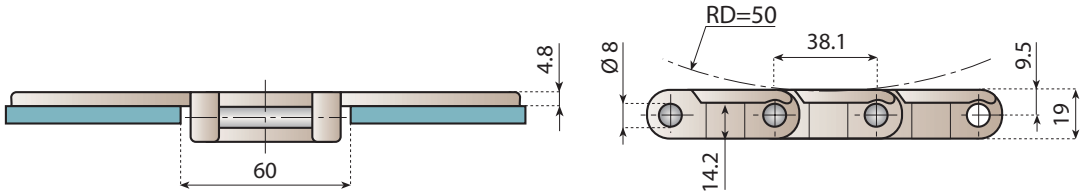

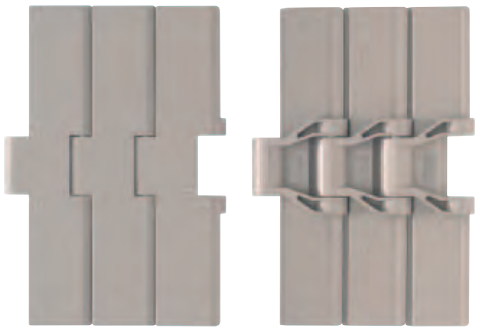

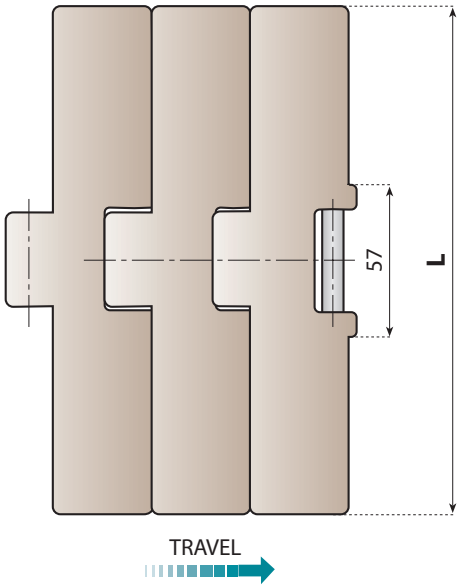

Advantages:
- High strength
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and rubber top chains

Pin material: Austenitic Steel


MATERIAL Pages 4⇨7
Pages 303⇨305
Pages 340⇨343


Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 8257 K750	**11167**	**LF** Brown	10.000	190.5	7 ½	2.20
LF 8257 K1000	**11168**			254.0	10	2.55
LF 8257 K1200	**11169**			304.8	12	2.90
LFG 8257 K750	**11175**	**LFG** Dark Grey	10.000	190.5	7 ½	2.20
LFG 8257 K1000	**11176**			254.0	10	2.55
LFG 8257 K1200	**11177**			304.8	12	2.90
NG 8257 K750	**11180**	**NG** Green	9.000	190.5	7 ½	2.20
NG 8257 K1000	**11181**			254.0	10	2.55
NG 8257 K1200	**11182**			304.8	12	2.90

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153





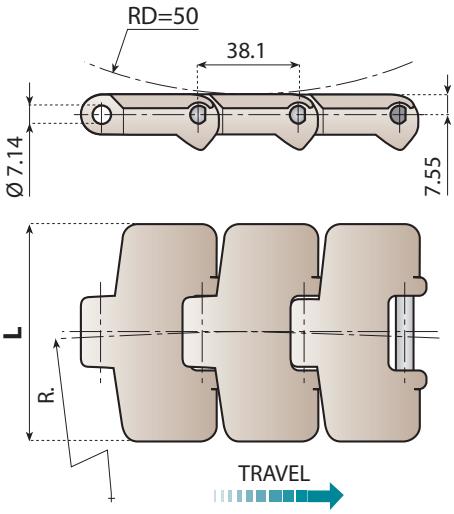

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Note:
The 879 series has a thicker top plate (4.8 mm) giving much more wear life. It also simplifies conveyor design when matching chains from the series 821, 831, 8257 and 882.

Pin material: Austenitic steel

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance

MATERIAL Pages 4⇨7 | Pages 257+261 | Pages 265+268 | Pages 300⇨301 | Pages 340⇨343


Chain - Ref.	Code	Material plate	Breaking load N	Width L		B Thickness mm	R min.	SC		Weight Kg/m
				mm	inch			Straight	Curving	
LF 880 K325	**11383**	**LF** Brown	6.000	82.5	3 ¼	4	500	44.5	41.3	0.89
LF 880 K350	**11189**			88.9	3 ½					0.92
LF 880 K450	**11386**			114.3	4 ½					1.04
NG 880 K325	**11187**	**NG** Green	5.000	82.5	3 ¼					0.89
NG 880 K350	**11186**			88.9	3 ½					0.92
NG 880 K450	**11185**			114.3	4 ½					1.04
LF 879 K325	**11506**	**LF** Brown	6.000	82.5	3 ¼	4.8	500	44.5	41.3	0.93
LF 879 K450	**11507**			114.3	4 ½					1.10
NG 879 K325	**11193**	**NG** Green	5.000	82.5	3 ¼					0.93
NG 879 K450	**11194**			114.3	4 ½					1.10


Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved





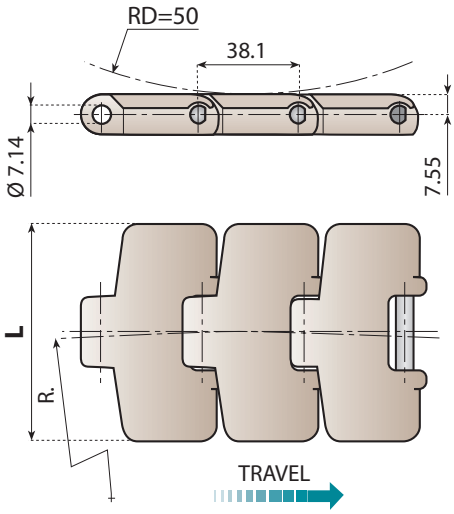

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Note:
The series has a thicker top plate (4.8 mm) giving much more wear life. It also simplifies conveyor design when matching chains from the series 821, 831, 8257 and 882.

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance

Pin material:
Austenitic steel (SPM) or plastic pin (PPM).


MATERIAL Pages 4⇨7 | Pages 257+261 | Pages 265+268 | Pages 300⇨301 | Pages 340⇨343


Chain - Ref.	Code	Material plate	Pin material	Breaking load N	Width L		B Thickness mm	R min.	SC		Weight Kg/m
					mm	inch			Straight	Curving	
LF 880 J K325	**11383UL**	**LF** Brown	**PPM**	2.800	82.5	3 ¼	4	457	44.5	41.3	0.67
LF 880 J K450	**11386UL**				114.3	4 ½					0.78
NG 880 J K325	**11187UL**	**NG** Green		2.200	82.5	3 ¼					0.67
NG 880 J K450	**11185UL**				114.3	4 ½					0.78
LF 880 J K325 S	**11383ULS**	**LF** Brown	**SPM**	6.000	82.5	3 ¼					0.70
LF 880 J K450 S	**11386ULS**				114.3	4 ½					0.83
NG 880 J K325 S	**11187ULS**	**NG** Green		5.000	82.5	3 ¼					0.70
NG 880 J K450 S	**11185ULS**				114.3	4 ½					0.83
LF 879 J K325	**11506UL**	**LF** Brown	**PPM**	2.800	82.5	3 ¼	4.8	457	44.5	41.3	0.67
LF 879 J K450	**11507UL**				114.3	4 ½					0.78
NG 879 J K325	**11193UL**	**NG** Green		2.200	82.5	3 ¼					0.67
NG 879 J K450	**11194UL**				114.3	4 ½					0.78
LF 879 J K325 S	**11506ULS**	**LF** Brown	**SPM**	6.000	82.5	3 ¼					0.70
LF 879 J K450 S	**11507ULS**				114.3	4 ½					0.83
NG 879 J K325 S	**11193ULS**	**NG** Green		5.000	82.5	3 ¼					0.70
NG 879 J K450 S	**11194ULS**				114.3	4 ½					0.83

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153





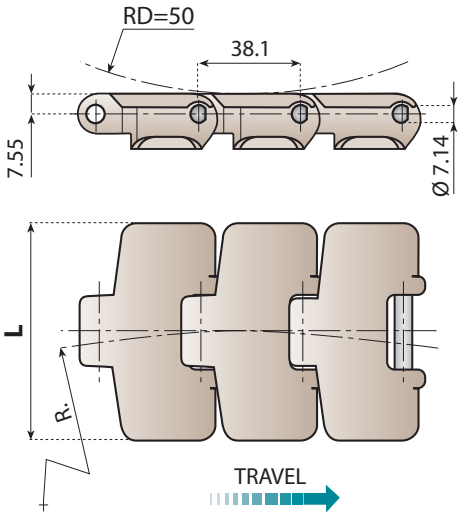

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Note:
The 879 TAB series has a thicker top plate (4.8 mm) giving much more wear life.
It also simplifies conveyor design when matching chains from the series 821, 831, 8257 and 882.

Pin material: Austenitic Steel

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance

Pages 4⇨7 Pages 256+261 Pages 265+267 Pages 300⇨302 Pages 340⇨343

Chain - Ref.	Code	Material plate	Breaking load N	Width L mm	Width L inch	B Thickness mm	R min.	Weight Kg/m
LF 880 TAB K325	**11377**	**LF** Brown	6.000	82.5	3 ¼	4	500	0.94
LF 880 TAB K330	**11259**			83.8	3 19/64			0.96
LF 880 TAB K350	**11190**			88.9	3 ½			1.01
LF 880 TAB K450	**11380**			114.3	4 ½			1.08
NG 880 TAB K325	**11195**	**NG** Green	5.000	82.5	3 ¼			0.94
NG 880 TAB K330	**11261**			83.8	3 19/64			0.96
NG 880 TAB K350	**11196**			88.9	3 ½			1.01
NG 880 TAB K450	**11197**			114.3	4 ½			1.08


LF 879 TAB K325	**11377ST**	**LF** Brown	6.000	82.5	3 ¼	4.8	500	0.98
LF 879 TAB K450	**11380ST**			114.3	4 ½			1.14
NG 879 TAB K325	**11198**	**NG** Green	5.000	82.5	3 ¼			0.98
NG 879 TAB K450	**11199**			114.3	4 ½			1.14


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved



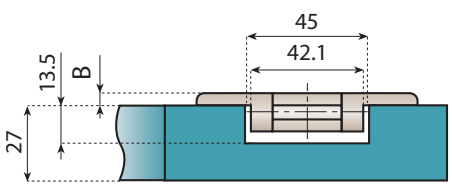

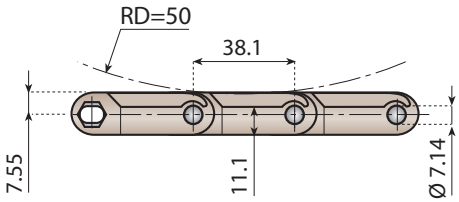

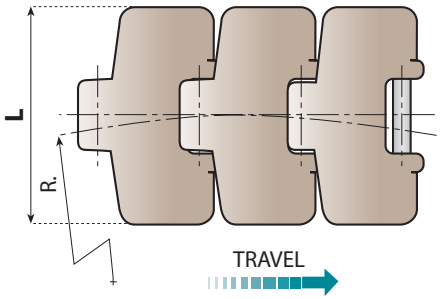

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Note:
The 879M series has a thicker top plate of 4.8 mm, giving much more wear life. It also simplifies conveyor design when matching chains from the series 821 - 831 - 882 - 8257

Advantages:
- One conveyor construction
- Easy to clean
- Easy maintenance
- Improved wear life
- Hygienic concept

Pin material:
Ferritic Stainless Steel

Characteristics:
Plastic magnetic system chains do not have TAB or BEVEL shoes. The ferritic stainless steel pins are securely retained in position by the magnets located in the upper section of the curve.
These chains can be easily removed from the curve for maintenance or cleaning, without dismantling the chain.


MATERIAL Pages 4⇨7 | Pages 202⇨220 | Page 268 | Pages 300⇨301 | Pages 340⇨343

Chain - Ref.	Code	Material plate	Breaking load N	Width L mm	Width L inch	B Thickness mm	R min.	Weight Kg/m
LF 880 M K325	**11377M**	**LF** Brown	5.700	82.5	3 ¼	4	500	1.05
LF 880 M K330	**11222M**			83.8	3 19/64			1.08
LF 880 M K450	**11380M**			114.3	4 ½			1.15
LF 880 M K750	**11393M**			190.5	7 ½			1.50
NG 880 M K325	**11195M**	**NG** Green	5.200	82.5	3 ¼			1.05
NG 880 M K330	**11224M**			83.8	3 19/64			1.08
NG 880 M K450	**11197M**			114.3	4 ½			1.15
NG 880 M K750	**11420M**			190.5	7 ½			1.50
LF 879 M K325	**11395M**	**LF** Brown	5.700	82.5	3 ¼	4.8	500	1.15
LF 879 M K450	**11396M**			114.3	4 ½			1.25
NG 879 M K325	**11198M**	**NG** Green	5.200	82.5	3 ¼			1.15
NG 879 M K450	**11421M**			114.3	4 ½			1.25

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153



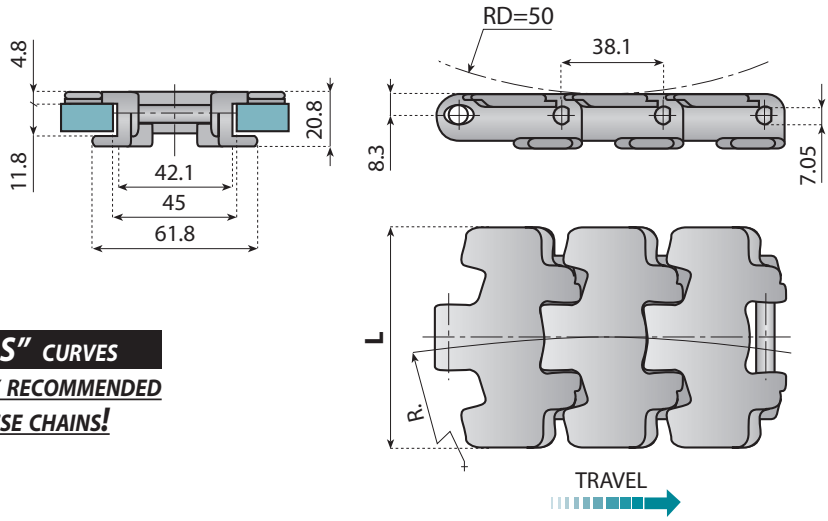

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Advantages:
- Small sideflexing radius R=190 mm
- Tangential engagement.
- Specially shaped flights to improve the contact between the product and chain.
- Small gap between flights to improve product stability.
- Bidirectional.

Characteristics:
The new 878 TAB series enables the designer and the manufacturer of sideflexing conveyors to reduce the radius of the curves.
This chain is suitable for solving conveying problems in confined spaces.
Can also be used where products are conveyed on an incline or decline and accumulation may occur.
The characteristics of this chain make this product unique in its design.

Pin material: Austenitic Steel.


MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 265+267 | Pages 330⇨333 | Pages 300⇨302 | Pages 340⇨343


Chain - Ref.	Code	Material plate	Breaking load N	Width L		R min.	Weight Kg/m
				mm	inch		
LF 878 TAB K325	**11390**	**LF** Brown	6.000	82.5	3 ¼	190	1.08
LF 878 TAB K450	**11389**			114.3	4 ½		1.20


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

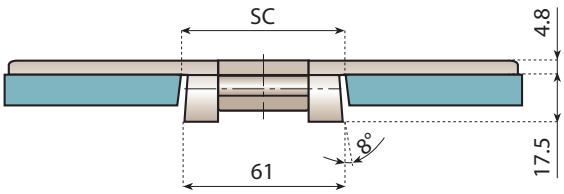

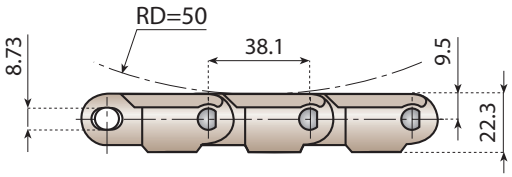

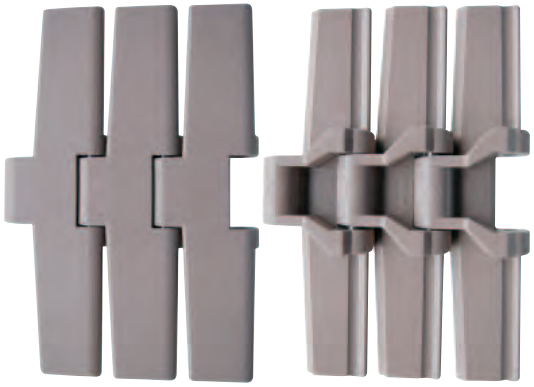

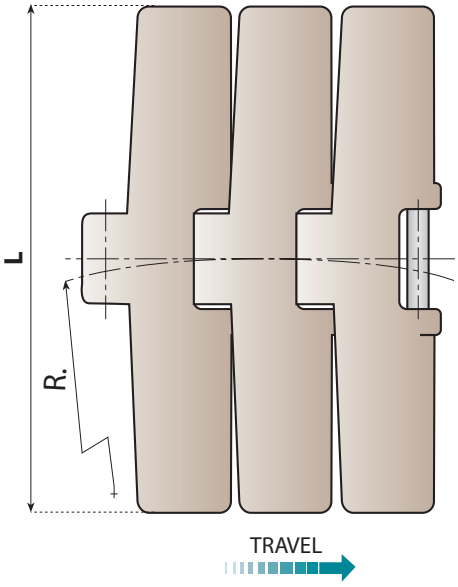

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Characteristics:
The 882 type has a larger hinge geometry and because of a well balanced distribution of the material it has an excellent carrying load capacity.

Advantages:
• Heavy duty

Pin material: Austenitic Steel.


MATERIAL Pages 4⇨7 | Page 258 | Page 266 | Pages 303⇨304 | Pages 340⇨343


Chain - Ref.	Code	Material plate	Breaking load N	Width L		R min.	SC		Weight Kg/m
				mm	inch		Straight	Curving	
LF 882 K450	**11459**	**LF** Brown	10.000	114.3	4 ½	610	62	58	1.94
LF 882 K750	**11460**			190.5	7 ½				2.38
LF 882 K1000	**11461**			254.0	10				2.83
NG 882 K450	**11480**	**NG** Green	9.000	114.3	4 ½				1.94
NG 882 K750	**11481**			190.5	7 ½				2.38
NG 882 K1000	**11482**			254.0	10				2.83

Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153



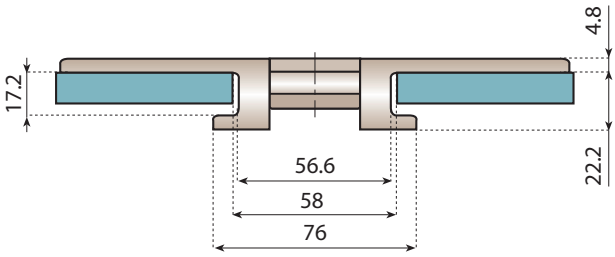

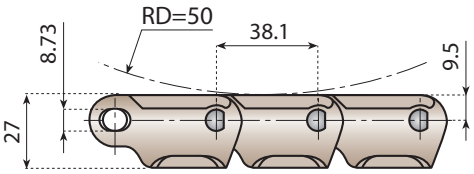

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

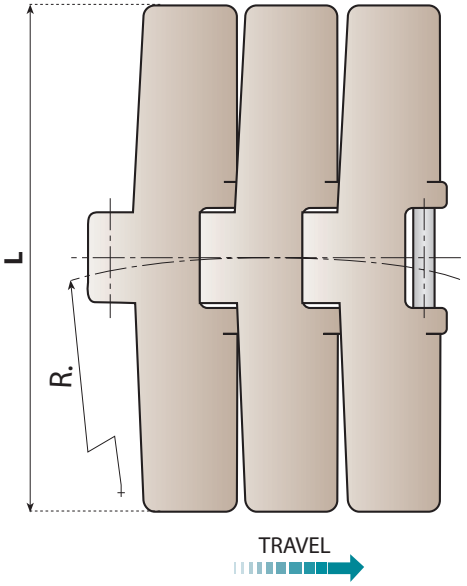

Characteristics:
The 882 TAB type has a larger pin size hinge geometry and because of a well balanced distribution of the material it has an excellent carrying load capacity.

The standard widths are produced up to 304.8 mm (12") making it compatible with the 821 series and offering the largest conveying area in the flat top chain products.

Advantages:
• Heavy duty

Pin material: Austenitic Steel.

MATERIAL Pages 4⇨7 | Page 258 | Page 266 | Pages 303⇨305 | Pages 340⇨343


Chain - Ref.	Code	Material plate	Breaking load N	Width L		R min.	Weight Kg/m
				mm	inch		
LF 882 TAB K450	**11040**	**LF** Brown	10.000	114.3	4 ½	610	2.03
LF 882 TAB K750	**11041**			190.5	7 ½		2.46
LF 882 TAB K1000	**11042**			254.0	10		2.87
LF 882 TAB K1200	**11043**			304.8	12		3.41
NG 882 TAB K450	**11483**	**NG** Green	9.000	114.3	4 ½		2.03
NG 882 TAB K750	**11484**			190.5	7 ½		2.46
NG 882 TAB K1000	**11485**			254.0	10		2.87
NG 882 TAB K1200	**11486**			304.8	12		3.41


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l., 2012 - All Rights Reserved


SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM 882 M

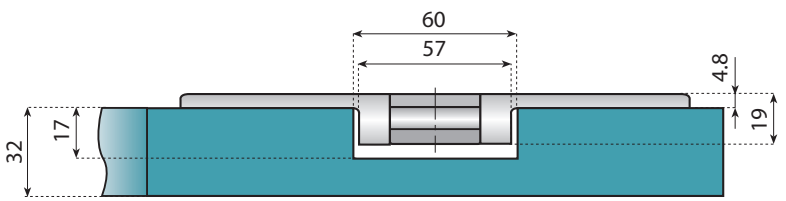

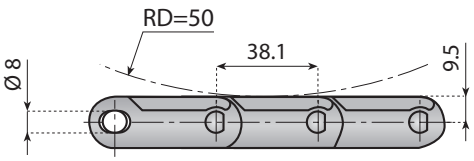

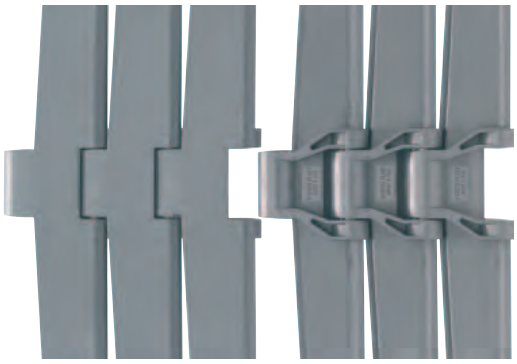

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

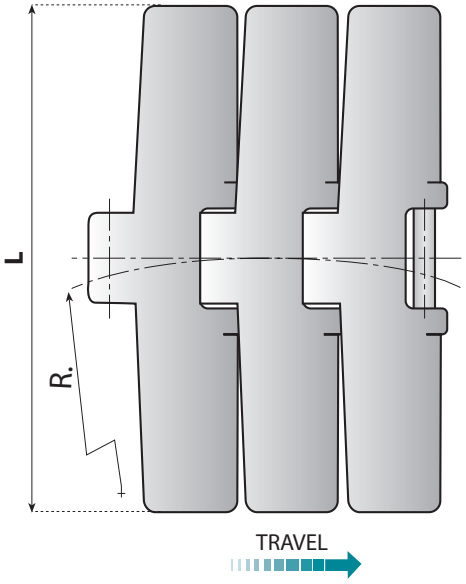

Characteristics:
Plastic magnetic system chains do not have TAB or BEVEL shoes.
The Ferritic Stainless Steel pins are securely retained in position by the magnets located in the upper section of the curve.
These chains can be easily removed from the curve for maintenance or cleaning, without dismantling the chain.

Advantages:
- One conveyor construction
- Heavy duty
- Exceptionally flat surface
- Hygienic concept
- Easy maintenance
- Easy to clean
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and rubber top chains

Pin material: Ferritic Stainless Steel

MATERIAL Pages 4⇨7
Pages 221⇨226
Pages 269
Pages 303⇨305
Pages 340⇨343

Chain - Ref.	Code	Material plate	Breaking load N	Width L		R min.	Weight Kg/m
				mm	inch		
LF 882 M K750	**11487**	**LF** Brown	10.000	190.5	7 ½	610	2.15
LF 882 M K1000	**11488**			254.0	10		2.45
LF 882 M K1200	**11489**			304.8	12		2.70
LFG 882 M K750	**11490**	**LFG** Dark Grey	10.000	190.5	7 ½		2.15
LFG 882 M K1000	**11491**			254.0	10		2.45
LFG 882 M K1200	**11492**			304.8	12		2.70
NG 882 M K750	**11493**	**NG** Green	9.000	190.5	7 ½		2.15
NG 882 M K1000	**11494**			254.0	10		2.45
NG 882 M K1200	**11495**			304.8	12		2.70

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING CHAINS with low noise accumulation rollers

Series	Pages
LBP 821 - LBP 8257 - LBP 831	46 → 48

SIDEFLEXING CHAINS with low noise accumulation rollers

Series	Pages
LBP 878 TAB - LBP 879 M	
LBP 882 TAB - LBP 882 M	49 → 52

APPLICATION:

- *FOOD AND BEVERAGE INDUSTRY PACKAGING LINE (PET BOTTLE PACKS AND CANS IN HEAT SHRINK FILM)*
- *GENERAL PURPOSE CONVEYING APPLICATIONS TO REDUCE PRESSURE CREATED BETWEEN PRODUCT AND FLIGHT SURFACE.*


CHARACTERISTICS:


THIS SERIES OF THERMOPLASTIC CHAINS IS THE SOLUTION TO REDUCE ACCUMULATION PRESSURE.
SMALL WIDTH ROLLERS PROVIDE A STABLE CONVEYING SURFACE AND ENABLE THE PRODUCT TO BE HANDLED WITHOUT DAMAGE, HOWEVER THE CHAIN STILL PROVIDES A POSITIVE FORWARD MOTION.


LOW NOISE ROLLERS
THESE CHAINS ARE PRODUCED IN A SILENT VERSION WITH REDUCED BACKLINE PRESSURE


LBP 821

DOUBLE HINGE STRAIGHT RUNNING CHAINS WITH LOW NOISE ACCUMULATION ROLLERS

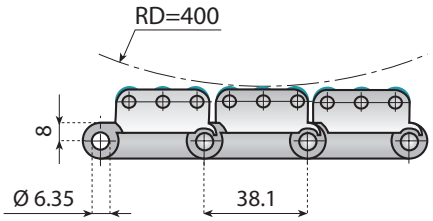


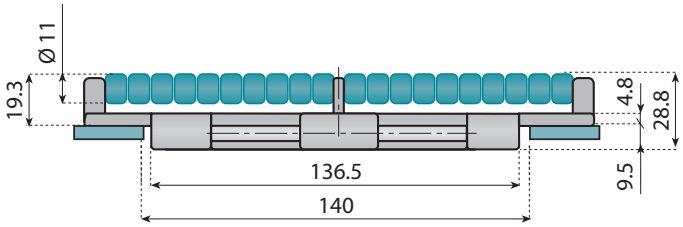

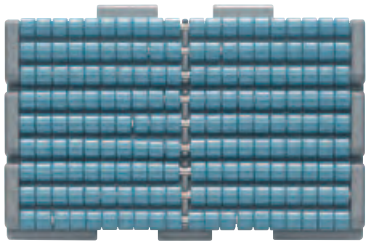


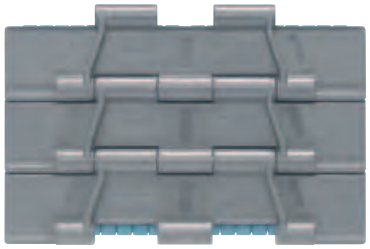


K750

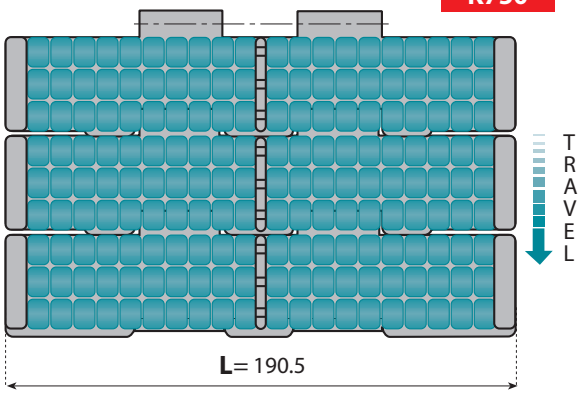

K1000

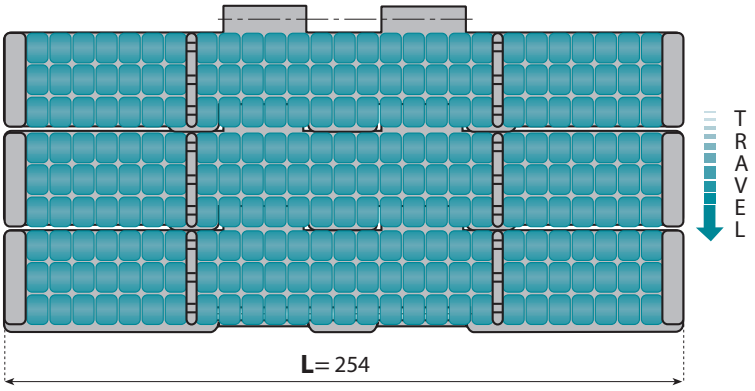

K1200

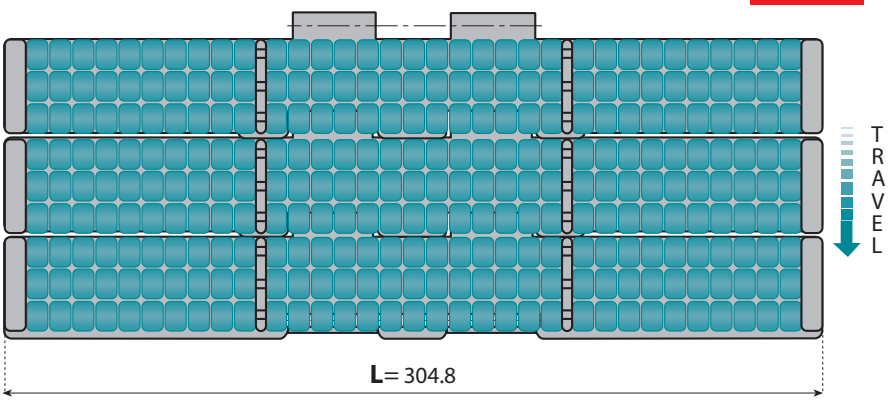

Advantages:

- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and low noise level

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7
Pages 297⇨299
Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Weight Kg/m
		Plate	Roller		mm	inch	
LBP 821 K750	**11055**	**LFG** Dark Grey	Water blue	8.300	190.5	7 ½	5.52
LBP 821 K1000	**11056**				254.0	10	6.90
LBP 821 K1200	**11057**				304.8	12	8.00


Standard length: 40 pitches (5 ft. - 1.524 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l., 2012 - All Rights Reserved

HEAVY DUTY SINGLE HINGE STRAIGHT RUNNING CHAINS WITH LOW NOISE ACCUMULATION ROLLERS


LBP 8257

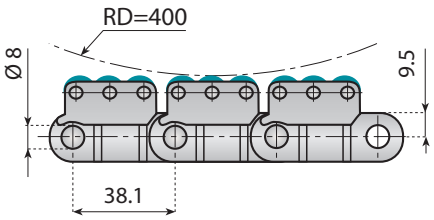

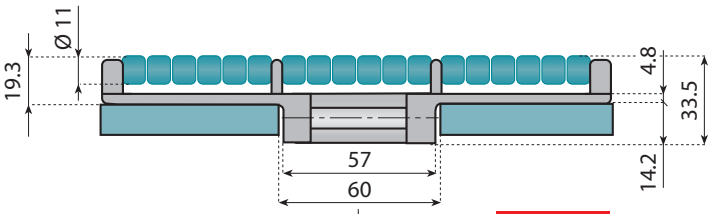

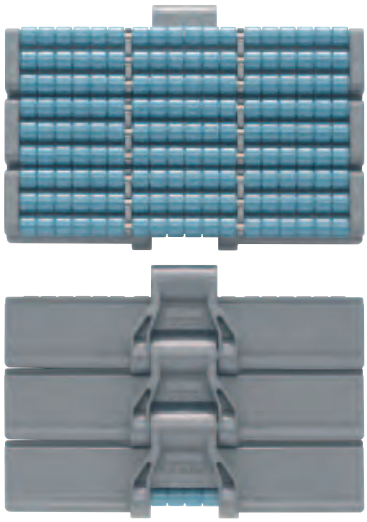


K750

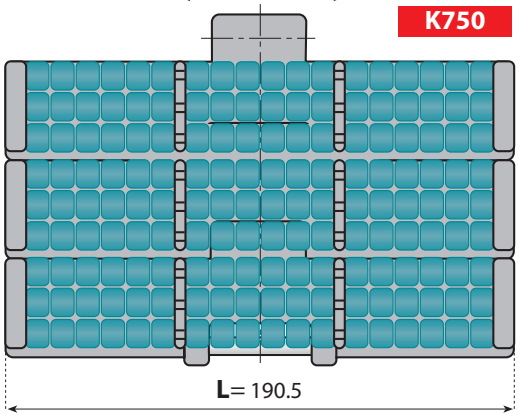


TRAVEL

K1000

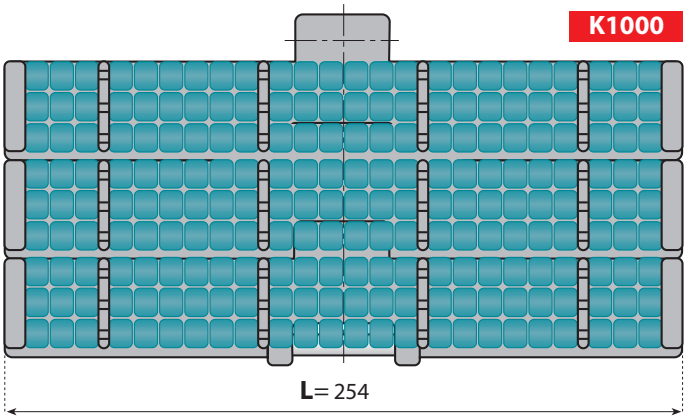

TRAVEL

K1200

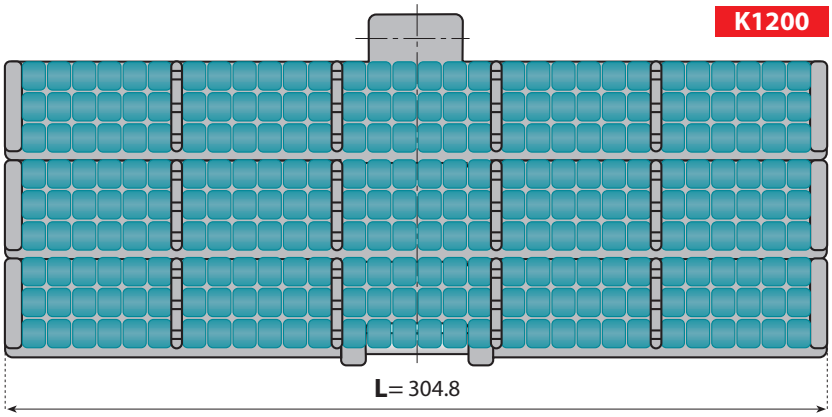

TRAVEL

Advantages:

- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and low noise level
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also Flat Top and rubber top chains

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7

Pages 303⇨304

Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	Width L		Weight Kg/m
		Plate	Roller		mm	inch	
LBP 8257 K750	**11076**	**LFG** Dark Grey	Water blue	10.000	190.5	7 ½	5.65
LBP 8257 K1000	**11077**				254.0	10	7.20
LBP 8257 K1200	**11078**				304.8	12	8.10


Standard length: 40 pitches (5 ft. - 1.524 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

LBP 831

SINGLE HINGE STRAIGHT RUNNING CHAINS WITH LOW NOISE ACCUMULATION ROLLERS

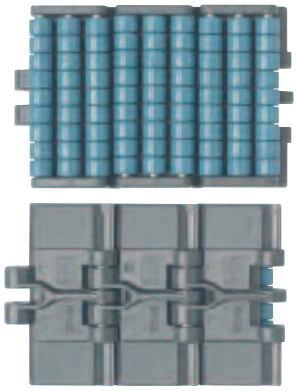

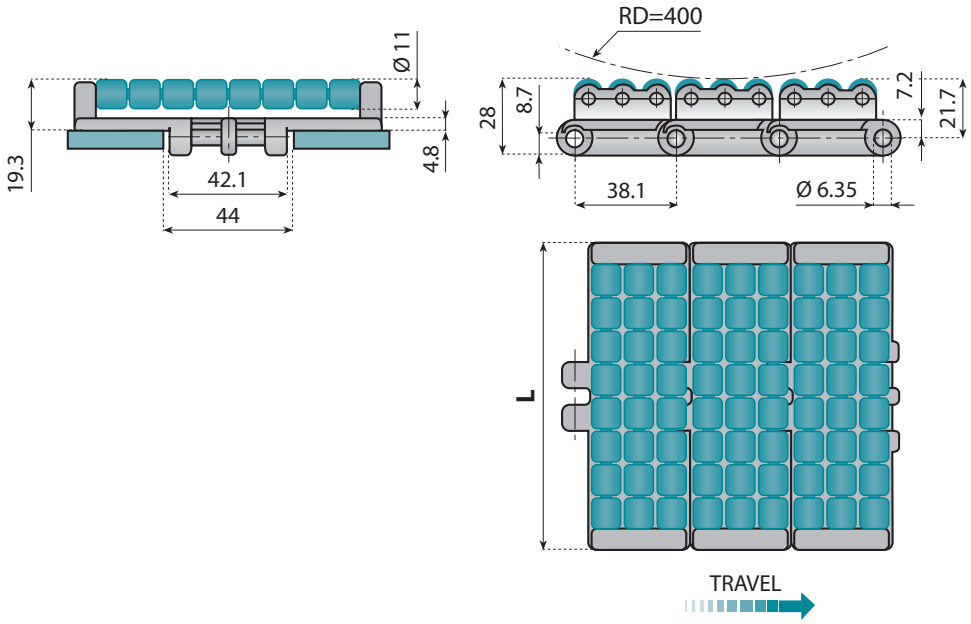

Advantages:

- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and low noise level

Pin material: Austenitic Steel

Pages 4⇨7

Pages 293⇨296

Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Weight Kg/m
		Plate	Roller		mm	inch	
LBP 831 K325	**11053**	**LFG** Dark Grey	Water blue	5.000	82.5	3 ¼	2.15
LBP831 K450	**11054**				114.3	4 ½	2.85


Standard length: 40 pitches (5 ft. - 1.524 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

© System Plast S.r.l. , 2012 - All Rights Reserved

SIDEFLEXING CHAINS WITH LOW NOISE ACCUMULATION ROLLERS

LBP 878 TAB

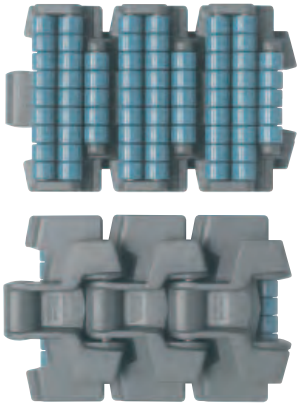

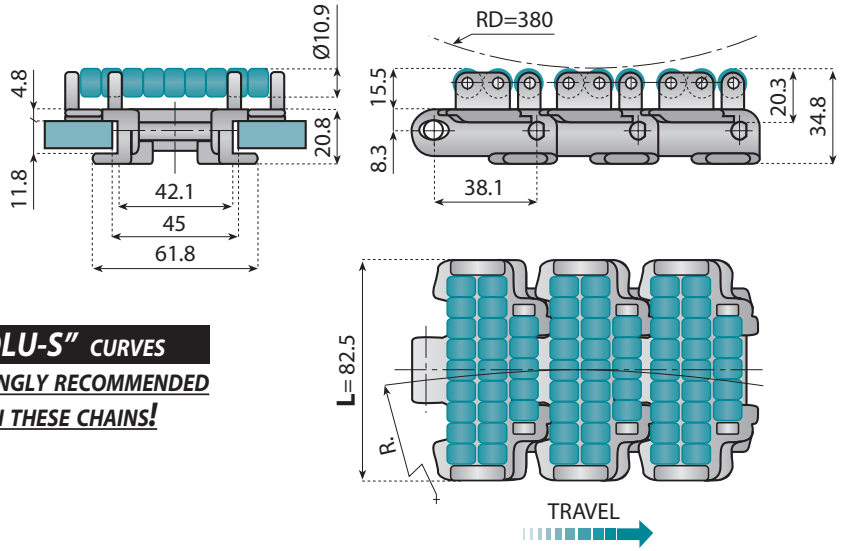

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Advantages:
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.
- Small sideflexing radius 200 mm


Pin material: Austenitic Steel


MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 265+267 | Pages 300⇨302 | Pages 330⇨333 | Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Plate	Roller		mm	inch		
LBP 878 TAB K325	**11388**	**LFG** Dark Grey	Water blue	6.000	82.5	3 ¼	200	3.20

SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM WITH LOW NOISE ACCUMULATION ROLLERS

LBP 879 M

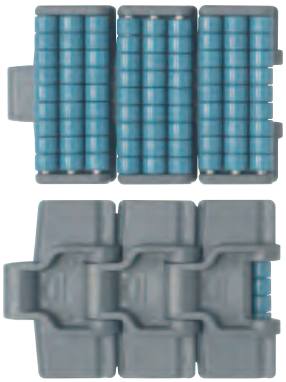

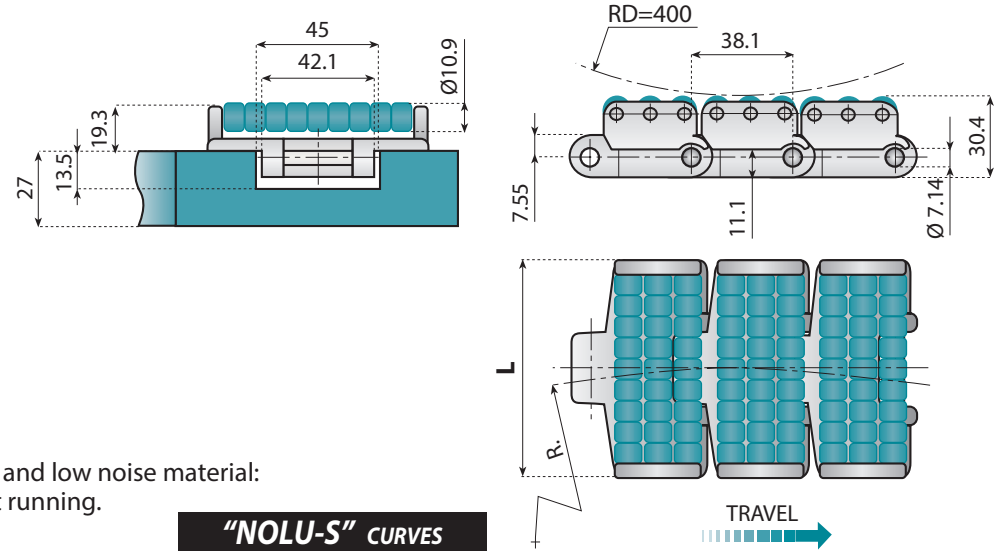

Advantages:
- High ultimate load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.
- One conveyor construction
- Easy to clean
- Easy maintenance

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Note:
Plastic magnetic system chains do not have tabs or bevels, it is the Stainless Steel pin in the chain which is attracted by the magnets embedded in the curve.


Pin material: Ferritic Stainless Steel


Pages 340⇨343
MATERIAL Pages 4⇨7 | Page 227 | Page 268 | Pages 300⇨301


Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Plate	Roller		mm	inch		
LBP 879 M K325	**11067**	**LFG** Dark Grey	Water blue	5.700	82.5	3 ¼	500	2.30

Standard length: 40 pitches (5 ft. - 1.524 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

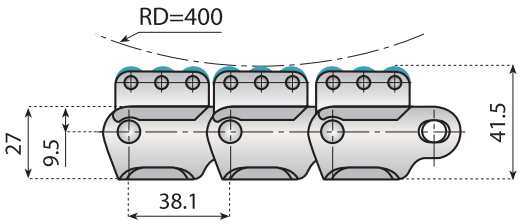

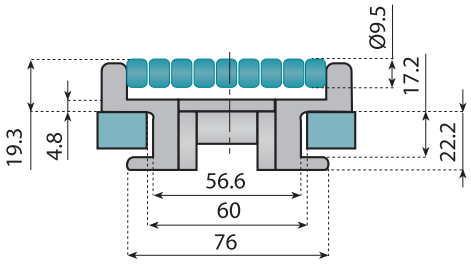


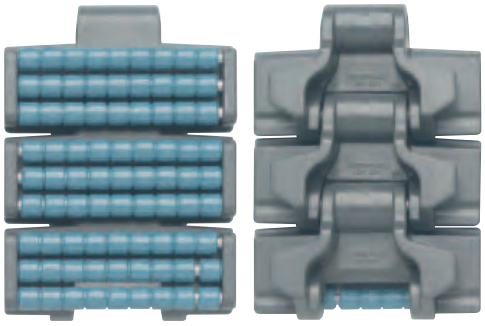

K375

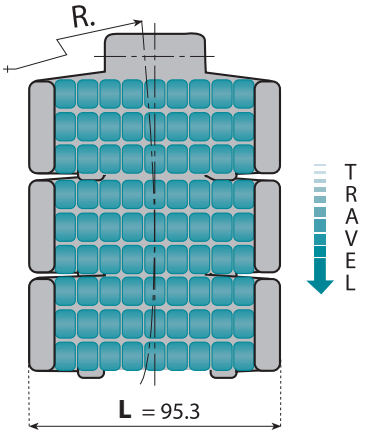

K450

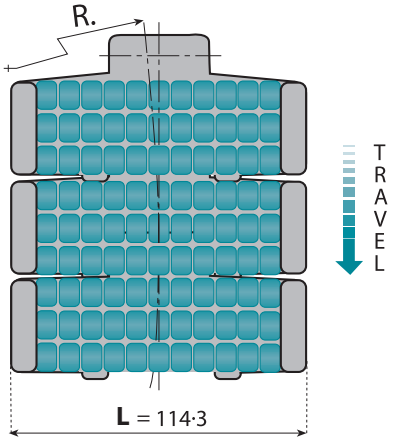

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Advantages:
- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7
Page 258
Page 266
Pages 303⇨305
Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Plate	Roller		mm	inch		
LBP 882 TAB K375	**11070**	**LFG** Dark Grey	Water blue	10.000	95.3	3 ¾	610	3.31
LBP 882 TAB K450	**11071**				114.3	4 ½		4.03


Standard length: 40 pitches (5 ft. - 1.524 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved


SIDEFLEXING CHAINS
WITH LOW NOISE ACCUMULATION ROLLERS


LBP 882 TAB

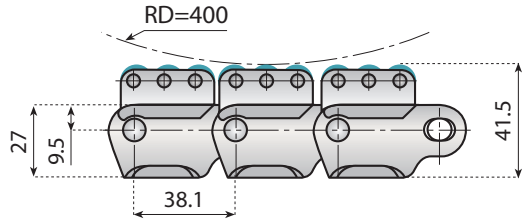


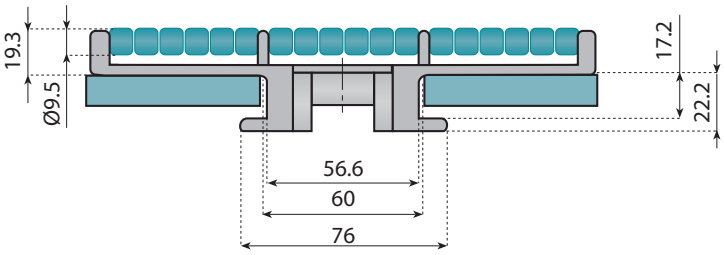

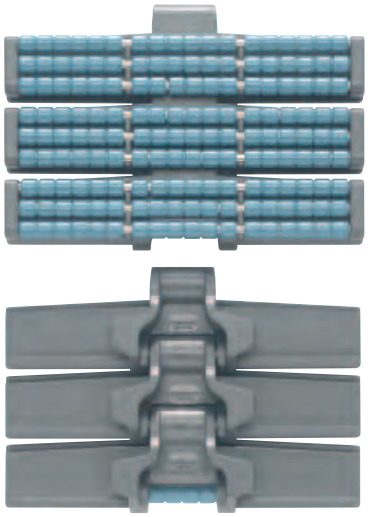

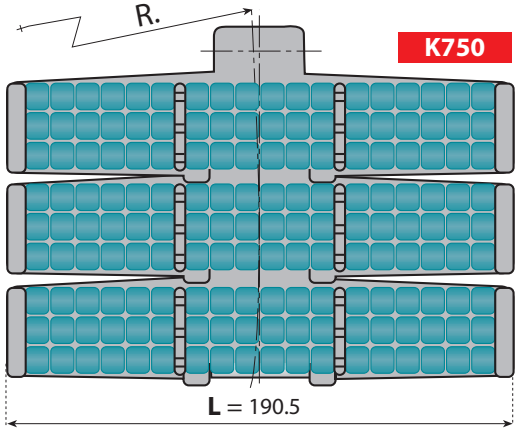

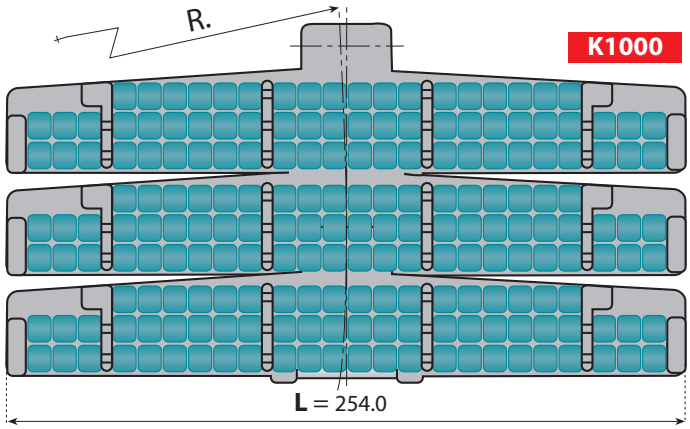

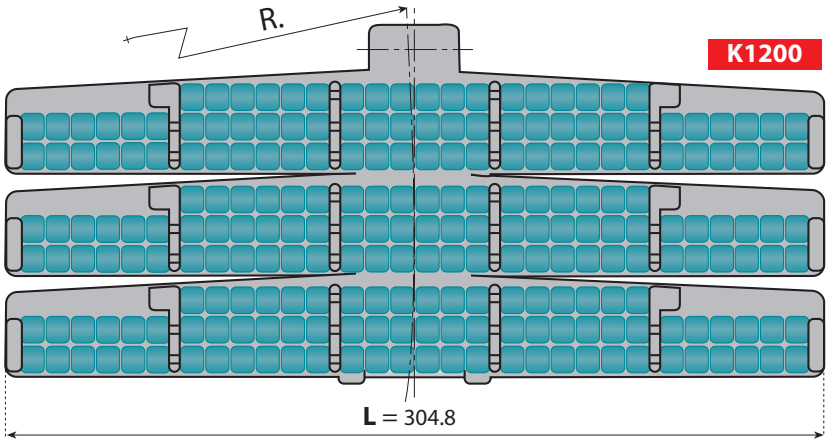

Advantages:
- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7
Page 258
Page 266
Pages 303⇨305
Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Plate	Roller		mm	inch		
LBP 882 TAB K750	**11072**	**LFG** Dark Grey	Water blue	10.000	190.5	7 ½	610	4.70
LBP 882 TAB K1000	**11069**				254.0	10		5.90
LBP 882 TAB K1200	**11068**				304.8	12		6.50


Standard length: 40 pitches (5 ft. - 1.524 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


© System Plast S.r.l., 2012 - All Rights Reserved


LBP 882 M


SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM HEAVY DUTY SINGLE HINGE WITH LOW NOISE ACCUMULATION ROLLERS

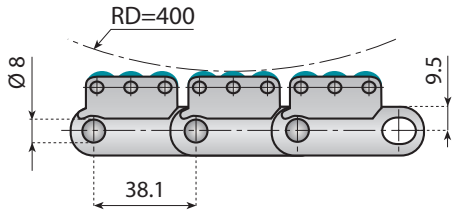


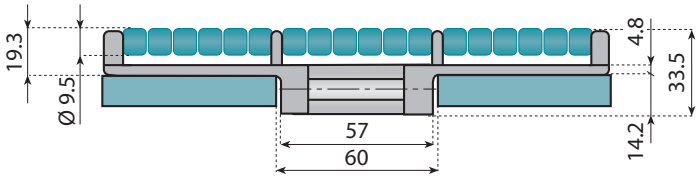


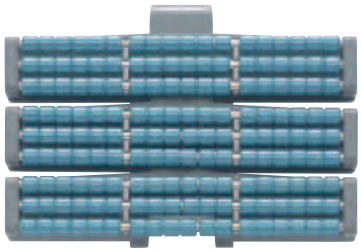

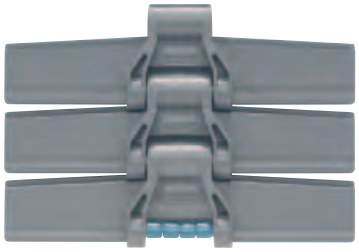

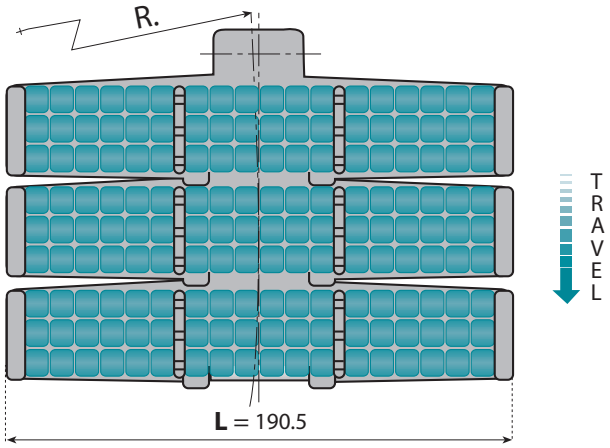

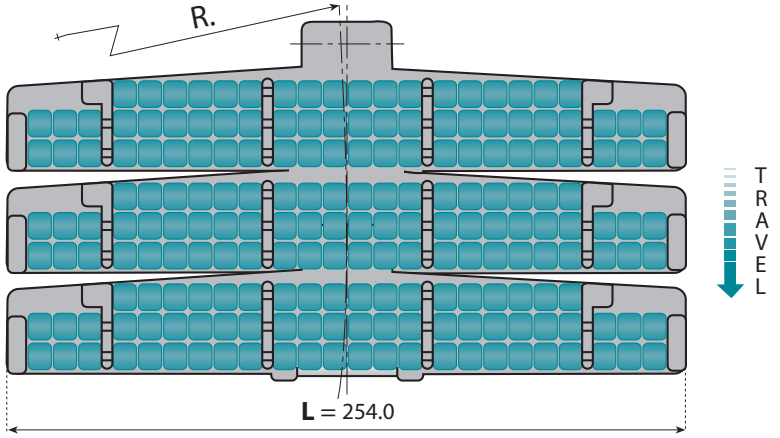

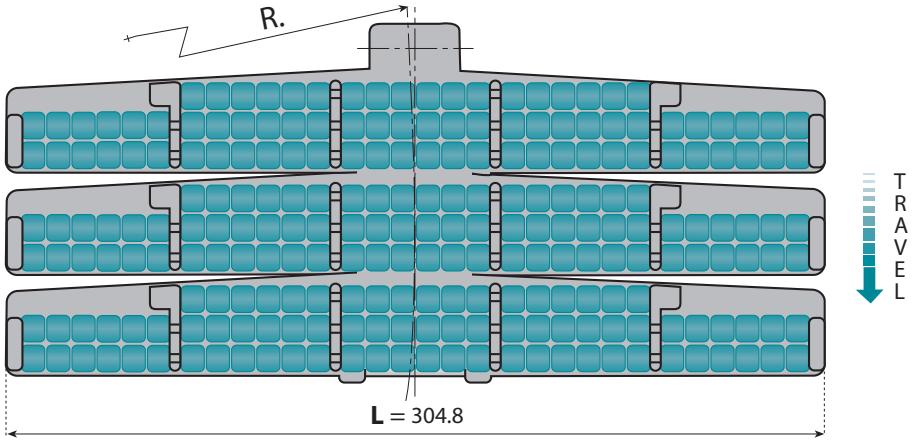

Advantages:

- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.
- A pin roller support has been added to maintain a flat and consistent carrying surface. (10" - 12" width only).
- One conveyor construction
- Easy to clean
- Easy maintenance
- Same hinge width available in many chain types, both steel and plastic, also Flat Top and rubber top chains

Note:
Plastic magnetic system chains do not have tabs or bevels, it is the Stainless Steel pin in the chain which is attracted by the magnets embedded in the curve.

Pin material: Ferritic Stainless Steel

MATERIAL Pages 4⇨7
Pages 228⇨230
Page 269
Pages 303⇨305
Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Plate	Roller		mm	inch		
LBP 882 M K750	**11073**	**LFG** Dark Grey	Water blue	10.000	190.5	7 ½	610	3.90
LBP 882 M K1000	**11074**				254.0	10		4.95
LBP 882 M K1200	**11075**				304.8	12		5.85

Standard length: 40 pitches (5 ft. - 1.524 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING PLASTIC CHAINS with friction surface

Series	*Pages*
831 VG - 821 VG - 8257 VG	54 → 55

SIDEFLEXING PLASTIC CHAINS with high friction surface

Series	*Pages*
878 TAB VG - 879 TAB VG - 879 M VG 882 TAB VG - 882 M VG - 1873 VG	56 → 59

APPLICATION:

FOOD AND BEVERAGE INDUSTRY:
PACKAGING LINES WITH INCLINED AND DECLINED CONVEYORS (TRAYS, PET BOTTLE PACKS IN HEAT SHRINK FILM, CANS IN HEAT SHRINK FILM)

GENERAL APPLICATION:


INCLINED AND DECLINED CONVEYORS FOR BOXES, BAGS, CRATES.


ALL OUR HIGH FRICTION CHAINS OFFER:

- ***LONG WEARLIFE***
- ***LOW ENERGY CONSUMPTION***
- ***HIGH FRICTION PAD. INCLINES UP TO 20° ARE POSSIBLE***
- ***EASY TO CLEAN DESIGN***

SPECIAL CONFIGURATIONS ON REQUEST
INDICATE THE DISTANCE BETWEEN THE RUBBER PADS AT THE TIME OF ORDERING

831 VG STRAIGHT RUNNING CHAINS SINGLE HINGE WITH HIGH FRICTION SURFACE

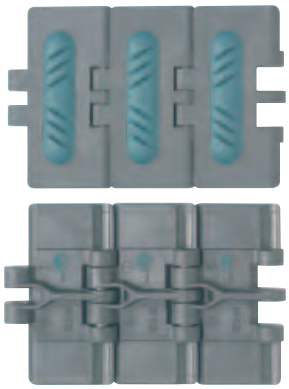

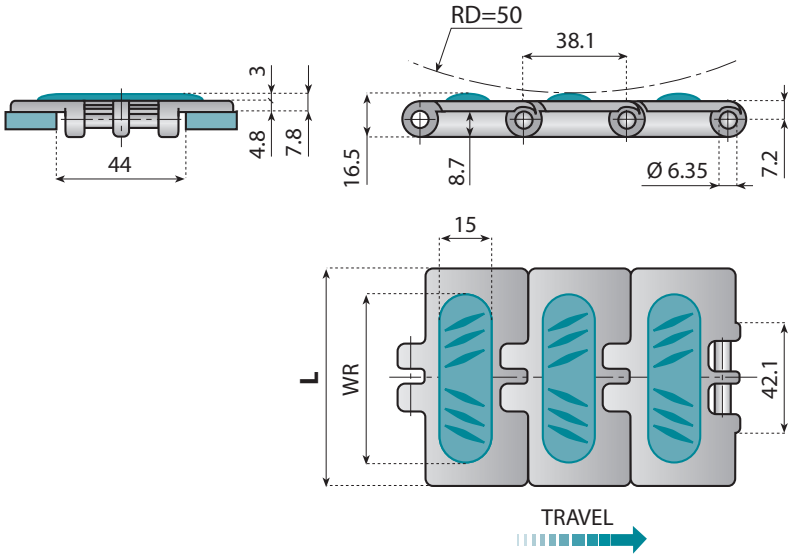



Characteristics:
For 831 VG K325 chains a roller return track is required as the friction pad extends accross the full width of the plate.
Pin material: Austenitic Steel

MATERIAL Pages 4⇨7 Pages 294⇨296 Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Width WR		Weight Kg/m
		Plate	Rubber		mm	inch	mm	inch	
NGD 831 K325 VG	**11221**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	4.000	82.5	3 ¼	60	2.36	1.40

821VG STRAIGHT RUNNING CHAINS DOUBLE HINGE WITH HIGH FRICTION SURFACE

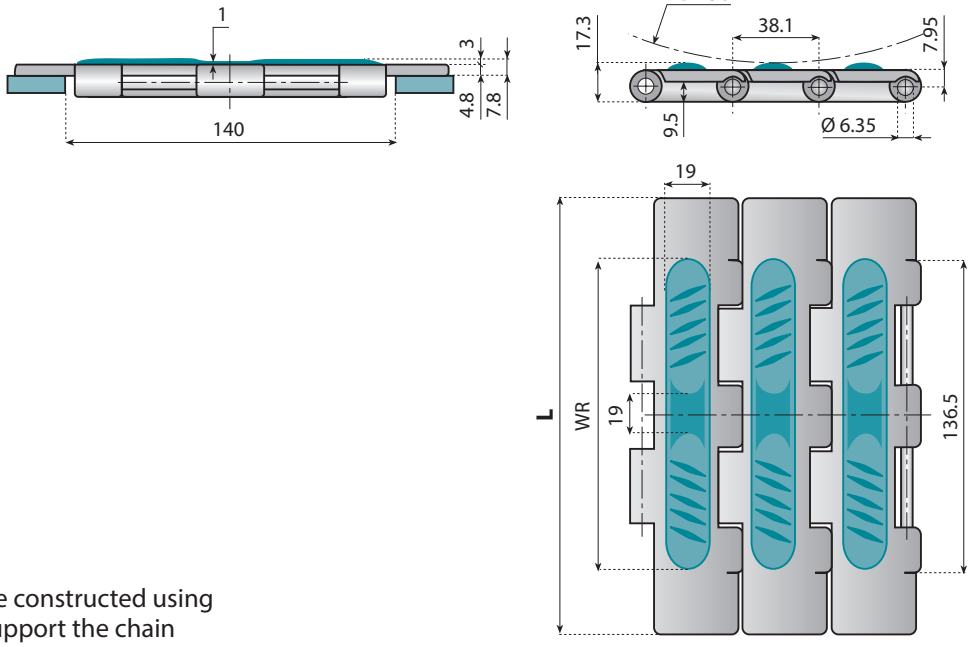

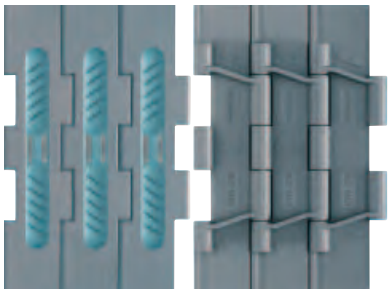

Characteristics:
The return section of the conveyor can be constructed using standard wearstrips or return rollers to support the chain on its return.
Advantages:
- High breaking load.
- Heavy duty

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7 Pages 297⇨299 Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Width WR		Weight Kg/m
		Plate	Rubber		mm	inch	mm	inch	
NGD 821 K750 VG	**11033**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	7.800	190.5	7 ½	134	5 5⁄16	2.70
NGD 821 K1000 VG	**11034**				254.0	10	192	7 ½	3.25
NGD 821 K1200 VG	**11035**				304.8	12	252	10	3.75


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved


STRAIGHT RUNNING CHAINS
HEAVY DUTY SINGLE HINGE WITH HIGH FRICTION SURFACE

8257 VG

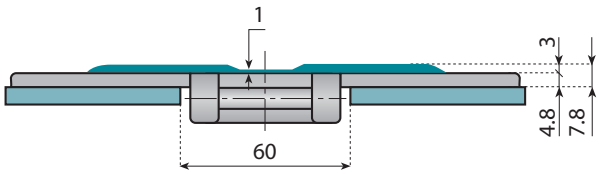

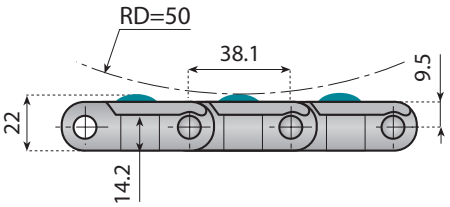

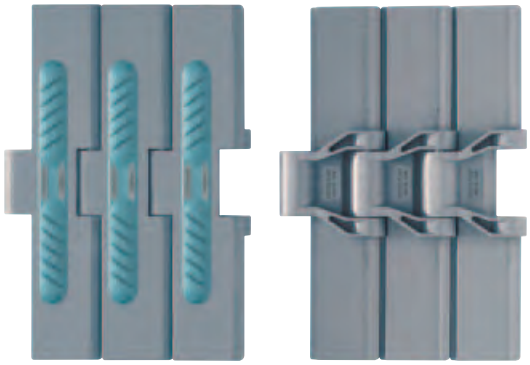

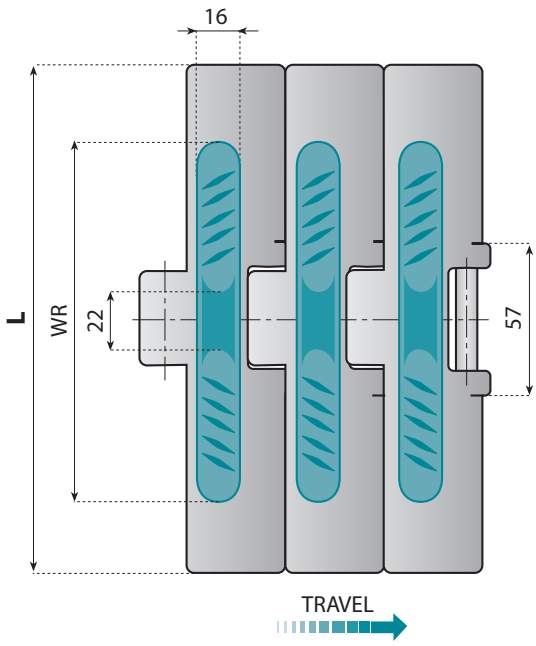

Characteristics:
- The return section of the conveyor can be constructed using standard wearstrips or return rollers to support the chain on its return.

Advantages:
- High strength
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and Flat Top chains

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7 | Pages 303⇨304 | Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	Width L		Width WR		Weight Kg/m
		Plate	Rubber		mm	inch	mm	inch	
NGD 8257 K450 VG	**11086**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	9.000	114.3	4 ½	90	3 ½	1.95
NGD 8257 K750 VG	**11083**				190.5	7 ½	134	5 5⁄16	2.25
NGD 8257 K1000 VG	**11084**				254.0	10	192	7 ½	2.60
NGD 8257 K1200 VG	**11085**				304.8	12	252	10	2.95

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

878 TAB VG — SIDEFLEXING CHAINS WITH HINGE FRICTION SURFACE



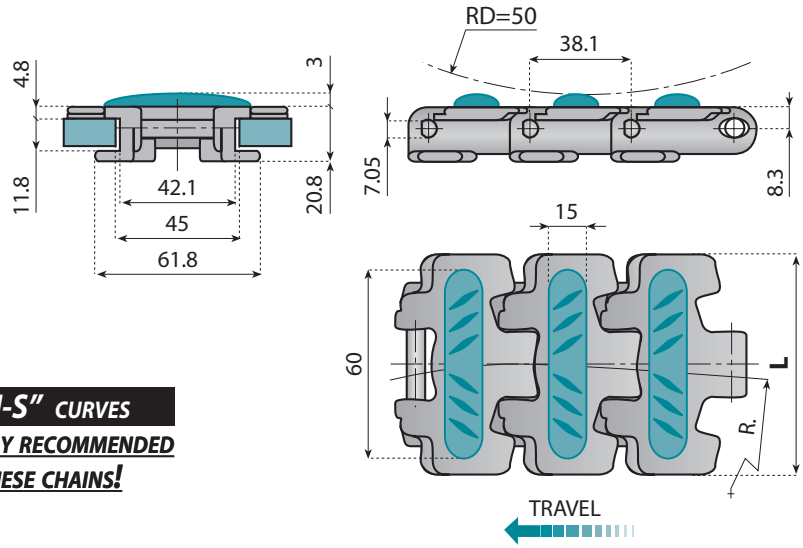

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!


Characteristics:
Turning disks can be used, as the chain is designed to turn around a very small curve radius.
Pin material: Austenitic Steel

MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 265+267 | Pages 300⇨302 | Pages 330⇨333 | Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Plate	Rubber		mm	inch		
NGD 878 TAB K325 VG	**11391**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	5.000	82.5	3 ¼	190	0.89

879 TAB VG — SIDEFLEXING CHAINS WITH HINGE FRICTION SURFACE



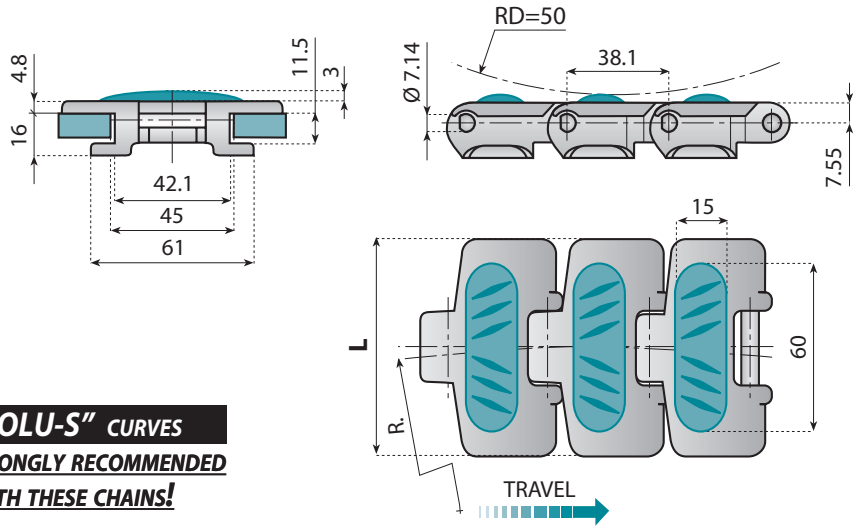

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 265+267 | Pages 300⇨302 | Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Plate	Rubber		mm	inch		
NGD 879 TAB K325 VG	**11242**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	5.000	82.5	3 ¼	500	1.40
NGD 879 TAB K325 VG 3	**11243**							1.25
NGD 879 TAB K325 VG 6	**11244**							1.10
NGD 879 TAB K450 VG	**11245**				114.3	4 ½		1.60
NGD 879 TAB K450 VG 3	**11246**							1.45
NGD 879 TAB K450 VG 6	**11247**							1.30


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


© System Plast S.r.l., 2012 - All Rights Reserved

SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM WITH HIGH FRICTION SURFACE 879 M VG

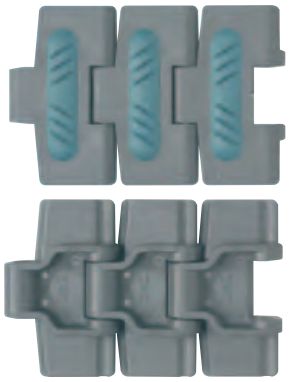

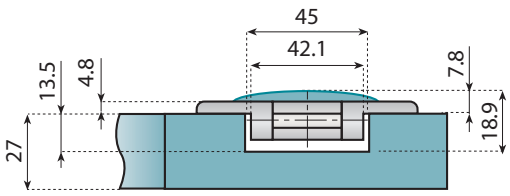

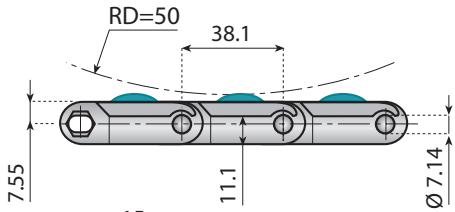

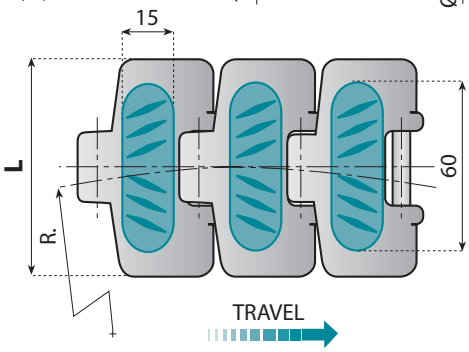


Advantages:
- One conveyor construction
- Easy to clean
- Hygienic concept
- Easy maintenance


MATERIAL Pages 4⇨7 | Pages 202⇨217 | Page 268 | Pages 300⇨301 | Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	Width L		R mm	Weight Kg/m
		Plate	Rubber		mm	inch.		
NGD 879 M K325 VG	**11225**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	5.200	82.5	3 ¼	500	1.15

SIDEFLEXING CHAINS WITH HIGH FRICTION SURFACE 882 TAB VG



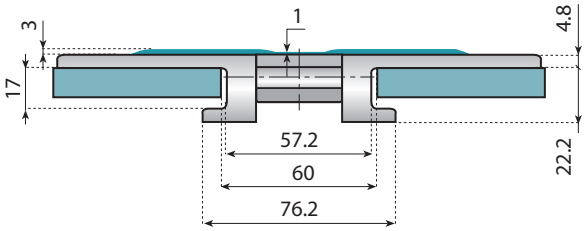

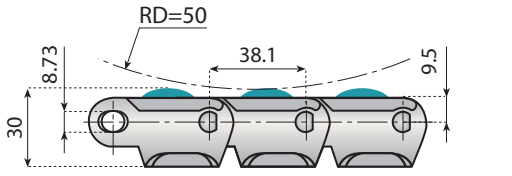

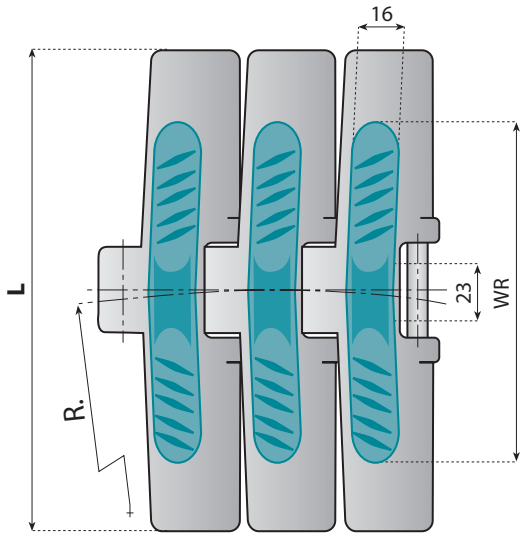

Advantages:
- High breaking load
- This chain is particularly suitable where heavier and larger products are conveyed.

Pin material: Austenitic Steel

MATERIAL Pages 4⇨7 | Page 258 | Page 266 | Pages 303⇨305 | Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	Width L		Width WR		R min.	Weight Kg/m
		Plate	Rubber		mm	inch	mm	inch		
NGD 882 TAB K750 VG	**11093**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	9.000	190.5	7 ½	134	5 5⁄16	610	2.35
NGD 882 TAB K1000 VG	**11094**				254.0	10	192	7 ½		2.65
NGD 882 TAB K1200 VG	**11095**				304.8	12	252	10		2.90


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


882 M VG

SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM
HEAVY DUTY SINGLE HINGE WITH HIGH FRICTION SURFACE

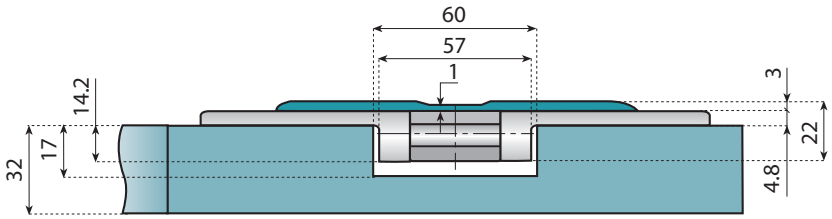

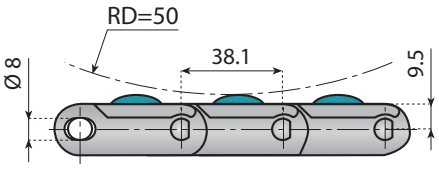

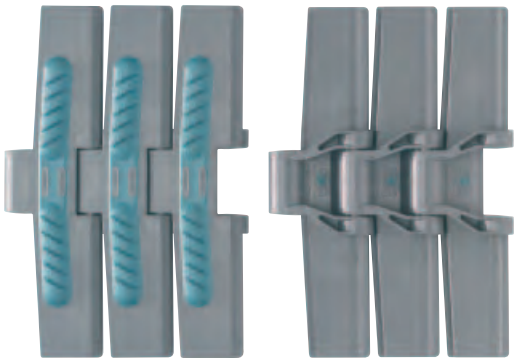

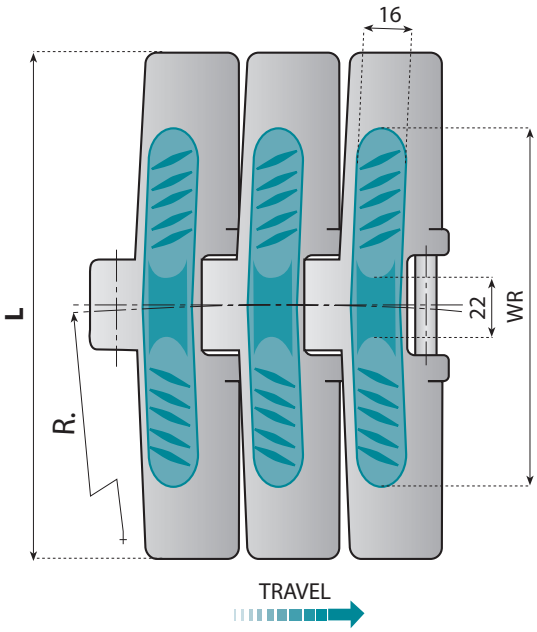

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Advantages:
- High breaking load
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and flat top chains

Note:
Plastic magnetic system chains do not have tabs or bevels, it is the Stainless Steel pin in the chain which is attracted by the magnets embedded in the curve.
Pin material: Ferritic Stainless Steel

MATERIAL Pages 4⇨7
Pages 221⇨226
Page 269
Pages 303⇨305
Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Width WR		R min.	Weight Kg/m
		Plate	Rubber		mm	inch	mm	inch		
NGD 882 M K750 VG	**11703**	**NGD** Dark Grey	**TPR** Water blue 70 shore A	9.000	190.5	7 ½	134	5 5⁄16	610	2.10
NGD 882 M K1000 VG	**11704**				254.0	10	192	7 ½		2.45
NGD 882 M K1200 VG	**11705**				304.8	12	252	9 15⁄16		2.75


Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved


SIDEFLEXING PLATE TOP CHAINS BASE ROLLER CHAINS 19,05 mm (¾") PITCH WITH HIGH FRICTION SURFACE — 1873 VG

K 750

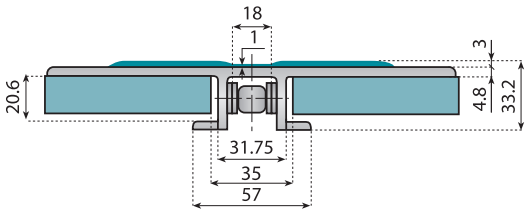

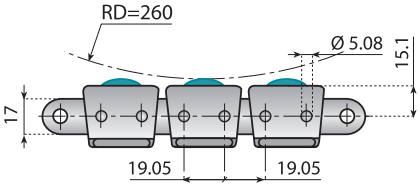


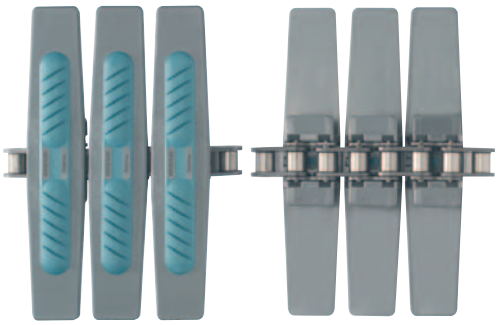


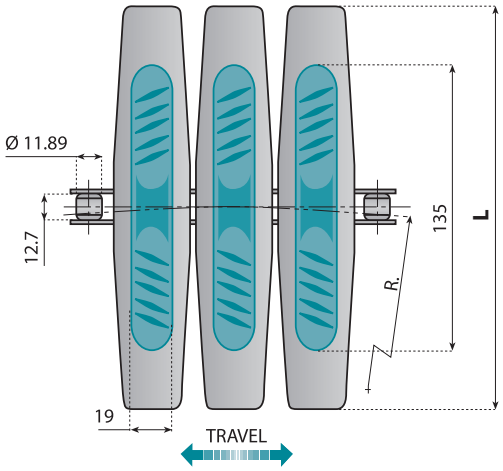



"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

K 1200

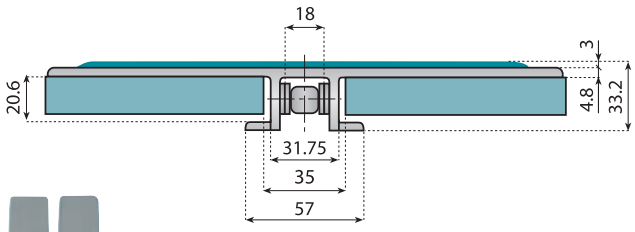

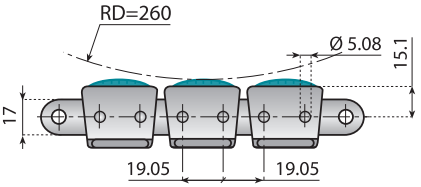

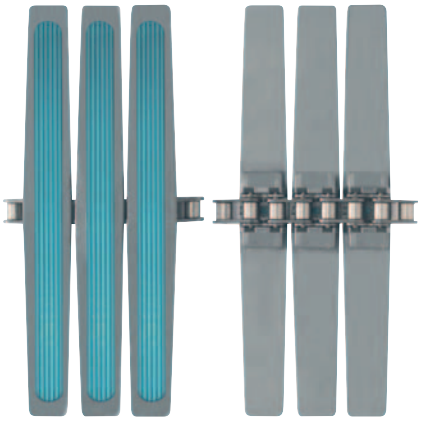

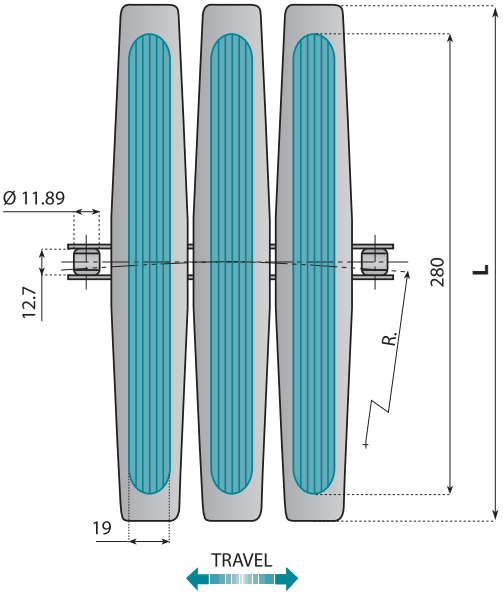

Advantages:
- High speed
- Very high loads
- Longer conveyors
- Easy maintenance
- Flights removable
- Lower noise
- No chain elongation

Roller chain Material	Connection Joint Code Link
C45	211115
SS	211116

MATERIAL Pages 4⇨7 — Page 260 — Page 267 — Page 308 — Pages 340⇨343

Chain - Ref.	Code	Material			Breaking load N	Width L		R min.	Weight Kg/m
		Roller chains	Plate	Rubber		mm	inch		
NGD 1873 K750 VG	**11590**	**C45**	**NGD** Dark Grey	**TPR** Water blue 70 schore A	27.000	190.5	7 ½	500	2.6
NGD 1873 SS K750 VG	**11591**	**SS**			21.000				
LFG 1873 K1200 VG	**11572**	**C45**	**LFG** Dark Grey		27.000	304.8	12	610	3.8
LFG 1873 SS K1200 VG	**11578**	**SS**			21.000				

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

PLASTIC SIDEFLEXING GRIPPER CHAINS

Series

878 TAB GS - 1873 GS

Pages

62 → 65

STEEL SIDEFLEXING GRIPPER CHAINS

Series

1874GV

Pages

66

ADVANTAGES:

- ***HIGH RESISTANCE TO WEAR AND TEAR***
- ***WORKING TEMPERATURE FROM -30°C TO + 120°C***


APPLICATION:


ELEVATOR CONVEYORS FOR BOTTLES, CANS AND SMALL BOXES




878 TAB GS — SIDEFLEXING GRIPPER CHAINS





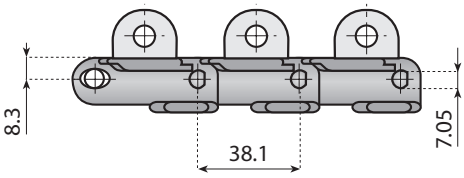

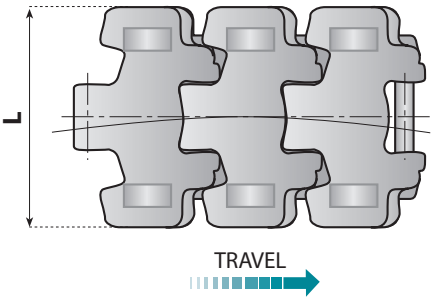

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Advantages:
- Exceptional durability.
- Optimum performance.
- Extremely low noise level.
- Removable gripper.
- Rubber pads with high resistance.

NOW AVAILABLE IN CHEMICAL RESISTANT MATERIAL

Note:
- Not suitable with oils.

MATERIAL Pages 4⇨7 | Pages 256+261 | Pages 267 | Pages 300⇨302 | Pages 340⇨343

Chain - Ref.	Code	Material	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LFG 878 TAB K325 GS	**11387**	**LFG** (Grey)	6.000	82.5	3 ¼	0.90
PP 878 TAB K325 GS	**11387CR**	**PP** (Grey)				

Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved

LFG **PP**











GS 1 *LIGHT APPLICATIONS*

Chain - Ref.	Code	Kit rubber + pin	Only rubber	K mm	Material		R min.	Weight Kg/m
					Plate	Gripper		
LFG 878 TAB K325 GS1	**11407**	**11736**	**11740**	82	**LFG** (Grey)	**THERMOPLASTIC**	210	4.65
PP 878 TAB K325 GS1	**11407CR**	**11736CR**	**11740CR**		**PP** (Grey)	**EPDM - PP** (beige)		










GS 2 *HEAVY APPLICATIONS*

Chain - Ref.	Code	Kit rubber + pin	Only rubber	K mm	Material		R min.	Weight Kg/m
					Plate	Gripper		
LFG 878 TAB K325 GS2	**11408**	**11737**	**11742**	82	**LFG** (Grey)	**THERMOPLASTIC**	225	4.05
PP 878 TAB K325 GS2	**11408CR**	**11737CR**	**11742CR**		**PP** (Grey)	**EPDM - PP** (beige)		










GS 3 *SPECIAL APPLICATIONS*

Chain - Ref.	Code	Kit rubber + pin	Only rubber	K mm	Material		R min.	Weight Kg/m
					Plate	Gripper		
LFG 878 TAB K325 GS3	**11409**	**11738**	**11744**	82	**LFG** (Grey)	**THERMOPLASTIC**	220	3.95
PP 878 TAB K325 GS3	**11409CR**	**11738CR**	**11744CR**		**PP** (Grey)	**EPDM - PP** (beige)		








GS 4 *SPECIAL APPLICATIONS*


Chain - Ref.	Code	Kit rubber + pin	Only rubber	K mm	Material		R min.	Weight Kg/m
					Plate	Gripper		
LFG 878 TAB K325 GS4	**11404**	**11739**	**11746**	82	**LFG** (Grey)	**THERMOPLASTIC**	250	4.10
PP 878 TAB K325 GS4	**11404CR**	**11739CR**	**11746CR**		**PP** (Grey)	**EPDM - PP** (beige)		


1873 GS

SIDEFLEXING PLASTIC PLATE TOP GRIPPER CHAINS BASE ROLLER CHAINS 19.05 mm (¾") PITCH



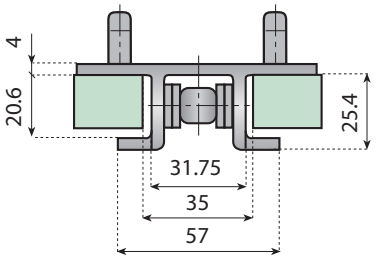

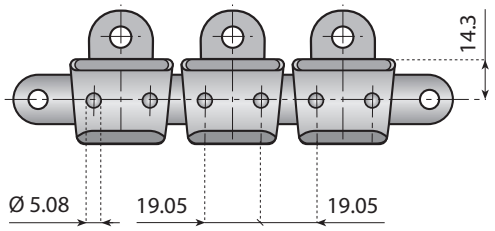

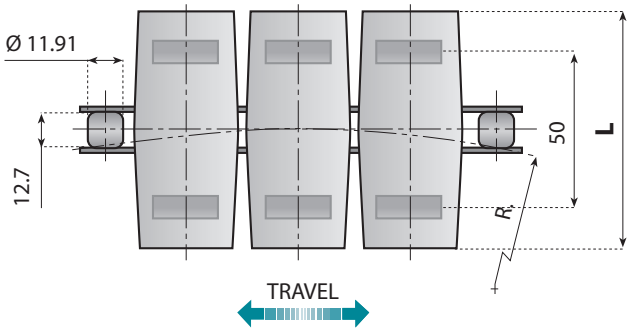

Advantages:
- High wear resistance
- High speeds
- Exceptional durability
- Optimum performance
- Extremely low noise level
- Removable gripper
- Rubber pads with high resistance
- Plastic snap-on links

Note:
- Not suitable with oils

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Roller chain Material	Connection Joint Code Link
C45	211115
AUSTENITIC	211116

NOW AVAILABLE IN CHEMICAL RESISTANT MATERIAL

MATERIAL Pages 4⇨7

Page 260

Page 267

Page 308

Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Roller chain	Plate		mm	inch		
LFG 1873 K325 GS	**11790**	**C45**	**LFG** (Grey)	27.000	82.5	3 ¼	380	2.36
LFG 1873 SS K325 GS	**11791**	**AUSTENITIC**		21.000				
PP 1873 SS K325 GS	**11791CR**	**AUSTENITIC**	**PP** (Grey)	21.000				
LFG 1873 K450 GS	**11795**	**C45**	**LFG** (Grey)	27.000	114.3	4 ½		2.88
LFG 1873 SS K450 GS	**11796**	**AUSTENITIC**		21.000				
PP 1873 SS K450 GS	**11796CR**	**AUSTENITIC**	**PP** (Grey)	21.000				

Standard length: 80 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

SIDEFLEXING PLASTIC PLATE TOP CHAINS WITH SNAP ON GRIPPER


1873 GS




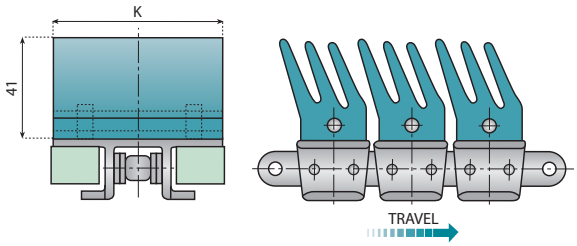

GS 1 *LIGHT APPLICATIONS*

Chain - Ref.	Code	Kit flight rubber + pin	Only rubber	K mm	Material			Weight Kg/m
					Roller chain	Plate	Gripper	
LFG 1873 K325 GS1	**11762**	**11730**	**11740**	82	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	4.65
LFG 1873 SS K325 GS1	**11763**				**AUSTENITIC**			
PP 1873 SS K325 GS1	**11763CR**	**11730CR**	**11740CR**			**PP** (Grey)	**EPDM - PP** (beige)	
LFG 1873 K450 GS1	**11766**	**11731**	**11741**	114	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	7.05
LFG 1873 SS K450 GS1	**11767**				**AUSTENITIC**			
PP 1873 SS K450 GS1	**11767CR**	**11731CR**	**11741CR**			**PP** (Grey)	**EPDM - PP** (beige)	




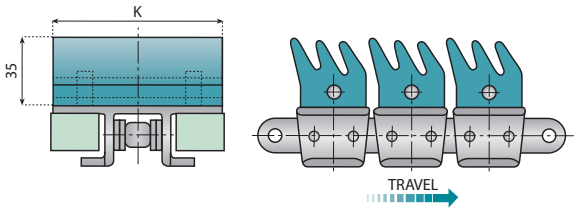

GS 2 *HEAVY APPLICATIONS*

Chain - Ref.	Code	Kit flight rubber + pin	Only rubber	K mm	Material			Weight Kg/m
					Roller chain	Plate	Gripper	
LFG 1873 K325 GS2	**11775**	**11732**	**11742**	82	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	4.05
LFG 1873 SS K325 GS2	**11776**				**AUSTENITIC**			
PP 1873 SS K325 GS2	**11776CR**	**11732CR**	**11742CR**			**PP** (Grey)	**EPDM - PP** (beige)	
LFG 1873 K450 GS2	**11779**	**11733**	**11743**	114	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	6.45
LFG 1873 SS K450 GS2	**11780**				**AUSTENITIC**			
PP 1873 SS K450 GS2	**11780CR**	**11733CR**	**11743CR**			**PP** (Grey)	**EPDM - PP** (beige)	




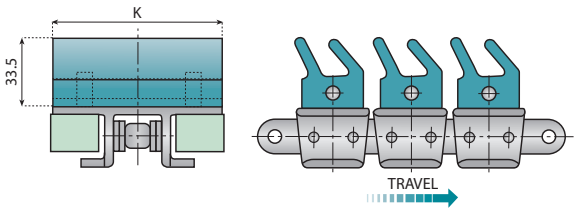

GS 3 *SPECIAL APPLICATIONS*

Chain - Ref.	Code	Kit flight rubber + pin	Only rubber	K mm	Material			Weight Kg/m
					Roller chain	Plate	Gripper	
LFG 1873 K325 GS3	**11781**	**11734**	**11744**	82	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	3.95
LFG 1873 SS K325 GS3	**11782**				**AUSTENITIC**			
PP 1873 SS K325 GS3	**11782CR**	**11734CR**	**11744CR**			**PP** (Grey)	**EPDM - PP** (beige)	
LFG 1873 K450 GS3	**11783**	**11735**	**11745**	114	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	6.35
LFG 1873 SS K450 GS3	**11784**				**AUSTENITIC**			
PP 1873 SS K450 GS3	**11784CR**	**11735CR**	**11745CR**			**PP** (Grey)	**EPDM - PP** (beige)	



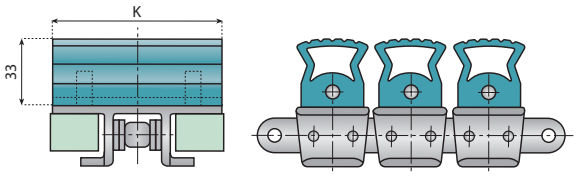



GS 4 *SPECIAL APPLICATIONS*


Chain - Ref.	Code	Kit flight rubber + pin	Only rubber	K mm	Material			Weight Kg/m
					Roller chain	Plate	Gripper	
LFG 1873 K325 GS4	**11785**	**11728**	**11746**	82	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	4.15
LFG 1873 SS K325 GS4	**11786**				**AUSTENITIC**			
PP 1873 SS K325 GS4	**11786CR**	**11728CR**	**11746CR**			**PP** (Grey)	**EPDM - PP** (beige)	
LFG 1873 K450 GS4	**11787**	**11729**	**11747**	114	**C45**	**LFG** (Grey)	**THERMOPLASTIC**	6.55
LFG 1873 SS K450 GS4	**11788**				**AUSTENITIC**			
PP 1873 SS K450 GS4	**11788CR**	**11729CR**	**11747CR**			**PP** (Grey)	**EPDM - PP** (beige)	

1874 GV GRIPPER CHAINS WITH VULCANIZED RUBBER PADS





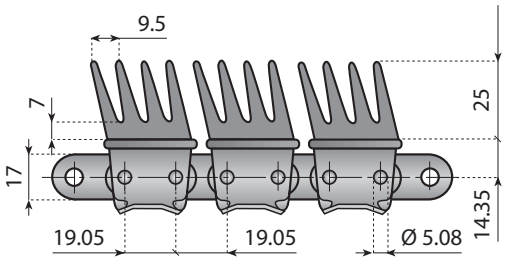

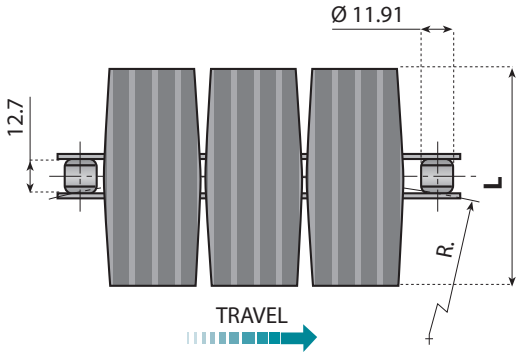

Application:
Elevating and lowerating conveyors.

Characteristics:
Gripper pads are utilized for a wide range of applications due to their unique mechanical properties.
They offer users high laceration and abrasion resistance, good resistance to deformation and excellent resistance to fatigue and heat.

Roller chain Material	Connection Joint Code Link
C45	211115
AUSTENITIC	211116

MATERIAL Pages 4⇨7 | Page 260 | Page 267 | Page 308 | Pages 340⇨343

Chain - Ref.	Code	Material			Breaking load N	Width L		R min.	Weight Kg/m
		Roller chain	Plate	Rubber		mm	inch		
1874 A K325 GV	**11203**	**C45**	**AUSTENITIC**	**NBR**	27.000	82.5	3 ¼	380	5.8
1874 SS K325 GV	**11204**	**AUSTENITIC**			21.000				
1874 SS K325 GVE	**11202**	**AUSTENITIC**		**EPDM**	21.000				

Standard length: 160 pitches (10 ft. - 3.048 m) 80 Flights

© System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING PLATE TOP CHAINS

Series

843 - 845 - 863

Pages

68 → 70

SIDEFLEXING PLATE TOP CHAINS

Series

1843 - 1863 - 1873 - 1883

Pages

71 → 73


ALL OUR PLATE TOP OFFER:

- **HIGH SPEED**
- **VERY HIGH LOADS**
- **LONGER CONVEYORS**
- **EASY MAINTENANCE**
- **FLIGHTS REMOVABLE**
- **LOWER NOISE**
- **NO CHAIN ELOGATION**



843 STRAIGHT RUNNING PLASTIC PLATE TOP CHAINS WITH BASE ROLLER CHAINS 12.7 mm (½") PITCH



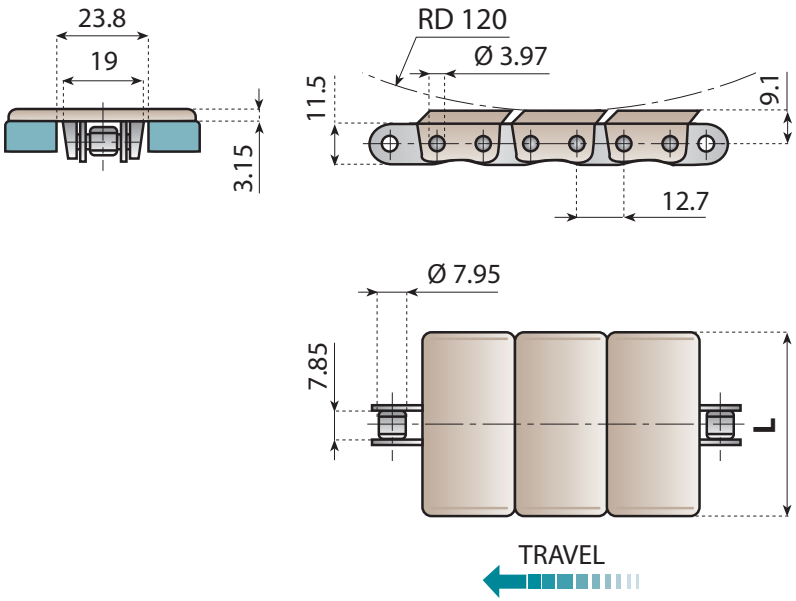

Advantages:
- Small pitch
- Reduced chordal effect
- Reduced sprocket diameter

Roller chain Material	Connection Joint Code Link
C45	211222
AUSTENITIC	211224

On request and for adequate quantities these chains can be produced in:

D
Grey Acetal Resin

MATERIAL Pages 4⇨7 | Page 308 | Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Weight Kg/m
		Roller chain	Top plate		mm	inch	
LF 843 K100	**11593**	C45	LF Brown	16.900	25.4	1	0.82
LF 843 K125	**11720**				31.8	1 ¼	0.83
LF 843 K138	**11614**				34.9	1 ⅜	0.83
LF 843 K144	**11615**				36.5	1 7/16	0.84
LF 843 K200	**11616**				50.8	2	0.89
LF 843 K325	**11617**				82.5	3 ¼	1.03
NG 843 K100	**11670**		NG Green		25.4	1	0.82
NG 843 K125	**11722**				31.8	1 ¼	0.83
NG 843 K138	**11671**				34.9	1 ⅜	0.83
NG 843 K144	**11672**				36.5	1 7/16	0.84
NG 843 K200	**11673**				50.8	2	0.89
NG 843 K325	**11674**				82.5	3 ¼	1.03
LF 843 SS K100	**11597**	AUSTENITIC	LF Brown	10.690	25.4	1	0.82
LF 843 SS K125	**11723**				31.8	1 ¼	0.83
LF 843 SS K138	**11644**				34.9	1 ⅜	0.83
LF 843 SS K144	**11645**				36.5	1 7/16	0.84
LF 843 SS K200	**11646**				50.8	2	0.89
LF 843 SS K325	**11647**				82.5	3 ¼	1.03
NG 843 SS K100	**11675**		NG Green		25.4	1	0.82
NG 843 SS K125	**11725**				31.8	1 ¼	0.83
NG 843 SS K138	**11676**				34.9	1 ⅜	0.83
NG 843 SS K144	**11677**				36.5	1 7/16	0.84
NG 843 SS K200	**11678**				50.8	2	0.89
NG 843 SS K325	**11679**				82.5	3 ¼	1.03


Standard length: 240 pitches (10 ft. - 3.048 m)


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT RUNNING PLASTIC PLATE TOP CHAINS WITH BASE ROLLER CHAINS 12.7 mm (½") PITCH





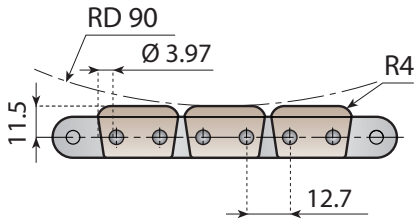

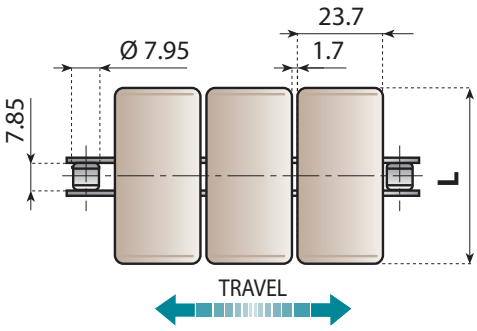

Advantages:

- High speed
- Low noise
- Small pitch
- Reduced chordal effect
- Reduced sprocket diameter
- Easy maintenance
- Plastic flights removable
- High loads

Roller chain Material	Connection Joint Code Link
SS	211229


Pages 4⇨7 Page 308 Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Weight Kg/m
		Roller chain	Top plate		mm	inch	
LF 845 SS K200 - 298 LINKS	**11445/298**	SS	LF Brown	10.690	50.8	2	0.89
LF 845 SS K200 - 300 LINKS	**11445/300**						

Breaking Load according to Standard ISO 4348 - DIN 8153

STRAIGHT RUNNING PLATE TOP CHAINS WITH BASE ROLLER CHAINS 19.05 mm (¾") PITCH



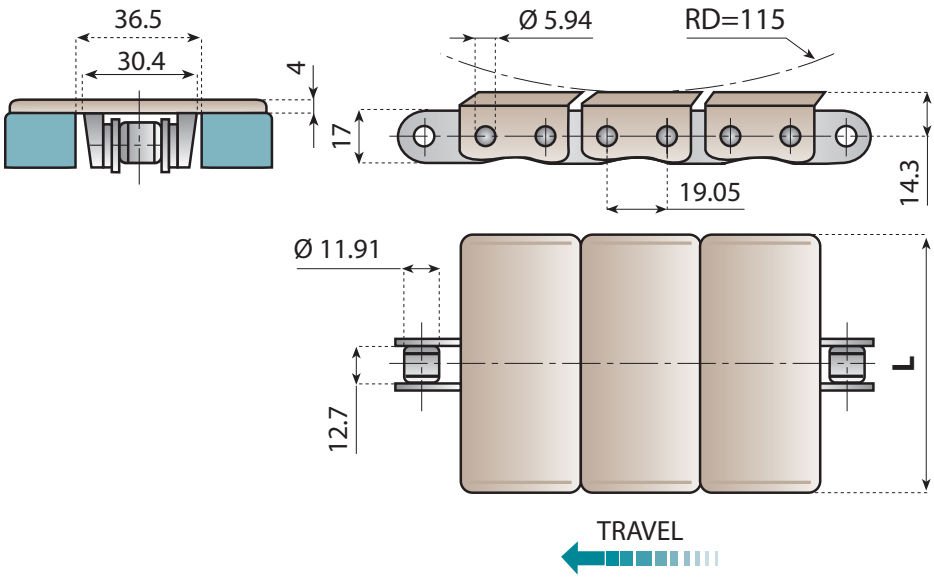

Descriptions:
Combining the carrying capacity of a high quality base roller chain with the smoothness and flatness of the thermoplastic flights, allows for greater conveyor design freedom with these chains, increased conveyor lengths and faster speeds are possible.

Roller chain Material	Connection Joint Code Link
C45	211226
AUSTENITIC	211228

On request and for adequate quantities these chains can be produced in:

D
Grey Acetal Resin

MATERIAL Pages 4⇨7 | Page 308 | Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		Weight Kg/m
		Roller chain	Top plate		mm	inch	
LF 863 K325	**11622**	**C45**	**LF** Brown	38.000	82.5	3 ¼	2.10
LF 863 K450	**11623**				114.3	4 ½	2.23
LF 863 K600	**11624**				152.4	6	2.53
LF 863 K750	**11625**				190.5	7 ½	2.68
NG 863 K325	**11680**		**NG** Green		82.5	3 ¼	2.10
NG 863 K450	**11681**				114.3	4 ½	2.23
NG 863 K600	**11682**				152.4	6	2.53
NG 863 K750	**11683**				190.5	7 ½	2.68
LF 863 SS K325	**11652**	**AUSTENITIC**	**LF** Brown	30.000	82.5	3 ¼	2.10
LF 863 SS K450	**11653**				114.3	4 ½	2.23
LF 863 SS K600	**11654**				152.4	6	2.53
LF 863 SS K750	**11655**				190.5	7 ½	2.68
NG 863 SS K325	**11684**		**NG** Green		82.5	3 ¼	2.10
NG 863 SS K450	**11685**				114.3	4 ½	2.23
NG 863 SS K600	**11686**				152.4	6	2.53
NG 863 SS K750	**11687**				190.5	7 ½	2.68

Standard length: 160 pitches (10 ft. - 3.048 m) 80 Flights

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved


SIDEFLEXING OVERLAPPING PLATE TOP CHAINS WITH BASE ROLLER CHAINS 12.7 mm (½") PITCH


1843



Advantages:
- Small pitch
- Reduced chordal effect
- Reduced sprocket diameter
- Continuous flat conveying surface.

Standard length:
240 pitches (10 Ft - 3,048 m)
120 flights



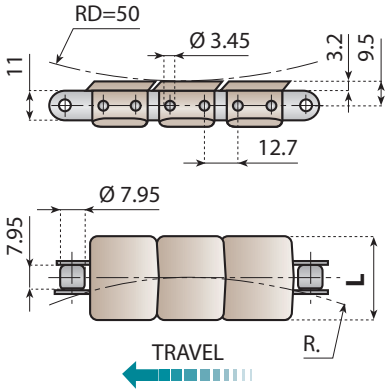

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

On request and for adequate quantities these chains can be produced in:

AS	D
Anti-static Acetal Resin	Grey Acetal Resin

Roller chain Material	Connection Joint Code Link
C45	211230
AUSTENITIC	211232

MATERIAL Pages 4⇨7 · Page 262 · Page 269 · Page 308 · Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	Width L		R mm	Weight Kg/m
		Roller chain	Top plate		mm	inch.		
LF 1843 K125	**11543**	**C45**	**LF** Brown	13000	31.8	1 ¼	254	0.74
LF 1843 K200	**11429**				50.8	2		0.89
NG 1843 K125	**11425**		**NG** Green		31.8	1 ¼		0.74
NG 1843 K200	**11431**				50.8	2		0.89
LF 1843 SS K125	**11545**	**AUSTENITIC**	**LF** Brown	10000	31.8	1 ¼		0.74
LF 1843 SS K200	**11433**				50.8	2		0.89
NG 1843 SS K125	**11426**		**NG** Green		31.8	1 ¼		0.74
NG 1843 SS K200	**11435**				50.8	2		0.89


SIDEFLEXING OVERLAPPING PLATE TOP CHAINS WITH BASE ROLLER CHAINS 19.05 mm (¾") PITCH

1863



Advantages:
- Overlapping flights reduce gap between flights and assure better product stability
- Improved safety because of the reduced flights gap on both the straight and curved sections of the conveyor
- Interchangeable with 1873 series



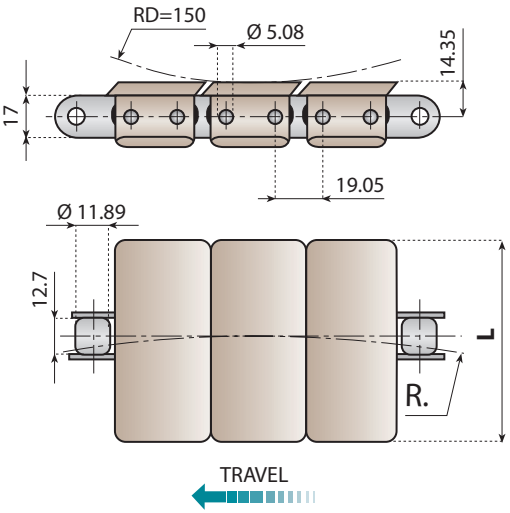

Roller chain Material	Connection Joint Code Link
C45	211115
AUSTENITIC	211116

MATERIAL Pages 4⇨7 · Page 260 · Page 267 · Page 308 · Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	SC		Weight Kg/m
		Roller chain	Top plate		mm	inch		Straight	Curving	
LF 1863 K225	**11547**	**C45**	**LF** Brown	27.000	57.2	2 ¼	380	33.3	35	2.00
NG 1863 K225	**11710**		**NG** Green							
LF 1863 SS K225	**11557**	**AUSTENITIC**	**LF** Brown	21.000						
NG 1863 SS K225	**11711**		**NG** Green							

Standard length: 160 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

SIDEFLEXING PLATE TOP CHAINS WITH BASE ROLLER CHAINS 19.05 mm (¾") PITCH



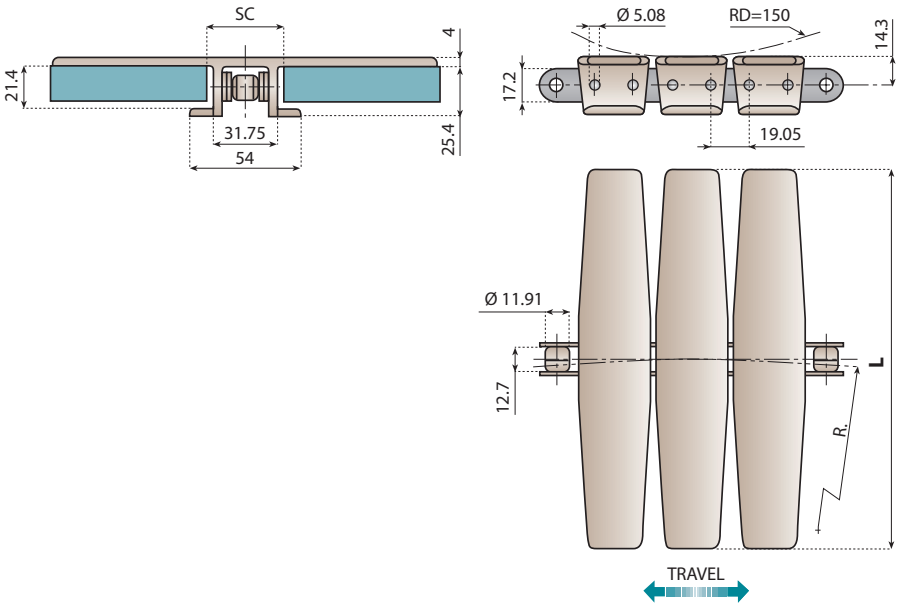

Roller chain Material	Connection Joint Code Link
C45	211115
AUSTENITIC	211116

MATERIAL Pages 4⇨7
Page 260
Page 267
Page 308
Pages 340⇨343

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!


Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	SC		Weight Kg/m
		Roller chain	Plate		mm	inch		Straight	Curving	
LF 1873 K225	**11633**	C45	LF Brown	27.000	57.1	2 ¼	380	33.3	35	2.00
LF 1873 K325	**11634**				82.5	3 ¼				2.10
LF 1873 K450	**11635**				114.3	4 ½				2.23
LF 1873 K600	**11636**				152.4	6	500			2.40
LF 1873 K750	**11637**				190.5	7 ½				2.60
LF 1873 K1000	**11638**				254.0	10				2.80
LF 1873 K1200	**11639**				304.8	12	610			3.00
NG 1873 K225	**11707**		NG Green		57.1	2 ¼	380			2.00
NG 1873 K325	**11688**				82.5	3 ¼				2.10
NG 1873 K450	**11689**				114.3	4 ½				2.23
NG 1873 K600	**11690**				152.4	6	500			2.40
NG 1873 K750	**11691**				190.5	7 ½				2.60
NG 1873 K1000	**11692**				254.0	10				2.80
NG 1873 K1200	**11693**				304.8	12	610			3.00
LF 1873 SS K225	**11663**	AUSTENITIC	LF Brown	21.000	57.1	2 ¼	380	33.3	35	2.00
LF 1873 SS K325	**11664**				82.5	3 ¼				2.10
LF 1873 SS K450	**11665**				114.3	4 ½				2.23
LF 1873 SS K600	**11666**				152.4	6	500			2.40
LF 1873 SS K750	**11667**				190.5	7 ½				2.60
LF 1873 SS K1000	**11668**				254.0	10				2.80
LF 1873 SS K1200	**11669**				304.8	12	610			3.00
NG 1873 SS K225	**11709**		NG Green		57.1	2 ¼	380			2.00
NG 1873 SS K325	**11694**				82.5	3 ¼				2.10
NG 1873 SS K450	**11695**				114.3	4 ½				2.23
NG 1873 SS K600	**11696**				152.4	6	500			2.40
NG 1873 SS K750	**11697**				190.5	7 ½				2.60
NG 1873 SS K1000	**11698**				254.0	10				2.80
NG 1873 SS K1200	**11699**				304.8	12	610			3.00


Standard length: 160 pitches (10 ft. - 3.048 m) 80 flights


Breaking Load according to Standard ISO 4348 - DIN 8153


 © System Plast S.r.l. , 2012 - All Rights Reserved

SIDEFLEXING OVERLAPPING PLATE TOP CHAINS WITH BASE ROLLER CHAINS 25.4 mm (1") PITCH





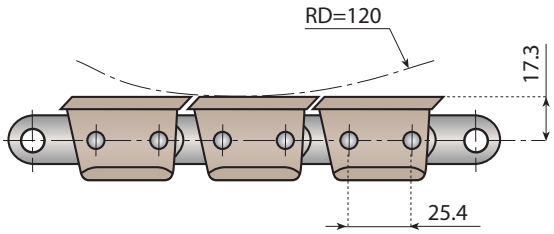

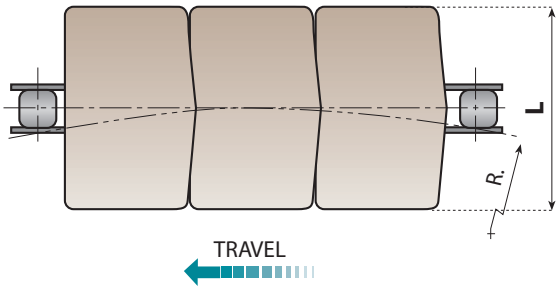

Advantages:

- Overlapping flights reduce gap between flights and assure better product stability
- Improved safety because of the reduced flights gap on both the straight and curved sections of the conveyor

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

Roller chain Material	Connection Joint Code Link
C45	AA1000000

On request and for adequate quantities these chains can be produced in:

D
Grey Acetal Resin

MATERIAL Pages 4⇨7
Page 262
Page 270
Page 308
Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	Weight Kg/m
		Roller chain	Plate		mm	inch		
LF 1883 K325	**11850**	**C45**	**LF** Brown	55.000	82.5	3 ¼	715	3.44
NG 1883 K325	**11852**		**NG** Green					

Standard length: 120 pitches (10 ft. - 3.048 m) 60 flights

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

PLASTIC MULTIFLEX CHAINS

Series *Pages*

1700 - 1701 TAB - 1701 TAB OP
1701 TAB OP M - 1702 - 1702 M
HMGK 50 - HMGK 50 FN -HMGK 50 MS
HMGK 50 P - HMGK 50 TAB P
HMGK 50 H - HMGK 50 TAB H
7000 - 7000 TAB - 7001 - 7001 TAB
7005 - 7005 TAB - 1706 76 → 82

APPLICATION:

- *DAIRY INDUSTRY CONVEYING OF MILK CARTONS*
- *ELEVATION OR LOWERING PRODUCTS WITH POSSIBILITY OF ACCUMULATION*
- *PRESERVING AND MECHANICAL INDUSTRIES*

ADVANTAGES:

- *MULTI-DIRECTIONAL FLEXIBILIY*
- *SMALL SIDEFLEXING RADIUS*
- *HIGH WORKING LOAD*
- *CONSISTENT HIGH QUALITY*
- *LONG WEAR LIFE*
- *LOW COEFFICIENT OF FRICTION*

CRATE CONVEYOR CHAINS

Series *Pages*


CC 600 - CC 600 TAB - CC 600 P
CC 1400 V - CC 140 V TAB - CC 600 F
CC 600 TAB P - CC 631 TAB
CC 1400 - CC 1400 TAB - CC 1431 TAB 83 → 85


APPLICATION:

- *TRANSPORTATION OF PLASTIC CRATES*
- *GENERAL PURPOSE CONVEYING APPLICATIONS*


ADVANTAGES:


- *HIGH STRENGTH*
- *CURVING RADIUS CAPABILITY*
- *VERY HIGH WEAR RESISTANCE*

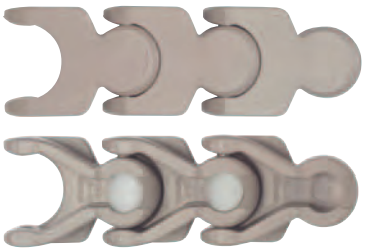

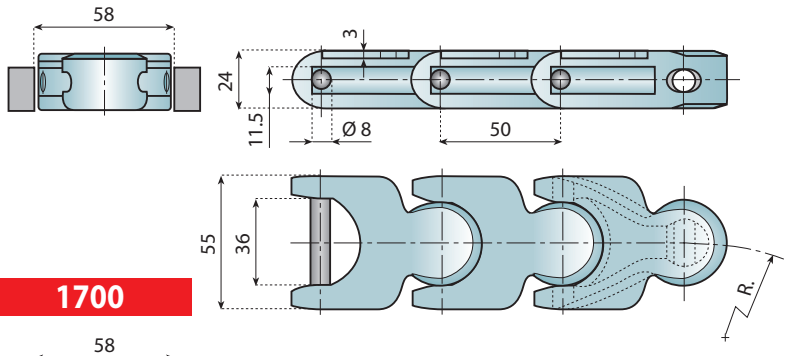

1700

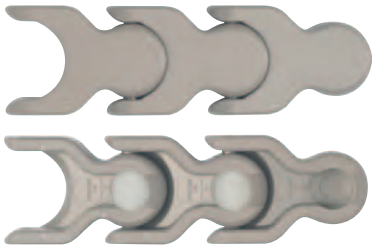

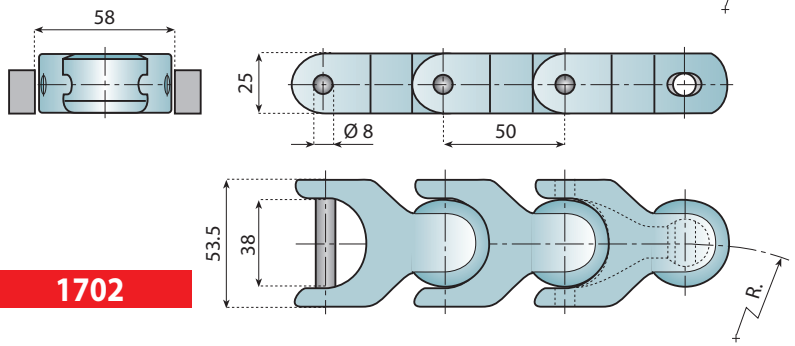

1702


Pin Material: Austenitic Stainless Steel

Chain - Ref.	Code	Material Link	Breaking load N	R min.	Weight Kg/m
D - 1700	**11950**	**D**	8.500	150	1.25
W - 1700	**11951**	**W**			
LF - 1700	**11952**	**LF**			
LFW - 1700	**11953**	**LFW**			
NG - 1700	**11948**	**NG**			
D - 1702	**11949**	**D**	9.500		1.40
LF - 1702	**11954**	**LF**			
LFW - 1702	**11955**	**LFW**			
NG - 1702	**11984**	**NG**			


MATERIAL Pages 4⇨7 | Page 263 | Page 271 | Page 306 | Pages 334⇨335 | Pages 340⇨343




HMGK 50 FN
is identical to series 1700 hains but has no overlapping top plate

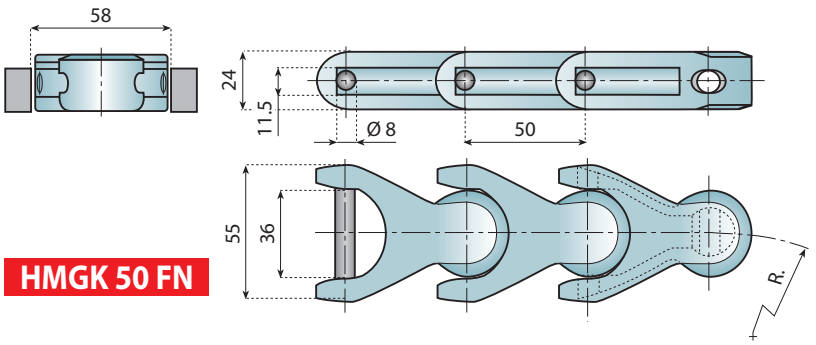

HMGK 50 FN

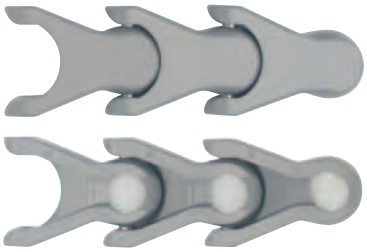

HMGK 50
is identical to series 1700 Chains but does not have sideslots or overlapping top plate

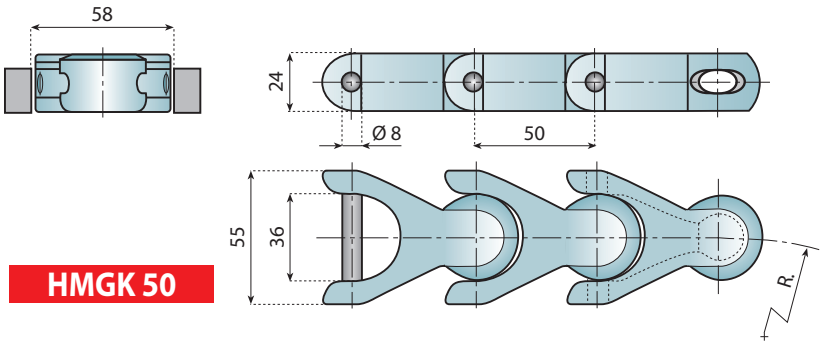

HMGK 50


Pin Material: Austenitic Stainless Steel

Chain - Ref.	Code	Material Link	Breaking load N	R min.	Weight Kg/m
W - HMGK 50 FN	**11961**	**W**	8.500	130	1.25
D - HMGK 50	**11962**	**D**		145	1.35
W - HMGK 50	**11963**	**W**			


Standard length: 61 pitches (10 ft. - 3.050 m)

MATERIAL Pages 4⇨7 | Page 263 | Page 271 | Page 306 | Pages 334⇨335 | Pages 340⇨343


 © System Plast S.r.l. , 2012 - All Rights Reserved

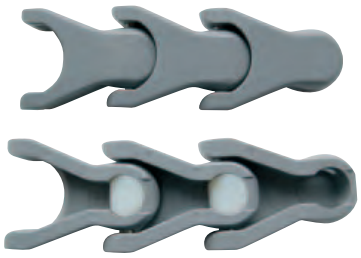


HMGK 50 MS is identical to series HMGK 50 but as an additional feature a bevelled top plate

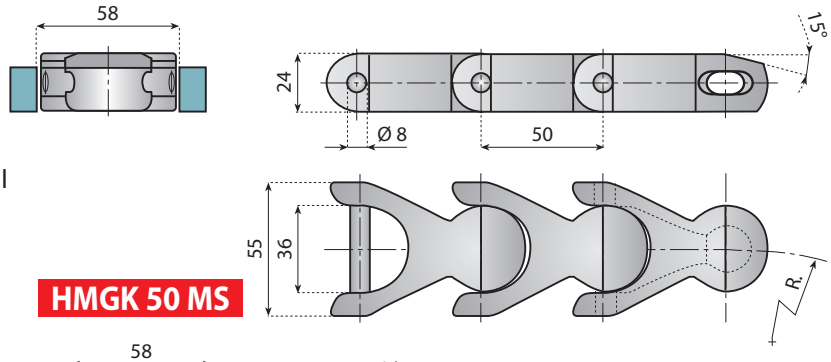

HMGK 50 MS

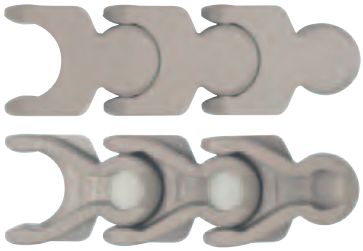

HMGK 50 P identical to series 1700 chain but has no sideslots for guiding

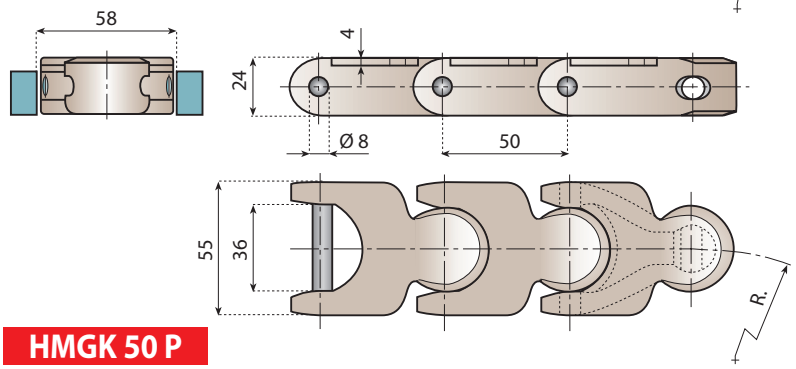


HMGK 50 P


MATERIAL Pages 4⇨7 | Page 263 | Page 271 | Page 306 | Pages 334⇨335 | Pages 340⇨343

Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Link	Breaking load N	R min.	Weight Kg/m
D - HMGK 50 MS	**11960**	**D**	8.500	145	1.35
LF - HMGK 50 P	**11982**	**LF**		135	1.45

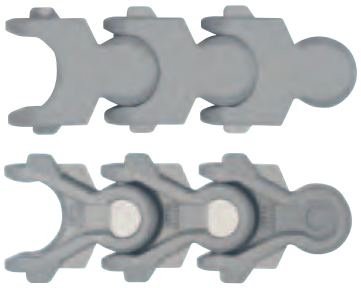


1701 TAB and **1701 TAB OP** have identical dimensions as 1700 series but include TAB configuration to hold down chains especially in curves.

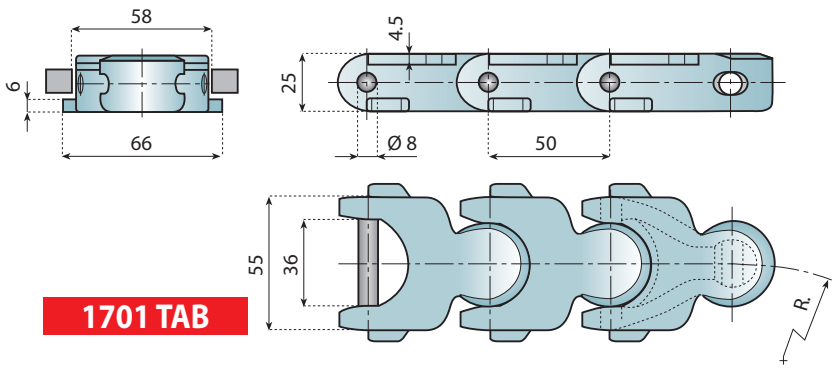

1701 TAB

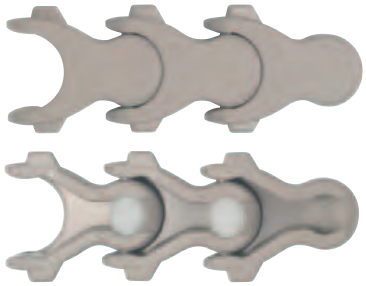

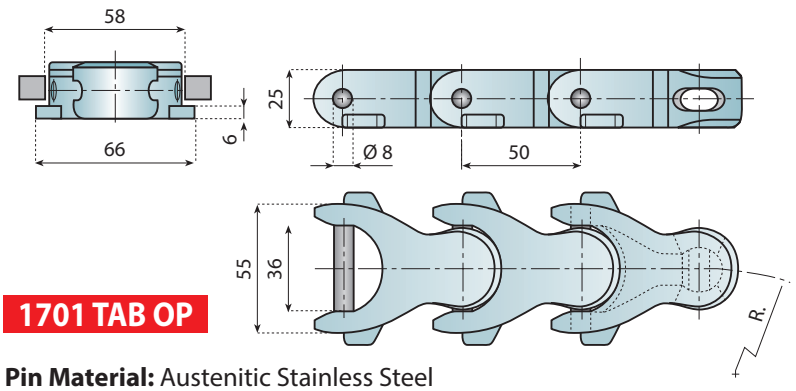


1701 TAB OP


MATERIAL Pages 4⇨7 | Page 263 | Page 270 | Page 306 | Pages 336⇨337 | Pages 340⇨343

Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Link	Breaking load N	R min.	Weight Kg/m
LF - 1701 TAB	**11956**	**LF**	9.500	150	1.45
LFW - 1701 TAB	**11957**	**LFW**			
NG - 1701 TAB	**11983**	**NG**			
LF - 1701 TAB OP	**11958**	**LF**			1.40
LFW - 1701 TAB OP	**11959**	**LFW**			

Standard length: 61 pitches (10 ft. - 3.050 m)

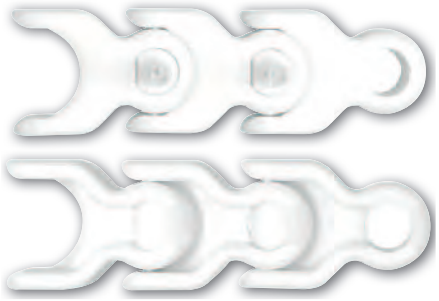





M3 (pusher white)





M1 (pusher white)

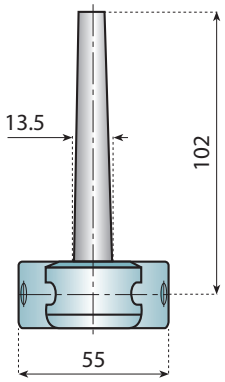


M2 (pusher white)




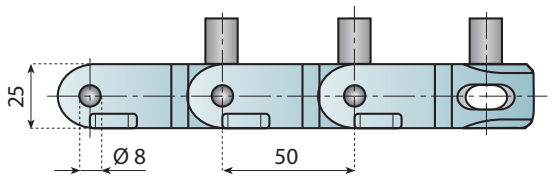


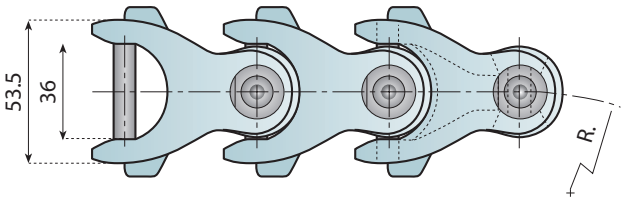

1701 TAB OP M



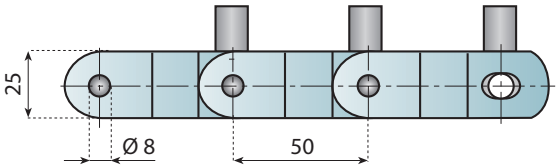

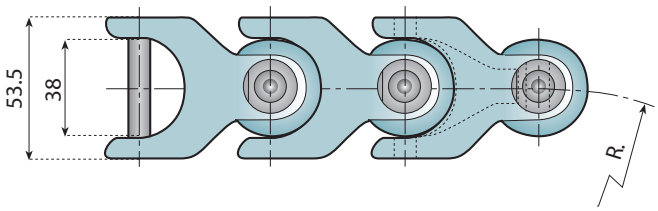

1702 M

MATERIAL Pages 4⇨7
Page 263
Page 270
Page 306
Pages 336⇨337
Pages 340⇨343


Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Link	Pusher type	Breaking load N	R min.	Weight Kg/m
LFW - 1701 TAB OP M1	**11964**	**LFW**	M1	9.500	150	2.0
LFW - 1701 TAB OP M2	**11965**		M2			2.3
LFW - 1701 TAB OP M3	**11966**		M3			1.6
LFW - 1702 M1	**11967**		M1			2.0
LFW - 1702 M2	**11968**		M2			2.3
LFW - 1702 M3	**11969**		M3			1.6


Standard length: 61 pitches (10 ft. - 3.050 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved


OVERLAPPING TOP PLATE MULTIFLEX CHAINS — HMGK 50 TAB P

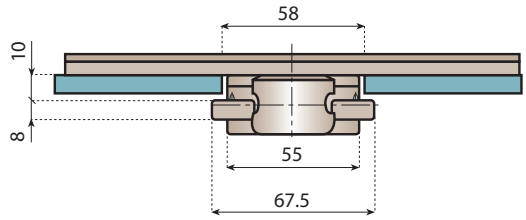

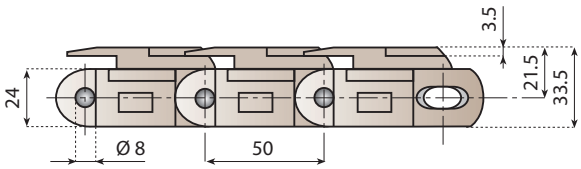

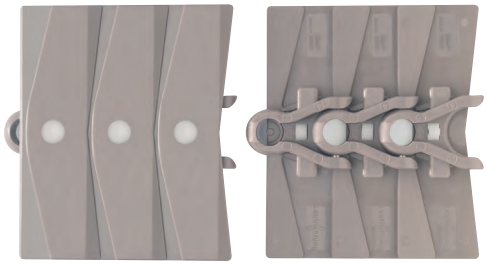

HMGK 50 TAB P

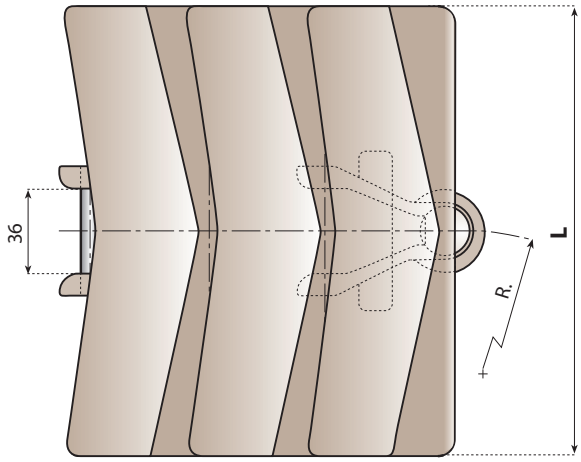

Page 264
Page 272
Page 306
Pages 340⇨343
Pages 4⇨7

Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Plate	Breaking load N	R min.	L mm	Weight Kg/m
LF - HMGK 50 TAB P1	**11976**	**LF**	10.500	550	191	2.5
LF - HMGK 50 TAB P2	**11977**				254	2.9


Standard length: 61 pitches (10 ft. - 3.050 m)

MULTIFLEX CHAINS — 1706








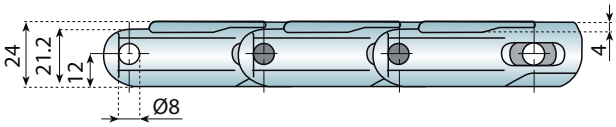

NEW

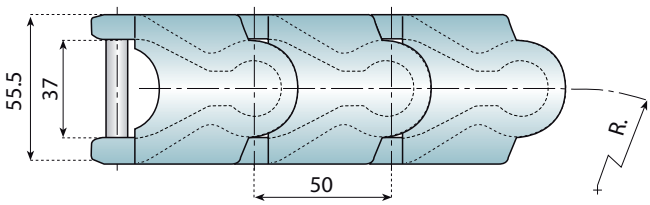


Backflex radius: 55 mm


Page 263
Page 271
Pages 334⇨335
Page 306
Pages 340⇨343
Pages 4⇨7

Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Link	Breaking load N	R min.	Weight Kg/m
LFW - 1706	**11988**	**LFW**	8.000	125	1.3
NG - 1706	**11989**	**NG**			





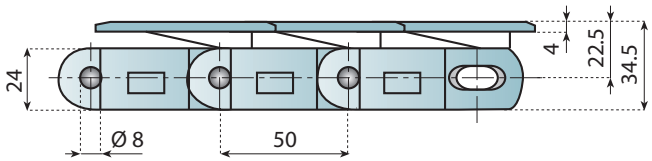

HMGK 50 TAB H

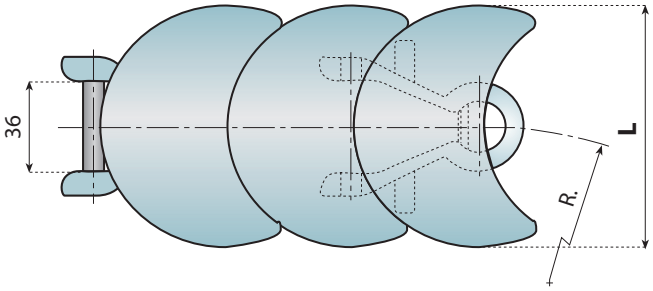



MATERIAL Pages 4⇨7
Page 264
Page 271
Page 306
Pages 340⇨343


Pin Material: Austenitic Stainless Steel

Chain - Ref.	Code	Material Link	Breaking load N	R min.	L mm	Weight Kg/m
D - HMGK 50 TAB H1	**11900**	**D**	10.500	150	95	1.92
D - HMGK 50 TAB H2	**11980**			500	190	2.35
LFW - HMGK 50 TAB H1	**11910**	**LFW**		150	95	1.92
LFW - HMGK 50 TAB H2	**11981**			500	190	2.35


Standard length: 61 pitches (10 ft. - 3.050 m)

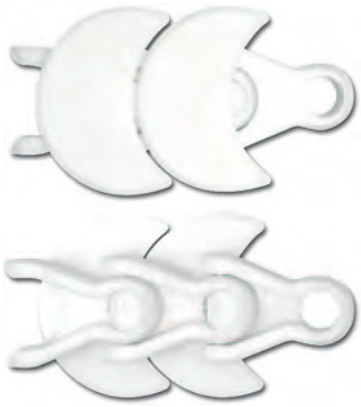



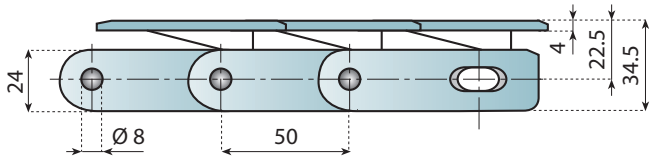

HMGK 50 H

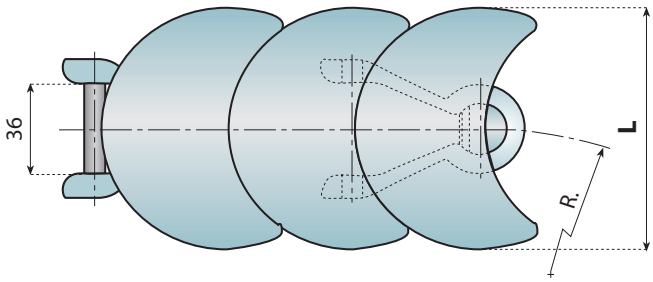

MATERIAL Pages 4⇨7
Pages 334⇨335
Page 264
Page 271
Page 306
Pages 340⇨343


Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Link	Breaking load N	R min.	L mm	Weight Kg/m
D - HMGK 50 H1	**11880**	**D**	10.500	150	95	1.92
D - HMGK 50 H2	**11978**			500	190	2.35
LFW - HMGK 50 H1	**11890**	**LFW**		150	95	1.92
LFW - HMGK 50 H2	**11979**			500	190	2.35

Standard length: 61 pitches (10 ft. - 3.050 m)


 © System Plast S.r.l. , 2012 - All Rights Reserved


MULTIFLEX CHAINS — 7000 - 7000 TAB

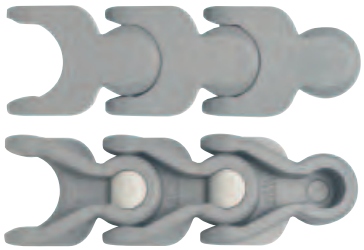

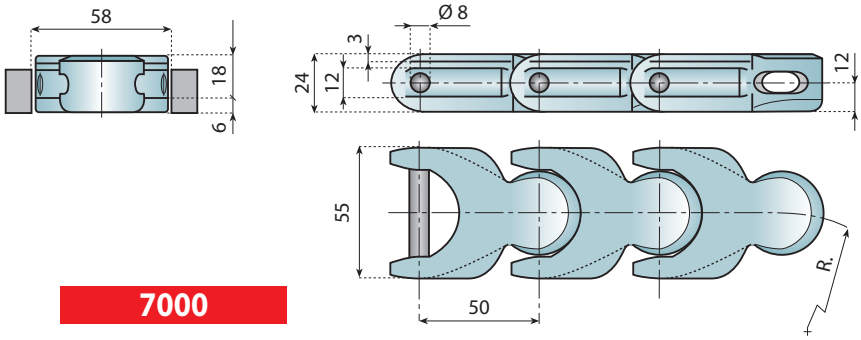

7000

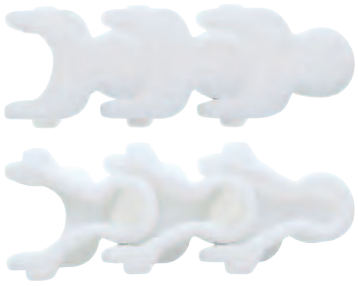

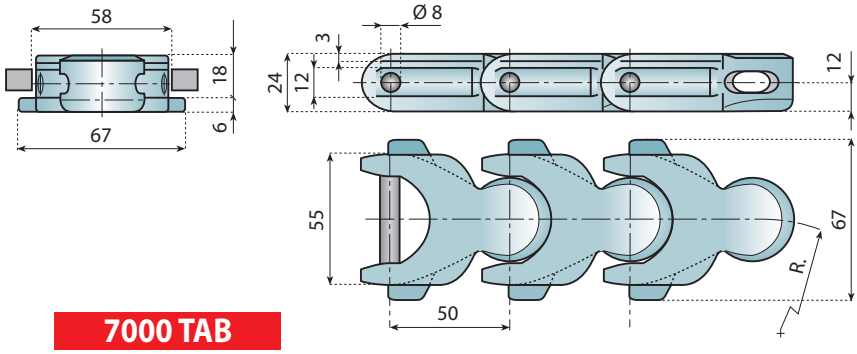


7000 TAB


Pin Material:
SS: Ferritic Stainless Steel
ZN: Zinc Plated Steel

Pages 4⇨7
Pages 334⇨335
Page 306
Page 263
Pages 270+271
Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	R min.	Weight Kg/m
		Link	Pin			
D - 7000 SS	11344	D	SS	8.500	140	1.27
D - 7000 ZN	11346		ZN			
LFW - 7000	11347	LFW	SS			
D - 7000 TAB SS	11253	D	SS			1.32
D - 7000 TAB ZN	11254		ZN			
LFW - 7000 TAB	11255	LFW	SS			


MULTIFLEX CHAINS — 7001 - 7001 TAB

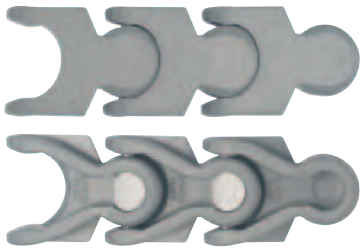

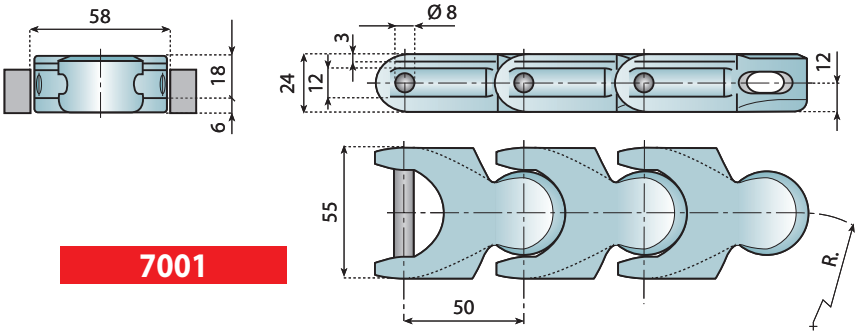

7001

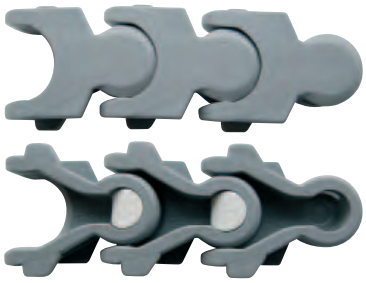

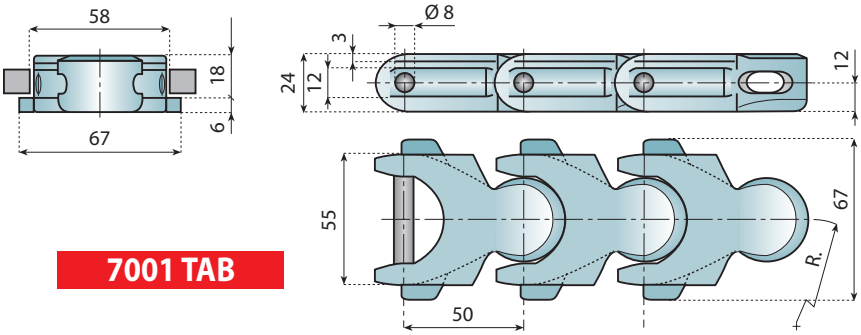


7001 TAB


Pin Material:
SS: Ferritic Stainless Steel
ZN: Zinc Plated Steel

Pages 4⇨7
Pages 334⇨335
Page 306
Page 263
Pages 270+271
Pages 340⇨343

Chain - Ref.	Code	Material		Breaking load N	R min.	Weight Kg/m
		Link	Pin			
D - 7001 SS	11348	D	SS	8.500	140	1.28
D - 7001 ZN	11350		ZN			
LFW - 7001	11351	LFW	SS			
D - 7001 TAB SS	11256	D	SS			1.33
D - 7001 TAB ZN	11257		ZN			
LFW - 7001 TAB	11258	LFW	SS			


Standard length: 61 pitches (10 ft. - 3.050 m)

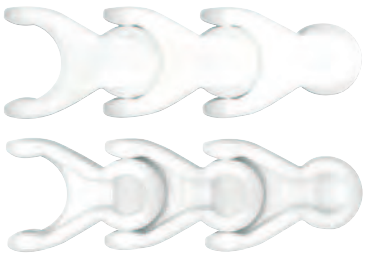

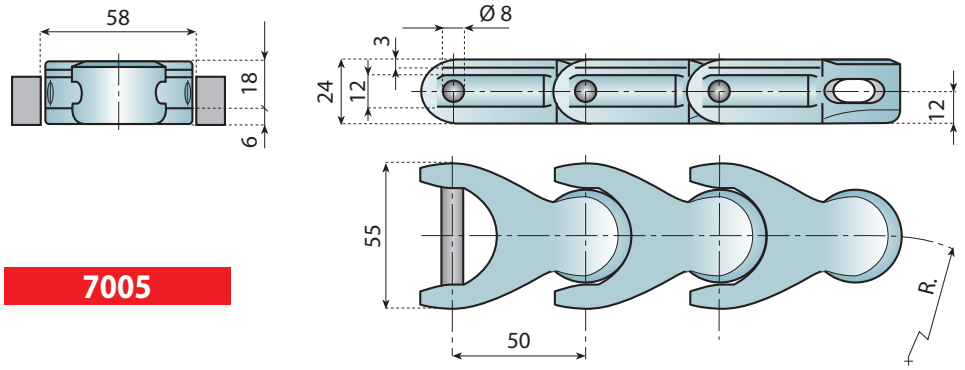

7005



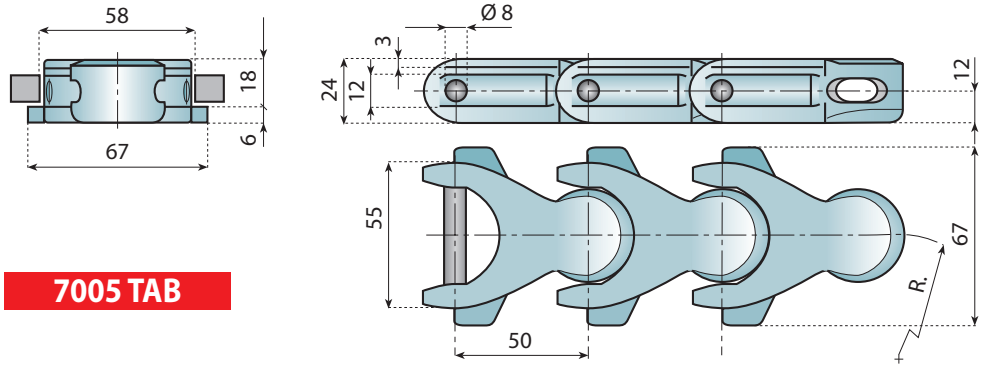

7005 TAB

Pin Material:
SS: Ferritic Stainless Steel
ZN: Zinc Plated Steel


Pages 4⇨7
Pages 334⇨337
Page 306
Page 263
Pages 270+271
Pages 340⇨343


Chain - Ref.	Code	Material		Breaking load N	R min.	Weight Kg/m
		Link	Pin			
D - 7005 SS	**11352**	**D**	**SS**	8.500	140	1.25
D - 7005 ZN	**11353**		**ZN**			
LFW - 7005	**11355**	**LFW**	**SS**			
D - 7005 TAB SS	**11250**	**D**	**SS**			1.30
D - 7005 TAB ZN	**11251**		**ZN**			
LFW - 7005 TAB	**11252**	**LFW**	**SS**			


Breaking load tested according to standard ISO 4348

 © System Plast S.r.l. , 2012 - All Rights Reserved

CRATE CONVEYOR CHAINS — CC 600 - CC 600 TAB

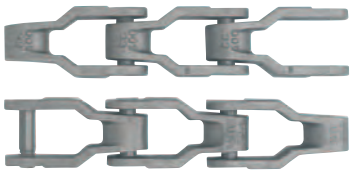

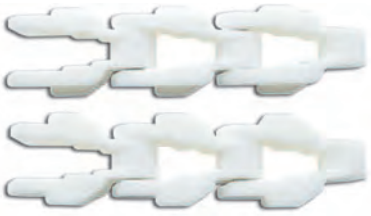

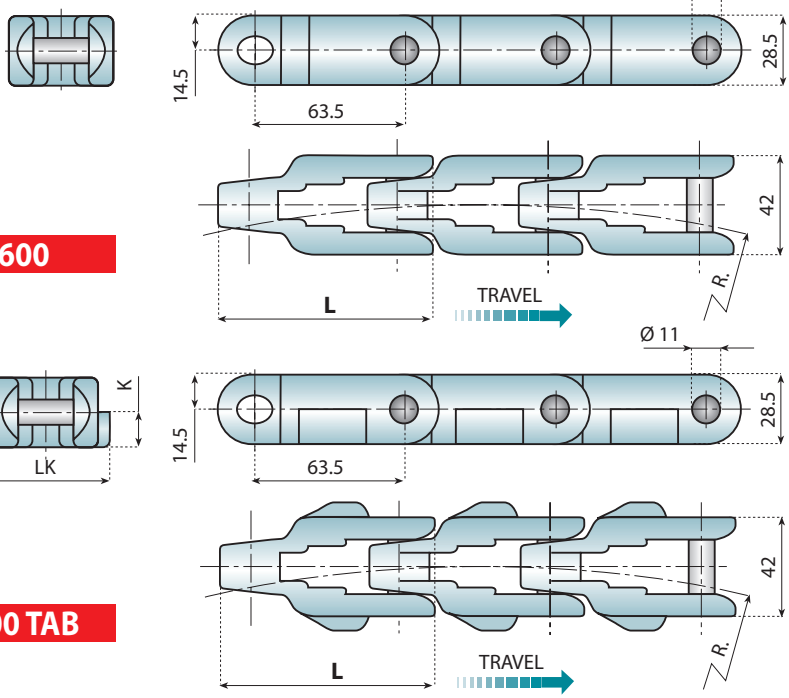

CC 600

CC 600 TAB

Pin Material: Austenitic Stainless Steel

CI
Cast Iron


Chain - Ref.	Code	Material		Breaking load N	R min.	L mm	K mm	LK mm	Weight Kg/m
		Link	Pin						
C 600	**11025**	CI	SS	55.000	760	92	14.2	---	5.22
C 600 TAB	**11026**							53.4	5.70
CC 600	**11007**	W		14.000	700	90	17	---	1.33
CC 600 TAB	**11009**							54	1.49
NG 600	**11027**	NG		12.500				---	1.33
NG 600 TAB	**11028**							54	1.49

MATERIAL Pages 4⇨7 — Page 307 — Pages 340⇨343

CRATE CONVEYOR CHAINS WITH TOP PLATE — CC 600 P - CC 600 TAB P





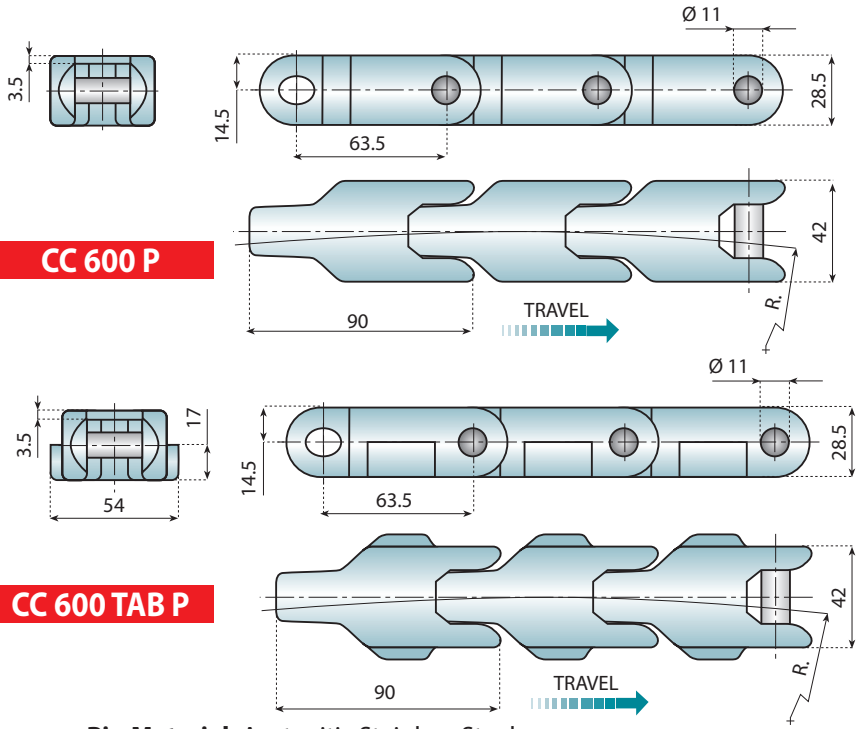

CC 600 P

CC 600 TAB P

Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Link	Breaking load N	R min.	Weight Kg/m
C 600 P	**11045**	W	14.000	700	1.40
C 600 TAB P	**11046**				1.55

MATERIAL Pages 4⇨7 — Page 307 — Pages 340⇨343

Standard length: 48 pitches (10 ft. - 3.048 m)


CC 600 F - CC 631 TAB — CRATE CONVEYOR CHAINS



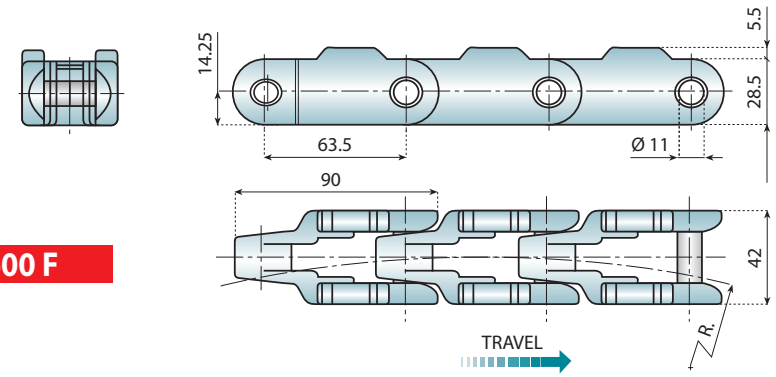

CC 600 F



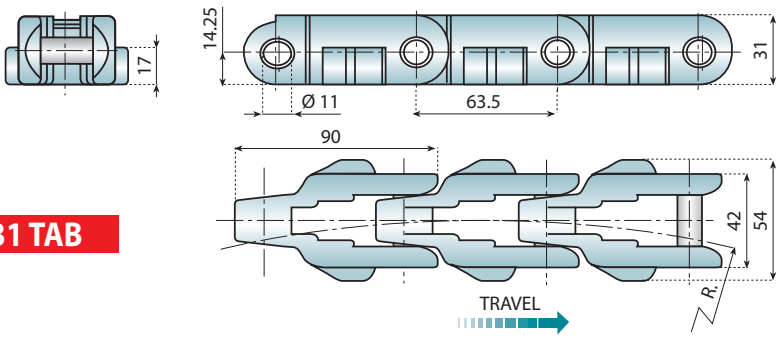

CC 631 TAB

Pin Material: Austenitic Stainless Steel


Chain - Ref.	Code	Material Link	Breaking load N	R min.	Weight Kg/m
CC 600 F	**11036**	**W**	14.000	700	1.41
CC 631 TAB	**11037**				

Standard length: 48 pitches (10 ft. - 3.048 m)


MATERIAL Pages 4⇨7 | Page 307 | Pages 340⇨343


CC 1400 V - CC 1400 V TAB — CRATE CONVEYOR CHAINS



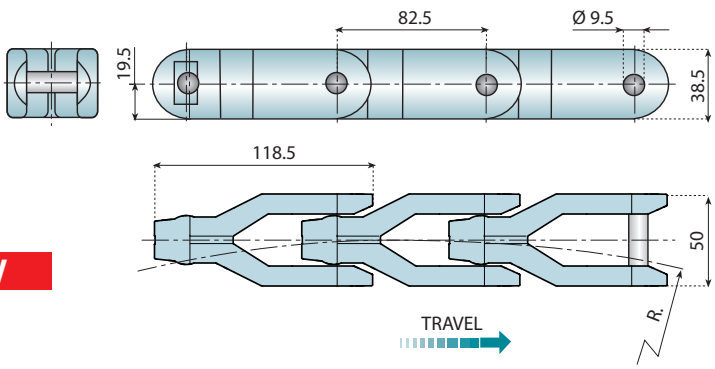

CC 1400 V

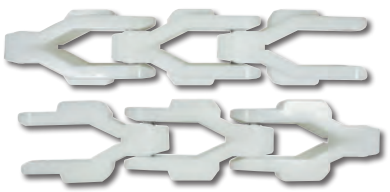

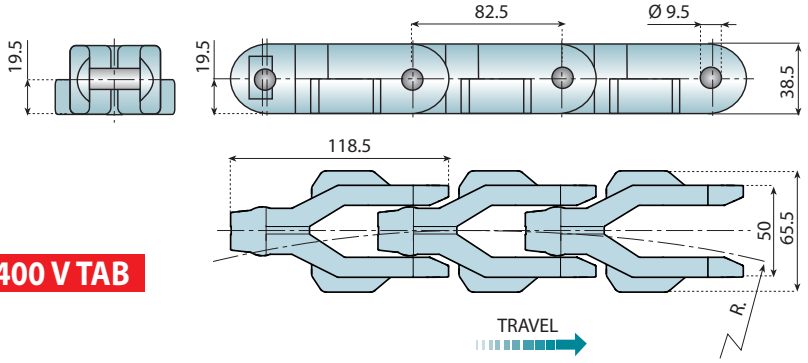

CC 1400 V TAB

Pin Material:
SS: Ferritic Stainless Steel
SS: Austenitic Stainless Steel Riveted

Chain - Ref.	Code	Material		Breaking load N	R min.	Weight Kg/m
		Link	Pin			
CC 1400 V	**11008**	**W**	**SS**	18.000	660	3.24
CC 1400 V TAB	**11010**					3.44
CC 1400 V R	**11008R**	**W**	**SS** Riveted	18.000	660	3.24
CC 1400 V TAB-R	**11010R**					3.44


Standard length: 37 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

MATERIAL Pages 4⇨7 | Page 307 | Pages 340⇨343


 © System Plast S.r.l., 2012 - All Rights Reserved



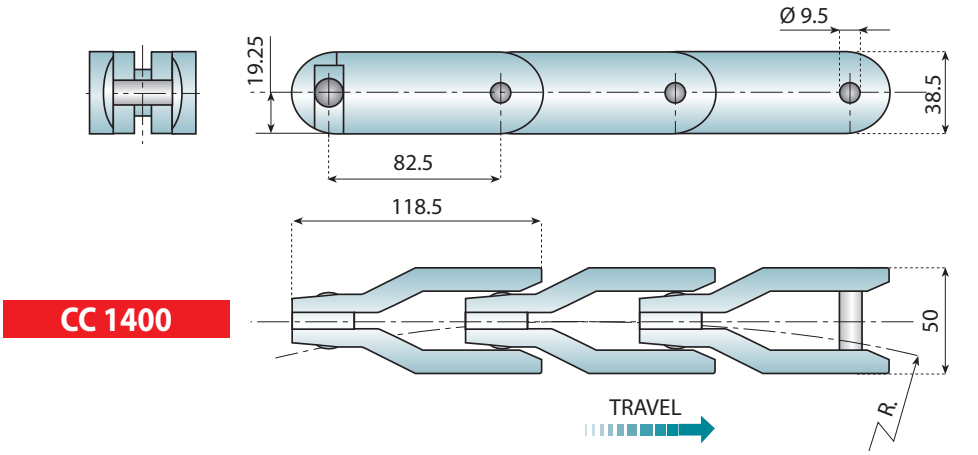


CC 1400



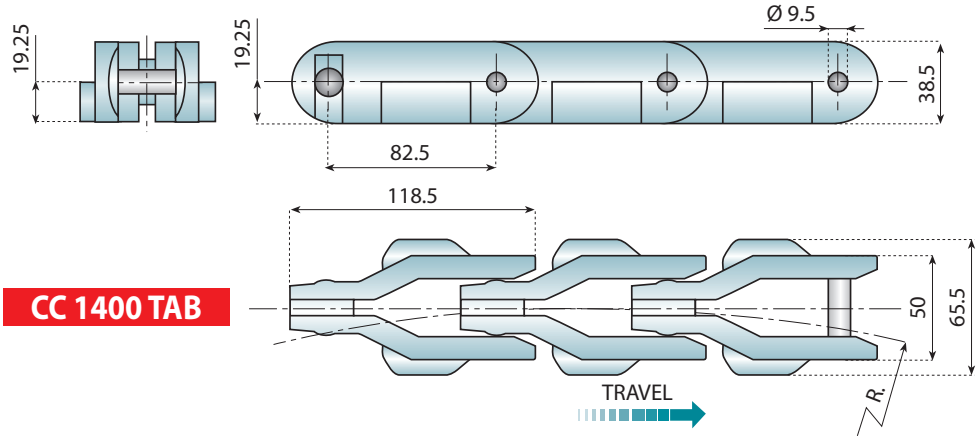

CC 1400 TAB



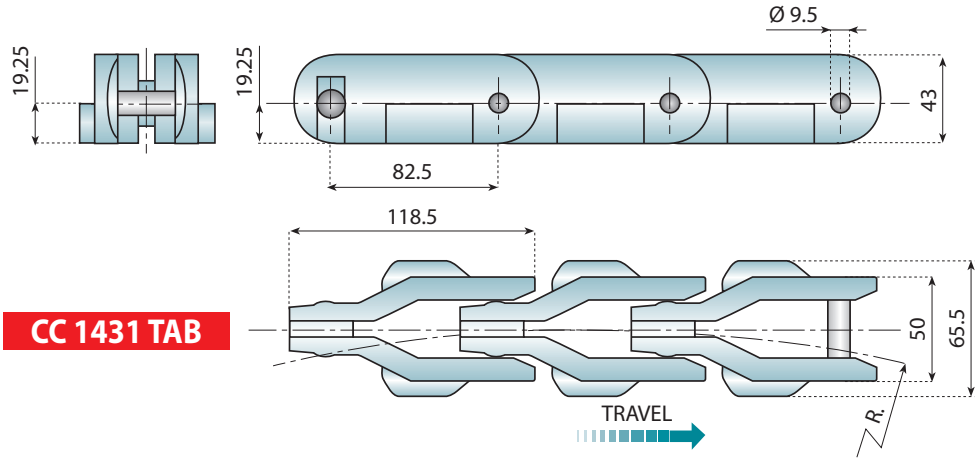

CC 1431 TAB

Chain - Ref.	Code	Material		Breaking load N	R min.	Weight Kg/m
		Link	Pin			
CC 1400	**11096**	**W**	**SS**	18.000	660	3.24
CC 1400 TAB	**11098**					3.44
CC 1431 TAB	**11087**					3.44
NG 1400	**11097**	**NG**		16.000		3.24
NG 1400 TAB	**11099**					3.44
NG 1431 TAB	**11088**					3.44
CC 1400 R	**11096R**	**W**	**SS** Riveted	18.000	660	3.24
CC 1400 TAB-R	**11098R**					3.44
CC 1431 TAB-R	**11087R**					3.44
NG 1400 R	**11097R**	**NG**		16.000		3.24
NG 1400 TAB-R	**11099R**					3.44
NG 1431 TAB-R	**11088R**					3.44

Pin Material:
SS: Ferritic Stainless Steel
SS: Austenitic Stainless Steel Riveted

MATERIAL Pages 4⇨7
Page 307
Pages 340⇨343

Standard length: 37 pitches (10 ft. - 3.053 m)

Breaking Load according to Standard ISO 4348 - DIN 8153

 © System Plast S.r.l. , 2012 - All Rights Reserved

PLASTIC MODULAR CONVEYOR BELT

Series	*Pages*
2120 FT/VG/FG/VGS	88 → 105
2122 FG	97
2120 LBP	106 → 108
2120 GB	109
2121 H FT	110 → 111
2120 NOSE BAR	112

All our straight running belts of the 2120, 2121 and 2122 series have a pitch of 12.7 mm (½ inch) and a height of 8.7 mm (11⁄32 inch).

BENEFITS AND FEATURES


- ***EASY INSTALLATION AND MAINTENANCE***
- ***HIGH MECHANICAL STRENGTH AND WEAR RESISTANCE***
- ***NO GAPS BETWEEN PARALLEL CHAINS***
- ***EXCELLENT PRODUCT HANDLING***
- ***INSTALLATION ON STANDARD CONVEYORS WITH 85 mm PITCH BETWEEN TRACKS***
- ***HIGH PERFORMANCE***
- ***SHORT TRANSFERS, POSSIBILITY TO USE NOSE BARS.***


CAN BE USED WITH A NOSE BAR TO CREATE EXTREMELY SHORT TRANSFERS.



2120 K134 H - 2120 K200 H FLAT TOP BELTS MINI ONE TRACK



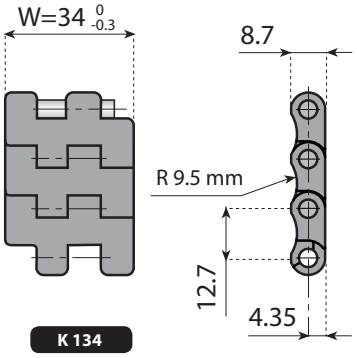

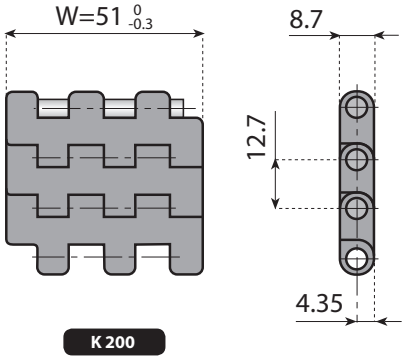

Version standard
Pin material: PBT (white)


Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
K 134 Pages 310⇨311
K 200 Pages 312⇨314
Page 310-311
Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2120 K134 H-FT	**25053H**	**LFG** Dark Grey	34.0	1.34	12.7	0.50	10	340	8.8
NGG 2120 K134 H-FT	**25053H-NGG**	**NGG** Light Grey							
LFG 2120 K200 H-FT	**25052H**	**LFG** Dark Grey	51.0	2.0	12.7	0.50	10	765	8.8
NGG 2120 K200 H-FT	**25052H-NGG**	**NGG** Light Grey							

2120 K134 H-FTP2 - 2120 K200 H-FTP2 FLAT TOP BELTS MINI ONE TRACK



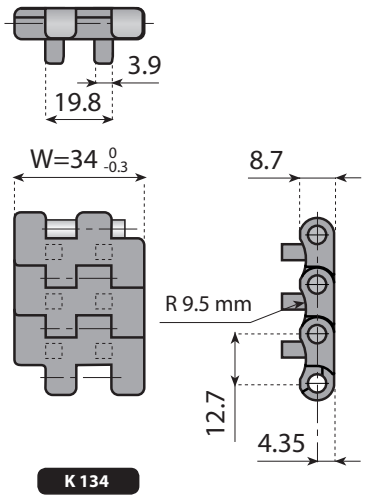

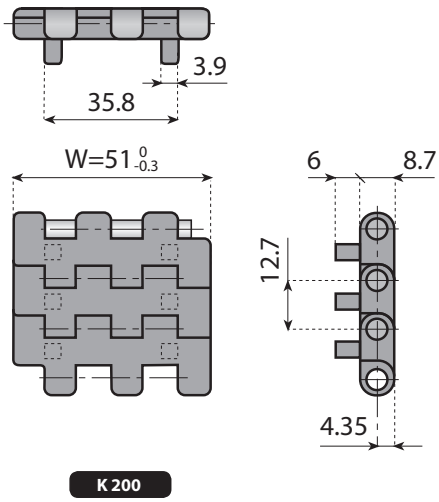

Version with two positioners
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
K 134 Pages 310⇨311
K 200 Pages 312⇨314
Page 310-311
Pages 340⇨343


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2120 K134 H-FTP2	**25055H**	**LFG** Dark Grey	34.0	1.34	12.7	0.50	10	340	9.0
NGG 2120 K134 H-FTP2	**25055H-NGG**	**NGG** Light Grey							
LFG 2120 K200 H-FTP2	**25054H**	**LFG** Dark Grey	51.0	2.0	12.7	0.50	10	765	9.0
NGG 2120 K200 H-FTP2	**25054H-NGG**	**NGG** Light Grey							

Standard length: 240 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved

GRIP TOP BELTS MINI ONE TRACK WITH HIGH FRICTION SURFACE VG 2120 K200

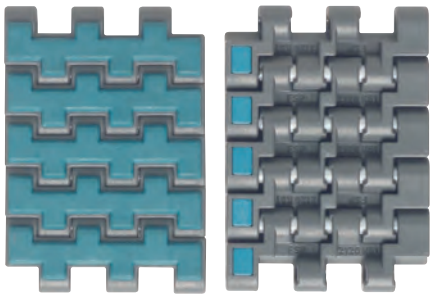

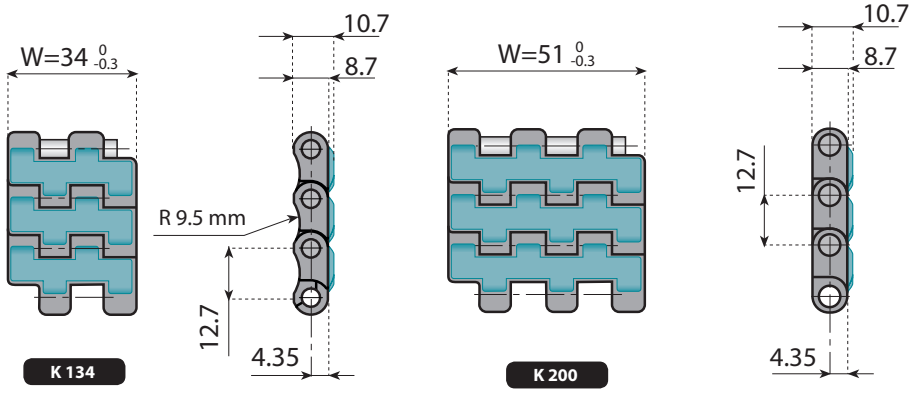

Version standard
Rubber material: thermoplastic rubber, waterblue colour
Pin material: PBT (white)


Standard materials


LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 K 200 Pages 312⇨314 Page 310-311 Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
VG 2120 K134	**261439**	**LFG** Dark Grey	34.0	1.34	12.7	0.50	10	340	8.8
VG 2120 K200	**25052H-VG**		51.0	2.0	12.7	0.50	20	765	9.3

GRIP TOP BELTS MINI ONE TRACK WITH HIGH FRICTION SURFACE VG 2120 K200 P2

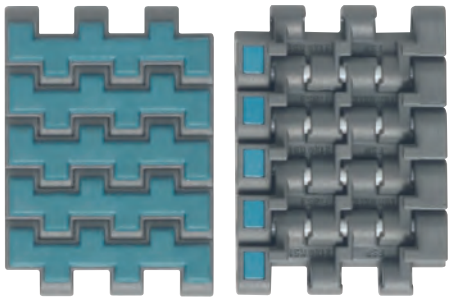

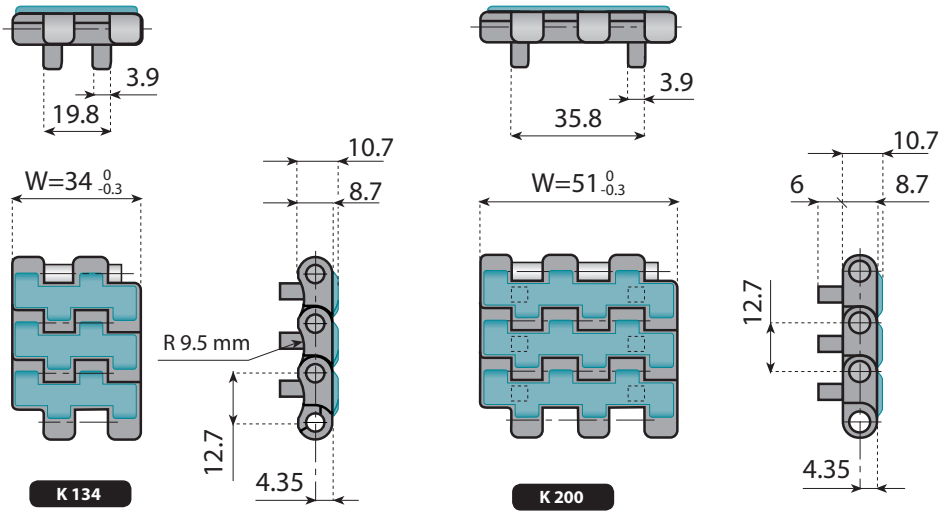

Version with two positioners
Rubber material: thermoplastic rubber, waterblue colour
Pin material: PBT (white)

Standard materials


LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber


MATERIAL Pages 4⇨7 K 200 Pages 312⇨314 Page 310-311 Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
VG 2120 K134 P2	**261440**	**LFG** Dark Grey	34.0	1.34	12.7	0.50	10	340	9.0
VG 2120 K200 P2	**25054H-VG**		51.0	2.0	12.7	0.50	20	765	9.5

Standard length: 120 pitches (5 ft. - 1.524 m)

2120 K330 H — FLAT TOP BELTS ONE TRACK

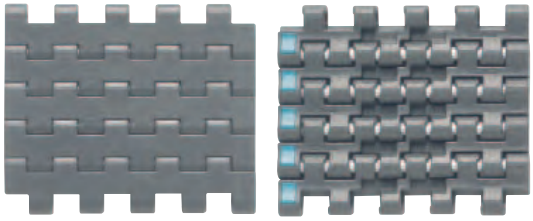

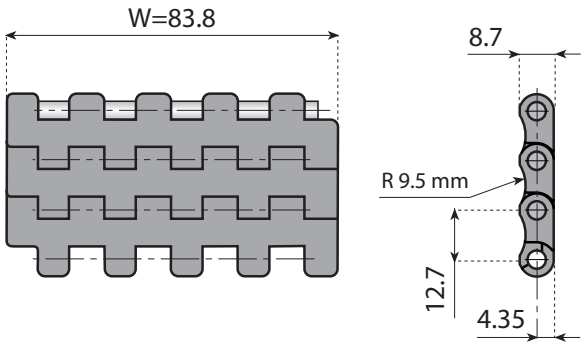

Version standard
Pin material: PBT (white)


Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2120 K330 H-FT	**25040H**	**LFG** Dark Grey	83.8	3.30	12.7	0.50	10	1676	8.8
NGG 2120 K330 H-FT	**25040H-NGG**	**NGG** Light Grey							

2120 K330 H-FTP2 — FLAT TOP BELTS ONE TRACK

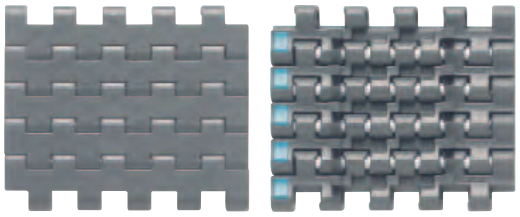

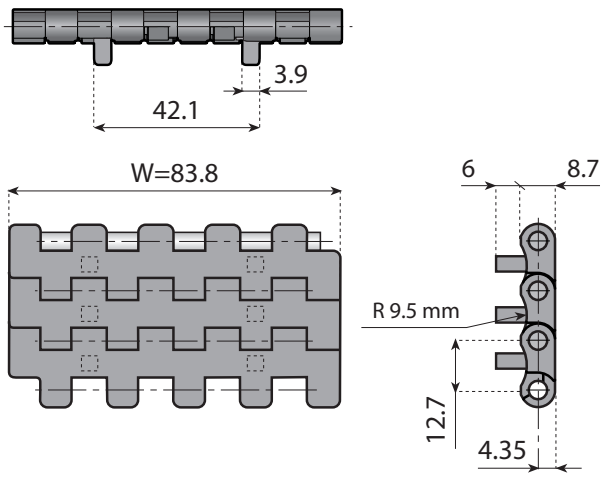

Version with two positioners
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2120 K330 H-FTP2	**25041H**	**LFG** Dark Grey	83.8	3.30	12.7	0.50	10	1676	8.8
NGG 2120 K330 H-FTP2	**25041H-NGG**	**NGG** Light Grey							

Standard length: 240 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l., 2012 - All Rights Reserved

FLAT TOP BELTS ONE TRACK WITH TRANSFER WING 2120 K330 H-FTTP2



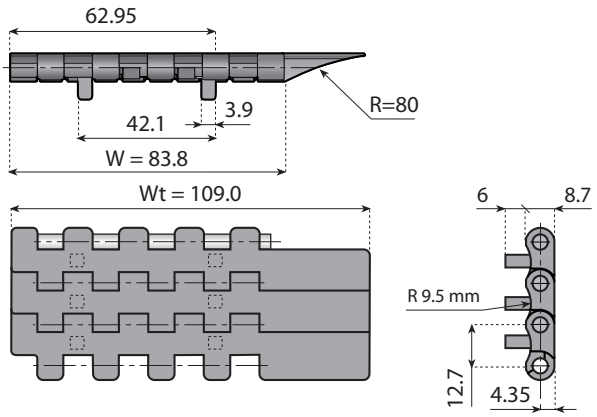

Version with two positioners and integrated active transfer wing
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2120 K330 H-FTTP2	**25042H**	**LFG** Dark Grey	83.8	3.30	12.7	0.50	15	1676	8.8
NGG 2120 K330 H-FTTP2	**25042H-NGG**	**NGG** Light Grey							

Standard length: 240 pitches (10 ft. - 3.048 m)

© System Plast S.r.l. , 2012 - All Rights Reserved


2120 H-FT — FLAT TOP BELTS (Pitch ½" - 12.7 mm)


Version standard
Backflex radius: 10 mm
Max load capacity: 20.000 N/m
Weight: 8.6 Kg/m² (FT), 7.4 Kg/m² (FG)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

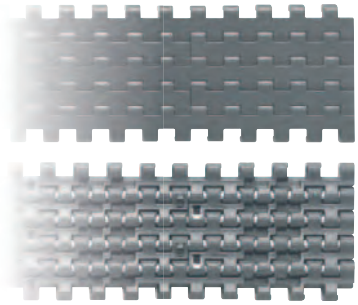

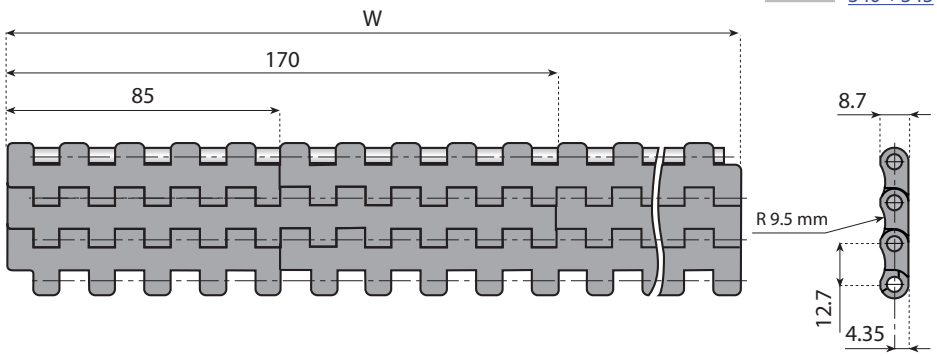



FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251400H-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2120-0085-H-FT	**251400H**	935	2120-0935-H-FT	**251410H**	1785	2120-1785-H-FT	**251420H**	2635	2120-2635-H-FT	**251430H**
170	2120-0170-H-FT	**251401H**	1020	2120-1020-H-FT	**251411H**	1870	2120-1870-H-FT	**251421H**	2720	2120-2720-H-FT	**251431H**
255	2120-0255-H-FT	**251402H**	1105	2120-1105-H-FT	**251412H**	1955	2120-1955-H-FT	**251422H**	2805	2120-2805-H-FT	**251432H**
340	2120-0340-H-FT	**251403H**	1190	2120-1190-H-FT	**251413H**	2040	2120-2040-H-FT	**251423H**	2890	2120-2890-H-FT	**251433H**
425	2120-0425-H-FT	**251404H**	1275	2120-1275-H-FT	**251414H**	2125	2120-2125-H-FT	**251424H**	2975	2120-2975-H-FT	**251434H**
510	2120-0510-H-FT	**251405H**	1360	2120-1360-H-FT	**251415H**	2210	2120-2210-H-FT	**251425H**	3060	2120-3060-H-FT	**251435H**
595	2120-0595-H-FT	**251406H**	1445	2120-1445-H-FT	**251416H**	2295	2120-2295-H-FT	**251426H**	3145	2120-3145-H-FT	**251436H**
680	2120-0680-H-FT	**251407H**	1530	2120-1530-H-FT	**251417H**	2380	2120-2380-H-FT	**251427H**	3230	2120-3230-H-FT	**251437H**
765	2120-0765-H-FT	**251408H**	1615	2120-1615-H-FT	**251418H**	2465	2120-2465-H-FT	**251428H**	3315	2120-3315-H-FT	**251438H**
850	2120-0850-H-FT	**251409H**	1700	2120-1700-H-FT	**251419H**	2550	2120-2550-H-FT	**251429H**	3400	2120-3400-H-FT	**251439H**

2120 FG — FLUSH GRID BELTS (Pitch ½" - 12.7 mm)

Open surface: 21%

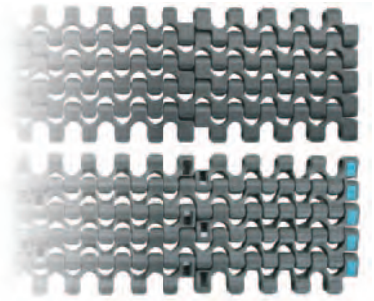

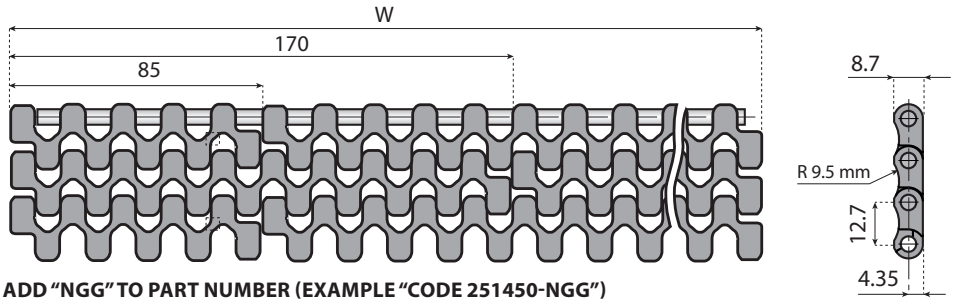

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251450-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2120-0085 FG	**251450**	935	2120-0935 FG	**251460**	1785	2120-1785 FG	**251470**	2635	2120-2635 FG	**251480**
170	2120-0170 FG	**251451**	1020	2120-1020 FG	**251461**	1870	2120-1870 FG	**251471**	2720	2120-2720 FG	**251481**
255	2120-0255 FG	**251452**	1105	2120-1105 FG	**251462**	1955	2120-1955 FG	**251472**	2805	2120-2805 FG	**251482**
340	2120-0340 FG	**251453**	1190	2120-1190 FG	**251463**	2040	2120-2040 FG	**251473**	2890	2120-2890 FG	**251483**
425	2120-0425 FG	**251454**	1275	2120-1275 FG	**251464**	2125	2120-2125 FG	**251474**	2975	2120-2975 FG	**251484**
510	2120-0510 FG	**251455**	1360	2120-1360 FG	**251465**	2210	2120-2210 FG	**251475**	3060	2120-3060 FG	**251485**
595	2120-0595 FG	**251456**	1445	2120-1445 FG	**251466**	2295	2120-2295 FG	**251476**	3145	2120-3145 FG	**251486**
680	2120-0680 FG	**251457**	1530	2120-1530 FG	**251467**	2380	2120-2380 FG	**251477**	3230	2120-3230 FG	**251487**
765	2120-0765 FG	**251458**	1615	2120-1615 FG	**251468**	2465	2120-2465 FG	**251478**	3315	2120-3315 FG	**251488**
850	2120-0850 FG	**251459**	1700	2120-1700 FG	**251469**	2550	2120-2550 FG	**251479**	3400	2120-3400 FG	**251489**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved


FLAT TOP BELTS (Pitch ½" - 12.7 mm) 2120 H-FTP1


Version standard
Backflex radius: 10 mm
Max load capacity: 20.000 N/m
Weight: 8.6 Kg/m² (FT), 7.4 Kg/m² (FG)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

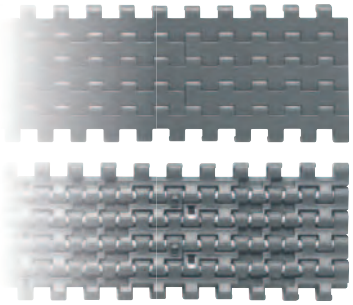

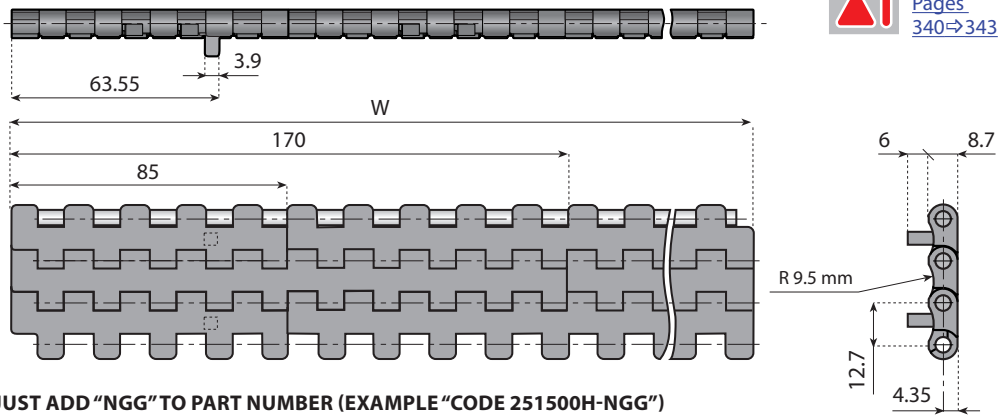



FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251500H-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2120-0085 H-FTP1	**251500H**	935	2120-0935 H-FTP1	**251510H**	1785	2120-1785 H-FTP1	**251520H**	2635	2120-2635 H-FTP1	**251530H**
170	2120-0170 H-FTP1	**251501H**	1020	2120-1020 H-FTP1	**251511H**	1870	2120-1870 H-FTP1	**251521H**	2720	2120-2720 H-FTP1	**251531H**
255	2120-0255 H-FTP1	**251502H**	1105	2120-1105 H-FTP1	**251512H**	1955	2120-1955 H-FTP1	**251522H**	2805	2120-2805 H-FTP1	**251532H**
340	2120-0340 H-FTP1	**251503H**	1190	2120-1190 H-FTP1	**251513H**	2040	2120-2040 H-FTP1	**251523H**	2890	2120-2890 H-FTP1	**251533H**
425	2120-0425 H-FTP1	**251504H**	1275	2120-1275 H-FTP1	**251514H**	2125	2120-2125 H-FTP1	**251524H**	2975	2120-2975 H-FTP1	**251534H**
510	2120-0510 H-FTP1	**251505H**	1360	2120-1360 H-FTP1	**251515H**	2210	2120-2210 H-FTP1	**251525H**	3060	2120-3060 H-FTP1	**251535H**
595	2120-0595 H-FTP1	**251506H**	1445	2120-1445 H-FTP1	**251516H**	2295	2120-2295 H-FTP1	**251526H**	3145	2120-3145 H-FTP1	**251536H**
680	2120-0680 H-FTP1	**251507H**	1530	2120-1530 H-FTP1	**251517H**	2380	2120-2380 H-FTP1	**251527H**	3230	2120-3230 H-FTP1	**251537H**
765	2120-0765 H-FTP1	**251508H**	1615	2120-1615 H-FTP1	**251518H**	2465	2120-2465 H-FTP1	**251528H**	3315	2120-3315 H-FTP1	**251538H**
850	2120-0850 H-FTP1	**251509H**	1700	2120-1700 H-FTP1	**251519H**	2550	2120-2550 H-FTP1	**251529H**	3400	2120-3400 H-FTP1	**251539H**

FLUSH GRID BELTS (Pitch ½" - 12.7 mm) 2120 FGP1

Open surface: 21%

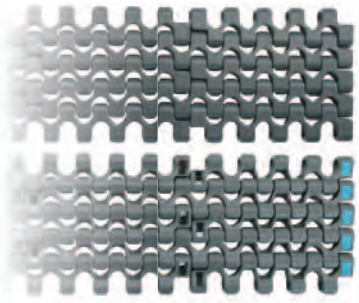

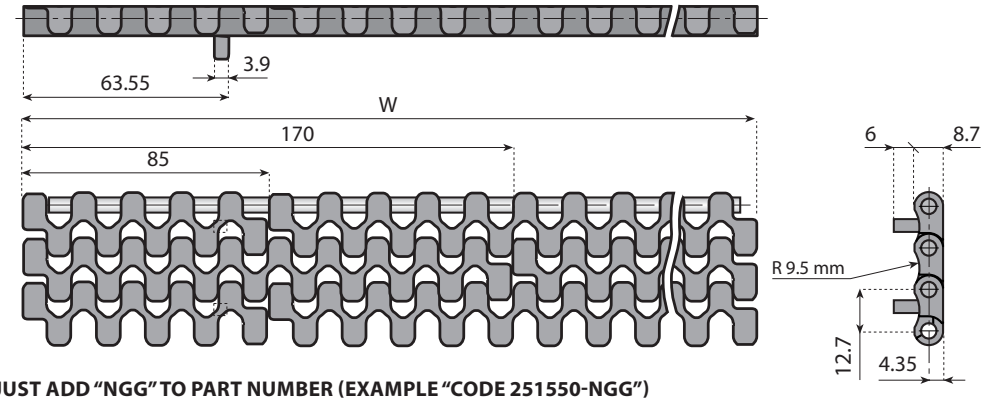

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251550-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2120-0085 FGP1	**251550**	935	2120-0935 FGP1	**251560**	1785	2120-1785 FGP1	**251570**	2635	2120-2635 FGP1	**251580**
170	2120-0170 FGP1	**251551**	1020	2120-1020 FGP1	**251561**	1870	2120-1870 FGP1	**251571**	2720	2120-2720 FGP1	**251581**
255	2120-0255 FGP1	**251552**	1105	2120-1105 FGP1	**251562**	1955	2120-1955 FGP1	**251572**	2805	2120-2805 FGP1	**251582**
340	2120-0340 FGP1	**251553**	1190	2120-1190 FGP1	**251563**	2040	2120-2040 FGP1	**251573**	2890	2120-2890 FGP1	**251583**
425	2120-0425 FGP1	**251554**	1275	2120-1275 FGP1	**251564**	2125	2120-2125 FGP1	**251574**	2975	2120-2975 FGP1	**251584**
510	2120-0510 FGP1	**251555**	1360	2120-1360 FGP1	**251565**	2210	2120-2210 FGP1	**251575**	3060	2120-3060 FGP1	**251585**
595	2120-0595 FGP1	**251556**	1445	2120-1445 FGP1	**251566**	2295	2120-2295 FGP1	**251576**	3145	2120-3145 FGP1	**251586**
680	2120-0680 FGP1	**251557**	1530	2120-1530 FGP1	**251567**	2380	2120-2380 FGP1	**251577**	3230	2120-3230 FGP1	**251587**
765	2120-0765 FGP1	**251558**	1615	2120-1615 FGP1	**251568**	2465	2120-2465 FGP1	**251578**	3315	2120-3315 FGP1	**251588**
850	2120-0850 FGP1	**251559**	1700	2120-1700 FGP1	**251569**	2550	2120-2550 FGP1	**251579**	3400	2120-3400 FGP1	**251589**

Other widths available on request.


2120 H-FTP2B — FLAT TOP BELTS (Pitch ½" - 12.7 mm)


Version standard
Backflex radius: 10 mm
Max load capacity: 20.000 N/m
Weight: 8.6 Kg/m² (FT), 7.4 Kg/m² (FG)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

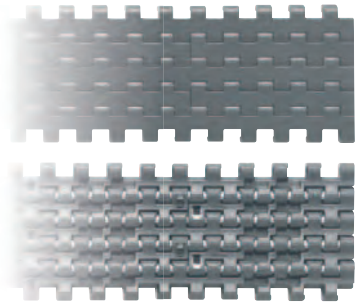

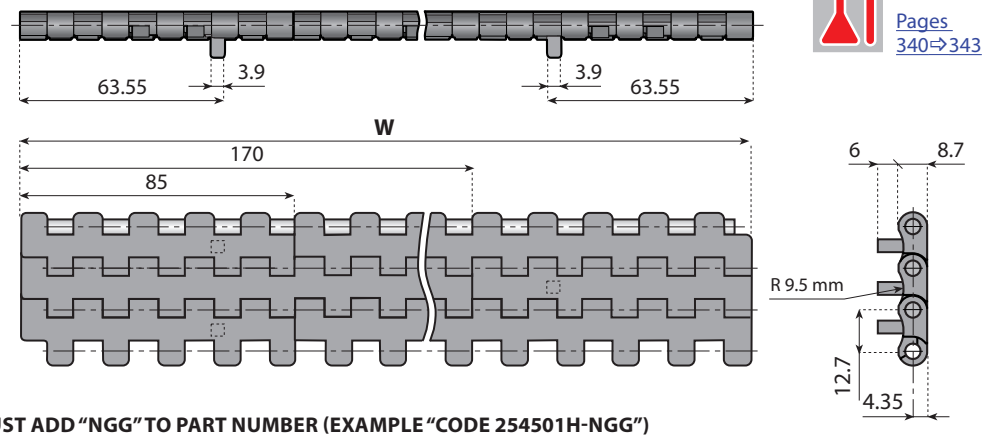



FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 254501H-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2120-0935 H-FTP2B	**254510H**	1785	2120-1785 H-FTP2B	**254520H**	2635	2120-2635 H-FTP2B	**254530H**
170	2120-0170 H-FTP2B	**254501H**	1020	2120-1020 H-FTP2B	**254511H**	1870	2120-1870 H-FTP2B	**254521H**	2720	2120-2720 H-FTP2B	**254531H**
255	2120-0255H-FTP2B	**254502H**	1105	2120-1105 H-FTP2B	**254512H**	1955	2120-1955 H-FTP2B	**254522H**	2805	2120-2805 H-FTP2B	**254532H**
340	2120-0340 H-FTP2B	**254503H**	1190	2120-1190 H-FTP2B	**254513H**	2040	2120-2040 H-FTP2B	**254523H**	2890	2120-2890 H-FTP2B	**254533H**
425	2120-0425 H-FTP2B	**254504H**	1275	2120-1275 H-FTP2B	**254514H**	2125	2120-2125 H-FTP2B	**254524H**	2975	2120-2975 H-FTP2B	**254534H**
510	2120-0510 H-FTP2B	**254505H**	1360	2120-1360 H-FTP2B	**254515H**	2210	2120-2210 H-FTP2B	**254525H**	3060	2120-3060 H-FTP2B	**254535H**
595	2120-0595 H-FTP2B	**254506H**	1445	2120-1445 H-FTP2B	**254516H**	2295	2120-2295 H-FTP2B	**254526H**	3145	2120-3145 H-FTP2B	**254536H**
680	2120-0680 H-FTP2B	**254507H**	1530	2120-1530 H-FTP2B	**254517H**	2380	2120-2380 H-FTP2B	**254527H**	3230	2120-3230 H-FTP2B	**254537H**
765	2120-0765 H-FTP2B	**254508H**	1615	2120-1615 H-FTP2B	**254518H**	2465	2120-2465 H-FTP2B	**254528H**	3315	2120-3315 H-FTP2B	**254538H**
850	2120-0850 H-FTP2B	**254509H**	1700	2120-1700 H-FTP2B	**254519H**	2550	2120-2550 H-FTP2B	**254529H**	3400	2120-3400 H-FTP2B	**254539H**

2120 FGP2B — FLUSH GRID BELTS (Pitch ½" - 12.7 mm)

Open surface: 21%

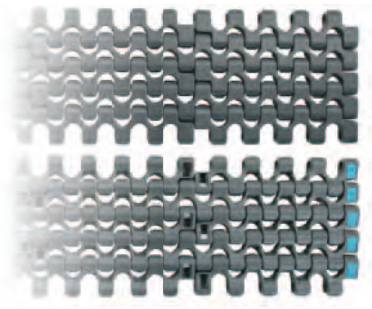

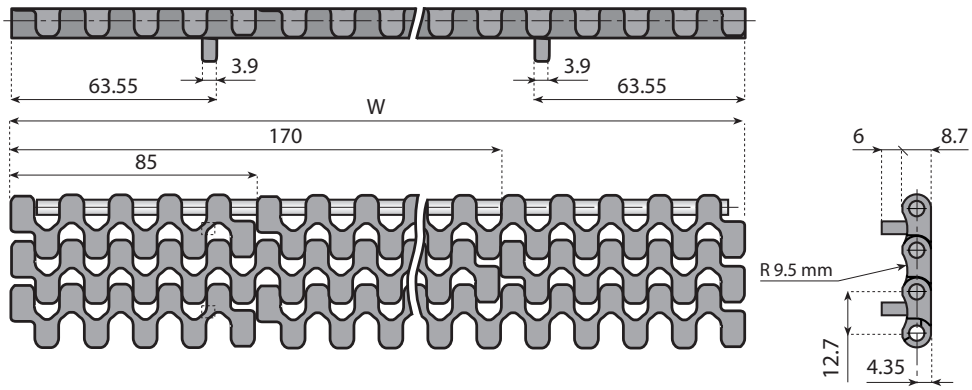

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 254551-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2120-0935 FGP2B	**254560**	1785	2120-1785 FGP2B	**254570**	2635	2120-2635 FGP2B	**254580**
170	2120-0170 FGP2B	**254551**	1020	2120-1020 FGP2B	**254561**	1870	2120-1870 FGP2B	**254571**	2720	2120-2720 FGP2B	**254581**
255	2120-0255 FGP2B	**254552**	1105	2120-1105 FGP2B	**254562**	1955	2120-1955 FGP2B	**254572**	2805	2120-2805 FGP2B	**254582**
340	2120-0340 FGP2B	**254553**	1190	2120-1190 FGP2B	**254563**	2040	2120-2040 FGP2B	**254573**	2890	2120-2890 FGP2B	**254583**
425	2120-0425 FGP2B	**254554**	1275	2120-1275 FGP2B	**254564**	2125	2120-2125 FGP2B	**254574**	2975	2120-2975 FGP2B	**254584**
510	2120-0510 FGP2B	**254555**	1360	2120-1360 FGP2B	**254565**	2210	2120-2210 FGP2B	**254575**	3060	2120-3060 FGP2B	**254585**
595	2120-0595 FGP2B	**254556**	1445	2120-1445 FGP2B	**254566**	2295	2120-2295 FGP2B	**254576**	3145	2120-3145 FGP2B	**254586**
680	2120-0680 FGP2B	**254557**	1530	2120-1530 FGP2B	**254567**	2380	2120-2380 FGP2B	**254577**	3230	2120-3230 FGP2B	**254587**
765	2120-0765 FGP2B	**254558**	1615	2120-1615 FGP2B	**254568**	2465	2120-2465 FGP2B	**254578**	3315	2120-3315 FGP2B	**254588**
850	2120-0850 FGP2B	**254559**	1700	2120-1700 FGP2B	**254569**	2550	2120-2550 FGP2B	**254579**	3400	2120-3400 FGP2B	**254589**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved


FLAT TOP BELTS (Pitch ½" - 12.7 mm) 2120 H-FTP2


Version standard
Backflex radius: 10 mm
Max load capacity: 20.000 N/m
Weight: 8.6 Kg/m² (FT), 7.4 Kg/m² (FG)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request


Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

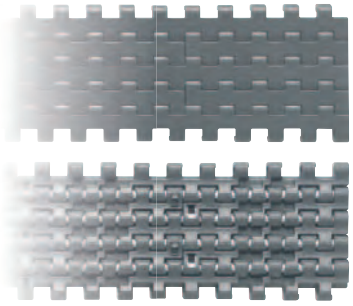

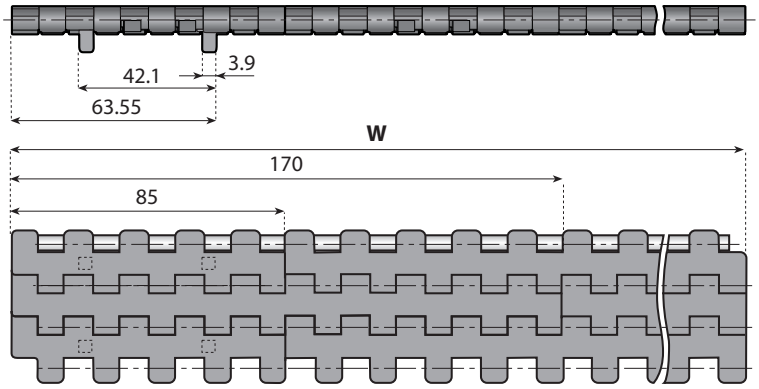





FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251600H-NGG")


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2120-0085 H-FTP2	**251600H**	935	2120-0935 H-FTP2	**251610H**	1785	2120-1785 H-FTP2	**251620H**	2635	2120-2635 H-FTP2	**251630H**
170	2120-0170 H-FTP2	**251601H**	1020	2120-1020 H-FTP2	**251611H**	1870	2120-1870 H-FTP2	**251621H**	2720	2120-2720 H-FTP2	**251631H**
255	2120-0255H-FTP2	**251602H**	1105	2120-1105 H-FTP2	**251612H**	1955	2120-1955 H-FTP2	**251622H**	2805	2120-2805 H-FTP2	**251632H**
340	2120-0340 H-FTP2	**251603H**	1190	2120-1190 H-FTP2	**251613H**	2040	2120-2040 H-FTP2	**251623H**	2890	2120-2890 H-FTP2	**251633H**
425	2120-0425 H-FTP2	**251604H**	1275	2120-1275 H-FTP2	**251614H**	2125	2120-2125 H-FTP2	**251624H**	2975	2120-2975 H-FTP2	**251634H**
510	2120-0510 H-FTP2	**251605H**	1360	2120-1360 H-FTP2	**251615H**	2210	2120-2210 H-FTP2	**251625H**	3060	2120-3060 H-FTP2	**251635H**
595	2120-0595 H-FTP2	**251606H**	1445	2120-1445 H-FTP2	**251616H**	2295	2120-2295 H-FTP2	**251626H**	3145	2120-3145 H-FTP2	**251636H**
680	2120-0680 H-FTP2	**251607H**	1530	2120-1530 H-FTP2	**251617H**	2380	2120-2380 H-FTP2	**251627H**	3230	2120-3230 H-FTP2	**251637H**
765	2120-0765 H-FTP2	**251608H**	1615	2120-1615 H-FTP2	**251618H**	2465	2120-2465 H-FTP2	**251628H**	3315	2120-3315 H-FTP2	**251638H**
850	2120-0850 H-FTP2	**251609H**	1700	2120-1700 H-FTP2	**251619H**	2550	2120-2550 H-FTP2	**251629H**	3400	2120-3400 H-FTP2	**251639H**

FLUSH GRID BELTS (Pitch ½" - 12.7 mm) 2120 FGP2

Open surface: 21%

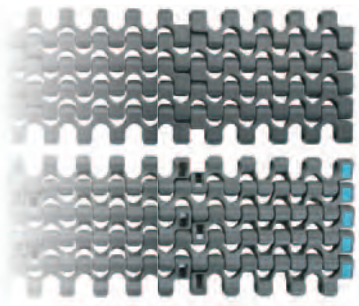

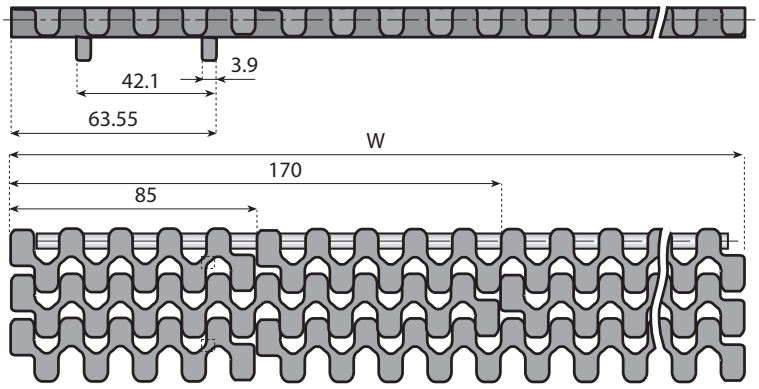



FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251650-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2120-0085 FGP2	**251650**	935	2120-0935 FGP2	**251660**	1785	2120-1785 FGP2	**251670**	2635	2120-2635 FGP2	**251680**
170	2120-0170 FGP2	**251651**	1020	2120-1020 FGP2	**251661**	1870	2120-1870 FGP2	**251671**	2720	2120-2720 FGP2	**251681**
255	2120-0255 FGP2	**251652**	1105	2120-1105 FGP2	**251662**	1955	2120-1955 FGP2	**251672**	2805	2120-2805 FGP2	**251682**
340	2120-0340 FGP2	**251653**	1190	2120-1190 FGP2	**251663**	2040	2120-2040 FGP2	**251673**	2890	2120-2890 FGP2	**251683**
425	2120-0425 FGP2	**251654**	1275	2120-1275 FGP2	**251664**	2125	2120-2125 FGP2	**251674**	2975	2120-2975 FGP2	**251684**
510	2120-0510 FGP2	**251655**	1360	2120-1360 FGP2	**251665**	2210	2120-2210 FGP2	**251675**	3060	2120-3060 FGP2	**251685**
595	2120-0595 FGP2	**251656**	1445	2120-1445 FGP2	**251666**	2295	2120-2295 FGP2	**251676**	3145	2120-3145 FGP2	**251686**
680	2120-0680 FGP2	**251657**	1530	2120-1530 FGP2	**251667**	2380	2120-2380 FGP2	**251677**	3230	2120-3230 FGP2	**251687**
765	2120-0765 FGP2	**251658**	1615	2120-1615 FGP2	**251668**	2465	2120-2465 FGP2	**251678**	3315	2120-3315 FGP2	**251688**
850	2120-0850 FGP2	**251659**	1700	2120-1700 FGP2	**251669**	2550	2120-2550 FGP2	**251679**	3400	2120-3400 FGP2	**251689**

Other widths available on request.


2120 H-FTP2BD — FLAT TOP BELTS (Pitch ½" - 12.7 mm)


Version standard
Backflex radius: 10 mm
Max load capacity: 20.000 N/m
Weight: 8.6 Kg/m² (FT), 7.4 Kg/m² (FG)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

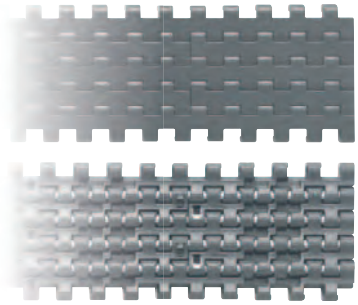

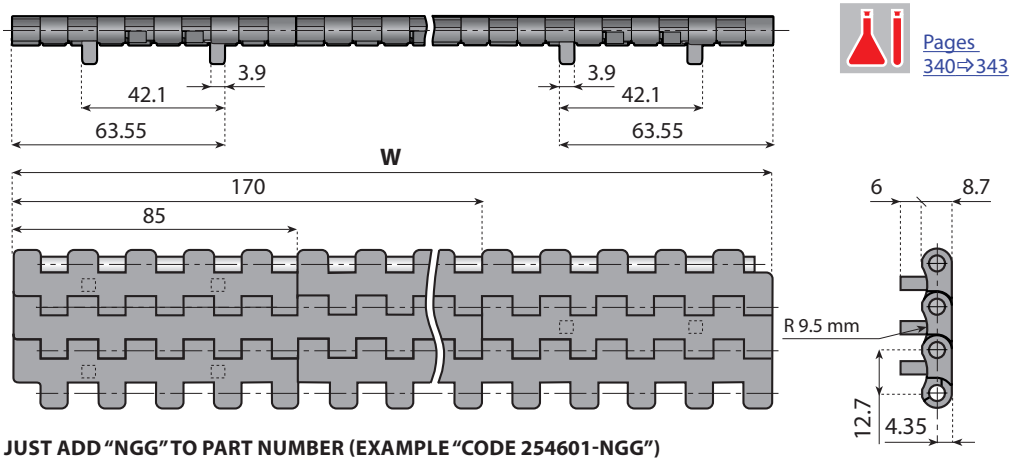



FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 254601-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2120-0935 H-FTP2BD	**254610H**	1785	2120-1785 H-FTP2BD	**254620H**	2635	2120-2635 H-FTP2BD	**254630H**
170	2120-0170 H-FTP2BD	**254601H**	1020	2120-1020 H-FTP2BD	**254611H**	1870	2120-1870 H-FTP2BD	**254621H**	2720	2120-2720 H-FTP2BD	**254631H**
255	2120-0255 H-FTP2BD	**254602H**	1105	2120-1105 H-FTP2BD	**254612H**	1955	2120-1955 H-FTP2BD	**254622H**	2805	2120-2805 H-FTP2BD	**254632H**
340	2120-0340 H-FTP2BD	**254603H**	1190	2120-1190 H-FTP2BD	**254613H**	2040	2120-2040 H-FTP2BD	**254623H**	2890	2120-2890 H-FTP2BD	**254633H**
425	2120-0425 H-FTP2BD	**254604H**	1275	2120-1275 H-FTP2BD	**254614H**	2125	2120-2125 H-FTP2BD	**254624H**	2975	2120-2975 H-FTP2BD	**254634H**
510	2120-0510 H-FTP2BD	**254605H**	1360	2120-1360 H-FTP2BD	**254615H**	2210	2120-2210 H-FTP2BD	**254625H**	3060	2120-3060 H-FTP2BD	**254635H**
595	2120-0595 H-FTP2BD	**254606H**	1445	2120-1445 H-FTP2BD	**254616H**	2295	2120-2295 H-FTP2BD	**254626H**	3145	2120-3145 H-FTP2BD	**254636H**
680	2120-0680 H-FTP2BD	**254607H**	1530	2120-1530 H-FTP2BD	**254617H**	2380	2120-2380 H-FTP2BD	**254627H**	3230	2120-3230 H-FTP2BD	**254637H**
765	2120-0765 H-FTP2BD	**254608H**	1615	2120-1615 H-FTP2BD	**254618H**	2465	2120-2465 H-FTP2BD	**254628H**	3315	2120-3315 H-FTP2BD	**254638H**
850	2120-0850 H-FTP2BD	**254609H**	1700	2120-1700 H-FTP2BD	**254619H**	2550	2120-2550 H-FTP2BD	**254629H**	3400	2120-3400 H-FTP2BD	**254639H**

2120 FGP2BD — FLUSH GRID BELTS (Pitch ½" - 12.7 mm)

Open surface: 21%

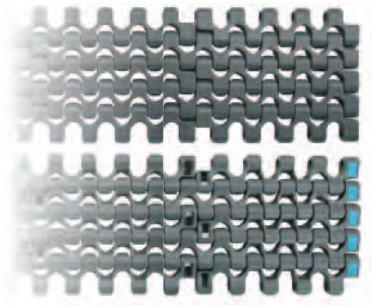

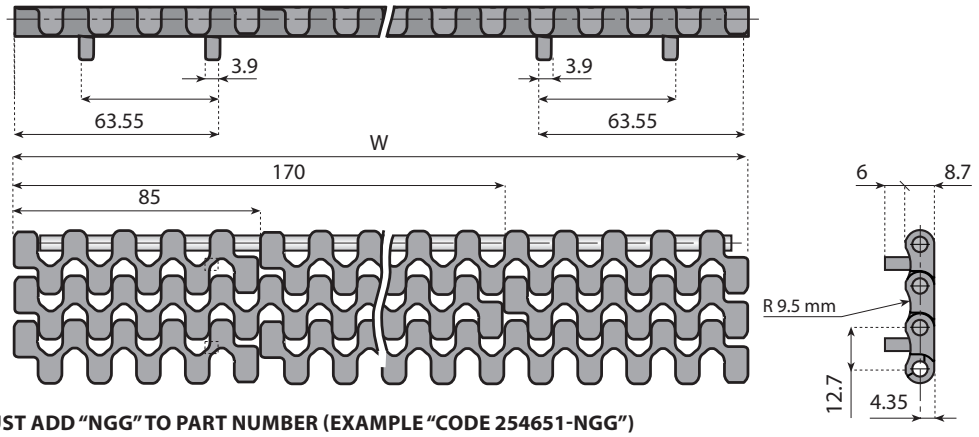

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 254651-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2120-0935 FGP2BD	**254660**	1785	2120-1785 FGP2BD	**254670**	2635	2120-2635 FGP2BD	**254680**
170	2120-0170 FGP2BD	**254651**	1020	2120-1020 FGP2BD	**254661**	1870	2120-1870 FGP2BD	**254671**	2720	2120-2720 FGP2BD	**254681**
255	2120-0255 FGP2BD	**254652**	1105	2120-1105 FGP2BD	**254662**	1955	2120-1955 FGP2BD	**254672**	2805	2120-2805 FGP2BD	**254682**
340	2120-0340 FGP2BD	**254653**	1190	2120-1190 FGP2BD	**254663**	2040	2120-2040 FGP2BD	**254673**	2890	2120-2890 FGP2BD	**254683**
425	2120-0425 FGP2BD	**254654**	1275	2120-1275 FGP2BD	**254664**	2125	2120-2125 FGP2BD	**254674**	2975	2120-2975 FGP2BD	**254684**
510	2120-0510 FGP2BD	**254655**	1360	2120-1360 FGP2BD	**254665**	2210	2120-2210 FGP2BD	**254675**	3060	2120-3060 FGP2BD	**254685**
595	2120-0595 FGP2BD	**254656**	1445	2120-1445 FGP2BD	**254666**	2295	2120-2295 FGP2BD	**254676**	3145	2120-3145 FGP2BD	**254686**
680	2120-0680 FGP2BD	**254657**	1530	2120-1530 FGP2BD	**254667**	2380	2120-2380 FGP2BD	**254677**	3230	2120-3230 FGP2BD	**254687**
765	2120-0765 FGP2BD	**254658**	1615	2120-1615 FGP2BD	**254668**	2465	2120-2465 FGP2BD	**254678**	3315	2120-3315 FGP2BD	**254688**
850	2120-0850 FGP2BD	**254659**	1700	2120-1700 FGP2BD	**254669**	2550	2120-2550 FGP2BD	**254679**	3400	2120-3400 FGP2BD	**254689**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLUSH GRID BELTS (Pitch ½" - 12.7 mm) 2122FG

2122 FG belts are similar to 2120FG belts.
The difference is the width of the modules.
Standard increments are 100 mm.
Special widths can be created on request in steps of 20 mm.

Open surface: 21%





Pages 4⇨7



Pages 315⇨316


Page 112



Pages 340⇨343

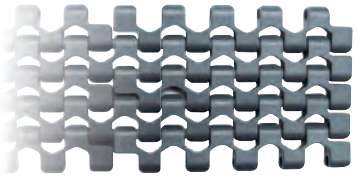

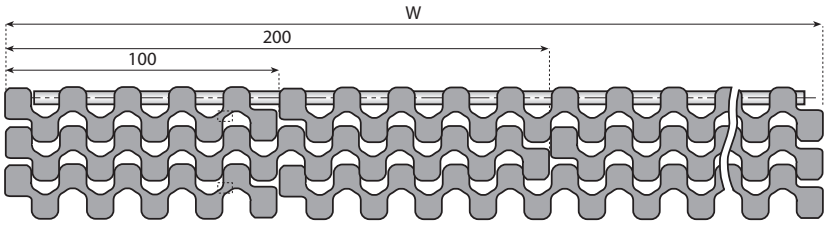



CAN BE USED WITH A NOSE BAR
TO CREATE EXTREMELY SHORT TRANSFERS.



Version standard
Backflex radius: 10 mm
Max load capacity: 20.000 N/m
Weight: 6.8 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 400mm: 3,048m belt length
belt width > 400mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26501-NGG")


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
100	2122-0100 FG	**26501**	1100	2122-1100 FG	**26511**	2100	2122-2100 FG	**26521**
200	2122-0200 FG	**26502**	1200	2122-1200 FG	**26512**	2200	2122-2200 FG	**26522**
300	2122-0300 FG	**26503**	1300	2122-1300 FG	**26513**	2300	2122-2300 FG	**26523**
400	2122-0400 FG	**26504**	1400	2122-1400 FG	**26514**	2400	2122-2400 FG	**26524**
500	2122-0500 FG	**26505**	1500	2122-1500 FG	**26515**	2500	2122-2500 FG	**26525**
600	2122-0600 FG	**26506**	1600	2122-1600 FG	**26516**	2600	2122-2600 FG	**26526**
700	2122-0700 FG	**26507**	1700	2122-1700 FG	**26517**	2700	2122-2700 FG	**26527**
800	2122-0800 FG	**26508**	1800	2122-1800 FG	**26518**	2800	2122-2800 FG	**26528**
900	2122-0900 FG	**26509**	1900	2122-1900 FG	**26519**	2900	2122-2900 FG	**26529**
1000	2122-1000 FG	**26510**	2000	2122-2000 FG	**26520**	3000	2122-3000 FG	**26530**

Other widths available on request.


2120 H-FTTP2 FLAT TOP BELTS (Pitch ½" - 12.7 mm) WITH TRANSFER WING

Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343



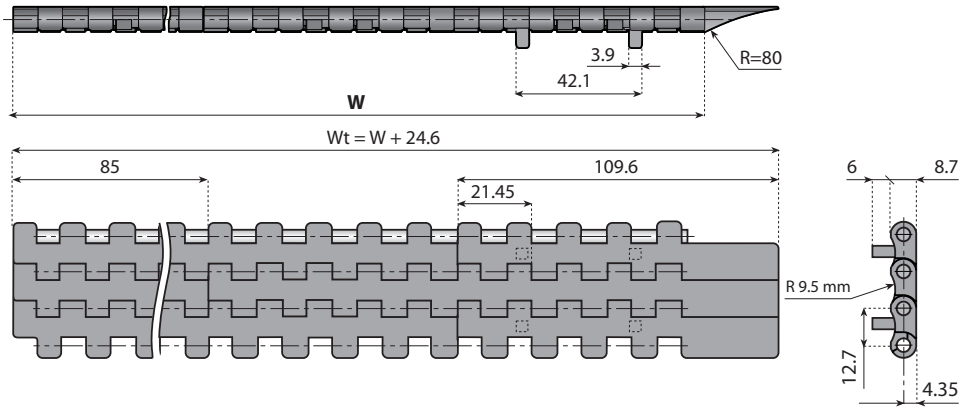

CAN BE USED WITH A NOSE BAR
TO CREATE EXTREMELY SHORT TRANSFERS.



Version standard
Backflex radius: 15 mm
Max load capacity: 20.000 N/m
Weight: 8.6 Kg/m² (FT)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251700H-NGG")


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2120-0085 H-FTTP2	**251700H**	935	2120-0935 H-FTTP2	**251710H**	1785	2120-1785 H-FTTP2	**251720H**	2635	2120-2635 H-FTTP2	**251730H**
170	2120-0170 H-FTTP2	**251701H**	1020	2120-1020 H-FTTP2	**251711H**	1870	2120-1870 H-FTTP2	**251721H**	2720	2120-2720 H-FTTP2	**251731H**
255	2120-0255 H-FTTP2	**251702H**	1105	2120-1105 H-FTTP2	**251712H**	1955	2120-1955 H-FTTP2	**251722H**	2805	2120-2805 H-FTTP2	**251732H**
340	2120-0340 H-FTTP2	**251703H**	1190	2120-1190 H-FTTP2	**251713H**	2040	2120-2040 H-FTTP2	**251723H**	2890	2120-2890 H-FTTP2	**251733H**
425	2120-0425 H-FTTP2	**251704H**	1275	2120-1275 H-FTTP2	**251714H**	2125	2120-2125 H-FTTP2	**251724H**	2975	2120-2975 H-FTTP2	**251734H**
510	2120-0510 H-FTTP2	**251705H**	1360	2120-1360 H-FTTP2	**251715H**	2210	2120-2210 H-FTTP2	**251725H**	3060	2120-3060 H-FTTP2	**251735H**
595	2120-0595 H-FTTP2	**251706H**	1445	2120-1445 H-FTTP2	**251716H**	2295	2120-2295 H-FTTP2	**251726H**	3145	2120-3145 H-FTTP2	**251736H**
680	2120-0680 H-FTTP2	**251707H**	1530	2120-1530 H-FTTP2	**251717H**	2380	2120-2380 H-FTTP2	**251727H**	3230	2120-3230 H-FTTP2	**251737H**
765	2120-0765 H-FTTP2	**251708H**	1615	2120-1615 H-FTTP2	**251718H**	2465	2120-2465 H-FTTP2	**251728H**	3315	2120-3315 H-FTTP2	**251738H**
850	2120-0850 H-FTTP2	**251709H**	1700	2120-1700 H-FTTP2	**251719H**	2550	2120-2550 H-FTTP2	**251729H**	3400	2120-3400 H-FTTP2	**251739H**

 © System Plast S.r.l. , 2012 - All Rights Reserved


FLAT TOP BELTS (Pitch ½" - 12.7 mm) WITH TRANSFER WING 2120 H-FTTP2-SX

Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343



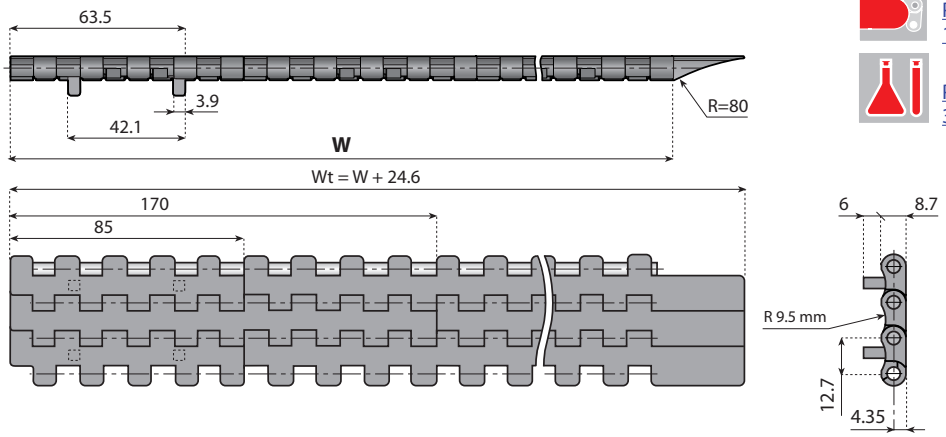

CAN BE USED WITH A NOSE BAR
TO CREATE EXTREMELY SHORT TRANSFERS.



Version with two positioners and integrated active transfer wing
Backflex radius: 15 mm
Max load capacity: 20.000 N/m
Weight: 8.6 Kg/m² (FT)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251700H-NGG")

Width W mm	Belts Ref.	Code
85	2120-0085-H-FTTP2	**251700H**
170	2120-0170-H-FTTP2-SX	**251701H-SX**
255	2120-0255-H-FTTP2-SX	**251702H-SX**
340	2120-0340-H-FTTP2-SX	**251703H-SX**
425	2120-0425-H-FTTP2-SX	**251704H-SX**
510	2120-0510-H-FTTP2-SX	**251705H-SX**
595	2120-0595-H-FTTP2-SX	**251706H-SX**
680	2120-0680-H-FTTP2-SX	**251707H-SX**
765	2120-0765-H-FTTP2-SX	**251708H-SX**
850	2120-0850-H-FTTP2-SX	**251709H-SX**


Width W mm	Belts Ref.	Code
935	2120-0935-H-FTTP2-SX	**251710H-SX**
1020	2120-1020-H-FTTP2-SX	**251711H-SX**
1105	2120-1105-H-FTTP2-SX	**251712H-SX**
1190	2120-1190-H-FTTP2-SX	**251713H-SX**
1275	2120-1275-H-FTTP2-SX	**251714H-SX**
1360	2120-1360-H-FTTP2-SX	**251715H-SX**
1445	2120-1445-H-FTTP2-SX	**251716H-SX**
1530	2120-1530-H-FTTP2-SX	**251717H-SX**
1615	2120-1615-H-FTTP2-SX	**251718H-SX**
1700	2120-1700-H-FTTP2-SX	**251719H-SX**


Width W mm	Belts Ref.	Code
1785	2120-1785-H-FTTP2-SX	**251720H-SX**
1870	2120-1870-H-FTTP2-SX	**251721H-SX**
1955	2120-1955-H-FTTP2-SX	**251722H-SX**
2040	2120-2040-H-FTTP2-SX	**251723H-SX**
2125	2120-2125-H-FTTP2-SX	**251724H-SX**
2210	2120-2210-H-FTTP2-SX	**251725H-SX**
2295	2120-2295-H-FTTP2-SX	**251726H-SX**
2380	2120-2380-H-FTTP2-SX	**251727H-SX**
2465	2120-2465-H-FTTP2-SX	**251728H-SX**
2550	2120-2550-H-FTTP2-SX	**251729H-SX**

Width W mm	Belts Ref.	Code
2635	2120-2635-H-FTTP2-SX	**251730H-SX**
2720	2120-2720-H-FTTP2-SX	**251731H-SX**
2805	2120-2805-H-FTTP2-SX	**251732H-SX**
2890	2120-2890-H-FTTP2-SX	**251733H-SX**
2975	2120-2975-H-FTTP2-SX	**251734H-SX**
3060	2120-3060-H-FTTP2-SX	**251735H-SX**
3145	2120-3145-H-FTTP2-SX	**251736H-SX**
3230	2120-3230-H-FTTP2-SX	**251737H-SX**
3315	2120-3315-H-FTTP2-SX	**251738H-SX**
3400	2120-3400-H-FTTP2-SX	**251739H-SX**

Other widths available on request.

VG 2120 GRIP BELTS (Pitch ½" - 12.7 mm) WITH HIGH FRICTION SURFACE



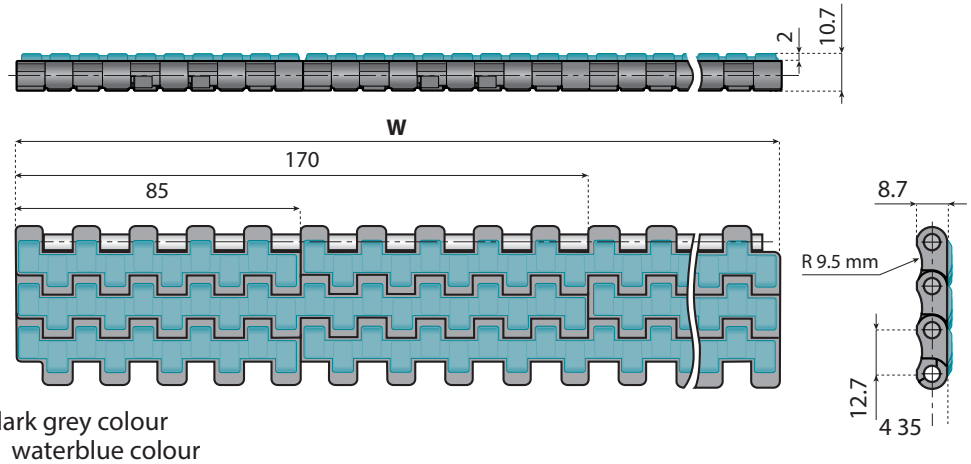


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 20 mm
Max load capacity: 20.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


TYPE VG 2120



Weight: 9.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2120-0085	**254700**	935	VG 2120-0935	**254710**	1785	VG 2120-1785	**254720**
170	VG 2120-0170	**254701**	1020	VG 2120-1020	**254711**	1870	VG 2120-1870	**254721**
255	VG 2120-0255	**254702**	1105	VG 2120-1105	**254712**	1955	VG 2120-1955	**254722**
340	VG 2120-0340	**254703**	1190	VG 2120-1190	**254713**	2040	VG 2120-2040	**254723**
425	VG 2120-0425	**254704**	1275	VG 2120-1275	**254714**	2125	VG 2120-2125	**254724**
510	VG 2120-0510	**254705**	1360	VG 2120-1360	**254715**	2210	VG 2120-2210	**254725**
595	VG 2120-0595	**254706**	1445	VG 2120-1445	**254716**	2295	VG 2120-2295	**254726**
680	VG 2120-0680	**254707**	1530	VG 2120-1530	**254717**	2380	VG 2120-2380	**254727**
765	VG 2120-0765	**254708**	1615	VG 2120-1615	**254718**			
850	VG 2120-0850	**254709**	1700	VG 2120-1700	**254719**			


TYPE VG2 2120



Weight: 9.2 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2120-0085	**254800**	935	VG2 2120-0935	**254810**	1785	VG2 2120-1785	**254820**
170	VG2 2120-0170	**254801**	1020	VG2 2120-1020	**254811**	1870	VG2 2120-1870	**254821**
255	VG2 2120-0255	**254802**	1105	VG2 2120-1105	**254812**	1955	VG2 2120-1955	**254822**
340	VG2 2120-0340	**254803**	1190	VG2 2120-1190	**254813**	2040	VG2 2120-2040	**254823**
425	VG2 2120-0425	**254804**	1275	VG2 2120-1275	**254814**	2125	VG2 2120-2125	**254824**
510	VG2 2120-0510	**254805**	1360	VG2 2120-1360	**254815**	2210	VG2 2120-2210	**254825**
595	VG2 2120-0595	**254806**	1445	VG2 2120-1445	**254816**	2295	VG2 2120-2295	**254826**
680	VG2 2120-0680	**254807**	1530	VG2 2120-1530	**254817**	2380	VG2 2120-2380	**254827**
765	VG2 2120-0765	**254808**	1615	VG2 2120-1615	**254818**			
850	VG2 2120-0850	**254809**	1700	VG2 2120-1700	**254819**			

TYPE VG3 2120




Weight: 9.0 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2120-0085	**254900**	935	VG3 2120-0935	**254910**	1785	VG3 2120-1785	**254920**
170	VG3 2120-0170	**254901**	1020	VG3 2120-1020	**254911**	1870	VG3 2120-1870	**254921**
255	VG3 2120-0255	**254902**	1105	VG3 2120-1105	**254912**	1955	VG3 2120-1955	**254922**
340	VG3 2120-0340	**254903**	1190	VG3 2120-1190	**254913**	2040	VG3 2120-2040	**254923**
425	VG3 2120-0425	**254904**	1275	VG3 2120-1275	**254914**	2125	VG3 2120-2125	**254924**
510	VG3 2120-0510	**254905**	1360	VG3 2120-1360	**254915**	2210	VG3 2120-2210	**254925**
595	VG3 2120-0595	**254906**	1445	VG3 2120-1445	**254916**	2295	VG3 2120-2295	**254926**
680	VG3 2120-0680	**254907**	1530	VG3 2120-1530	**254917**	2380	VG3 2120-2380	**254927**
765	VG3 2120-0765	**254908**	1615	VG3 2120-1615	**254918**			
850	VG3 2120-0850	**254909**	1700	VG3 2120-1700	**254919**			

Other widths available on request.

 © System Plast S.r.l., 2012 - All Rights Reserved

GRIP BELTS (Pitch ½" - 12.7 mm) WITH HIGH FRICTION SURFACE VG 2120 P1



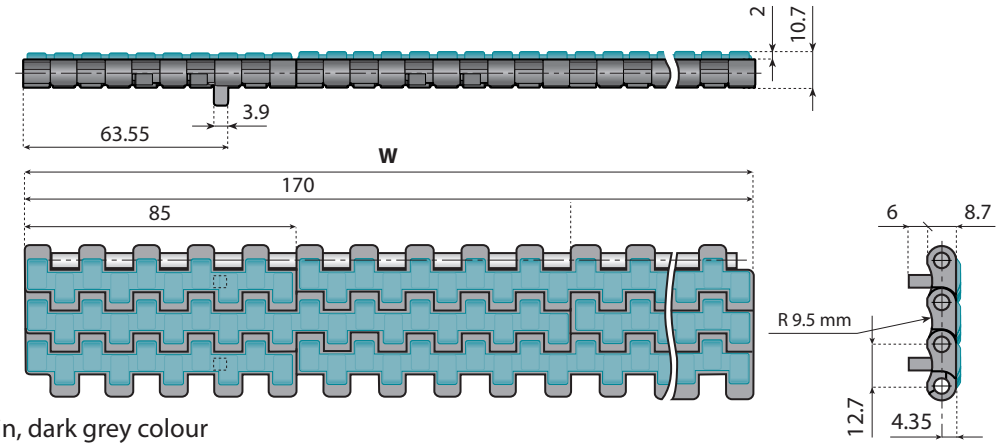


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 20 mm
Max load capacity: 20.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


TYPE VG 2120 P1



Weight: 9.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2120-0085 P1	**255000**	935	VG 2120-0935 P1	**255010**	1785	VG 2120-1785 P1	**255020**
170	VG 2120-0170 P1	**255001**	1020	VG 2120-1020 P1	**255011**	1870	VG 2120-1870 P1	**255021**
255	VG 2120-0255 P1	**255002**	1105	VG 2120-1105 P1	**255012**	1955	VG 2120-1955 P1	**255022**
340	VG 2120-0340 P1	**255003**	1190	VG 2120-1190 P1	**255013**	2040	VG 2120-2040 P1	**255023**
425	VG 2120-0425 P1	**255004**	1275	VG 2120-1275 P1	**255014**	2125	VG 2120-2125 P1	**255024**
510	VG 2120-0510 P1	**255005**	1360	VG 2120-1360 P1	**255015**	2210	VG 2120-2210 P1	**255025**
595	VG 2120-0595 P1	**255006**	1445	VG 2120-1445 P1	**255016**	2295	VG 2120-2295 P1	**255026**
680	VG 2120-0680 P1	**255007**	1530	VG 2120-1530 P1	**255017**	2380	VG 2120-2380 P1	**255027**
765	VG 2120-0765 P1	**255008**	1615	VG 2120-1615 P1	**255018**			
850	VG 2120-0850 P1	**255009**	1700	VG 2120-1700 P1	**255019**			


TYPE VG2 2120 P1



Weight: 9.2 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2120-0085 P1	**255100**	935	VG2 2120-0935 P1	**255110**	1785	VG2 2120-1785 P1	**255120**
170	VG2 2120-0170 P1	**255101**	1020	VG2 2120-1020 P1	**255111**	1870	VG2 2120-1870 P1	**255121**
255	VG2 2120-0255 P1	**255102**	1105	VG2 2120-1105 P1	**255112**	1955	VG2 2120-1955 P1	**255122**
340	VG2 2120-0340 P1	**255103**	1190	VG2 2120-1190 P1	**255113**	2040	VG2 2120-2040 P1	**255123**
425	VG2 2120-0425 P1	**255104**	1275	VG2 2120-1275 P1	**255114**	2125	VG2 2120-2125 P1	**255124**
510	VG2 2120-0510 P1	**255105**	1360	VG2 2120-1360 P1	**255115**	2210	VG2 2120-2210 P1	**255125**
595	VG2 2120-0595 P1	**255106**	1445	VG2 2120-1445 P1	**255116**	2295	VG2 2120-2295 P1	**255126**
680	VG2 2120-0680 P1	**255107**	1530	VG2 2120-1530 P1	**255117**	2380	VG2 2120-2380 P1	**255127**
765	VG2 2120-0765 P1	**255108**	1615	VG2 2120-1615 P1	**255118**			
850	VG2 2120-0850 P1	**255109**	1700	VG2 2120-1700 P1	**255119**			

TYPE VG3 2120 P1





Weight: 9.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2120-0085 P1	**255200**	935	VG3 2120-0935 P1	**255210**	1785	VG3 2120-1785 P1	**255220**
170	VG3 2120-0170 P1	**255201**	1020	VG3 2120-1020 P1	**255211**	1870	VG3 2120-1870 P1	**255221**
255	VG3 2120-0255 P1	**255202**	1105	VG3 2120-1105 P1	**255212**	1955	VG3 2120-1955 P1	**255222**
340	VG3 2120-0340 P1	**255203**	1190	VG3 2120-1190 P1	**255213**	2040	VG3 2120-2040 P1	**255223**
425	VG3 2120-0425 P1	**255204**	1275	VG3 2120-1275 P1	**255214**	2125	VG3 2120-2125 P1	**255224**
510	VG3 2120-0510 P1	**255205**	1360	VG3 2120-1360 P1	**255215**	2210	VG3 2120-2210 P1	**255225**
595	VG3 2120-0595 P1	**255206**	1445	VG3 2120-1445 P1	**255216**	2295	VG3 2120-2295 P1	**255226**
680	VG3 2120-0680 P1	**255207**	1530	VG3 2120-1530 P1	**255217**	2380	VG3 2120-2380 P1	**255227**
765	VG3 2120-0765 P1	**255208**	1615	VG3 2120-1615 P1	**255218**			
850	VG3 2120-0850 P1	**255209**	1700	VG3 2120-1700 P1	**255219**			

Other widths available on request.

VG 2120 P2 GRIP BELTS (Pitch ½" - 12.7 mm) WITH HIGH FRICTION SURFACE



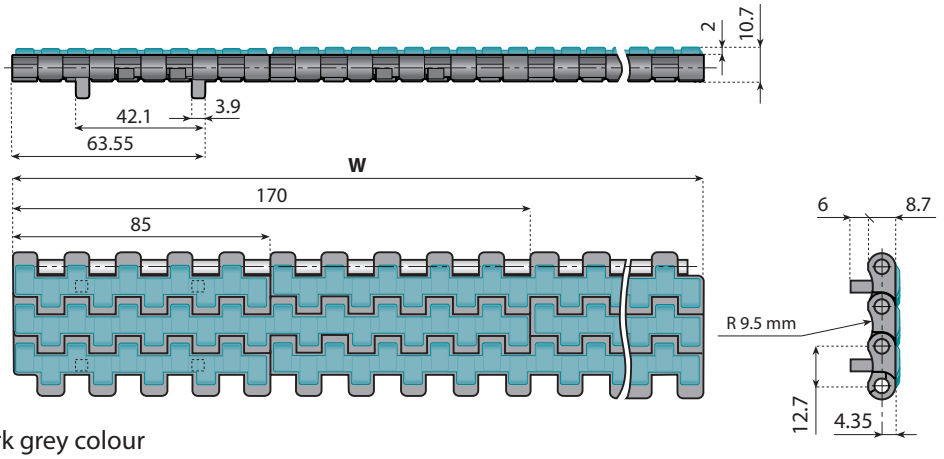


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 20 mm
Max load capacity: 20.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


TYPE VG 2120 P2



Weight: 9.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2120-0085 P2	**255300**	935	VG 2120-0935 P2	**255310**	1785	VG 2120-1785 P2	**255320**
170	VG 2120-0170 P2	**255301**	1020	VG 2120-1020 P2	**255311**	1870	VG 2120-1870 P2	**255321**
255	VG 2120-0255 P2	**255302**	1105	VG 2120-1105 P2	**255312**	1955	VG 2120-1955 P2	**255322**
340	VG 2120-0340 P2	**255303**	1190	VG 2120-1190 P2	**255313**	2040	VG 2120-2040 P2	**255323**
425	VG 2120-0425 P2	**255304**	1275	VG 2120-1275 P2	**255314**	2125	VG 2120-2125 P2	**255324**
510	VG 2120-0510 P2	**255305**	1360	VG 2120-1360 P2	**255315**	2210	VG 2120-2210 P2	**255325**
595	VG 2120-0595 P2	**255306**	1445	VG 2120-1445 P2	**255316**	2295	VG 2120-2295 P2	**255326**
680	VG 2120-0680 P2	**255307**	1530	VG 2120-1530 P2	**255317**	2380	VG 2120-2380 P2	**255327**
765	VG 2120-0765 P2	**255308**	1615	VG 2120-1615 P2	**255318**			
850	VG 2120-0850 P2	**255309**	1700	VG 2120-1700 P2	**255319**			


TYPE VG2 2120 P2



Weight: 9.2 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2120-0085 P2	**255400**	935	VG2 2120-0935 P2	**255410**	1785	VG2 2120-1785 P2	**255420**
170	VG2 2120-0170 P2	**255401**	1020	VG2 2120-1020 P2	**255411**	1870	VG2 2120-1870 P2	**255421**
255	VG2 2120-0255 P2	**255402**	1105	VG2 2120-1105 P2	**255412**	1955	VG2 2120-1955 P2	**255422**
340	VG2 2120-0340 P2	**255403**	1190	VG2 2120-1190 P2	**255413**	2040	VG2 2120-2040 P2	**255423**
425	VG2 2120-0425 P2	**255404**	1275	VG2 2120-1275 P2	**255414**	2125	VG2 2120-2125 P2	**255424**
510	VG2 2120-0510 P2	**255405**	1360	VG2 2120-1360 P2	**255415**	2210	VG2 2120-2210 P2	**255425**
595	VG2 2120-0595 P2	**255406**	1445	VG2 2120-1445 P2	**255416**	2295	VG2 2120-2295 P2	**255426**
680	VG2 2120-0680 P2	**255407**	1530	VG2 2120-1530 P2	**255417**	2380	VG2 2120-2380 P2	**255427**
765	VG2 2120-0765 P2	**255408**	1615	VG2 2120-1615 P2	**255418**			
850	VG2 2120-0850 P2	**255409**	1700	VG2 2120-1700 P2	**255419**			

TYPE VG3 2120 P2




Weight: 9.0 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2120-0085 P2	**255500**	935	VG3 2120-0935 P2	**255510**	1785	VG3 2120-1785 P2	**255520**
170	VG3 2120-0170 P2	**255501**	1020	VG3 2120-1020 P2	**255511**	1870	VG3 2120-1870 P2	**255521**
255	VG3 2120-0255 P2	**255502**	1105	VG3 2120-1105 P2	**255512**	1955	VG3 2120-1955 P2	**255522**
340	VG3 2120-0340 P2	**255503**	1190	VG3 2120-1190 P2	**255513**	2040	VG3 2120-2040 P2	**255523**
425	VG3 2120-0425 P2	**255504**	1275	VG3 2120-1275 P2	**255514**	2125	VG3 2120-2125 P2	**255524**
510	VG3 2120-0510 P2	**255505**	1360	VG3 2120-1360 P2	**255515**	2210	VG3 2120-2210 P2	**255525**
595	VG3 2120-0595 P2	**255506**	1445	VG3 2120-1445 P2	**255516**	2295	VG3 2120-2295 P2	**255526**
680	VG3 2120-0680 P2	**255507**	1530	VG3 2120-1530 P2	**255517**	2380	VG3 2120-2380 P2	**255527**
765	VG3 2120-0765 P2	**255508**	1615	VG3 2120-1615 P2	**255518**			
850	VG3 2120-0850 P2	**255509**	1700	VG3 2120-1700 P2	**255519**			

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

GRIP BELTS (Pitch ½" - 12.7 mm) WITH HIGH FRICTION SURFACE VGS 2120



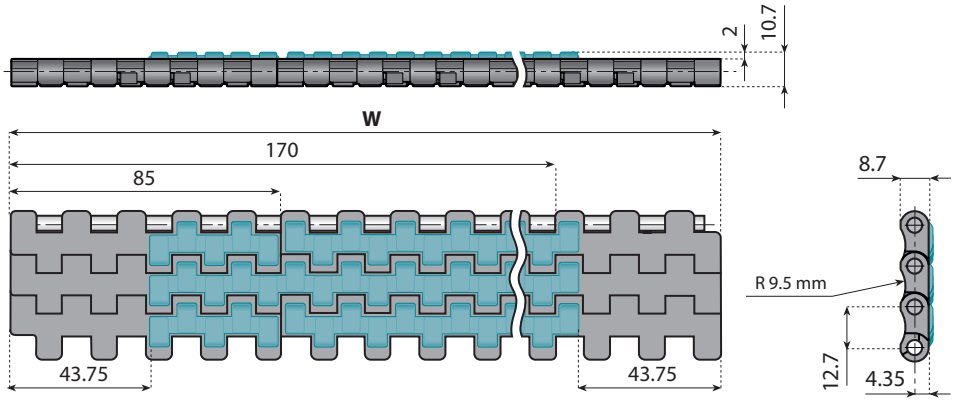


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 20 mm
Max load capacity: 20.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


TYPE VGS 2120



Weight: 9.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2120-0935	**255610**	1785	VGS 2120-1785	**255620**
170	-	-	1020	VGS 2120-1020	**255611**	1870	VGS 2120-1870	**255621**
255	VGS 2120-0255	**255602**	1105	VGS 2120-1105	**255612**	1955	VGS 2120-1955	**255622**
340	VGS 2120-0340	**255603**	1190	VGS 2120-1190	**255613**	2040	VGS 2120-2040	**255623**
425	VGS 2120-0425	**255604**	1275	VGS 2120-1275	**255614**	2125	VGS 2120-2125	**255624**
510	VGS 2120-0510	**255605**	1360	VGS 2120-1360	**255615**	2210	VGS 2120-2210	**255625**
595	VGS 2120-0595	**255606**	1445	VGS 2120-1445	**255616**	2295	VGS 2120-2295	**255626**
680	VGS 2120-0680	**255607**	1530	VGS 2120-1530	**255617**	2380	VGS 2120-2380	**255627**
765	VGS 2120-0765	**255608**	1615	VGS 2120-1615	**255618**			
850	VGS 2120-0850	**255609**	1700	VGS 2120-1700	**255619**			


TYPE VGS2 2120



Weight: 9.2 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2120-0935	**255710**	1785	VGS2 2120-1785	**255720**
170	VGS2 2120-0170	**255701**	1020	VGS2 2120-1020	**255711**	1870	VGS2 2120-1870	**255721**
255	VGS2 2120-0255	**255702**	1105	VGS2 2120-1105	**255712**	1955	VGS2 2120-1955	**255722**
340	VGS2 2120-0340	**255703**	1190	VGS2 2120-1190	**255713**	2040	VGS2 2120-2040	**255723**
425	VGS2 2120-0425	**255704**	1275	VGS2 2120-1275	**255714**	2125	VGS2 2120-2125	**255724**
510	VGS2 2120-0510	**255705**	1360	VGS2 2120-1360	**255715**	2210	VGS2 2120-2210	**255725**
595	VGS2 2120-0595	**255706**	1445	VGS2 2120-1445	**255716**	2295	VGS2 2120-2295	**255726**
680	VGS2 2120-0680	**255707**	1530	VGS2 2120-1530	**255717**	2380	VGS2 2120-2380	**255727**
765	VGS2 2120-0765	**255708**	1615	VGS2 2120-1615	**255718**			
850	VGS2 2120-0850	**255709**	1700	VGS2 2120-1700	**255719**			

TYPE VGS3 2120





Weight: 9.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2120-0935	**255810**	1785	VGS3 2120-1785	**255820**
170	VGS3 2120-0170	**255801**	1020	VGS3 2120-1020	**255811**	1870	VGS3 2120-1870	**255821**
255	VGS3 2120-0255	**255802**	1105	VGS3 2120-1105	**255812**	1955	VGS3 2120-1955	**255822**
340	VGS3 2120-0340	**255803**	1190	VGS3 2120-1190	**255813**	2040	VGS3 2120-2040	**255823**
425	VGS3 2120-0425	**255804**	1275	VGS3 2120-1275	**255814**	2125	VGS3 2120-2125	**255824**
510	VGS3 2120-0510	**255805**	1360	VGS3 2120-1360	**255815**	2210	VGS3 2120-2210	**255825**
595	VGS3 2120-0595	**255806**	1445	VGS3 2120-1445	**255816**	2295	VGS3 2120-2295	**255826**
680	VGS3 2120-0680	**255807**	1530	VGS3 2120-1530	**255817**	2380	VGS3 2120-2380	**255827**
765	VGS3 2120-0765	**255808**	1615	VGS3 2120-1615	**255818**			
850	VGS3 2120-0850	**255809**	1700	VGS3 2120-1700	**255819**			

Other widths available on request.

VGS 2120 P1 GRIP BELTS (Pitch ½" - 12.7 mm) WITH HIGH FRICTION SURFACE



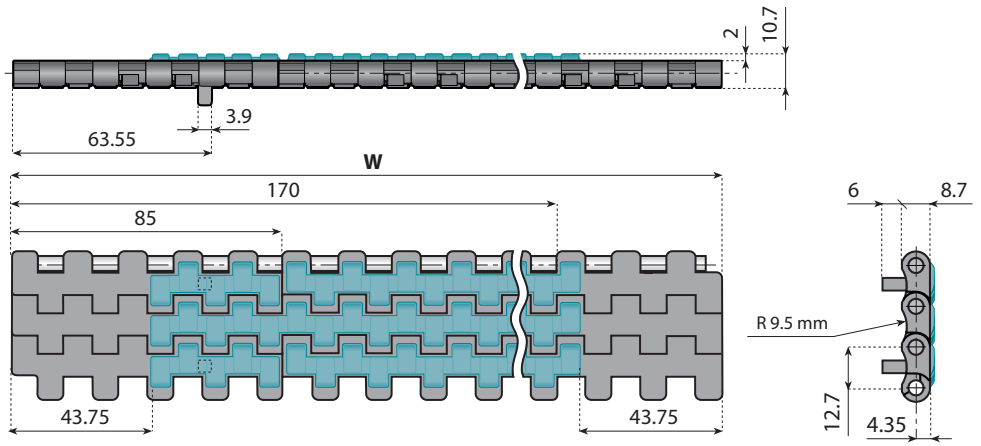


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 20 mm
Max load capacity: 20.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


TYPE VGS 2120 P1



Weight: 9.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2120-0935 P1	**255910**	1785	VGS 2120-1785 P1	**255920**
170	-	-	1020	VGS 2120-1020 P1	**255911**	1870	VGS 2120-1870 P1	**255921**
255	VGS 2120-0255 P1	**255902**	1105	VGS 2120-1105 P1	**255912**	1955	VGS 2120-1955 P1	**255922**
340	VGS 2120-0340 P1	**255903**	1190	VGS 2120-1190 P1	**255913**	2040	VGS 2120-2040 P1	**255923**
425	VGS 2120-0425 P1	**255904**	1275	VGS 2120-1275 P1	**255914**	2125	VGS 2120-2125 P1	**255924**
510	VGS 2120-0510 P1	**255905**	1360	VGS 2120-1360 P1	**255915**	2210	VGS 2120-2210 P1	**255925**
595	VGS 2120-0595 P1	**255906**	1445	VGS 2120-1445 P1	**255916**	2295	VGS 2120-2295 P1	**255926**
680	VGS 2120-0680 P1	**255907**	1530	VGS 2120-1530 P1	**255917**	2380	VGS 2120-2380 P1	**255927**
765	VGS 2120-0765 P1	**255908**	1615	VGS 2120-1615 P1	**255918**			
850	VGS 2120-0850 P1	**255909**	1700	VGS 2120-1700 P1	**255919**			


TYPE VGS2 2120 P1



Weight: 9.2 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2120-0935 P1	**256010**	1785	VGS2 2120-1785 P1	**256020**
170	VGS2 2120-0170 P1	**256001**	1020	VGS2 2120-1020 P1	**256011**	1870	VGS2 2120-1870 P1	**256021**
255	VGS2 2120-0255 P1	**256002**	1105	VGS2 2120-1105 P1	**256012**	1955	VGS2 2120-1955 P1	**256022**
340	VGS2 2120-0340 P1	**256003**	1190	VGS2 2120-1190 P1	**256013**	2040	VGS2 2120-2040 P1	**256023**
425	VGS2 2120-0425 P1	**256004**	1275	VGS2 2120-1275 P1	**256014**	2125	VGS2 2120-2125 P1	**256024**
510	VGS2 2120-0510 P1	**256005**	1360	VGS2 2120-1360 P1	**256015**	2210	VGS2 2120-2210 P1	**256025**
595	VGS2 2120-0595 P1	**256006**	1445	VGS2 2120-1445 P1	**256016**	2295	VGS2 2120-2295 P1	**256026**
680	VGS2 2120-0680 P1	**256007**	1530	VGS2 2120-1530 P1	**256017**	2380	VGS2 2120-2380 P1	**256027**
765	VGS2 2120-0765 P1	**256008**	1615	VGS2 2120-1615 P1	**256018**			
850	VGS2 2120-0850 P1	**256009**	1700	VGS2 2120-1700 P1	**256019**			

TYPE VGS3 2120 P1




Weight: 9.0 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2120-0935 P1	**256110**	1785	VGS3 2120-1785 P1	**256120**
170	-	-	1020	VGS3 2120-1020 P1	**256111**	1870	VGS3 2120-1870 P1	**256121**
255	VGS3 2120-0255 P1	**256102**	1105	VGS3 2120-1105 P1	**256112**	1955	VGS3 2120-1955 P1	**256122**
340	VGS3 2120-0340 P1	**256103**	1190	VGS3 2120-1190 P1	**256113**	2040	VGS3 2120-2040 P1	**256123**
425	VGS3 2120-0425 P1	**256104**	1275	VGS3 2120-1275 P1	**256114**	2125	VGS3 2120-2125 P1	**256124**
510	VGS3 2120-0510 P1	**256105**	1360	VGS3 2120-1360 P1	**256115**	2210	VGS3 2120-2210 P1	**256125**
595	VGS3 2120-0595 P1	**256106**	1445	VGS3 2120-1445 P1	**256116**	2295	VGS3 2120-2295 P1	**256126**
680	VGS3 2120-0680 P1	**256107**	1530	VGS3 2120-1530 P1	**256117**	2380	VGS3 2120-2380 P1	**256127**
765	VGS3 2120-0765 P1	**256108**	1615	VGS3 2120-1615 P1	**256118**			
850	VGS3 2120-0850 P1	**256109**	1700	VGS3 2120-1700 P1	**256119**			

Other widths available on request.

 © System Plast S.r.l., 2012 - All Rights Reserved

GRIP BELTS (Pitch ½" - 12.7 mm) WITH HIGH FRICTION SURFACE VGS 2120 P2



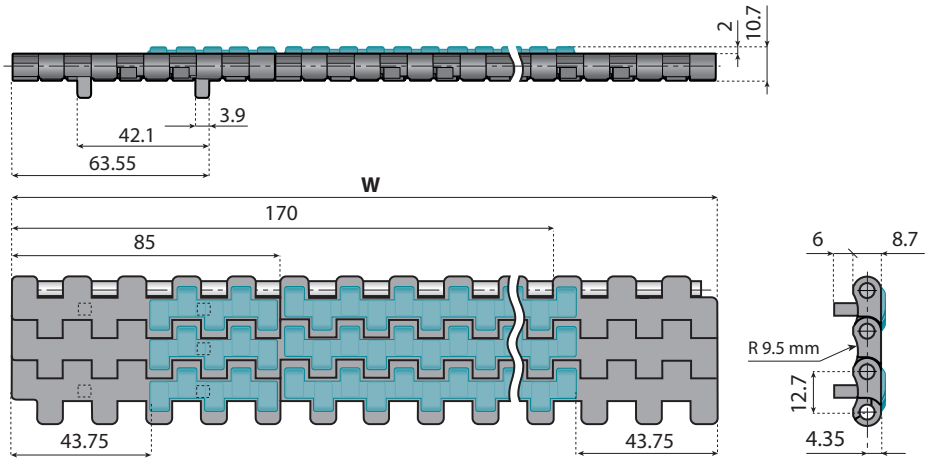


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 20 mm
Max load capacity: 20.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


TYPE VGS 2120 P2



Weight: 9.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2120-0935 P2	**256210**	1785	VGS 2120-1785 P2	**256220**
170	-	-	1020	VGS 2120-1020 P2	**256211**	1870	VGS 2120-1870 P2	**256221**
255	VGS 2120-0255 P2	**256202**	1105	VGS 2120-1105 P2	**256212**	1955	VGS 2120-1955 P2	**256222**
340	VGS 2120-0340 P2	**256203**	1190	VGS 2120-1190 P2	**256213**	2040	VGS 2120-2040 P2	**256223**
425	VGS 2120-0425 P2	**256204**	1275	VGS 2120-1275 P2	**256214**	2125	VGS 2120-2125 P2	**256224**
510	VGS 2120-0510 P2	**256205**	1360	VGS 2120-1360 P2	**256215**	2210	VGS 2120-2210 P2	**256225**
595	VGS 2120-0595 P2	**256206**	1445	VGS 2120-1445 P2	**256216**	2295	VGS 2120-2295 P2	**256226**
680	VGS 2120-0680 P2	**256207**	1530	VGS 2120-1530 P2	**256217**	2380	VGS 2120-2380 P2	**256227**
765	VGS 2120-0765 P2	**256208**	1615	VGS 2120-1615 P2	**256218**			
850	VGS 2120-0850 P2	**256209**	1700	VGS 2120-1700 P2	**256219**			


TYPE VGS2 2120 P2



Weight: 9.2 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2120-0935 P2	**256310**	1785	VGS2 2120-1785 P2	**256320**
170	VGS2 2120-0170 P2	**256301**	1020	VGS2 2120-1020 P2	**256311**	1870	VGS2 2120-1870 P2	**256321**
255	VGS2 2120-0255 P2	**256302**	1105	VGS2 2120-1105 P2	**256312**	1955	VGS2 2120-1955 P2	**256322**
340	VGS2 2120-0340 P2	**256303**	1190	VGS2 2120-1190 P2	**256313**	2040	VGS2 2120-2040 P2	**256323**
425	VGS2 2120-0425 P2	**256304**	1275	VGS2 2120-1275 P2	**256314**	2125	VGS2 2120-2125 P2	**256324**
510	VGS2 2120-0510 P2	**256305**	1360	VGS2 2120-1360 P2	**256315**	2210	VGS2 2120-2210 P2	**256325**
595	VGS2 2120-0595 P2	**256306**	1445	VGS2 2120-1445 P2	**256316**	2295	VGS2 2120-2295 P2	**256326**
680	VGS2 2120-0680 P2	**256307**	1530	VGS2 2120-1530 P2	**256317**	2380	VGS2 2120-2380 P2	**256327**
765	VGS2 2120-0765 P2	**256308**	1615	VGS2 2120-1615 P2	**256318**			
850	VGS2 2120-0850 P2	**256309**	1700	VGS2 2120-1700 P2	**256319**			

TYPE VGS3 2120 P2





Weight: 9.0 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2120-0935 P2	**256410**	1785	VGS3 2120-1785 P2	**256420**
170	-	-	1020	VGS3 2120-1020 P2	**256411**	1870	VGS3 2120-1870 P2	**256421**
255	VGS3 2120-0255 P2	**256402**	1105	VGS3 2120-1105 P2	**256412**	1955	VGS3 2120-1955 P2	**256422**
340	VGS3 2120-0340 P2	**256403**	1190	VGS3 2120-1190 P2	**256413**	2040	VGS3 2120-2040 P2	**256423**
425	VGS3 2120-0425 P2	**256404**	1275	VGS3 2120-1275 P2	**256414**	2125	VGS3 2120-2125 P2	**256424**
510	VGS3 2120-0510 P2	**256405**	1360	VGS3 2120-1360 P2	**256415**	2210	VGS3 2120-2210 P2	**256425**
595	VGS3 2120-0595 P2	**256406**	1445	VGS3 2120-1445 P2	**256416**	2295	VGS3 2120-2295 P2	**256426**
680	VGS3 2120-0680 P2	**256407**	1530	VGS3 2120-1530 P2	**256417**	2380	VGS3 2120-2380 P2	**256427**
765	VGS3 2120-0765 P2	**256408**	1615	VGS3 2120-1615 P2	**256418**			
850	VGS3 2120-0850 P2	**256409**	1700	VGS3 2120-1700 P2	**256419**			

Other widths available on request.

LBP BELTS (Pitch ½" - 12.7 mm) WITH LOW NOISE ACCUMULATION ROLLERS

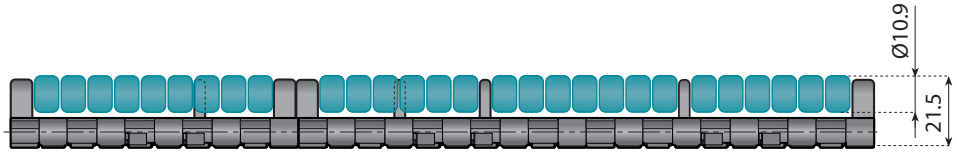



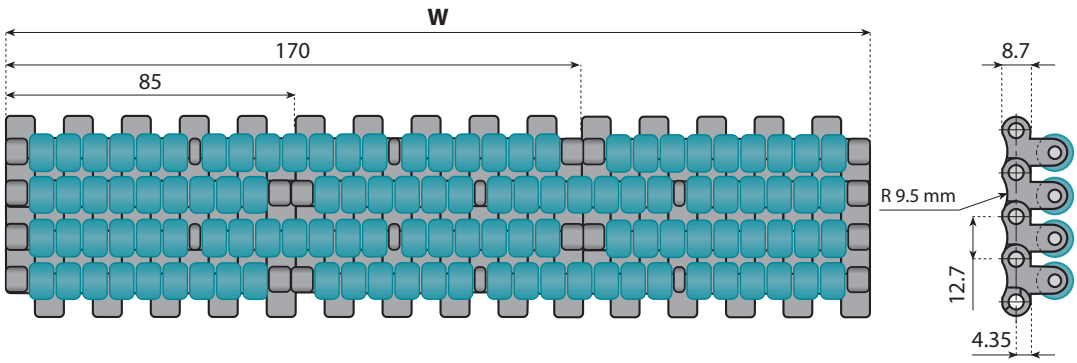

Version standard
Backflex radius: 65 mm
Max load capacity: 20.000 N/m
Weight: 23.2 Kg/m²
Pin material: PBT (white)
Roller shaft material: Stainless Steel AISI 304
Standard length:
belt width ≤ 340mm: 1,524m belt length
belt width > 340mm, but ≤ 935mm: 0,762m belt length
belt width > 935mm: belt length on request

Standard material

LFG
Low Friction Acetal Resin

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

Width W mm	Belts Ref.	Code
85	LBP 2120-0085	**256500**
170	LBP 2120-0170	**256501**
255	LBP 2120-0255	**256502**
340	LBP 2120-0340	**256503**
425	LBP 2120-0425	**256504**
510	LBP 2120-0510	**256505**
595	LBP 2120-0595	**256506**
680	LBP 2120-0680	**256507**
765	LBP 2120-0765	**256508**
850	LBP 2120-0850	**256509**

Width W mm	Belts Ref.	Code
935	LBP 2120-0935	**256510**
1020	LBP 2120-1020	**256511**
1105	LBP 2120-1105	**256512**
1190	LBP 2120-1190	**256513**
1275	LBP 2120-1275	**256514**
1360	LBP 2120-1360	**256515**
1445	LBP 2120-1445	**256516**
1530	LBP 2120-1530	**256517**
1615	LBP 2120-1615	**256518**
1700	LBP 2120-1700	**256519**


Width W mm	Belts Ref.	Code
1785	LBP 2120-1785	**256520**
1870	LBP 2120-1870	**256521**
1955	LBP 2120-1955	**256522**
2040	LBP 2120-2040	**256523**
2125	LBP 2120-2125	**256524**
2210	LBP 2120-2210	**256525**
2295	LBP 2120-2295	**256526**
2380	LBP 2120-2380	**256527**
2465	LBP 2120-2465	**256528**
2550	LBP 2120-2550	**256529**

Width W mm	Belts Ref.	Code
2635	LBP 2120-2635	**256530**
2720	LBP 2120-2720	**256531**
2805	LBP 2120-2805	**256532**
2890	LBP 2120-2890	**256533**
2975	LBP 2120-2975	**256534**
3060	LBP 2120-3060	**256535**
3145	LBP 2120-3145	**256536**
3230	LBP 2120-3230	**256537**
3315	LBP 2120-3315	**256538**
3400	LBP 2120-3400	**256539**

 © System Plast S.r.l. , 2012 - All Rights Reserved

LBP BELTS (Pitch ½" - 12.7 mm)
WITH LOW NOISE ACCUMULATION ROLLERS

LBP 2120 P1

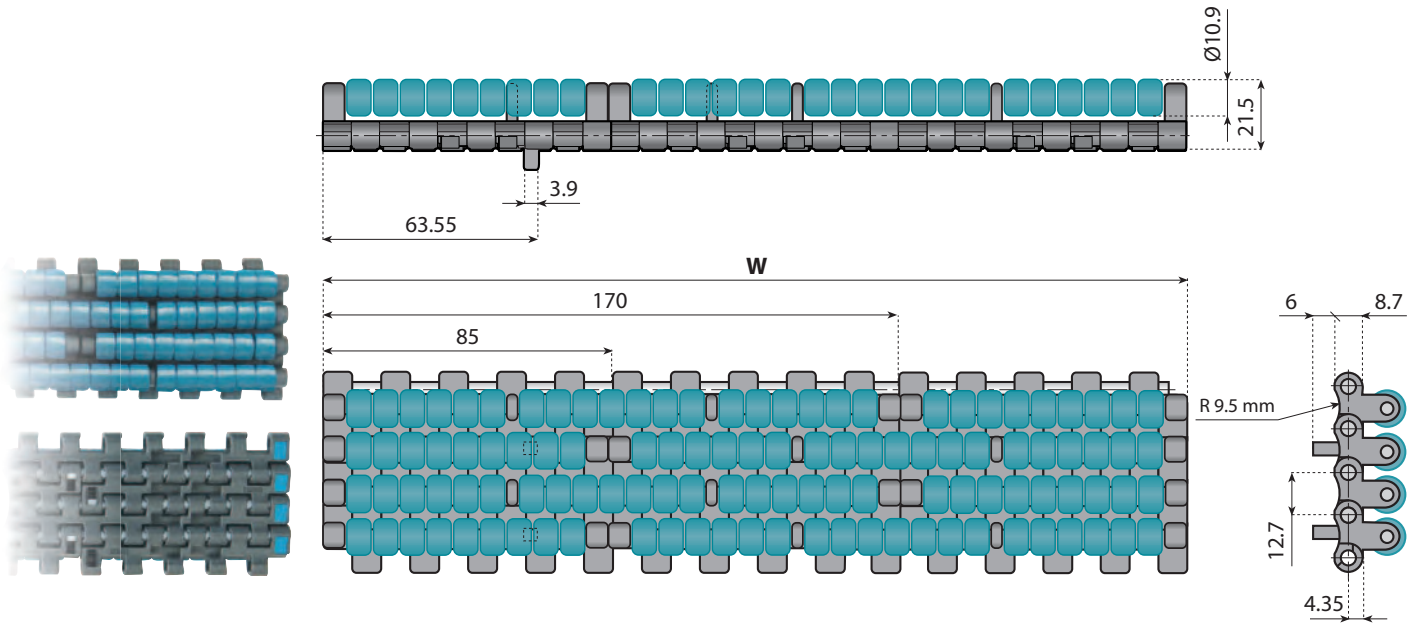

Version standard
Backflex radius: 65 mm
Max load capacity: 20.000 N/m
Weight: 23.2 Kg/m²
Pin material: PBT (white)
Roller shaft material: Stainless Steel AISI 304
Standard length:
belt width ≤ 340mm: 1,524m belt length
belt width > 340mm, but ≤ 935mm: 0,762m belt length
belt width > 935mm: belt length on request

Standard material

LFG
Low Friction Acetal Resin

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


Width W mm	Belts Ref.	Code
85	LBP 2120-0085 P1	**256600**
170	LBP 2120-0170 P1	**256601**
255	LBP 2120-0255 P1	**256602**
340	LBP 2120-0340 P1	**256603**
425	LBP 2120-0425 P1	**256604**
510	LBP 2120-0510 P1	**256605**
595	LBP 2120-0595 P1	**256606**
680	LBP 2120-0680 P1	**256607**
765	LBP 2120-0765 P1	**256608**
850	LBP 2120-0850 P1	**256609**

Width W mm	Belts Ref.	Code
935	LBP 2120-0935 P1	**256610**
1020	LBP 2120-1020 P1	**256611**
1105	LBP 2120-1105 P1	**256612**
1190	LBP 2120-1190 P1	**256613**
1275	LBP 2120-1275 P1	**256614**
1360	LBP 2120-1360 P1	**256615**
1445	LBP 2120-1445 P1	**256616**
1530	LBP 2120-1530 P1	**256617**
1615	LBP 2120-1615 P1	**256618**
1700	LBP 2120-1700 P1	**256619**

Width W mm	Belts Ref.	Code
1785	LBP 2120-1785 P1	**256620**
1870	LBP 2120-1870 P1	**256621**
1955	LBP 2120-1955 P1	**256622**
2040	LBP 2120-2040 P1	**256623**
2125	LBP 2120-2125 P1	**256624**
2210	LBP 2120-2210 P1	**256625**
2295	LBP 2120-2295 P1	**256626**
2380	LBP 2120-2380 P1	**256627**
2465	LBP 2120-2465 P1	**256628**
2550	LBP 2120-2550 P1	**256629**

Width W mm	Belts Ref.	Code
2635	LBP 2120-2635 P1	**256630**
2720	LBP 2120-2720 P1	**256631**
2805	LBP 2120-2805 P1	**256632**
2890	LBP 2120-2890 P1	**256633**
2975	LBP 2120-2975 P1	**256634**
3060	LBP 2120-3060 P1	**256635**
3145	LBP 2120-3145 P1	**256636**
3230	LBP 2120-3230 P1	**256637**
3315	LBP 2120-3315 P1	**256638**
3400	LBP 2120-3400 P1	**256639**

LBP BELTS (Pitch ½" - 12.7 mm) WITH LOW NOISE ACCUMULATION ROLLERS

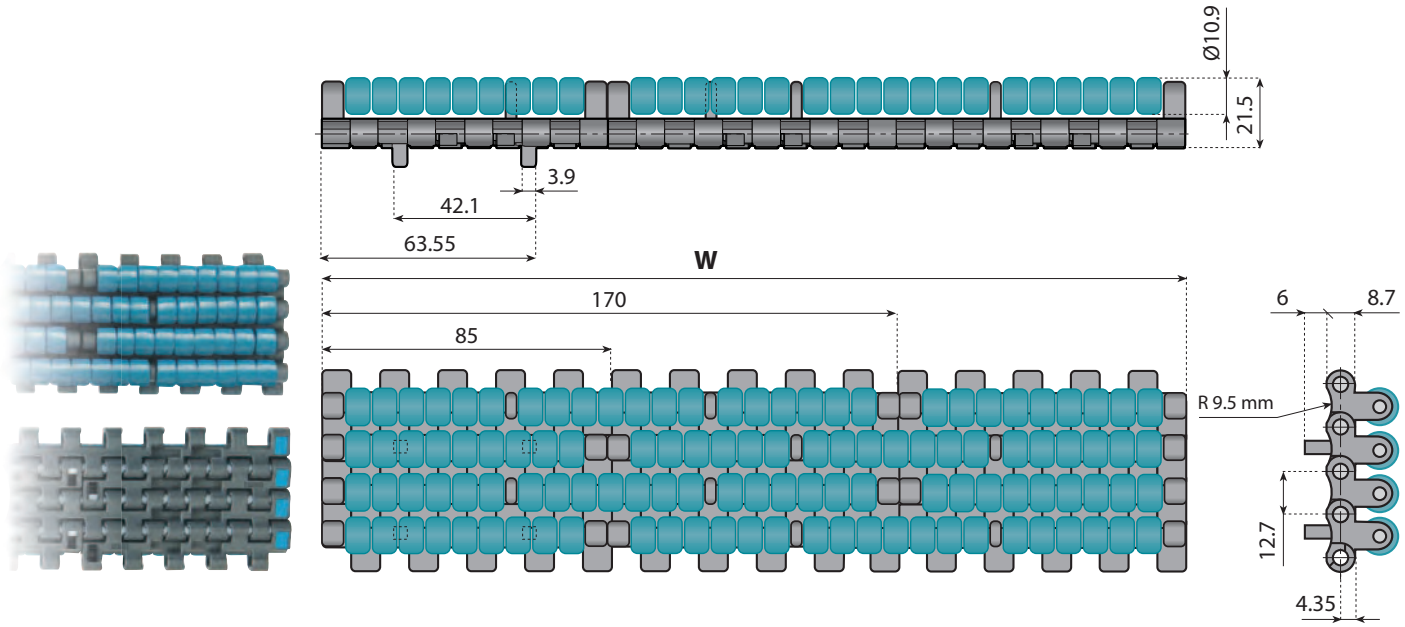

Version standard
Backflex radius: 65 mm
Max load capacity: 20.000 N/m
Weight: 23.2 Kg/m²
Pin material: PBT (white)
Roller shaft material: Stainless Steel AISI 304
Standard length:
belt width ≤ 340mm: 1,524m belt length
belt width > 340mm, but ≤ 935mm: 0,762m belt length
belt width > 935mm: belt length on request

Standard material

LFG
Low Friction Acetal Resin

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

Width W mm	Belts Ref.	Code
85	LBP 2120-0085 P2	**256700**
170	LBP 2120-0170 P2	**256701**
255	LBP 2120-0255 P2	**256702**
340	LBP 2120-0340 P2	**256703**
425	LBP 2120-0425 P2	**256704**
510	LBP 2120-0510 P2	**256705**
595	LBP 2120-0595 P2	**256706**
680	LBP 2120-0680 P2	**256707**
765	LBP 2120-0765 P2	**256708**
850	LBP 2120-0850 P2	**256709**

Width W mm	Belts Ref.	Code
935	LBP 2120-0935 P2	**256710**
1020	LBP 2120-1020 P2	**256711**
1105	LBP 2120-1105 P2	**256712**
1190	LBP 2120-1190 P2	**256713**
1275	LBP 2120-1275 P2	**256714**
1360	LBP 2120-1360 P2	**256715**
1445	LBP 2120-1445 P2	**256716**
1530	LBP 2120-1530 P2	**256717**
1615	LBP 2120-1615 P2	**256718**
1700	LBP 2120-1700 P2	**256719**


Width W mm	Belts Ref.	Code
1785	LBP 2120-1785 P2	**256720**
1870	LBP 2120-1870 P2	**256721**
1955	LBP 2120-1955 P2	**256722**
2040	LBP 2120-2040 P2	**256723**
2125	LBP 2120-2125 P2	**256724**
2210	LBP 2120-2210 P2	**256725**
2295	LBP 2120-2295 P2	**256726**
2380	LBP 2120-2380 P2	**256727**
2465	LBP 2120-2465 P2	**256728**
2550	LBP 2120-2550 P2	**256729**


Width W mm	Belts Ref.	Code
2635	LBP 2120-2635 P2	**256730**
2720	LBP 2120-2720 P2	**256731**
2805	LBP 2120-2805 P2	**256732**
2890	LBP 2120-2890 P2	**256733**
2975	LBP 2120-2975 P2	**256734**
3060	LBP 2120-3060 P2	**256735**
3145	LBP 2120-3145 P2	**256736**
3230	LBP 2120-3230 P2	**256737**
3315	LBP 2120-3315 P2	**256738**
3400	LBP 2120-3400 P2	**256739**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLAT TOP BELTS (Pitch ½" - 12.7 mm) with GUIDE BAR — GB 2120

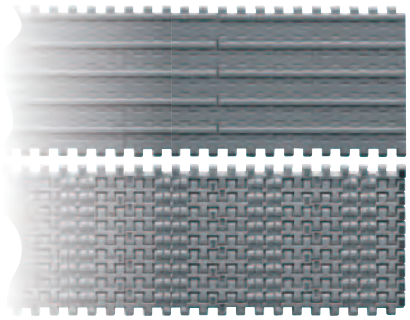

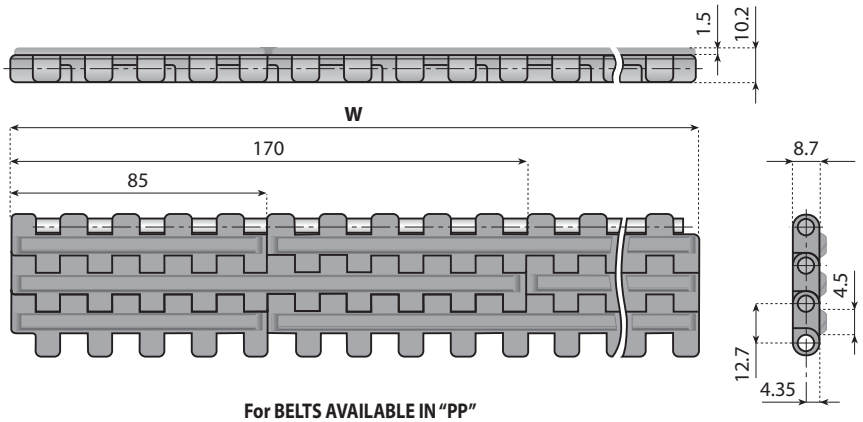

With guide bar
Belt material: low friction acetal resin, dark grey colour
Backflex radius: 20 mm
Max load capacity: 20.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request


For BELTS AVAILABLE IN "PP" material just add "PP" to part number (example "code 256800-PP")

Standard materials

LFG	PP
Low Friction Acetal Resin	Polypropylene

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


TYPE GB 2120



Weight: 10.4 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	GB 2120-0085	**256800**	935	GB 2120-0935	**256810**	1785	GB 2120-1785	**256820**
170	GB 2120-0170	**256801**	1020	GB 2120-1020	**256811**	1870	GB 2120-1870	**256821**
255	GB 2120-0255	**256802**	1105	GB 2120-1105	**256812**	1955	GB 2120-1955	**256822**
340	GB 2120-0340	**256803**	1190	GB 2120-1190	**256813**	2040	GB 2120-2040	**256823**
425	GB 2120-0425	**256804**	1275	GB 2120-1275	**256814**	2125	GB 2120-2125	**256824**
510	GB 2120-0510	**256805**	1360	GB 2120-1360	**256815**	2210	GB 2120-2210	**256825**
595	GB 2120-0595	**256806**	1445	GB 2120-1445	**256816**	2295	GB 2120-2295	**256826**
680	GB 2120-0680	**256807**	1530	GB 2120-1530	**256817**	2380	GB 2120-2380	**256827**
765	GB 2120-0765	**256808**	1615	GB 2120-1615	**256818**			
850	GB 2120-0850	**256809**	1700	GB 2120-1700	**256819**			


TYPE GB2 2120



Weight: 10.1 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	GB2 2120-0085	**256900**	935	GB2 2120-0935	**256910**	1785	GB2 2120-1785	**256920**
170	GB2 2120-0170	**256901**	1020	GB2 2120-1020	**256911**	1870	GB2 2120-1870	**256921**
255	GB2 2120-0255	**256902**	1105	GB2 2120-1105	**256912**	1955	GB2 2120-1955	**256922**
340	GB2 2120-0340	**256903**	1190	GB2 2120-1190	**256913**	2040	GB2 2120-2040	**256923**
425	GB2 2120-0425	**256904**	1275	GB2 2120-1275	**256914**	2125	GB2 2120-2125	**256924**
510	GB2 2120-0510	**256905**	1360	GB2 2120-1360	**256915**	2210	GB2 2120-2210	**256925**
595	GB2 2120-0595	**256906**	1445	GB2 2120-1445	**256916**	2295	GB2 2120-2295	**256926**
680	GB2 2120-0680	**256907**	1530	GB2 2120-1530	**256917**	2380	GB2 2120-2380	**256927**
765	GB2 2120-0765	**256908**	1615	GB2 2120-1615	**256918**			
850	GB2 2120-0850	**256909**	1700	GB2 2120-1700	**256919**			

TYPE GB3 2120




Weight: 9.9 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	GB3 2120-0085	**257000**	935	GB3 2120-0935	**257010**	1785	GB3 2120-1785	**257020**
170	GB3 2120-0170	**257001**	1020	GB3 2120-1020	**257011**	1870	GB3 2120-1870	**257021**
255	GB3 2120-0255	**257002**	1105	GB3 2120-1105	**257012**	1955	GB3 2120-1955	**257022**
340	GB3 2120-0340	**257003**	1190	GB3 2120-1190	**257013**	2040	GB3 2120-2040	**257023**
425	GB3 2120-0425	**257004**	1275	GB3 2120-1275	**257014**	2125	GB3 2120-2125	**257024**
510	GB3 2120-0510	**257005**	1360	GB3 2120-1360	**257015**	2210	GB3 2120-2210	**257025**
595	GB3 2120-0595	**257006**	1445	GB3 2120-1445	**257016**	2295	GB3 2120-2295	**257026**
680	GB3 2120-0680	**257007**	1530	GB3 2120-1530	**257017**	2380	GB3 2120-2380	**257027**
765	GB3 2120-0765	**257008**	1615	GB3 2120-1615	**257018**			
850	GB3 2120-0850	**257009**	1700	GB3 2120-1700	**257019**			

Other widths available on request.

2121 H FT

FLAT TOP IMPERIAL SIZE BELTS ONE TRACK DEDICATED WIDTHS

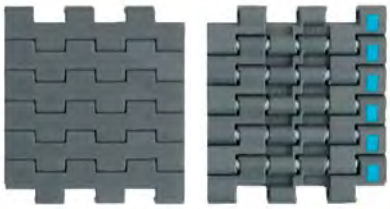

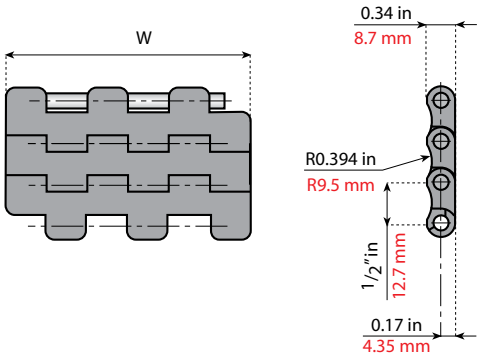

Dedicated widths
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26050-NGG")

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N	lbs	Kg/m²	lbs/ft²
LFG 2121 K300 FT	**26050**	**LFG** Dark Grey	76.2	3.00	12.7	½"	10	0.4"	1524	342	8.8	1.8
LFG 2121 K325 FT	**26051**		82.6	3.25					1652	371		
LFG 2121 K450 FT	**26052**		114.3	4.50					2286	514		
LFG 2121 K600 FT	**26053**		152.4	6.00					3048	685		
LFG 2121 K750 FT	**26054**		190.5	7.50					3810	856		

2121 H FTP2

FLAT TOP IMPERIAL SIZE BELTS ONE TRACK DEDICATED WIDTHS



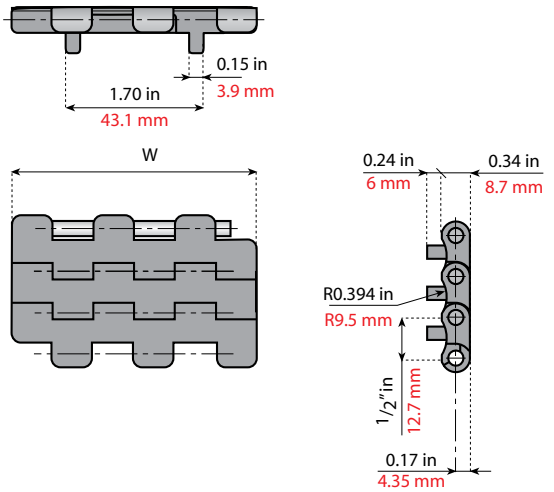

Version with two positioners
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26050-NGG")


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N/m	lbs/ft	Kg/m²	lbs/ft²
LFG 2121 K300 FTP2	**26055**	**LFG** Dark Grey	76.2	3.00	12.7	½"	10	0.4"	20.000	1370	8.8	1.8
LFG 2121 K325 FTP2	**26056**		82.6	3.25								
LFG 2121 K450 FTP2	**26057**		114.3	4.50								
LFG 2121 K600 FTP2	**26058**		152.4	6.00								
LFG 2121 K750 FTP2	**26059**		190.5	7.50								

Other widths available on request. **Standard length:** 240 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLAT TOP IMPERIAL SIZE BELTS (Pitch ½" - 12.7 mm) 2121 H FT

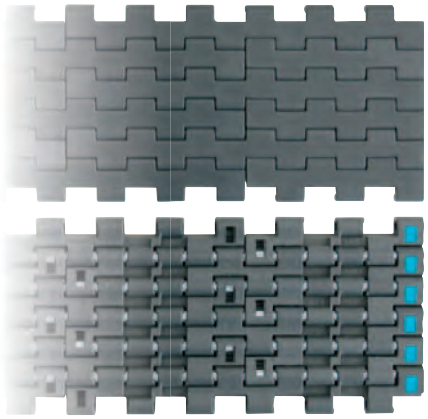

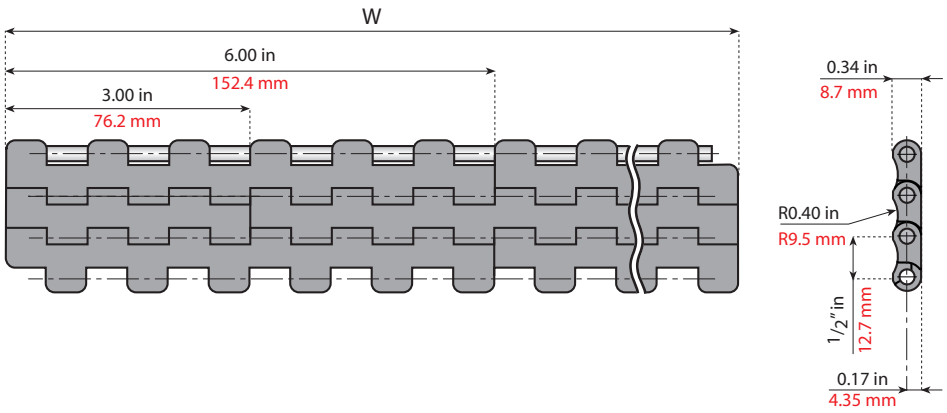

Backflex radius: 10 mm - 0.4" inch.
Max load capacity: 20.000 N/m - 1370 lbs/ft
Weight: 8.8 Kg/m² - 1.8 lbs/ft²
Pin material: PBT (white)
Standard length:
belt width ≤ 15 inch: 3,048m belt length
belt width > 15inch, but ≤ 66 inch: 1,524m belt length
belt width > 66 inch: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Page 312⇨314 +316
Page 112
Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26050-NGG")

Width W		Belts Ref.	Code
inch	mm		
3.00	76	2121-0003 FT	**26050**
6.00	152	2121-0006 FT	**26053**
9.00	229	2121-0009 FT	**261102**
12.00	305	2121-0012 FT	**261103**
15.00	381	2121-0015 FT	**261104**
18.00	457	2121-0018 FT	**261105**
21.00	533	2121-0021 FT	**261106**
24.00	610	2121-0024 FT	**261107**
27.00	686	2121-0027 FT	**261108**
30.00	762	2121-0030 FT	**261109**


Width W		Belts Ref.	Code
inch	mm		
33.00	838	2121-0033 FT	**261110**
36.00	914	2121-0036 FT	**261111**
39.00	991	2121-0039 FT	**261112**
42.00	1067	2121-0042 FT	**261113**
45.00	1143	2121-0045 FT	**261114**
48.00	1219	2121-0048 FT	**261115**
51.00	1295	2121-0051 FT	**261116**
54.00	1372	2121-0054 FT	**261117**
57.00	1448	2121-0057 FT	**261118**
60.00	1524	2121-0060 FT	**261119**


Width W		Belts Ref.	Code
inch	mm		
63.00	1600	2121-0063 FT	**261120**
66.00	1676	2121-0066 FT	**261121**
69.00	1753	2121-0069 FT	**261122**
72.00	1829	2121-0072 FT	**261123**
75.00	1905	2121-0075 FT	**261124**
78.00	1981	2121-0078 FT	**261125**
81.00	2057	2121-0081 FT	**261126**
84.00	2134	2121-0084 FT	**261127**
87.00	2210	2121-0087 FT	**261128**
90.00	2286	2121-0090 FT	**261129**

Width W		Belts Ref.	Code
inch	mm		
93.00	2362	2121-0093 FT	**261130**
96.00	2438	2121-0096 FT	**261131**
99.00	2515	2121-0099 FT	**261132**
102.00	2591	2121-0102 FT	**261133**
105.00	2667	2121-0105 FT	**261134**
108.00	2743	2121-0108 FT	**261135**
111.00	2819	2121-0111 FT	**261136**
114.00	2896	2121-0114 FT	**261137**
117.00	2972	2121-0117 FT	**261138**
120.00	3048	2121-0120 FT	**261139**


Other widths available on request.

2120 SERIES — NOSE BAR FOR 0.5 pitch BELT

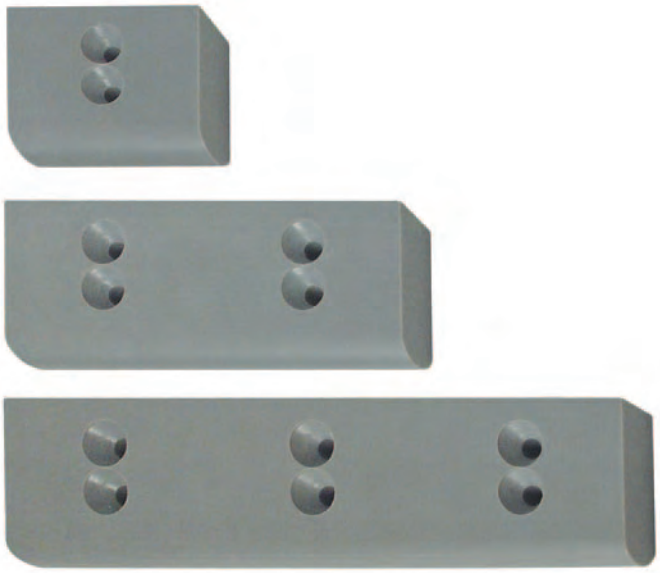

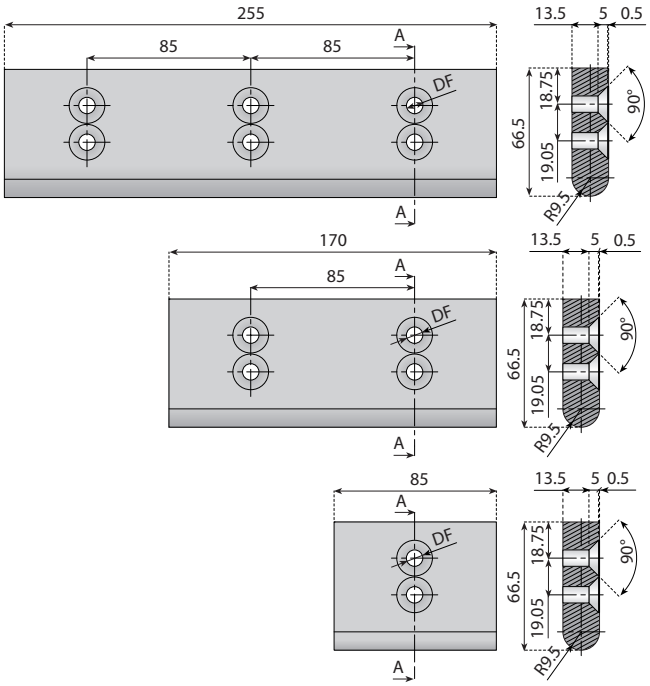


Can be used with a Nose Bar
to create extremely short transfers.




Standard material: Nolu-S


CODE	Total Width mm	Total Height mm	Radius mm	DF mm
14143	85	19	9.5	8.5
14144	170			
14145	255			

For belts with positioners, grooves can optionally be machined into the nose bar

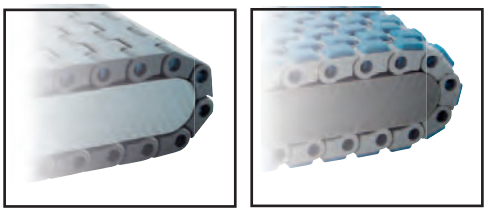


2120M — NOSE BAR for FlowFlex

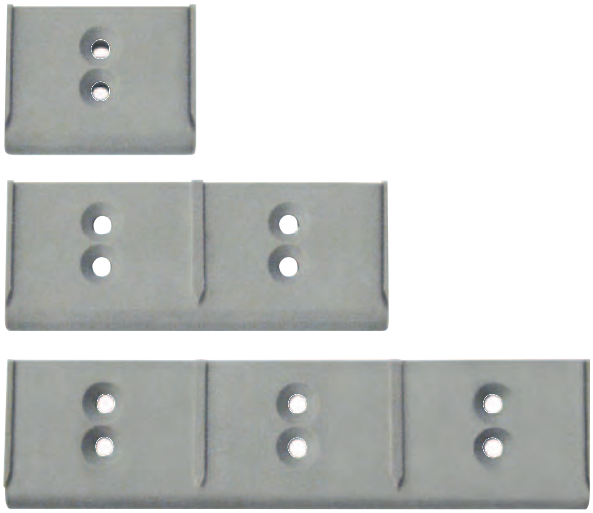

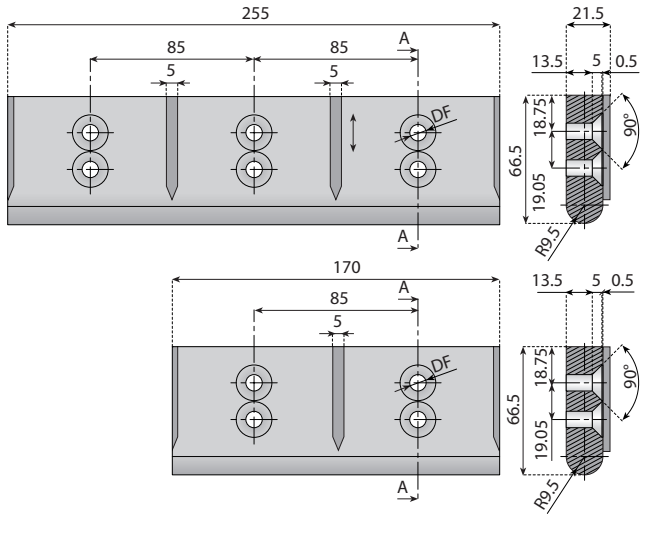

Can be used with a Nose Bar
to create extremely short transfers.



Standard material: Nolu-S

CODE	Total Width mm	Total Height mm	Radius mm	DF mm
14143M	85	19	9.5	8.5
14144M	170			
14145M	255			



 © System Plast S.r.l. , 2012 - All Rights Reserved


Plastic modular conveyor belt

Series	*Pages*
2190 FT	114 → 115
2190 FG	116 → 117


All our 2190 series belts have a pitch of 19.05 mm (¾ inch) and a height of 8.7 mm (11⁄32 inch).


BENEFITS AND FEATURES:

- RELATIVELY SHORT PITCH.
- HIGH STRENGTH.
- EASY INSTALLATION AND MAINTENANCE WITH PIN-CLIP SYSTEM.
- SMOOTH OPERATION.
- EXCELLENT PRODUCT HANDLING.
- IMPERIAL WIDTHS.

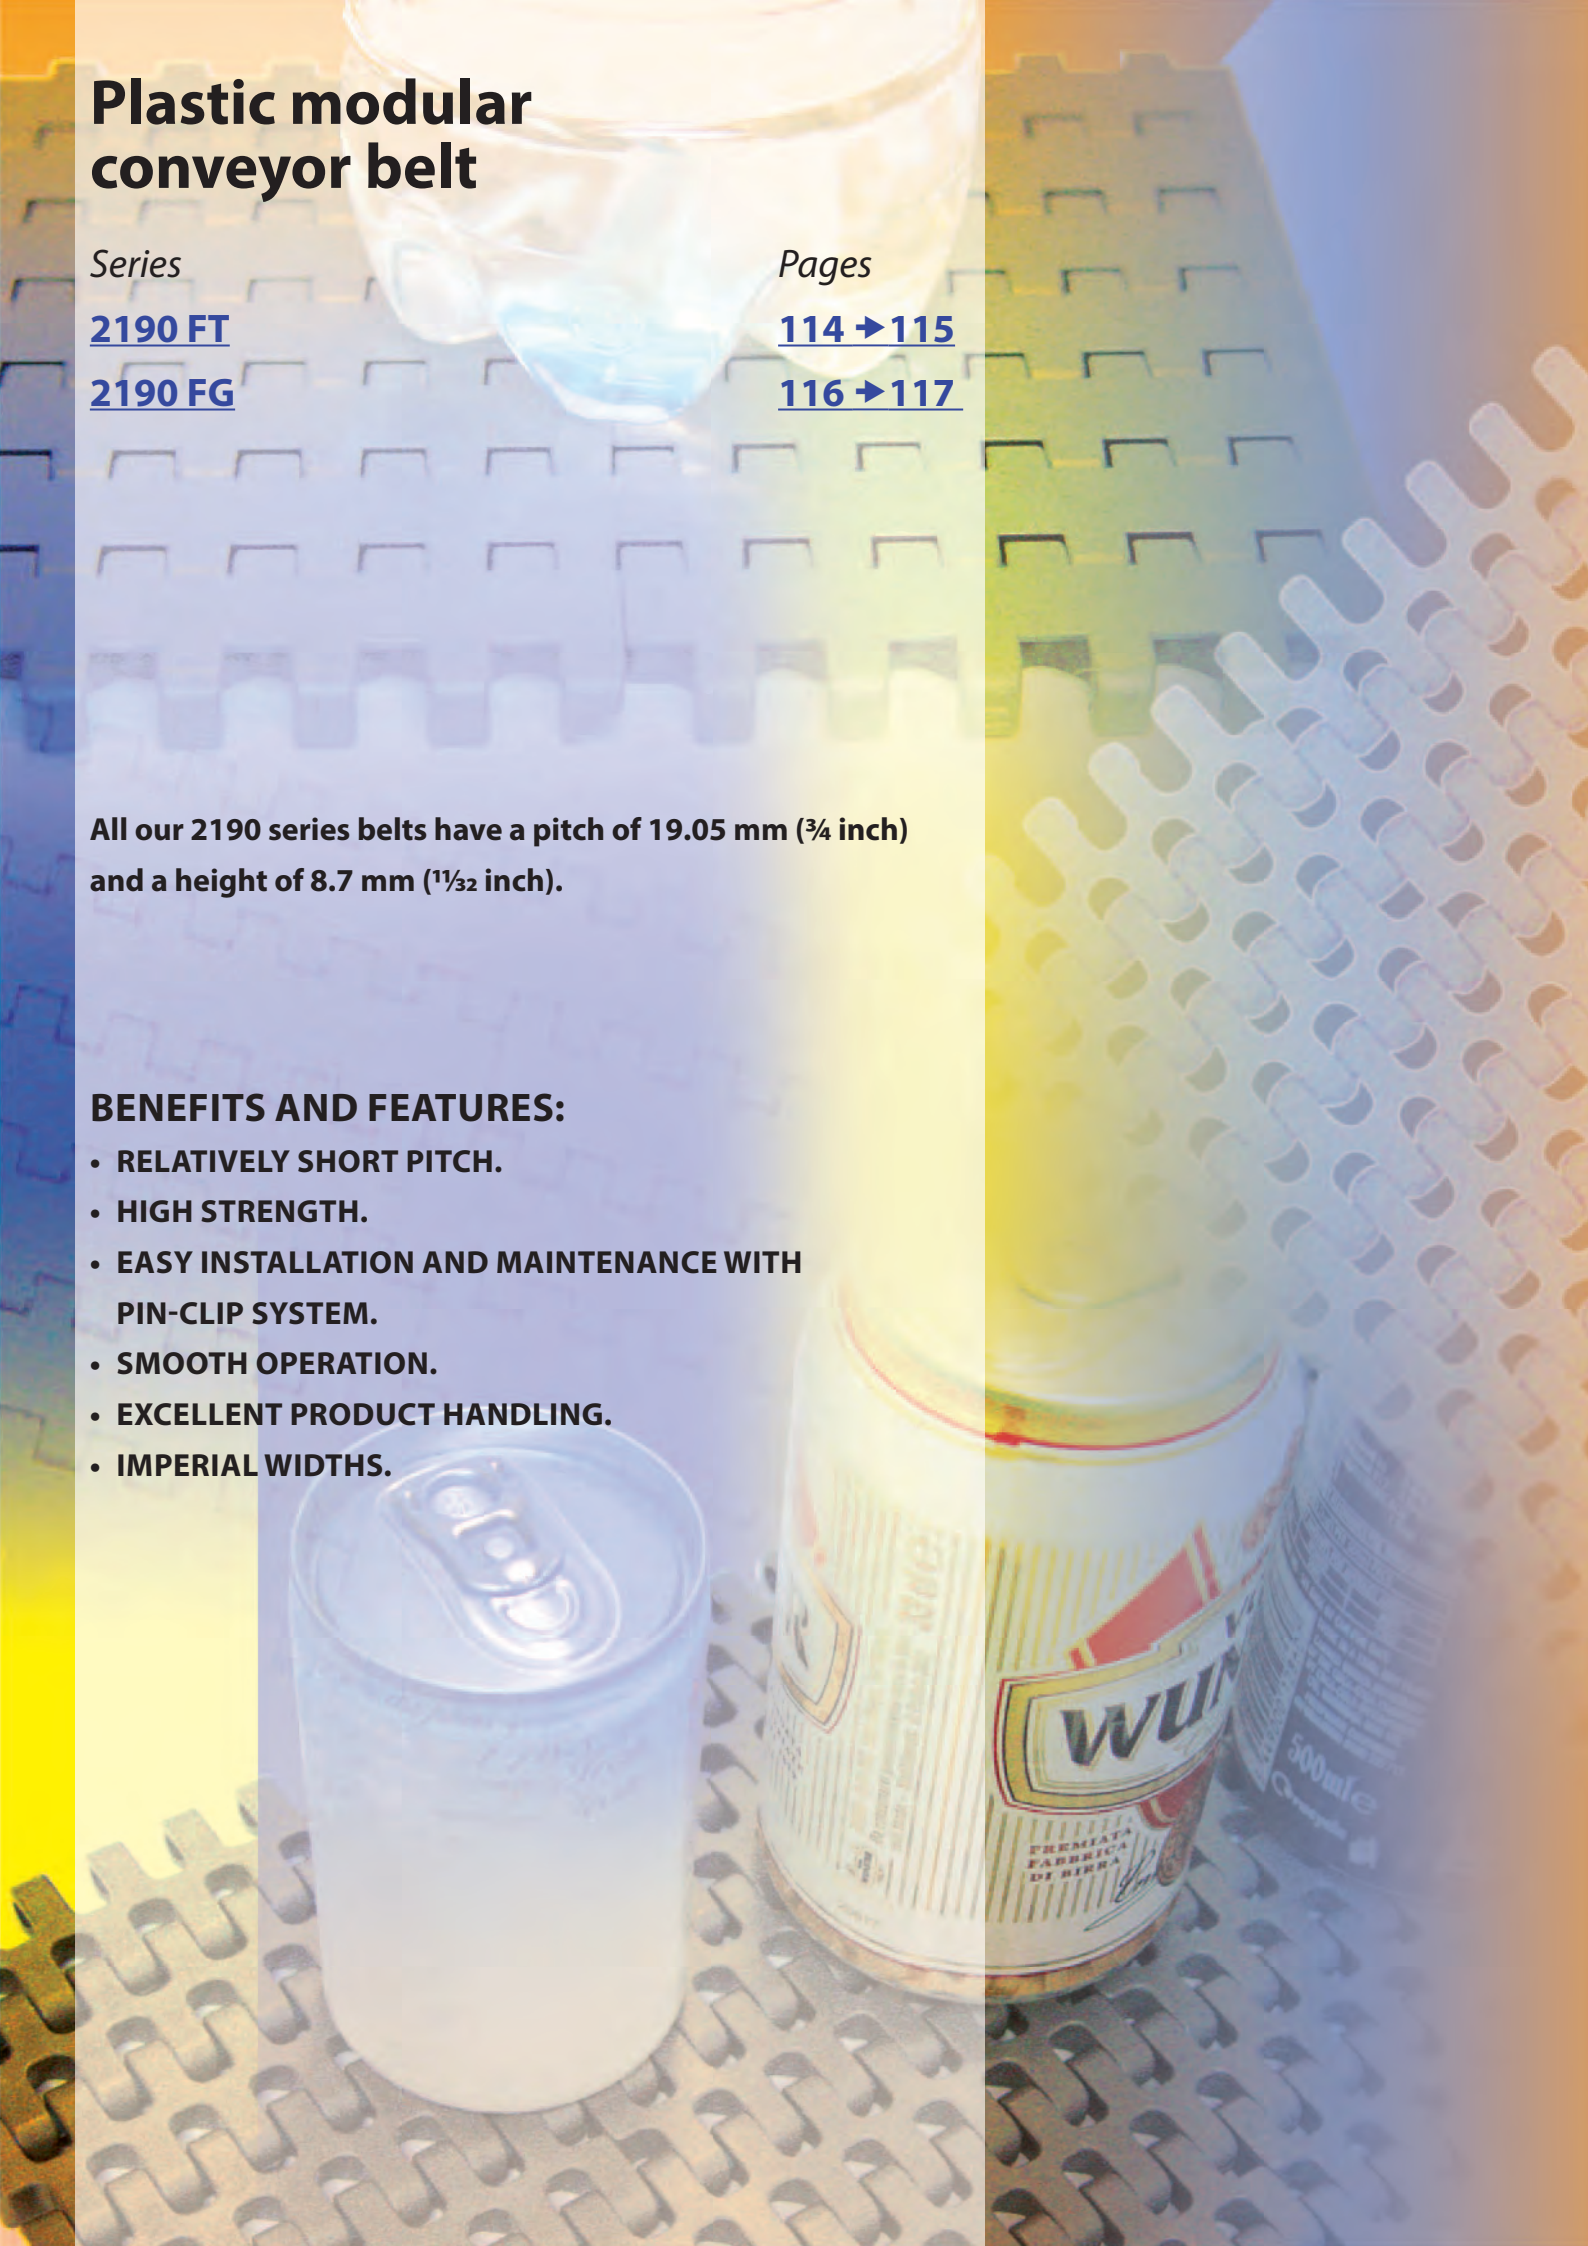

2190 FT FLAT TOP IMPERIAL SIZE BELTS ONE TRACK (Pitch ¾" - 19.05 mm)

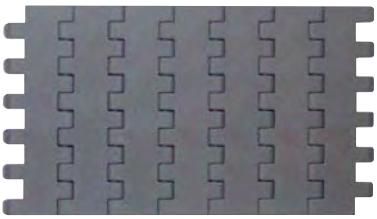

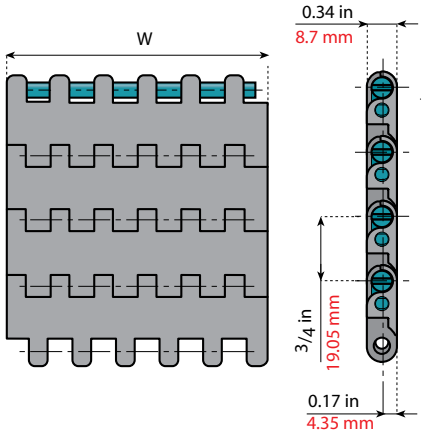

Dedicated widths
Pin material: PBT (water blue)

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
Pages 317
Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26050-NGG")

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N	lbs	Kg/m²	lbs/ft²
LFG 2190 K300 FT	**261300**	**LFG** Dark Grey	76.2	3.00	19.05	0.75	20	0.79	2286	513	7.4	1.5
LFG 2190 K325 FT	**261340**		82.6	3.25					2478	556		
LFG 2190 K450 FT	**261341**		114.3	4.50					3429	771		
LFG 2190 K600 FT	**261301**		152.4	6.00					4572	1027		
LFG 2190 K750 FT	**261342**		190.5	7.50					5715	1284		

2190 FTP2 FLAT TOP IMPERIAL SIZE BELTS ONE TRACK (Pitch ¾" - 19.05 mm)

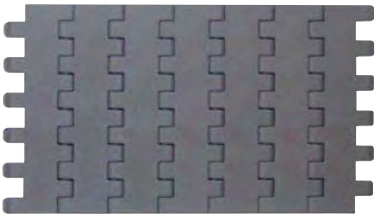

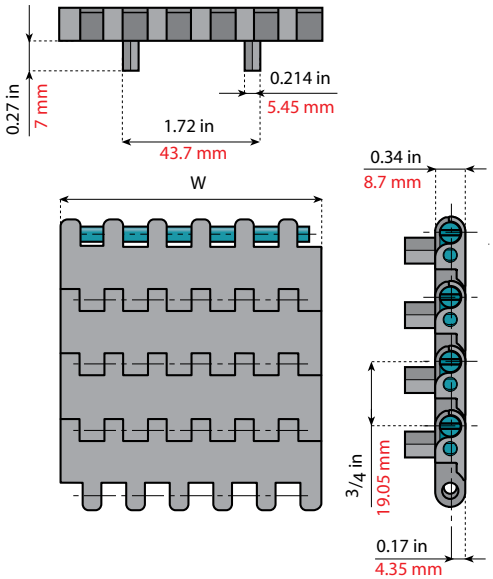

Version with two positioners
Pin material: PBT (water blue)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Pages 317
Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26050-NGG")

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N	lbs	Kg/m²	lbs/ft²
LFG 2190 K300 FTP2	**261343**	**LFG** Dark Grey	76.2	3.00	19.05	0.75	20	0.79	2286	513	7.4	1.5
LFG 2190 K325 FTP2	**261344**		82.6	3.25					2478	556		
LFG 2190 K450 FTP2	**261345**		114.3	4.50					3429	771		
LFG 2190 K600 FTP2	**261346**		152.4	6.00					4572	1027		
LFG 2190 K750 FTP2	**261347**		190.5	7.50					5715	1284		


Standard length: 160 pitches (10 ft. - 3.048 m)


Other widths available on request.


 © System Plast S.r.l. , 2012 - All Rights Reserved

FLAT TOP IMPERIAL SIZE BELTS (Pitch ¾" - 19.05 mm) 2190 FT



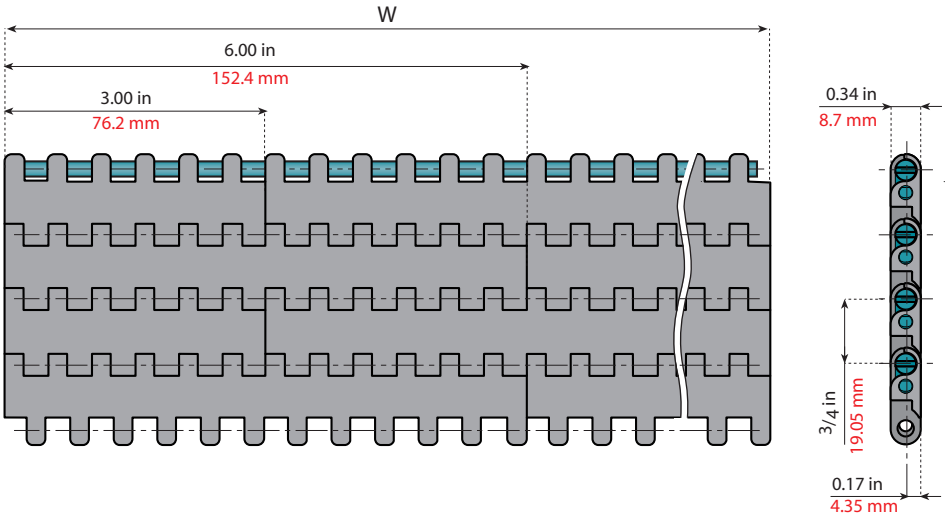



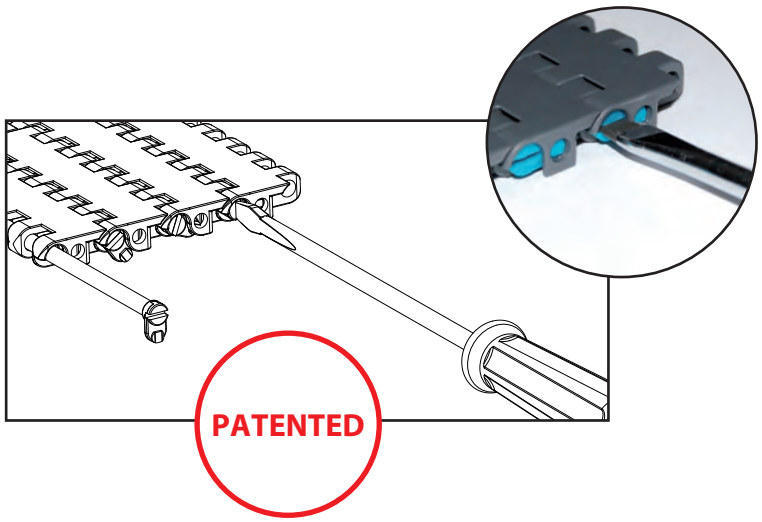

Backflex radius: 20 mm - 0.79 inch.
Max load capacity: 30.000 N/m - 2.056 lbs/ft
Weight: 8.2 Kg/m² - 1.7 lb/ft²
Pin material: PBT (water blue)
Standard length:
belt width ≤ 15 inch: 3,048m belt length
belt width > 15inch, but ≤ 66 inch: 1,524m belt length
belt width > 66 inch: belt length on request

MATERIAL Pages 4⇨7
Pages 317
Pages 340⇨343

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 261300-NGG")

Width W		Belts Ref.	Code
inch	mm		
3.00	76	2190-0003 FT	**261300**
6.00	152	2190-0006 FT	**261301**
9.00	229	2190-0009 FT	**261302**
12.00	305	2190-0012 FT	**261303**
15.00	381	2190-0015 FT	**261304**
18.00	457	2190-0018 FT	**261305**
21.00	533	2190-0021 FT	**261306**
24.00	610	2190-0024 FT	**261307**
27.00	686	2190-0027 FT	**261308**
30.00	762	2190-0030 FT	**261309**


Width W		Belts Ref.	Code
inch	mm		
33.00	838	2190-0033 FT	**261310**
36.00	914	2190-0036 FT	**261311**
39.00	991	2190-0039 FT	**261312**
42.00	1067	2190-0042 FT	**261313**
45.00	1143	2190-0045 FT	**261314**
48.00	1219	2190-0048 FT	**261315**
51.00	1295	2190-0051 FT	**261316**
54.00	1372	2190-0054 FT	**261317**
57.00	1448	2190-0057 FT	**261318**
60.00	1524	2190-0060 FT	**261319**


Width W		Belts Ref.	Code
inch	mm		
63.00	1600	2190-0063 FT	**261320**
66.00	1676	2190-0066 FT	**261321**
69.00	1753	2190-0069 FT	**261322**
72.00	1829	2190-0072 FT	**261323**
75.00	1905	2190-0075 FT	**261324**
78.00	1981	2190-0078 FT	**261325**
81.00	2057	2190-0081 FT	**261326**
84.00	2134	2190-0084 FT	**261327**
87.00	2210	2190-0087 FT	**261328**
90.00	2286	2190-0090 FT	**261329**

Width W		Belts Ref.	Code
inch	mm		
93.00	2362	2190-0093 FT	**261330**
96.00	2438	2190-0096 FT	**261331**
99.00	2515	2190-0099 FT	**261332**
102.00	2591	2190-0102 FT	**261333**
105.00	2667	2190-0105 FT	**261334**
108.00	2743	2190-0108 FT	**261335**
111.00	2819	2190-0111 FT	**261336**
114.00	2896	2190-0114 FT	**261337**
117.00	2972	2190-0117 FT	**261338**
120.00	3048	2190-0120 FT	**261339**

Other widths available on request.

2190 FG FLUSH GRID IMPERIAL SIZE BELTS ONE TRACK (Pitch ¾" - 19.05 mm)



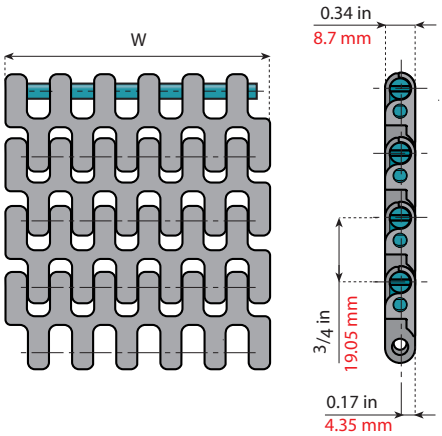

Dedicated widths
Pin material: PBT (water blue)
Open surface: 19%


Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Pages 317
Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N	lbs	Kg/m²	lbs/ft²
LFG 2190 K300 FG	**261350**	**LFG** Dark Grey	76.2	3.00	19.05	0.75	20	0.79	2286	513	6.4	1.3
LFG 2190 K325 FG	**261390**		82.6	3.25					2478	556		
LFG 2190 K450 FG	**261391**		114.3	4.50					3429	771		
LFG 2190 K600 FG	**261351**		152.4	6.00					4572	1027		
LFG 2190 K750 FG	**261392**		190.5	7.50					5715	1284		

2190 FGP2 FLUSH GRID IMPERIAL SIZE BELTS ONE TRACK (Pitch ¾" - 19.05 mm)



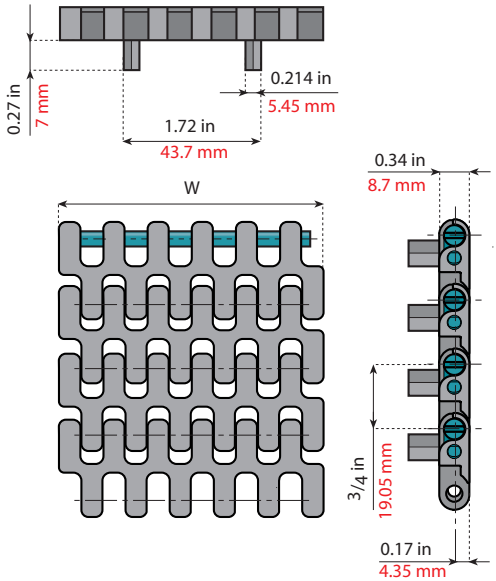

Version with two positioners
Pin material: PBT (water blue)
Open surface: 19%

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Pages 317
Pages 340⇨343


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N	lbs	Kg/m²	lbs/ft²
LFG 2190 K300 FGP2	**261393**	**LFG** Dark Grey	76.2	3.00	19.05	0.75	20	0.79	2286	513	6.4	1.3
LFG 2190 K325 FGP2	**261394**		82.6	3.25					2478	556		
LFG 2190 K450 FGP2	**261395**		114.3	4.50					3429	771		
LFG 2190 K600 FGP2	**261396**		152.4	6.00					4572	1027		
LFG 2190 K750 FGP2	**261397**		190.5	7.50					5715	1284		


Standard length: 160 pitches (10 ft. - 3.048 m)


Other widths available on request.


 © System Plast S.r.l. , 2012 - All Rights Reserved

FLUSH GRID IMPERIAL SIZE BELTS (Pitch ¾" - 19.05 mm) 2190 FG

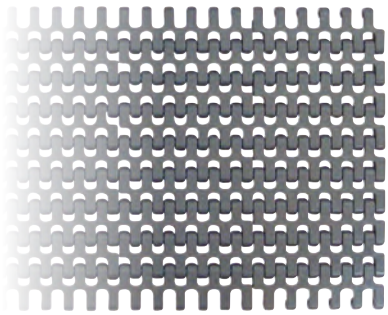

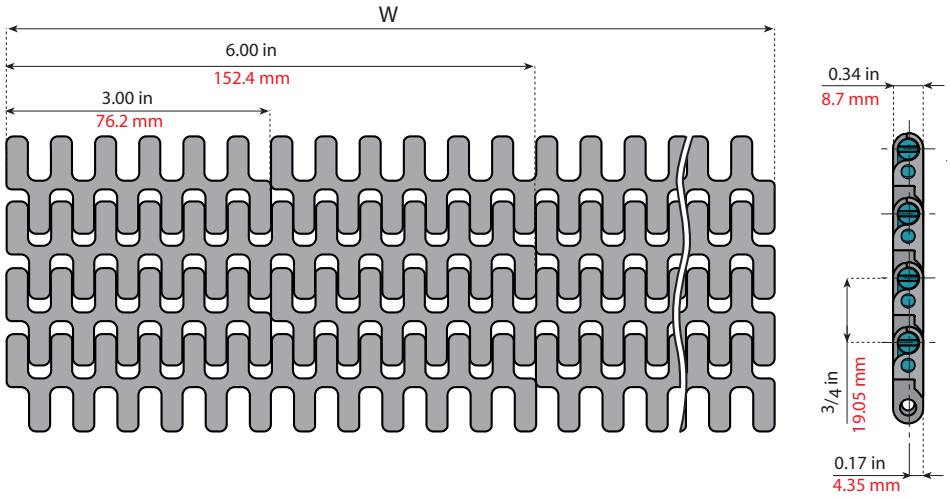



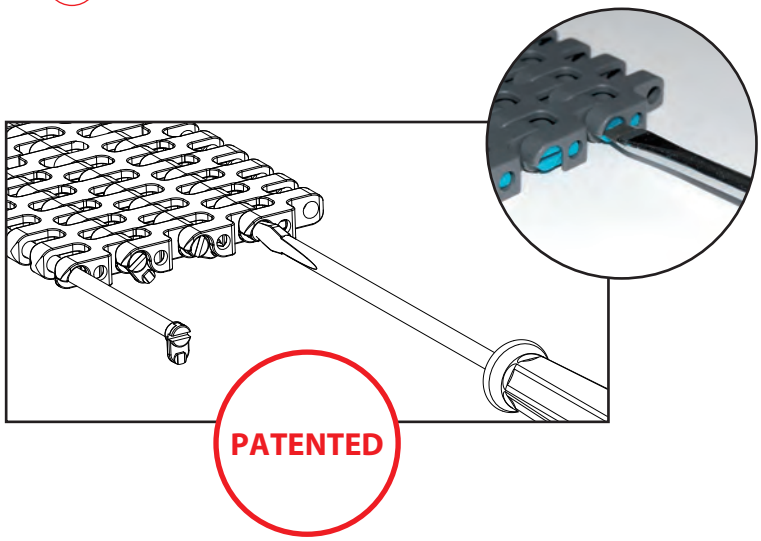

Backflex radius: 20 mm - 0.79 inch.
Max load capacity: 30.000 N/m - 2.056 lbs/ft
Weight: 7.7 Kg/m² - 1.6 lb/ft²
Pin material: PBT (water blue)
Open surface: 19%
Standard length:
belt width ≤ 15 inch: 3,048m belt length
belt width > 15inch, but ≤ 66 inch: 1,524m belt length
belt width > 66 inch: belt length on request

MATERIAL Pages 4 - 7
Pages 317
Pages 340⇨343

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 261350-NGG")

Width W		Belts Ref.	Code
inch	mm		
3.00	76	2190-0003 FG	**261350**
6.00	152	2190-0006 FG	**261351**
9.00	229	2190-0009 FG	**261352**
12.00	305	2190-0012 FG	**261353**
15.00	381	2190-0015 FG	**261354**
18.00	457	2190-0018 FG	**261355**
21.00	533	2190-0021 FG	**261356**
24.00	610	2190-0024 FG	**261357**
27.00	686	2190-0027 FG	**261358**
30.00	762	2190-0030 FG	**261359**

Width W		Belts Ref.	Code
inch	mm		
33.00	838	2190-0033 FG	**261360**
36.00	914	2190-0036 FG	**261361**
39.00	991	2190-0039 FG	**261362**
42.00	1067	2190-0042 FG	**261363**
45.00	1143	2190-0045 FG	**261364**
48.00	1219	2190-0048 FG	**261365**
51.00	1295	2190-0051 FG	**261366**
54.00	1372	2190-0054 FG	**261367**
57.00	1448	2190-0057 FG	**261368**
60.00	1524	2190-0060 FG	**261369**

Width W		Belts Ref.	Code
inch	mm		
63.00	1600	2190-0063 FG	**261370**
66.00	1676	2190-0066 FG	**261371**
69.00	1753	2190-0069 FG	**261372**
72.00	1829	2190-0072 FG	**261373**
75.00	1905	2190-0075 FG	**261374**
78.00	1981	2190-0078 FG	**261375**
81.00	2057	2190-0081 FG	**261376**
84.00	2134	2190-0084 FG	**261377**
87.00	2210	2190-0087 FG	**261378**
90.00	2286	2190-0090 FG	**261379**

Width W		Belts Ref.	Code
inch	mm		
93.00	2362	2190-0093 FG	**261380**
96.00	2438	2190-0096 FG	**261381**
99.00	2515	2190-0099 FG	**261382**
102.00	2591	2190-0102 FG	**261383**
105.00	2667	2190-0105 FG	**261384**
108.00	2743	2190-0108 FG	**261385**
111.00	2819	2190-0111 FG	**261386**
114.00	2896	2190-0114 FG	**261387**
117.00	2972	2190-0117 FG	**261388**
120.00	3048	2190-0120 FG	**261389**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

PLASTIC MODULAR CONVEYOR BELT


Series	*Pages*
2250 FT	120 → 128
2250 FG	129 → 137
2250 VG	138 → 143
2250 FLIGHTS	144 → 145
2253 RT	146 → 147
2253 FT	148


All our straight running belts of the 2250 and 2253 series have a pitch of 25.4 mm (1 inch) and a height of 8.7 mm (11/32 inch).

BENEFITS AND FEATURES

- ***EASY INSTALLATION AND MAINTENANCE***
- ***HIGH MECHANICAL STRENGTH AND WEAR RESISTANCE***
- ***NO GAPS BETWEEN PARALLEL CHAINS***
- ***EXCELLENT PRODUCT HANDLING***
- ***INSTALLATION ON STANDARD CONVEYORS WITH 85 mm PITCH BETWEEN TRACKS***
- ***HIGH PERFORMANCE***

2250 K330 FLAT TOP BELTS ONE TRACK

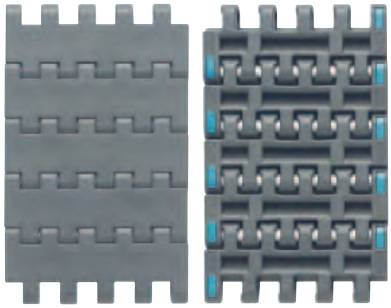

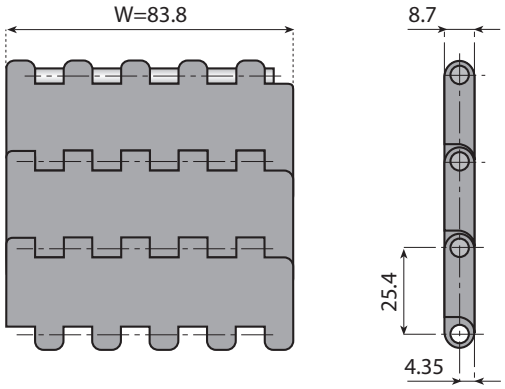

Version standard
Pin material: PBT (white)


Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2250 K330 FT	**25000**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	25	2095	6.40
NGG 2250 K330 FT	**25000NGG**	**NGG** Light Grey							

2250 K330 FTP2 FLAT TOP BELTS ONE TRACK

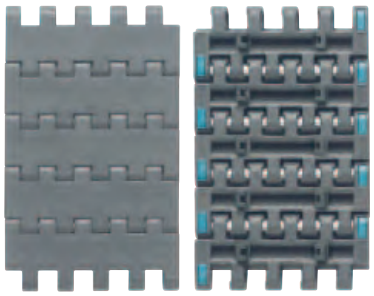

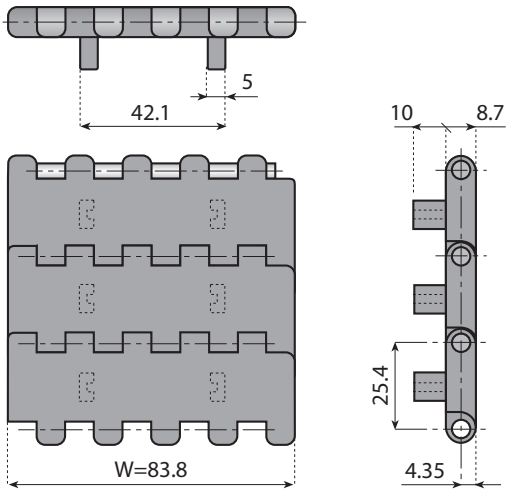

Version with two positioners
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2250 K330 FTP2	**25001**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	25	2095	6.40
NGG 2250 K330 FTP2	**25001NGG**	**NGG** Light Grey							


Standard length: 120 pitches (10 ft. - 3.048 m)


 © System Plast S.r.l. , 2012 - All Rights Reserved

FLAT TOP BELTS ONE TRACK WITH TRANSFER WING 2250 K330 FTTP2

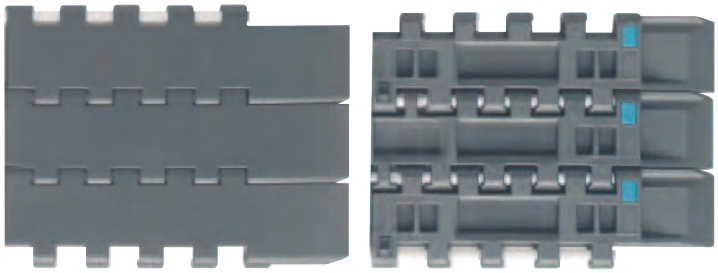

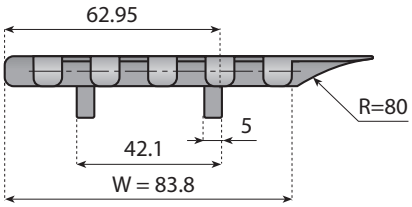

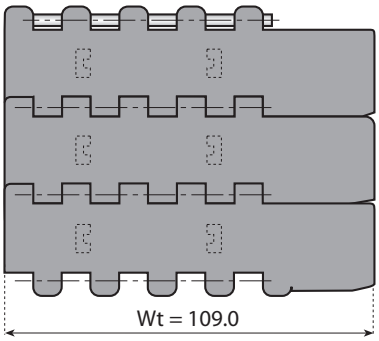

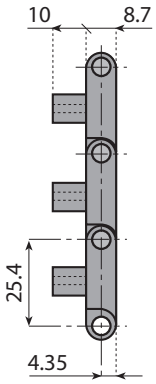

Version with two positioner wing
Pin material: PBT (white)

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2250 K330 FTTP2	**25002**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	30	2095	6.50
NGG 2250 K330 FTTP2	**25002NGG**	**NGG** Light Grey							


Standard length: 120 pitches (10 ft. - 3.048 m)

EXAMPLE INSTALLATION

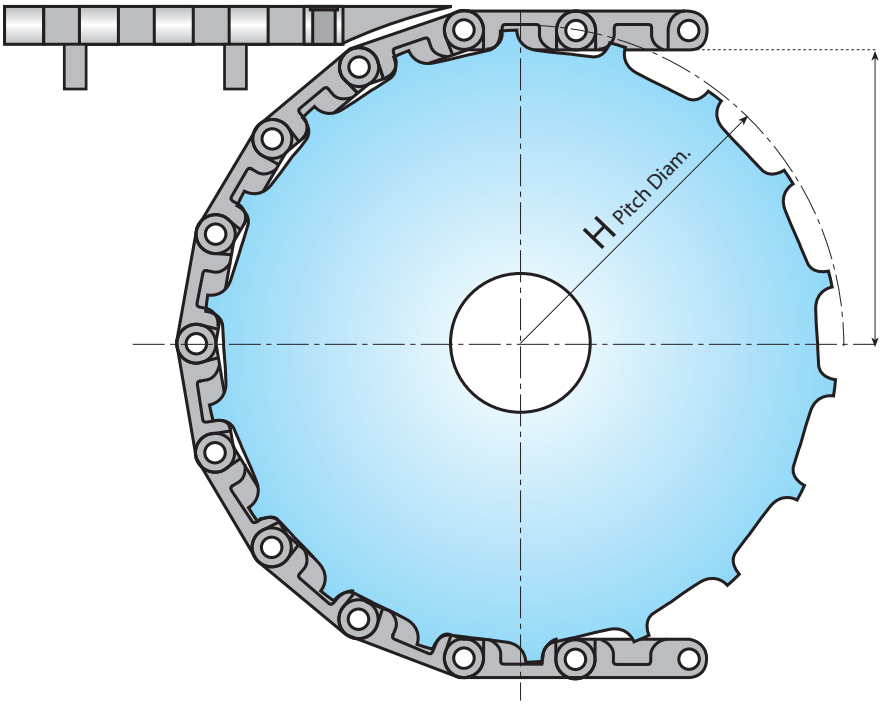

For further information contact our Technical Support Department

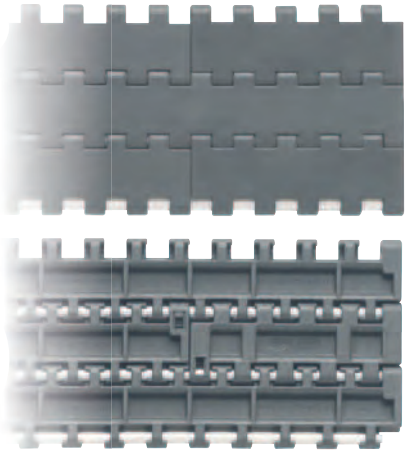

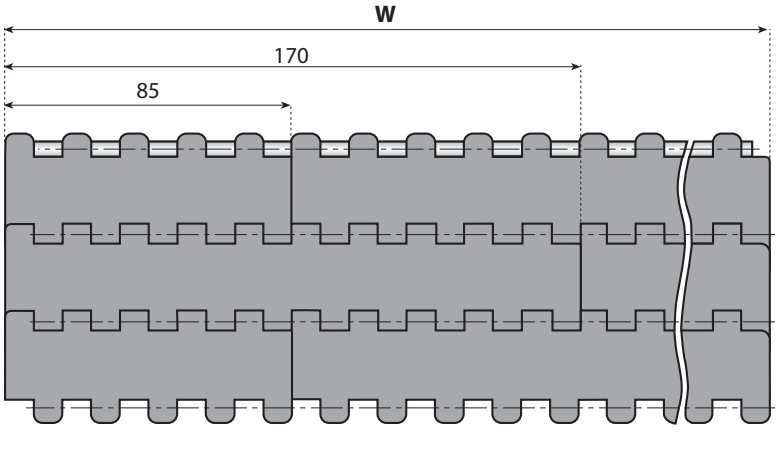

Version standard
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.4 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
Pages 318⇨320
Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25100-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 FT	**25100**	935	2250-0935 FT	**25110**	1785	2250-1785 FT	**25120**	2635	2250-2635 FT	**25130**
170	2250-0170 FT	**25101**	1020	2250-1020 FT	**25111**	1870	2250-1870 FT	**25121**	2720	2250-2720 FT	**25131**
255	2250-0255 FT	**25102**	1105	2250-1105 FT	**25112**	1955	2250-1955 FT	**25122**	2805	2250-2805 FT	**25132**
340	2250-0340 FT	**25103**	1190	2250-1190 FT	**25113**	2040	2250-2040 FT	**25123**	2890	2250-2890 FT	**25133**
425	2250-0425 FT	**25104**	1275	2250-1275 FT	**25114**	2125	2250-2125 FT	**25124**	2975	2250-2975 FT	**25134**
510	2250-0510 FT	**25105**	1360	2250-1360 FT	**25115**	2210	2250-2210 FT	**25125**	3060	2250-3060 FT	**25135**
595	2250-0595 FT	**25106**	1445	2250-1445 FT	**25116**	2295	2250-2295 FT	**25126**	3145	2250-3145 FT	**25136**
680	2250-0680 FT	**25107**	1530	2250-1530 FT	**25117**	2380	2250-2380 FT	**25127**	3230	2250-3230 FT	**25137**
765	2250-0765 FT	**25108**	1615	2250-1615 FT	**25118**	2465	2250-2465 FT	**25128**	3315	2250-3315 FT	**25138**
850	2250-0850 FT	**25109**	1700	2250-1700 FT	**25119**	2550	2250-2550 FT	**25129**	3400	2250-3400 FT	**25139**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

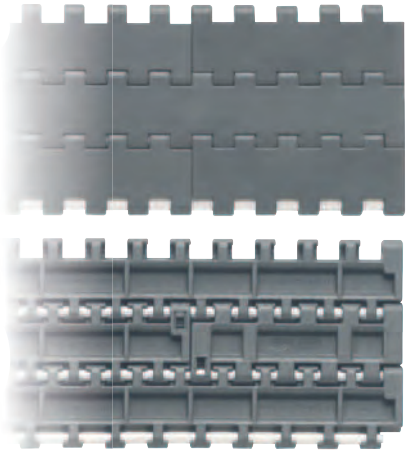

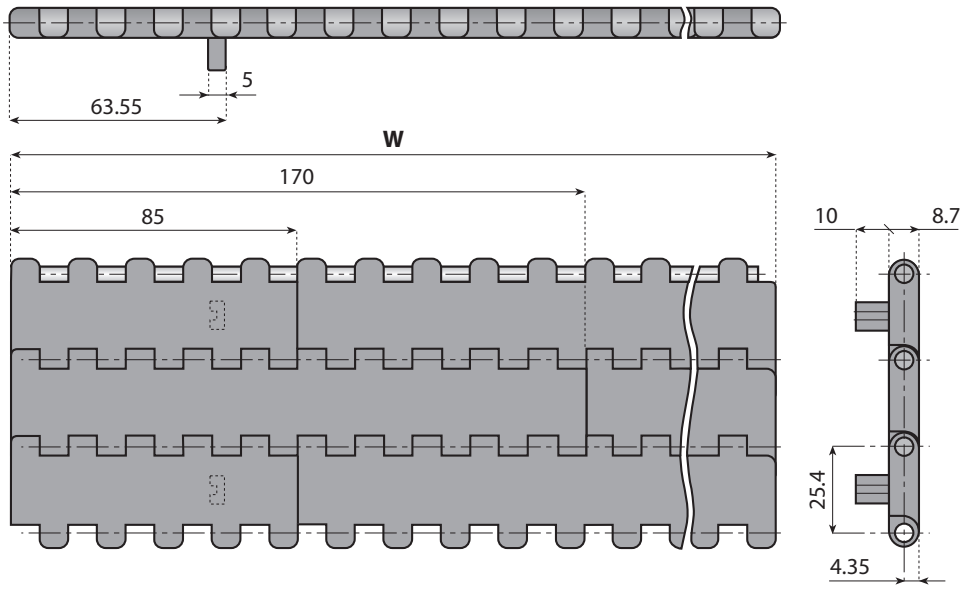

Version with one positioner
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.4 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
Pages 318⇨320
Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25200-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 FTP1	**25200**	935	2250-0935 FTP1	**25210**	1785	2250-1785 FTP1	**25220**	2635	2250-2635 FTP1	**25230**
170	2250-0170 FTP1	**25201**	1020	2250-1020 FTP1	**25211**	1870	2250-1870 FTP1	**25221**	2720	2250-2720 FTP1	**25231**
255	2250-0255 FTP1	**25202**	1105	2250-1105 FTP1	**25212**	1955	2250-1955 FTP1	**25222**	2805	2250-2805 FTP1	**25232**
340	2250-0340 FTP1	**25203**	1190	2250-1190 FTP1	**25213**	2040	2250-2040 FTP1	**25223**	2890	2250-2890 FTP1	**25233**
425	2250-0425 FTP1	**25204**	1275	2250-1275 FTP1	**25214**	2125	2250-2125 FTP1	**25224**	2975	2250-2975 FTP1	**25234**
510	2250-0510 FTP1	**25205**	1360	2250-1360 FTP1	**25215**	2210	2250-2210 FTP1	**25225**	3060	2250-3060 FTP1	**25235**
595	2250-0595 FTP1	**25206**	1445	2250-1445 FTP1	**25216**	2295	2250-2295 FTP1	**25226**	3145	2250-3145 FTP1	**25236**
680	2250-0680 FTP1	**25207**	1530	2250-1530 FTP1	**25217**	2380	2250-2380 FTP1	**25227**	3230	2250-3230 FTP1	**25237**
765	2250-0765 FTP1	**25208**	1615	2250-1615 FTP1	**25218**	2465	2250-2465 FTP1	**25228**	3315	2250-3315 FTP1	**25238**
850	2250-0850 FTP1	**25209**	1700	2250-1700 FTP1	**25219**	2550	2250-2550 FTP1	**25229**	3400	2250-3400 FTP1	**25239**

Other widths available on request.

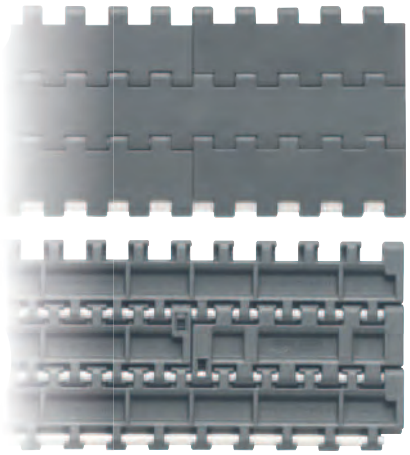

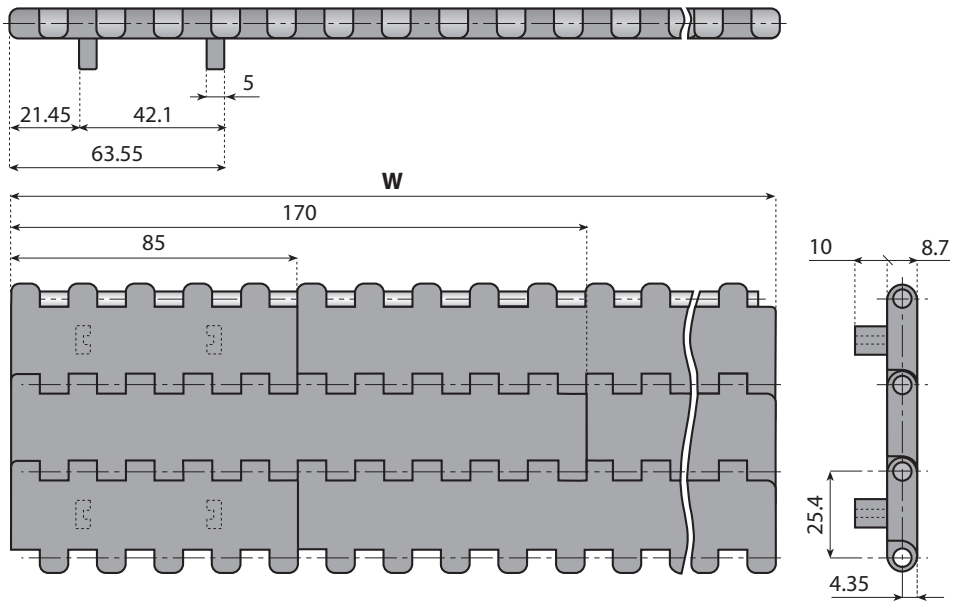

Version with two positioners
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.4 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


Pages 4⇨7 Pages 318⇨320 Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25300-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 FTP2	**25300**	935	2250-0935 FTP2	**25310**	1785	2250-1785 FTP2	**25320**	2635	2250-2635 FTP2	**25330**
170	2250-0170 FTP2	**25301**	1020	2250-1020 FTP2	**25311**	1870	2250-1870 FTP2	**25321**	2720	2250-2720 FTP2	**25331**
255	2250-0255 FTP2	**25302**	1105	2250-1105 FTP2	**25312**	1955	2250-1955 FTP2	**25322**	2805	2250-2805 FTP2	**25332**
340	2250-0340 FTP2	**25303**	1190	2250-1190 FTP2	**25313**	2040	2250-2040 FTP2	**25323**	2890	2250-2890 FTP2	**25333**
425	2250-0425 FTP2	**25304**	1275	2250-1275 FTP2	**25314**	2125	2250-2125 FTP2	**25324**	2975	2250-2975 FTP2	**25334**
510	2250-0510 FTP2	**25305**	1360	2250-1360 FTP2	**25315**	2210	2250-2210 FTP2	**25325**	3060	2250-3060 FTP2	**25335**
595	2250-0595 FTP2	**25306**	1445	2250-1445 FTP2	**25316**	2295	2250-2295 FTP2	**25326**	3145	2250-3145 FTP2	**25336**
680	2250-0680 FTP2	**25307**	1530	2250-1530 FTP2	**25317**	2380	2250-2380 FTP2	**25327**	3230	2250-3230 FTP2	**25337**
765	2250-0765 FTP2	**25308**	1615	2250-1615 FTP2	**25318**	2465	2250-2465 FTP2	**25328**	3315	2250-3315 FTP2	**25338**
850	2250-0850 FTP2	**25309**	1700	2250-1700 FTP2	**25319**	2550	2250-2550 FTP2	**25329**	3400	2250-3400 FTP2	**25339**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

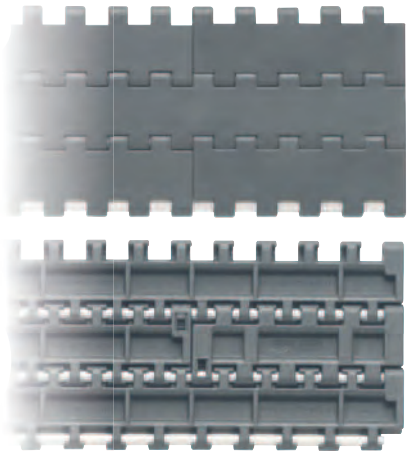

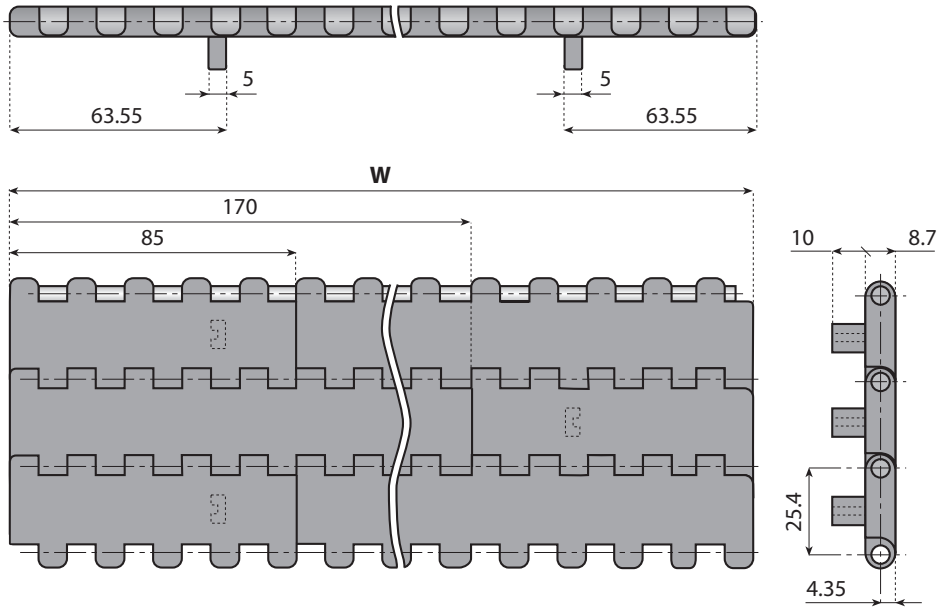

Version with one positioners on both side
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.4 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 254101-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2250-0935 FTP2B	**254110**	1785	2250-1785 FTP2B	**254120**	2635	2250-2635 FTP2B	**254130**
170	2250-0170 FTP2B	**254101**	1020	2250-1020 FTP2B	**254111**	1870	2250-1870 FTP2B	**254121**	2720	2250-2720 FTP2B	**254131**
255	2250-0255 FTP2B	**254102**	1105	2250-1105 FTP2B	**254112**	1955	2250-1955 FTP2B	**254122**	2805	2250-2805 FTP2B	**254132**
340	2250-0340 FTP2B	**254103**	1190	2250-1190 FTP2B	**254113**	2040	2250-2040 FTP2B	**254123**	2890	2250-2890 FTP2B	**254133**
425	2250-0425 FTP2B	**254104**	1275	2250-1275 FTP2B	**254114**	2125	2250-2125 FTP2B	**254124**	2975	2250-2975 FTP2B	**254134**
510	2250-0510 FTP2B	**254105**	1360	2250-1360 FTP2B	**254115**	2210	2250-2210 FTP2B	**254125**	3060	2250-3060 FTP2B	**254135**
595	2250-0595 FTP2B	**254106**	1445	2250-1445 FTP2B	**254116**	2295	2250-2295 FTP2B	**254126**	3145	2250-3145 FTP2B	**254136**
680	2250-0680 FTP2B	**254107**	1530	2250-1530 FTP2B	**254117**	2380	2250-2380 FTP2B	**254127**	3230	2250-3230 FTP2B	**254137**
765	2250-0765 FTP2B	**254108**	1615	2250-1615 FTP2B	**254118**	2465	2250-2465 FTP2B	**254128**	3315	2250-3315 FTP2B	**254138**
850	2250-0850 FTP2B	**254109**	1700	2250-1700 FTP2B	**254119**	2550	2250-2550 FTP2B	**254129**	3400	2250-3400 FTP2B	**254139**

Other widths available on request.

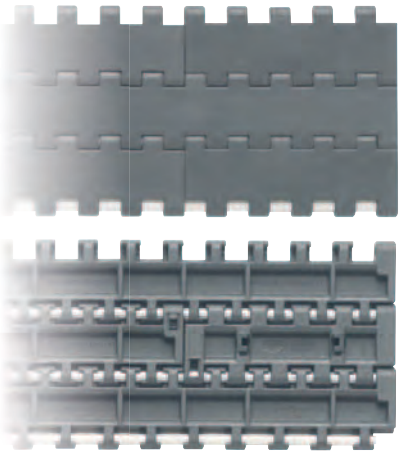

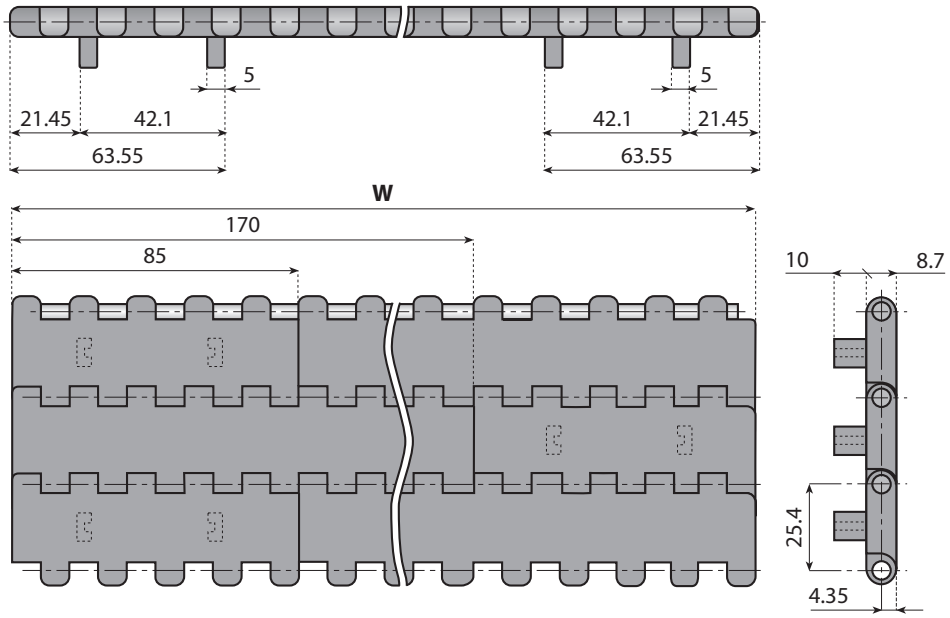

Version with two positioners on both sides
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.4 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 254201-NGG")


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2250-0935 FTP2BD	**254210**	1785	2250-1785 FTP2BD	**254220**	2635	2250-2635 FTP2BD	**254230**
170	2250-0170 FTP2BD	**254201**	1020	2250-1020 FTP2BD	**254211**	1870	2250-1870 FTP2BD	**254221**	2720	2250-2720 FTP2BD	**254231**
255	2250-0255 FTP2BD	**254202**	1105	2250-1105 FTP2BD	**254212**	1955	2250-1955 FTP2BD	**254222**	2805	2250-2805 FTP2BD	**254232**
340	2250-0340 FTP2BD	**254203**	1190	2250-1190 FTP2BD	**254213**	2040	2250-2040 FTP2BD	**254223**	2890	2250-2890 FTP2BD	**254233**
425	2250-0425 FTP2BD	**254204**	1275	2250-1275 FTP2BD	**254214**	2125	2250-2125 FTP2BD	**254224**	2975	2250-2975 FTP2BD	**254234**
510	2250-0510 FTP2BD	**254205**	1360	2250-1360 FTP2BD	**254215**	2210	2250-2210 FTP2BD	**254225**	3060	2250-3060 FTP2BD	**254235**
595	2250-0595 FTP2BD	**254206**	1445	2250-1445 FTP2BD	**254216**	2295	2250-2295 FTP2BD	**254226**	3145	2250-3145 FTP2BD	**254236**
680	2250-0680 FTP2BD	**254207**	1530	2250-1530 FTP2BD	**254217**	2380	2250-2380 FTP2BD	**254227**	3230	2250-3230 FTP2BD	**254237**
765	2250-0765 FTP2BD	**254208**	1615	2250-1615 FTP2BD	**254218**	2465	2250-2465 FTP2BD	**254228**	3315	2250-3315 FTP2BD	**254238**
850	2250-0850 FTP2BD	**254209**	1700	2250-1700 FTP2BD	**254219**	2550	2250-2550 FTP2BD	**254229**	3400	2250-3400 FTP2BD	**254239**

Other widths available on request.

 © System Plast S.r.l., 2012 - All Rights Reserved

FLAT TOP BELTS (Pitch 1” - 25.4 mm) WITH TRANSFER WING 2250 FTTP2



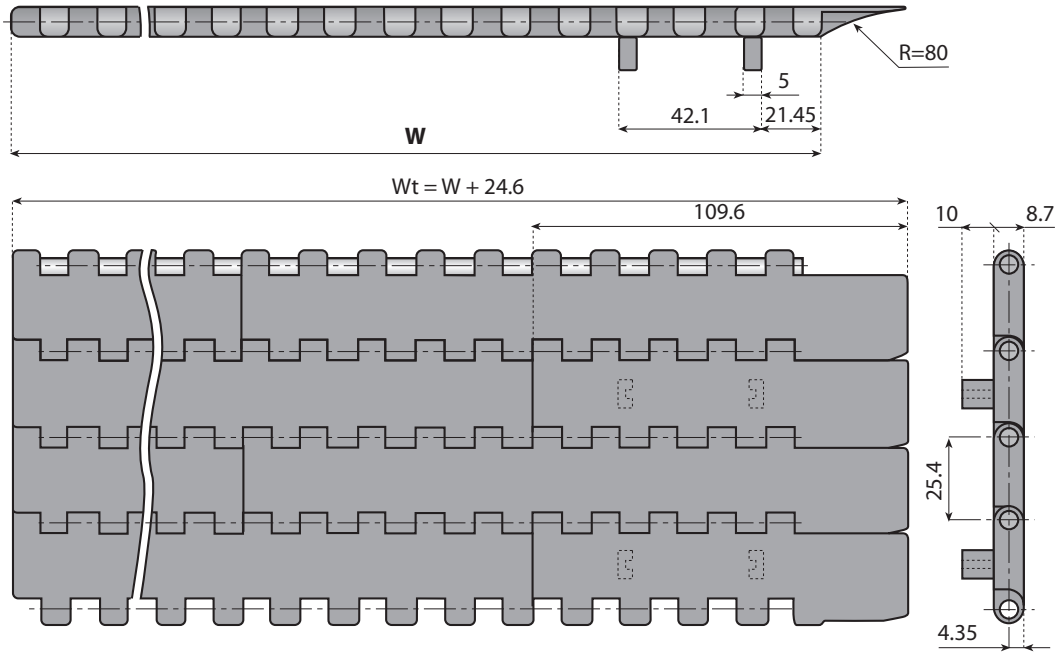

Version with two positioners and integrated active transfer wing
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Weight: 7.4 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

FOR BELTS AVAILABLE IN “NGG” MATERIAL JUST ADD “NGG” TO PART NUMBER (EXAMPLE “CODE 25401-NGG”)

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 FTTP2	**25400**	935	2250-0935 FTTP2	**25410**	1785	2250-1785 FTTP2	**25420**	2635	2250-2635 FTTP2	**25430**
170	2250-0170 FTTP2	**25401**	1020	2250-1020 FTTP2	**25411**	1870	2250-1870 FTTP2	**25421**	2720	2250-2720 FTTP2	**25431**
255	2250-0255 FTTP2	**25402**	1105	2250-1105 FTTP2	**25412**	1955	2250-1955 FTTP2	**25422**	2805	2250-2805 FTTP2	**25432**
340	2250-0340 FTTP2	**25403**	1190	2250-1190 FTTP2	**25413**	2040	2250-2040 FTTP2	**25423**	2890	2250-2890 FTTP2	**25433**
425	2250-0425 FTTP2	**25404**	1275	2250-1275 FTTP2	**25414**	2125	2250-2125 FTTP2	**25424**	2975	2250-2975 FTTP2	**25434**
510	2250-0510 FTTP2	**25405**	1360	2250-1360 FTTP2	**25415**	2210	2250-2210 FTTP2	**25425**	3060	2250-3060 FTTP2	**25435**
595	2250-0595 FTTP2	**25406**	1445	2250-1445 FTTP2	**25416**	2295	2250-2295 FTTP2	**25426**	3145	2250-3145 FTTP2	**25436**
680	2250-0680 FTTP2	**25407**	1530	2250-1530 FTTP2	**22417**	2380	2250-2380 FTTP2	**25427**	3230	2250-3230 FTTP2	**25437**
765	2250-0765 FTTP2	**25408**	1615	2250-1615 FTTP2	**25418**	2465	2250-2465 FTTP2	**25428**	3315	2250-3315 FTTP2	**25438**
850	2250-0850 FTTP2	**25409**	1700	2250-1700 FTTP2	**25419**	2550	2250-2550 FTTP2	**25429**	3400	2250-3400 FTTP2	**25439**

Other widths available on request.

2250 FTTP2-SX FLAT TOP BELTS (Pitch 1" - 25.4 mm) WITH TRANSFER WING

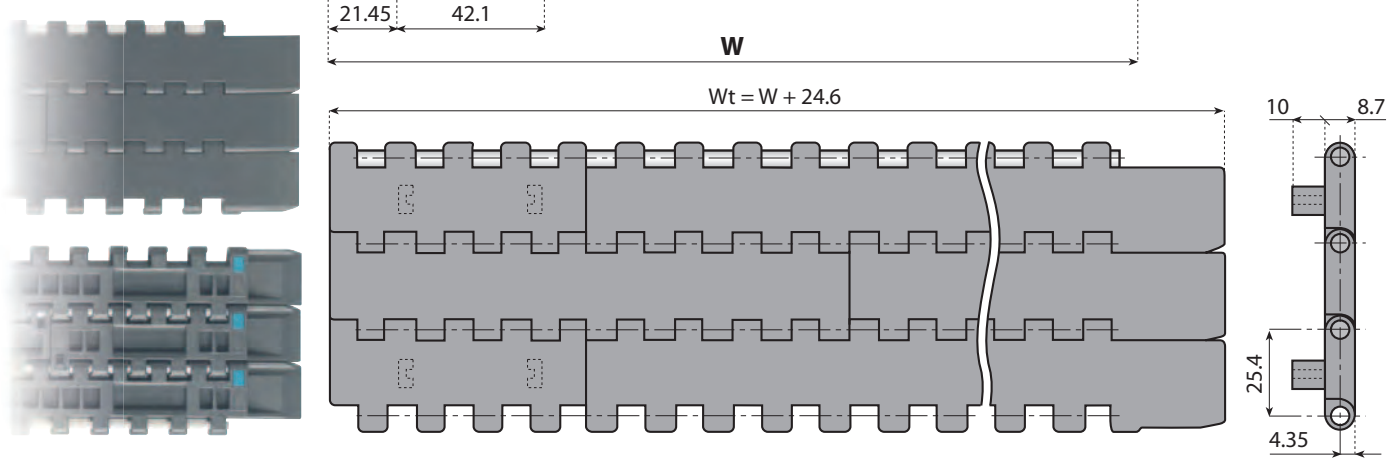

Version with two positioners and integrated active transfer wing
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Weight: 7.4 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 | Pages 318⇨320 | Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25401SX-NGG")


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 FTTP2-SX	**25400**	935	2250-0935 FTTP2-SX	**25410SX**	1785	2250-1785 FTTP2-SX	**25420SX**	2635	2250-2635 FTTP2-SX	**25430SX**
170	2250-0170 FTTP2-SX	**25401SX**	1020	2250-1020 FTTP2-SX	**25411SX**	1870	2250-1870 FTTP2-SX	**25421SX**	2720	2250-2720 FTTP2-SX	**25431SX**
255	2250-0255 FTTP2-SX	**25402SX**	1105	2250-1105 FTTP2-SX	**25412SX**	1955	2250-1955 FTTP2-SX	**25422SX**	2805	2250-2805 FTTP2-SX	**25432SX**
340	2250-0340 FTTP2-SX	**25403SX**	1190	2250-1190 FTTP2-SX	**25413SX**	2040	2250-2040 FTTP2-SX	**25423SX**	2890	2250-2890 FTTP2-SX	**25433SX**
425	2250-0425 FTTP2-SX	**25404SX**	1275	2250-1275 FTTP2-SX	**25414SX**	2125	2250-2125 FTTP2-SX	**25424SX**	2975	2250-2975 FTTP2-SX	**25434SX**
510	2250-0510 FTTP2-SX	**25405SX**	1360	2250-1360 FTTP2-SX	**25415SX**	2210	2250-2210 FTTP2-SX	**25425SX**	3060	2250-3060 FTTP2-SX	**25435SX**
595	2250-0595 FTTP2-SX	**25406SX**	1445	2250-1445 FTTP2-SX	**25416SX**	2295	2250-2295 FTTP2-SX	**25426SX**	3145	2250-3145 FTTP2-SX	**25436SX**
680	2250-0680 FTTP2-SX	**25407SX**	1530	2250-1530 FTTP2-SX	**22417SX**	2380	2250-2380 FTTP2-SX	**25427SX**	3230	2250-3230 FTTP2-SX	**25437SX**
765	2250-0765 FTTP2-SX	**25408SX**	1615	2250-1615 FTTP2-SX	**25418SX**	2465	2250-2465 FTTP2-SX	**25428SX**	3315	2250-3315 FTTP2-SX	**25438SX**
850	2250-0850 FTTP2-SX	**25409SX**	1700	2250-1700 FTTP2-SX	**25419SX**	2550	2250-2550 FTTP2-SX	**25429SX**	3400	2250-3400 FTTP2-SX	**25439SX**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLUSH GRID BELTS ONE TRACK — 2250 K330 J-FG

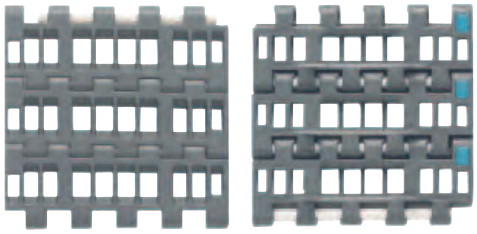

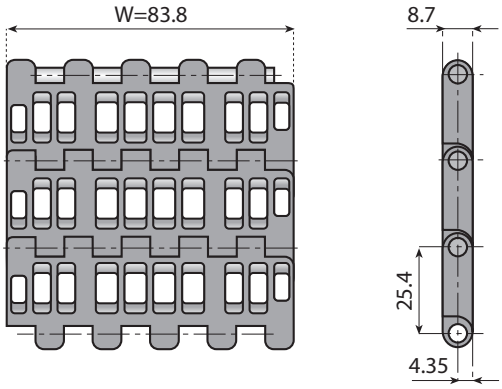

Version standard
Pin material: PBT (white)
Open surface: 23%


Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 | Pages 318⇨320 | Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2250 K330 J-FG	**25010J**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	25	2095	5.40
NGG 2250 K330 J-FG	**25010J-NGG**	**NGG** Light Grey							

FLUSH GRID BELTS ONE TRACK — 2250 K330 J-FGP2

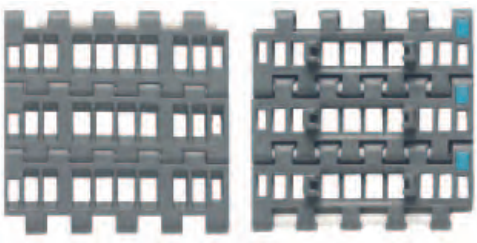

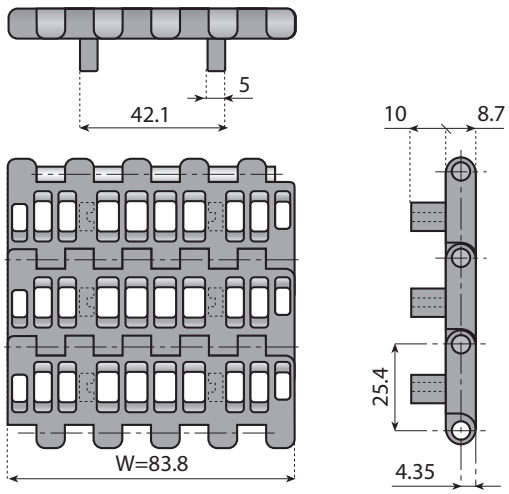

Version with two positioners
Pin material: PBT (white)
Open surface: 23%

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 | Pages 318⇨320 | Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2250 K330 J-FGP2	**25011J**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	25	2095	5.45
NGG 2250 K330 J-FGP2	**25011J-NGG**	**NGG** Light Grey							

Standard length: 120 pitches (10 ft. - 3.048 m)

2250 K330 J-FGTP2 FLUSH GRID BELTS ONE TRACK WITH TRANSFER WING

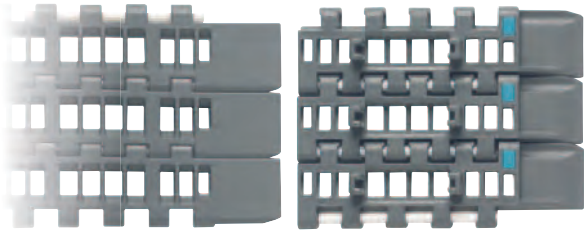

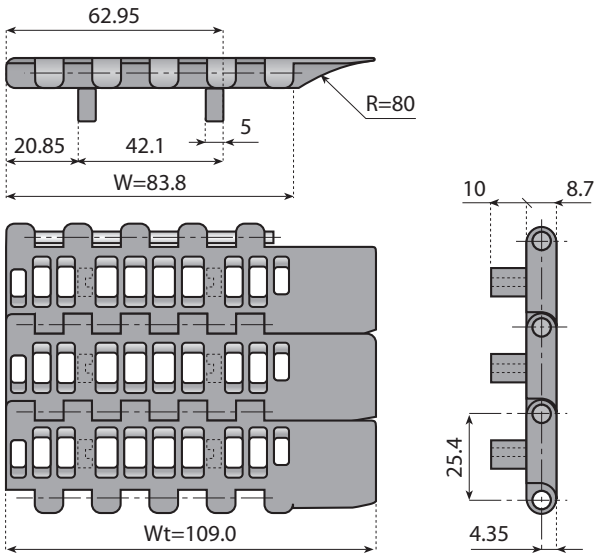

Open surface: 23%

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2250 K330 J-FGTP2	**25012J**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	30	2095	6.50
NGG 2250 K330 J-FGTP2	**25012J-NGG**	**NGG** Light Grey							

Standard length: 120 pitches (10 ft. - 3.048 m)


EXAMPLE OF INSTALLATION

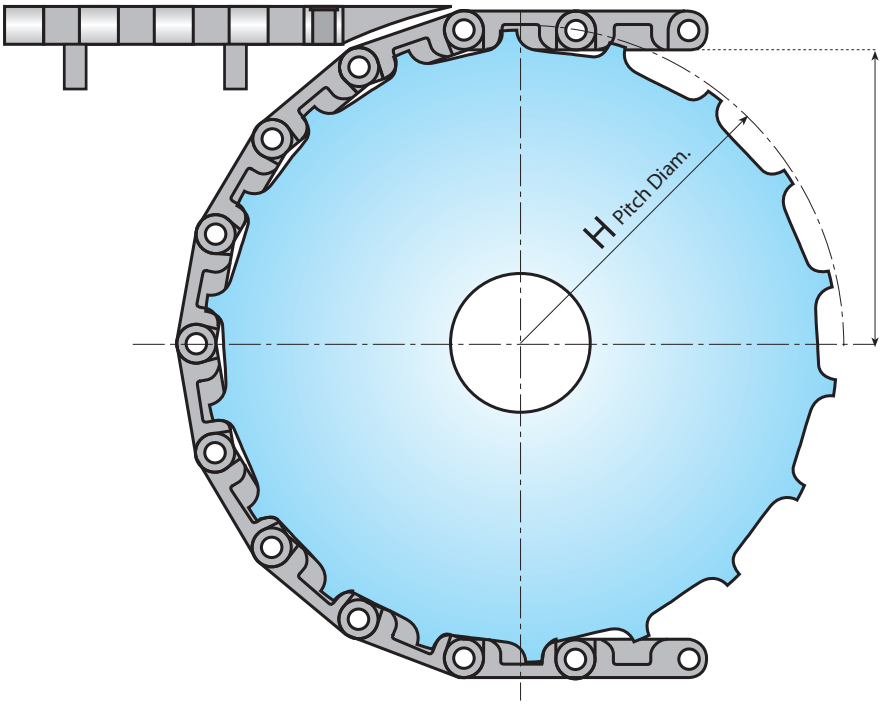

For further information contact our Technical Support Department

 © System Plast S.r.l. , 2012 - All Rights Reserved



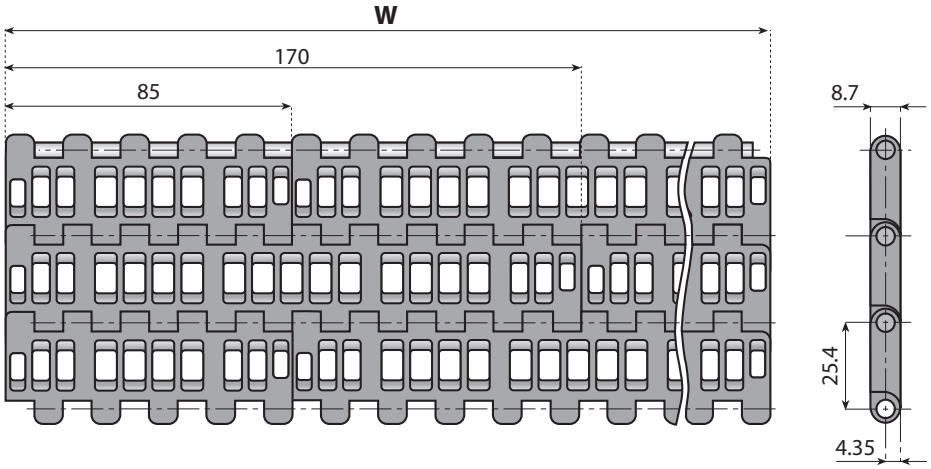

Version standard
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.5 Kg/m²
Pin material: PBT (white)
Open surface: 23%
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25500J-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 J-FG	**25500J**	935	2250-0935 J-FG	**25510J**	1785	2250-1785 J-FG	**25520J**	2635	2250-2635 J-FG	**25530J**
170	2250-0170 J-FG	**25501J**	1020	2250-1020 J-FG	**25511J**	1870	2250-1870 J-FG	**25521J**	2720	2250-2720 J-FG	**25531J**
255	2250-0255 J-FG	**25502J**	1105	2250-1105 J-FG	**25512J**	1955	2250-1955 J-FG	**25522J**	2805	2250-2805 J-FG	**25532J**
340	2250-0340 J-FG	**25503J**	1190	2250-1190 J-FG	**25513J**	2040	2250-2040 J-FG	**25523J**	2890	2250-2890 J-FG	**25533J**
425	2250-0425 J-FG	**25504J**	1275	2250-1275 J-FG	**25514J**	2125	2250-2125 J-FG	**25524J**	2975	2250-2975 J-FG	**25534J**
510	2250-0510 J-FG	**25505J**	1360	2250-1360 J-FG	**25515J**	2210	2250-2210 J-FG	**25525J**	3060	2250-3060 J-FG	**25535J**
595	2250-0595 J-FG	**25506J**	1445	2250-1445 J-FG	**25516J**	2295	2250-2295 J-FG	**25526J**	3145	2250-3145 J-FG	**25536J**
680	2250-0680 J-FG	**25507J**	1530	2250-1530 J-FG	**22517J**	2380	2250-2380 J-FG	**25527J**	3230	2250-3230 J-FG	**25537J**
765	2250-0765 J-FG	**25508J**	1615	2250-1615 J-FG	**25518J**	2465	2250-2465 J-FG	**25528J**	3315	2250-3315 J-FG	**25538J**
850	2250-0850 J-FG	**25509J**	1700	2250-1700 J-FG	**25519J**	2550	2250-2550 J-FG	**25529J**	3400	2250-3400 J-FG	**25539J**

Other widths available on request.

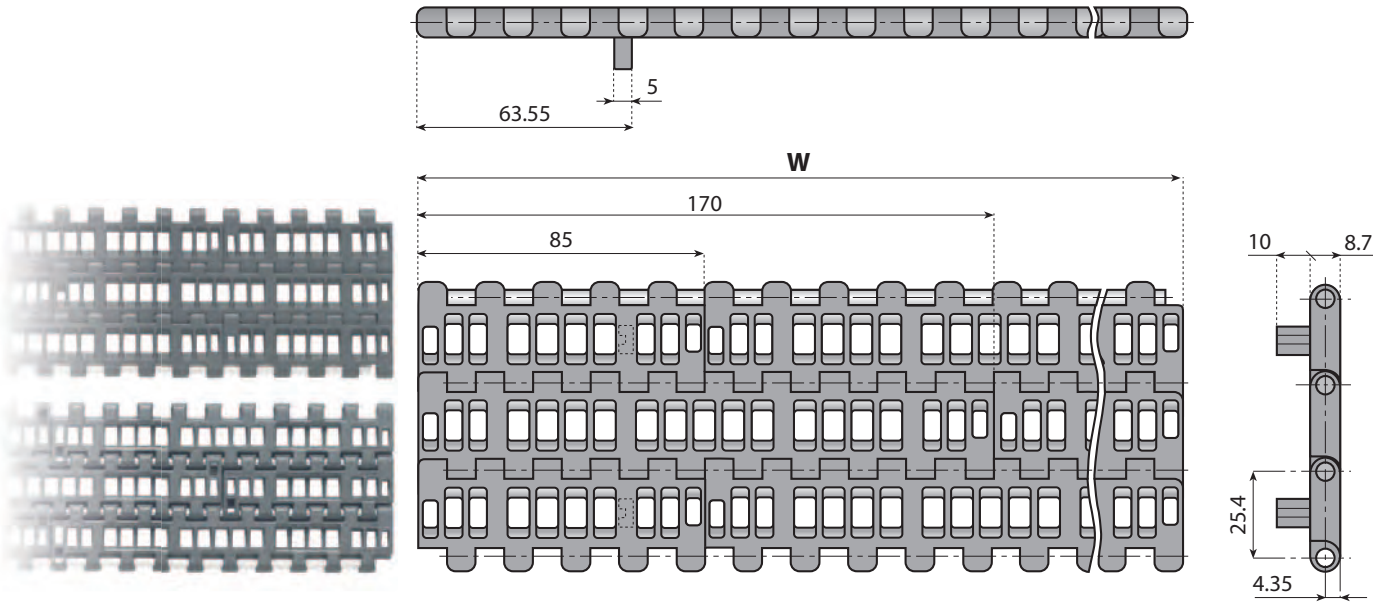

Version with one positioner
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.5 Kg/m²
Pin material: PBT (white)
Open surface: 23%
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25600J-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 J-FGP1	**25600J**	935	2250-0935 J-FGP1	**25610J**	1785	2250-1785 J-FGP1	**25620J**	2635	2250-2635 J-FGP1	**25630J**
170	2250-0170 J-FGP1	**25601J**	1020	2250-1020 J-FGP1	**25611J**	1870	2250-1870 J-FGP1	**25621J**	2720	2250-2720 J-FGP1	**25631J**
255	2250-0255 J-FGP1	**25602J**	1105	2250-1105 J-FGP1	**25612J**	1955	2250-1955 J-FGP1	**25622J**	2805	2250-2805 J-FGP1	**25632J**
340	2250-0340 J-FGP1	**25603J**	1190	2250-1190 J-FGP1	**25613J**	2040	2250-2040 J-FGP1	**25623J**	2890	2250-2890 J-FGP1	**25633J**
425	2250-0425 J-FGP1	**25604J**	1275	2250-1275 J-FGP1	**25614J**	2125	2250-2125 J-FGP1	**25624J**	2975	2250-2975 J-FGP1	**25634J**
510	2250-0510 J-FGP1	**25605J**	1360	2250-1360 J-FGP1	**25615J**	2210	2250-2210 J-FGP1	**25625J**	3060	2250-3060 J-FGP1	**25635J**
595	2250-0595 J-FGP1	**25606J**	1445	2250-1445 J-FGP1	**25616J**	2295	2250-2295 J-FGP1	**25626J**	3145	2250-3145 J-FGP1	**25636J**
680	2250-0680 J-FGP1	**25607J**	1530	2250-1530 J-FGP1	**22617J**	2380	2250-2380 J-FGP1	**25627J**	3230	2250-3230 J-FGP1	**25637J**
765	2250-0765 J-FGP1	**25608J**	1615	2250-1615 J-FGP1	**25618J**	2465	2250-2465 J-FGP1	**25628J**	3315	2250-3315 J-FGP1	**25638J**
850	2250-0850 J-FGP1	**25609J**	1700	2250-1700 J-FGP1	**25619J**	2550	2250-2550 J-FGP1	**25629J**	3400	2250-3400 J-FGP1	**25659J**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved



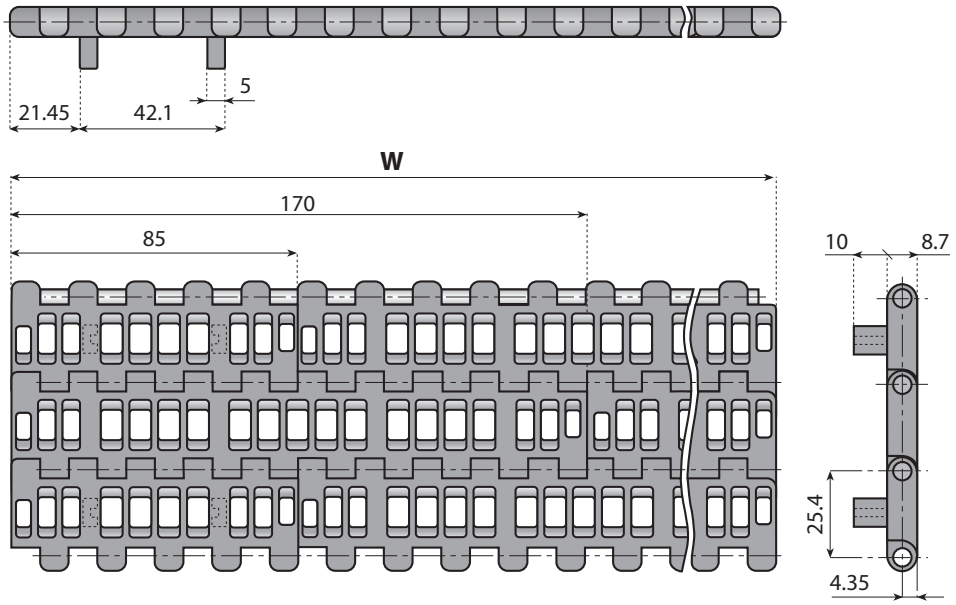

Version with two positioners
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.5 Kg/m²
Pin material: PBT (white)
Open surface: 23%
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
Pages 318⇨320
Pages 340⇨343

FOR BELTS AVAILABLE IN “NGG” MATERIAL JUST ADD “NGG” TO PART NUMBER (EXAMPLE “CODE 25700J-NGG”)

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 J-FGP2	**25700J**	935	2250-0935 J-FGP2	**25710J**	1785	2250-1785 J-FGP2	**25720J**	2635	2250-2635 J-FGP2	**25730J**
170	2250-0170 J-FGP2	**25701J**	1020	2250-1020 J-FGP2	**25711J**	1870	2250-1870 J-FGP2	**25721J**	2720	2250-2720 J-FGP2	**25731J**
255	2250-0255 J-FGP2	**25702J**	1105	2250-1105 J-FGP2	**25712J**	1955	2250-1955 J-FGP2	**25722J**	2805	2250-2805 J-FGP2	**25732J**
340	2250-0340 J-FGP2	**25703J**	1190	2250-1190 J-FGP2	**25713J**	2040	2250-2040 J-FGP2	**25723J**	2890	2250-2890 J-FGP2	**25733J**
425	2250-0425 J-FGP2	**25704J**	1275	2250-1275 J-FGP2	**25714J**	2125	2250-2125 J-FGP2	**25724J**	2975	2250-2975 J-FGP2	**25734J**
510	2250-0510 J-FGP2	**25705J**	1360	2250-1360 J-FGP2	**25715J**	2210	2250-2210 J-FGP2	**25725J**	3060	2250-3060 J-FGP2	**25735J**
595	2250-0595 J-FGP2	**25706J**	1445	2250-1445 J-FGP2	**25716J**	2295	2250-2295 J-FGP2	**25726J**	3145	2250-3145 J-FGP2	**25736J**
680	2250-0680 J-FGP2	**25707J**	1530	2250-1530 J-FGP2	**22717J**	2380	2250-2380 J-FGP2	**25727J**	3230	2250-3230 J-FGP2	**25737J**
765	2250-0765 J-FGP2	**25708J**	1615	2250-1615 J-FGP2	**25718J**	2465	2250-2465 J-FGP2	**25728J**	3315	2250-3315 J-FGP2	**25738J**
850	2250-0850 J-FGP2	**25709J**	1700	2250-1700 J-FGP2	**25719J**	2550	2250-2550 J-FGP2	**25729J**	3400	2250-3400 J-FGP2	**25739J**

Other widths available on request.



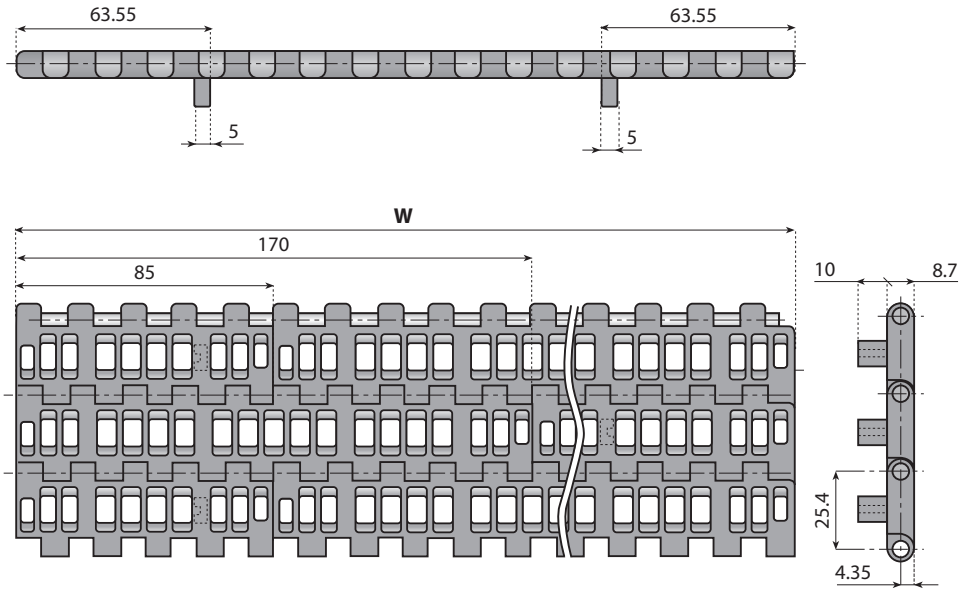

Version with one positioner on both sides
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.5 Kg/m²
Pin material: PBT (white)
Open surface: 23%
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Pages 318⇨320
Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 254301J-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85		-	935	2250-0935 J-FGP2B	**254310J**	1785	2250-1785 J-FGP2B	**254320J**	2635	2250-2635 J-FGP2B	**254330J**
170	2250-0170 J-FGP2B	**254301J**	1020	2250-1020 J-FGP2B	**254311J**	1870	2250-1870 J-FGP2B	**254321J**	2720	2250-2720 J-FGP2B	**254331J**
255	2250-0255 J-FGP2B	**254302J**	1105	2250-1105 J-FGP2B	**254312J**	1955	2250-1955 J-FGP2B	**254322J**	2805	2250-2805 J-FGP2B	**254332J**
340	2250-0340 J-FGP2B	**254303J**	1190	2250-1190 J-FGP2B	**254313J**	2040	2250-2040 J-FGP2B	**254323J**	2890	2250-2890 J-FGP2B	**254333J**
425	2250-0425 J-FGP2B	**254304J**	1275	2250-1275 J-FGP2B	**254314J**	2125	2250-2125 J-FGP2B	**254324J**	2975	2250-2975 J-FGP2B	**254334J**
510	2250-0510 J-FGP2B	**254305J**	1360	2250-1360 J-FGP2B	**254315J**	2210	2250-2210 J-FGP2B	**254325J**	3060	2250-3060 J-FGP2B	**254335J**
595	2250-0595 J-FGP2B	**254306J**	1445	2250-1445 J-FGP2B	**254316J**	2295	2250-2295 J-FGP2B	**254326J**	3145	2250-3145 J-FGP2B	**254336J**
680	2250-0680 J-FGP2B	**254307J**	1530	2250-1530 J-FGP2B	**254317J**	2380	2250-2380 J-FGP2B	**254327J**	3230	2250-3230 J-FGP2B	**254337J**
765	2250-0765 J-FGP2B	**254308J**	1615	2250-1615 J-FGP2B	**254318J**	2465	2250-2465 J-FGP2B	**254328J**	3315	2250-3315 J-FGP2B	**254338J**
850	2250-0850 J-FGP2B	**254309J**	1700	2250-1700 J-FGP2B	**254319J**	2550	2250-2550 J-FGP2B	**254329J**	3400	2250-3400 J-FGP2B	**254339J**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLUSH GRID BELTS (Pitch 1” - 25.4 mm) 2250 J-FGP2BD

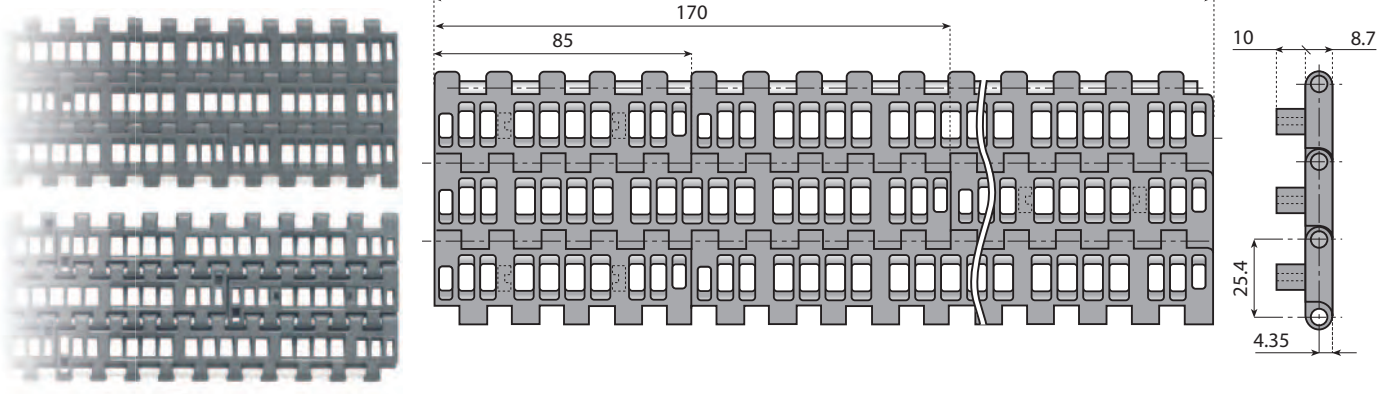

Version with two positioners on both sides
Backflex radius: 25 mm
Max load capacity: 25.000 N/m
Weight: 7.5 Kg/m²
Pin material: PBT (white)
Open surface: 23%
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

FOR BELTS AVAILABLE IN “NGG” MATERIAL JUST ADD “NGG” TO PART NUMBER (EXAMPLE “CODE 254401J-NGG”)

Width W mm	Belts Ref.	Code
85	-	-
170	2250-0170 J-FGP2BD	**254401J**
255	2250-0255 J-FGP2BD	**254402J**
340	2250-0340 J-FGP2BD	**254403J**
425	2250-0425 J-FGP2BD	**254404J**
510	2250-0510 J-FGP2BD	**254405J**
595	2250-0595 J-FGP2BD	**254406J**
680	2250-0680 J-FGP2BD	**254407J**
765	2250-0765 J-FGP2BD	**254408J**
850	2250-0850 J-FGP2BD	**254409J**

Width W mm	Belts Ref.	Code
935	2250-0935 J-FGP2BD	**254410J**
1020	2250-1020 J-FGP2BD	**254411J**
1105	2250-1105 J-FGP2BD	**254412J**
1190	2250-1190 J-FGP2BD	**254413J**
1275	2250-1275 J-FGP2BD	**254414J**
1360	2250-1360 J-FGP2BD	**254415J**
1445	2250-1445 J-FGP2BD	**254416J**
1530	2250-1530 J-FGP2BD	**254417J**
1615	2250-1615 J-FGP2BD	**254418J**
1700	2250-1700 J-FGP2BD	**254419J**


Width W mm	Belts Ref.	Code
1785	2250-1785 J-FGP2BD	**254420J**
1870	2250-1870 J-FGP2BD	**254421J**
1955	2250-1955 J-FGP2BD	**254422J**
2040	2250-2040 J-FGP2BD	**254423J**
2125	2250-2125 J-FGP2BD	**254424J**
2210	2250-2210 J-FGP2BD	**254425J**
2295	2250-2295 J-FGP2BD	**254426J**
2380	2250-2380 J-FGP2BD	**254427J**
2465	2250-2465 J-FGP2BD	**254428J**
2550	2250-2550 J-FGP2BD	**254429J**

Width W mm	Belts Ref.	Code
2635	2250-2635 J-FGP2BD	**254430J**
2720	2250-2720 J-FGP2BD	**254431J**
2805	2250-2805 J-FGP2BD	**254432J**
2890	2250-2890 J-FGP2BD	**254433J**
2975	2250-2975 J-FGP2BD	**254434J**
3060	2250-3060 J-FGP2BD	**254435J**
3145	2250-3145 J-FGP2BD	**254436J**
3230	2250-3230 J-FGP2BD	**254437J**
3315	2250-3315 J-FGP2BD	**254438J**
3400	2250-3400 J-FGP2BD	**254439J**

Other widths available on request.

2250 J-FGTP2 FLUSH GRID BELTS (Pitch 1" - 25.4 mm) WITH TRANSFER WING



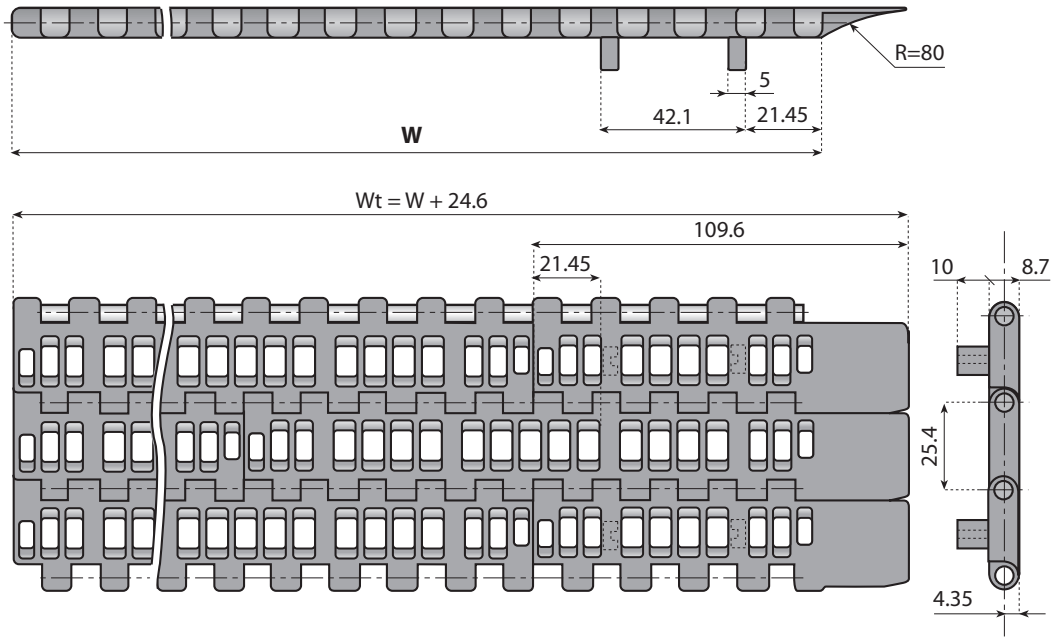

Version with two positioners and integrated active transfer wing
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Weight: 7.5 Kg/m²
Pin material: PBT (white)
Open surface: 23%
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25801J-NGG")


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 J-FGTP2	**25800J**	935	2250-0935 J-FGTP2	**25810J**	1785	2250-1785 J-FGTP2	**25820J**	2635	2250-2635 J-FGTP2	**25830J**
170	2250-0170 J-FGTP2	**25801J**	1020	2250-1020 J-FGTP2	**25811J**	1870	2250-1870 J-FGTP2	**25821J**	2720	2250-2720 J-FGTP2	**25831J**
255	2250-0255 J-FGTP2	**25802J**	1105	2250-1105 J-FGTP2	**25812J**	1955	2250-1955 J-FGTP2	**25822J**	2805	2250-2805 J-FGTP2	**25832J**
340	2250-0340 J-FGTP2	**25803J**	1190	2250-1190 J-FGTP2	**25813J**	2040	2250-2040 J-FGTP2	**25823J**	2890	2250-2890 J-FGTP2	**25833J**
425	2250-0425 J-FGTP2	**25804J**	1275	2250-1275 J-FGTP2	**25814J**	2125	2250-2125 J-FGTP2	**25824J**	2975	2250-2975 J-FGTP2	**25834J**
510	2250-0510 J-FGTP2	**25805J**	1360	2250-1360 J-FGTP2	**25815J**	2210	2250-2210 J-FGTP2	**25825J**	3060	2250-3060 J-FGTP2	**25835J**
595	2250-0595 J-FGTP2	**25806J**	1445	2250-1445 J-FGTP2	**25816J**	2295	2250-2295 J-FGTP2	**25826J**	3145	2250-3145 J-FGTP2	**25836J**
680	2250-0680 J-FGTP2	**25807J**	1530	2250-1530 J-FGTP2	**25817J**	2380	2250-2380 J-FGTP2	**25827J**	3230	2250-3230 J-FGTP2	**25837J**
765	2250-0765 J-FGTP2	**25808J**	1615	2250-1615 J-FGTP2	**25818J**	2465	2250-2465 J-FGTP2	**25828J**	3315	2250-3315 J-FGTP2	**25838J**
850	2250-0850 J-FGTP2	**25809J**	1700	2250-1700 J-FGTP2	**25819J**	2550	2250-2550 J-FGTP2	**25829J**	3400	2250-3400 J-FGTP2	**25839J**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLUSH GRID BELTS (Pitch 1" - 25.4 mm) WITH TRANSFER WING 2250 J-FGTP2-SX



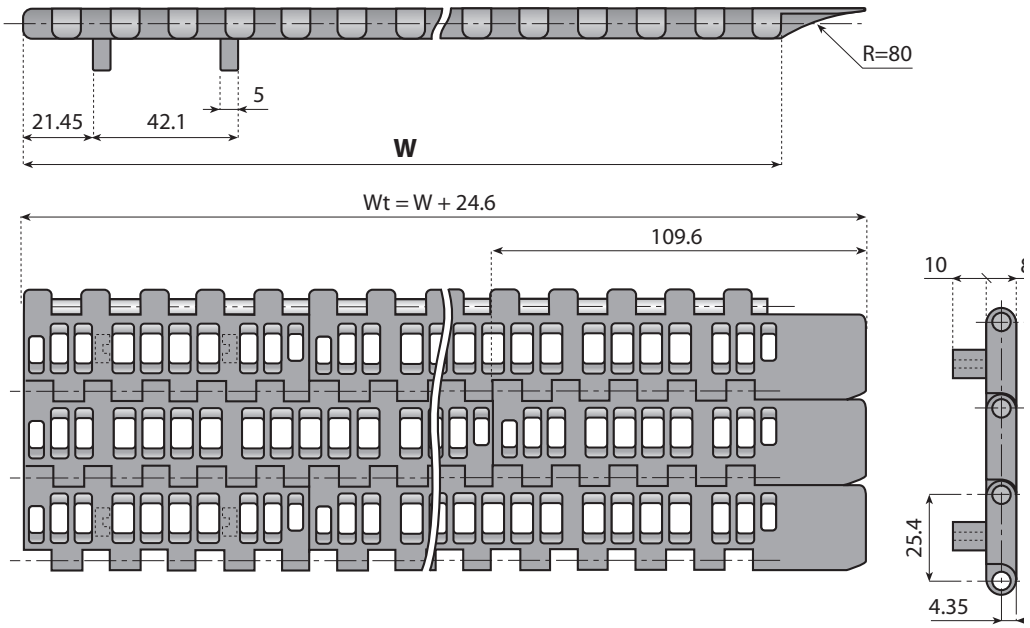

Version with two positioners and integrated active transfer wing
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Weight: 7.5 Kg/m²
Pin material: PBT (white)
Open surface: 23%
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
Pages 318⇨320
Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 25801JSX-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2250-0085 J-FGTP2-SX	**25800J**	935	2250-0935 J-FGTP2-SX	**25810J-SX**	1785	2250-1785 J-FGTP2-SX	**25820J-SX**	2635	2250-2635 J-FGTP2-SX	**25830J-SX**
170	2250-0170 J-FGTP2-SX	**25801J-SX**	1020	2250-1020 J-FGTP2-SX	**25811J-SX**	1870	2250-1870 J-FGTP2-SX	**25821J-SX**	2720	2250-2720 J-FGTP2-SX	**25831J-SX**
255	2250-0255 J-FGTP2-SX	**25802J-SX**	1105	2250-1105 J-FGTP2-SX	**25812J-SX**	1955	2250-1955 J-FGTP2-SX	**25822J-SX**	2805	2250-2805 J-FGTP2-SX	**25832J-SX**
340	2250-0340 J-FGTP2-SX	**25803J-SX**	1190	2250-1190 J-FGTP2-SX	**25813J-SX**	2040	2250-2040 J-FGTP2-SX	**25823J-SX**	2890	2250-2890 J-FGTP2-SX	**25833J-SX**
425	2250-0425 J-FGTP2-SX	**25804J-SX**	1275	2250-1275 J-FGTP2-SX	**25814J-SX**	2125	2250-2125 J-FGTP2-SX	**25824J-SX**	2975	2250-2975 J-FGTP2-SX	**25834J-SX**
510	2250-0510 J-FGTP2-SX	**25805J-SX**	1360	2250-1360 J-FGTP2-SX	**25815J-SX**	2210	2250-2210 J-FGTP2-SX	**25825J-SX**	3060	2250-3060 J-FGTP2-SX	**25835J-SX**
595	2250-0595 J-FGTP2-SX	**25806J-SX**	1445	2250-1445 J-FGTP2-SX	**25816J-SX**	2295	2250-2295 J-FGTP2-SX	**25826J-SX**	3145	2250-3145 J-FGTP2-SX	**25836J-SX**
680	2250-0680 J-FGTP2-SX	**25807J-SX**	1530	2250-1530 J-FGTP2-SX	**25817J-SX**	2380	2250-2380 J-FGTP2-SX	**25827J-SX**	3230	2250-3230 J-FGTP2-SX	**25837J-SX**
765	2250-0765 J-FGTP2-SX	**25808J-SX**	1615	2250-1615 J-FGTP2-SX	**25818J-SX**	2465	2250-2465 J-FGTP2-SX	**25828J-SX**	3315	2250-3315 J-FGTP2-SX	**25838J-SX**
850	2250-0850 J-FGTP2-SX	**25809J-SX**	1700	2250-1700 J-FGTP2-SX	**25819J-SX**	2550	2250-2550 J-FGTP2-SX	**25829J-SX**	3400	2250-3400 J-FGTP2-SX	**25839J-SX**

Other widths available on request.

VG 2250 GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE



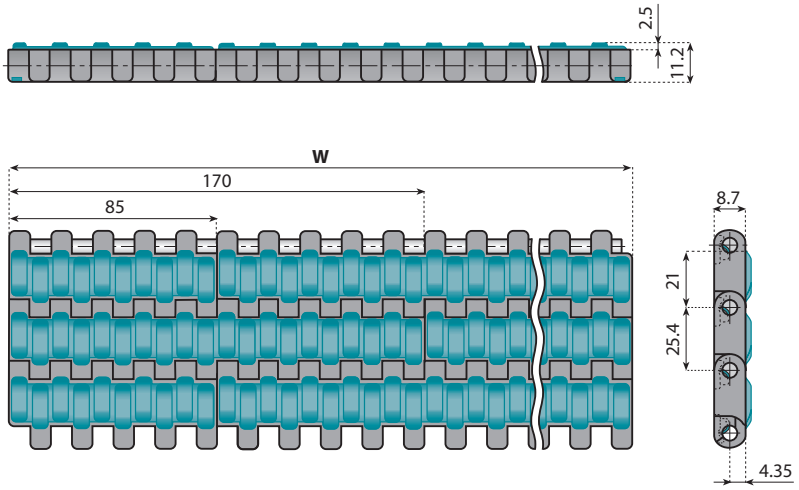


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 | Pages 318⇨320 | Pages 340⇨343


TYPE VG 2250



Weight: 8.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2250-0085	**250000**	935	VG 2250-0935	**250010**	1785	VG 2250-1785	**250020**
170	VG 2250-0170	**250001**	1020	VG 2250-1020	**250011**	1870	VG 2250-1870	**250021**
255	VG 2250-0255	**250002**	1105	VG 2250-1105	**250012**	1955	VG 2250-1955	**250022**
340	VG 2250-0340	**250003**	1190	VG 2250-1190	**250013**	2040	VG 2250-2040	**250023**
425	VG 2250-0425	**250004**	1275	VG 2250-1275	**250014**	2125	VG 2250-2125	**250024**
510	VG 2250-0510	**250005**	1360	VG 2250-1360	**250015**	2210	VG 2250-2210	**250025**
595	VG 2250-0595	**250006**	1445	VG 2250-1445	**250016**	2295	VG 2250-2295	**250026**
680	VG 2250-0680	**250007**	1530	VG 2250-1530	**250017**	2380	VG 2250-2380	**250027**
765	VG 2250-0765	**250008**	1615	VG 2250-1615	**250018**			
850	VG 2250-0850	**250009**	1700	VG 2250-1700	**250019**			


TYPE VG2-2250



Weight: 8.1 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2250-0085	**250100**	935	VG2 2250-0935	**250110**	1785	VG2 2250-1785	**250120**
170	VG2 2250-0170	**250101**	1020	VG2 2250-1020	**250111**	1870	VG2 2250-1870	**250121**
255	VG2 2250-0255	**250102**	1105	VG2 2250-1105	**250112**	1955	VG2 2250-1955	**250122**
340	VG2 2250-0340	**250103**	1190	VG2 2250-1190	**250113**	2040	VG2 2250-2040	**250123**
425	VG2 2250-0425	**250104**	1275	VG2 2250-1275	**250114**	2125	VG2 2250-2125	**250124**
510	VG2 2250-0510	**250105**	1360	VG2 2250-1360	**250115**	2210	VG2 2250-2210	**250125**
595	VG2 2250-0595	**250106**	1445	VG2 2250-1445	**250116**	2295	VG2 2250-2295	**250126**
680	VG2 2250-0680	**250107**	1530	VG2 2250-1530	**250117**	2380	VG2 2250-2380	**250127**
765	VG2 2250-0765	**250108**	1615	VG2 2250-1615	**250118**			
850	VG2 2250-0850	**250109**	1700	VG2 2250-1700	**250119**			

TYPE VG3-2250





Weight: 7.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2250-0085	**250200**	935	VG3 2250-0935	**250210**	1785	VG3 2250-1785	**250220**
170	VG3 2250-0170	**250201**	1020	VG3 2250-1020	**250211**	1870	VG3 2250-1870	**250221**
255	VG3 2250-0255	**250202**	1105	VG3 2250-1105	**250212**	1955	VG3 2250-1955	**250222**
340	VG3 2250-0340	**250203**	1190	VG3 2250-1190	**250213**	2040	VG3 2250-2040	**250223**
425	VG3 2250-0425	**250204**	1275	VG3 2250-1275	**250214**	2125	VG3 2250-2125	**250224**
510	VG3 2250-0510	**250205**	1360	VG3 2250-1360	**250215**	2210	VG3 2250-2210	**250225**
595	VG3 2250-0595	**250206**	1445	VG3 2250-1445	**250216**	2295	VG3 2250-2295	**250226**
680	VG3 2250-0680	**250207**	1530	VG3 2250-1530	**250217**	2380	VG3 2250-2380	**250227**
765	VG3 2250-0765	**250208**	1615	VG3 2250-1615	**250218**			
850	VG3 2250-0850	**250209**	1700	VG3 2250-1700	**250219**			

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved



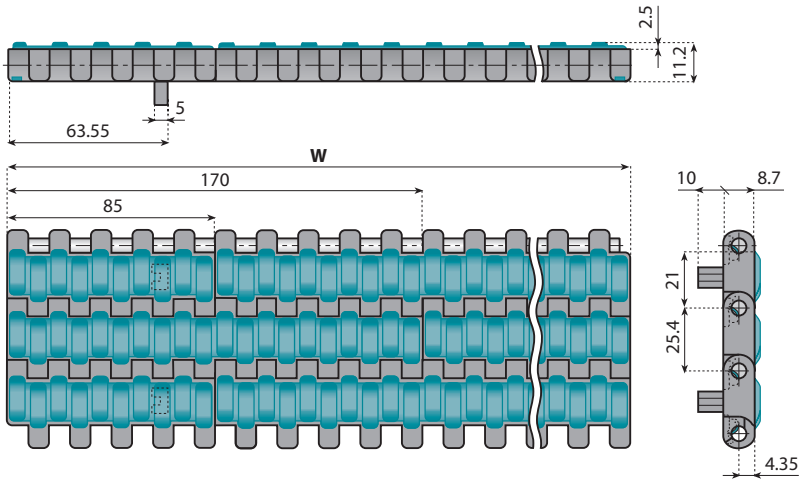


Version with one positioner
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 | Pages 318⇨320 | Pages 340⇨343


TYPE VG 2250 P1



Weight: 8.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2250-0085 P1	**250300**	935	VG 2250-0935 P1	**250310**	1785	VG 2250-1785 P1	**250320**
170	VG 2250-0170 P1	**250301**	1020	VG 2250-1020 P1	**250311**	1870	VG 2250-1870 P1	**250321**
255	VG 2250-0255 P1	**250302**	1105	VG 2250-1105 P1	**250312**	1955	VG 2250-1955 P1	**250322**
340	VG 2250-0340 P1	**250303**	1190	VG 2250-1190 P1	**250313**	2040	VG 2250-2040 P1	**250323**
425	VG 2250-0425 P1	**250304**	1275	VG 2250-1275 P1	**250314**	2125	VG 2250-2125 P1	**250324**
510	VG 2250-0510 P1	**250305**	1360	VG 2250-1360 P1	**250315**	2210	VG 2250-2210 P1	**250325**
595	VG 2250-0595 P1	**250306**	1445	VG 2250-1445 P1	**250316**	2295	VG 2250-2295 P1	**250326**
680	VG 2250-0680 P1	**250307**	1530	VG 2250-1530 P1	**250317**	2380	VG 2250-2380 P1	**250327**
765	VG 2250-0765 P1	**250308**	1615	VG 2250-1615 P1	**250318**			
850	VG 2250-0850 P1	**250309**	1700	VG 2250-1700 P1	**250319**			


TYPE VG2-2250 P1



Weight: 8.1 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2250-0085 P1	**250400**	935	VG2 2250-0935 P1	**250410**	1785	VG2 2250-1785 P1	**250420**
170	VG2 2250-0170 P1	**250401**	1020	VG2 2250-1020 P1	**250411**	1870	VG2 2250-1870 P1	**250421**
255	VG2 2250-0255 P1	**250402**	1105	VG2 2250-1105 P1	**250412**	1955	VG2 2250-1955 P1	**250422**
340	VG2 2250-0340 P1	**250403**	1190	VG2 2250-1190 P1	**250413**	2040	VG2 2250-2040 P1	**250423**
425	VG2 2250-0425 P1	**250404**	1275	VG2 2250-1275 P1	**250414**	2125	VG2 2250-2125 P1	**250424**
510	VG2 2250-0510 P1	**250405**	1360	VG2 2250-1360 P1	**250415**	2210	VG2 2250-2210 P1	**250425**
595	VG2 2250-0595 P1	**250406**	1445	VG2 2250-1445 P1	**250416**	2295	VG2 2250-2295 P1	**250426**
680	VG2 2250-0680 P1	**250407**	1530	VG2 2250-1530 P1	**250417**	2380	VG2 2250-2380 P1	**250427**
765	VG2 2250-0765 P1	**250408**	1615	VG2 2250-1615 P1	**250418**			
850	VG2 2250-0850 P1	**250409**	1700	VG2 2250-1700 P1	**250419**			


TYPE VG3-2250 P2




Weight: 7.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2250-0085 P1	**250500**	935	VG3 2250-0935 P1	**250510**	1785	VG3 2250-1785 P1	**250520**
170	VG3 2250-0170 P1	**250501**	1020	VG3 2250-1020 P1	**250511**	1870	VG3 2250-1870 P1	**250521**
255	VG3 2250-0255 P1	**250502**	1105	VG3 2250-1105 P1	**250512**	1955	VG3 2250-1955 P1	**250522**
340	VG3 2250-0340 P1	**250503**	1190	VG3 2250-1190 P1	**250513**	2040	VG3 2250-2040 P1	**250523**
425	VG3 2250-0425 P1	**250504**	1275	VG3 2250-1275 P1	**250514**	2125	VG3 2250-2125 P1	**250524**
510	VG3 2250-0510 P1	**250505**	1360	VG3 2250-1360 P1	**250515**	2210	VG3 2250-2210 P1	**250525**
595	VG3 2250-0595 P1	**250506**	1445	VG3 2250-1445 P1	**250516**	2295	VG3 2250-2295 P1	**250526**
680	VG3 2250-0680 P1	**250507**	1530	VG3 2250-1530 P1	**250517**	2380	VG3 2250-2380 P1	**250527**
765	VG3 2250-0765 P1	**250508**	1615	VG3 2250-1615 P1	**250518**			
850	VG3 2250-0850 P1	**250509**	1700	VG3 2250-1700 P1	**250519**			

VG 2250 P2 GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE

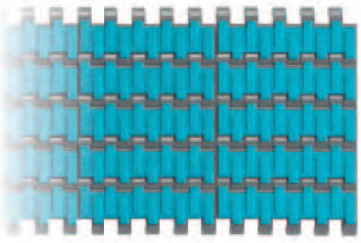

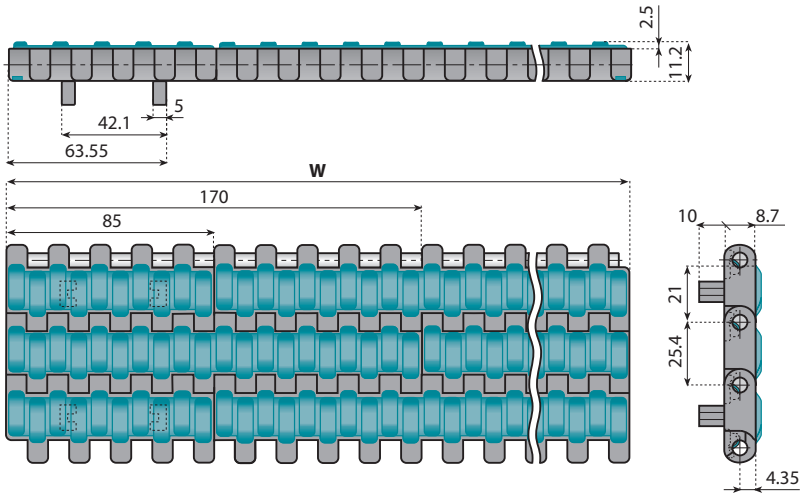


Version with two positioners
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343


TYPE VG 2250 P2



Weight: 8.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2250-0085 P2	**250600**	935	VG 2250-0935 P2	**250610**	1785	VG 2250-1785 P2	**250620**
170	VG 2250-0170 P2	**250601**	1020	VG 2250-1020 P2	**250611**	1870	VG 2250-1870 P2	**250621**
255	VG 2250-0255 P2	**250602**	1105	VG 2250-1105 P2	**250612**	1955	VG 2250-1955 P2	**250622**
340	VG 2250-0340 P2	**250603**	1190	VG 2250-1190 P2	**250613**	2040	VG 2250-2040 P2	**250623**
425	VG 2250-0425 P2	**250604**	1275	VG 2250-1275 P2	**250614**	2125	VG 2250-2125 P2	**250624**
510	VG 2250-0510 P2	**250605**	1360	VG 2250-1360 P2	**250615**	2210	VG 2250-2210 P2	**250625**
595	VG 2250-0595 P2	**250606**	1445	VG 2250-1445 P2	**250616**	2295	VG 2250-2295 P2	**250626**
680	VG 2250-0680 P2	**250607**	1530	VG 2250-1530 P2	**250617**	2380	VG 2250-2380 P2	**250627**
765	VG 2250-0765 P2	**250608**	1615	VG 2250-1615 P2	**250618**			
850	VG 2250-0850 P2	**250609**	1700	VG 2250-1700 P2	**250619**			


TYPE VG2-2250 P2



Weight: 8.1 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2250-0085 P2	**250700**	935	VG2 2250-0935 P2	**250710**	1785	VG2 2250-1785 P2	**250720**
170	VG2 2250-0170 P2	**250701**	1020	VG2 2250-1020 P2	**250711**	1870	VG2 2250-1870 P2	**250721**
255	VG2 2250-0255 P2	**250702**	1105	VG2 2250-1105 P2	**250712**	1955	VG2 2250-1955 P2	**250722**
340	VG2 2250-0340 P2	**250703**	1190	VG2 2250-1190 P2	**250713**	2040	VG2 2250-2040 P2	**250723**
425	VG2 2250-0425 P2	**250704**	1275	VG2 2250-1275 P2	**250714**	2125	VG2 2250-2125 P2	**250724**
510	VG2 2250-0510 P2	**250705**	1360	VG2 2250-1360 P2	**250715**	2210	VG2 2250-2210 P2	**250725**
595	VG2 2250-0595 P2	**250706**	1445	VG2 2250-1445 P2	**250716**	2295	VG2 2250-2295 P2	**250726**
680	VG2 2250-0680 P2	**250707**	1530	VG2 2250-1530 P2	**250717**	2380	VG2 2250-2380 P2	**250727**
765	VG2 2250-0765 P2	**250708**	1615	VG2 2250-1615 P2	**250718**			
850	VG2 2250-0850 P2	**250709**	1700	VG2 2250-1700 P2	**250719**			

TYPE VG3-2250 P2




Weight: 7.8 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2250-0085 P2	**250800**	935	VG3 2250-0935 P2	**250810**	1785	VG3 2250-1785 P2	**250820**
170	VG3 2250-0170 P2	**250801**	1020	VG3 2250-1020 P2	**250811**	1870	VG3 2250-1870 P2	**250821**
255	VG3 2250-0255 P2	**250802**	1105	VG3 2250-1105 P2	**250812**	1955	VG3 2250-1955 P2	**250822**
340	VG3 2250-0340 P2	**250803**	1190	VG3 2250-1190 P2	**250813**	2040	VG3 2250-2040 P2	**250823**
425	VG3 2250-0425 P2	**250804**	1275	VG3 2250-1275 P2	**250814**	2125	VG3 2250-2125 P2	**250824**
510	VG3 2250-0510 P2	**250805**	1360	VG3 2250-1360 P2	**250815**	2210	VG3 2250-2210 P2	**250825**
595	VG3 2250-0595 P2	**250806**	1445	VG3 2250-1445 P2	**250816**	2295	VG3 2250-2295 P2	**250826**
680	VG3 2250-0680 P2	**250807**	1530	VG3 2250-1530 P2	**250817**	2380	VG3 2250-2380 P2	**250827**
765	VG3 2250-0765 P2	**250808**	1615	VG3 2250-1615 P2	**250818**			
850	VG3 2250-0850 P2	**250809**	1700	VG3 2250-1700 P2	**250819**			

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE (SIDE INDENT) VGS 2250

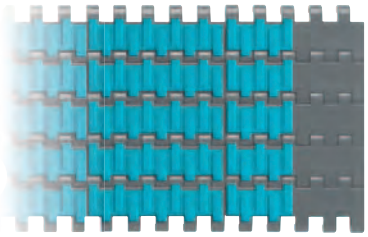

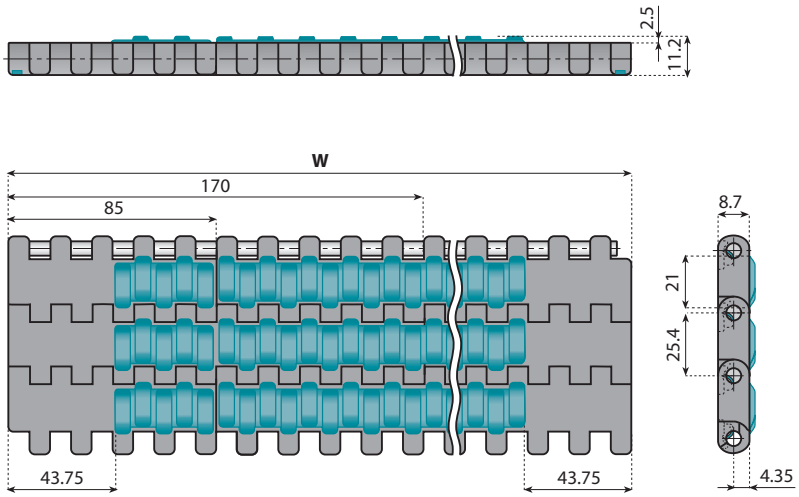


Version with side indent
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343


TYPE VGS 2250



Weight: 8.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2250-0935	**250060**	1785	VGS 2250-1785	**250070**
170	-	-	1020	VGS 2250-1020	**250061**	1870	VGS 2250-1870	**250071**
255	VGS 2250-0255	**250052**	1105	VGS 2250-1105	**250062**	1955	VGS 2250-1955	**250072**
340	VGS 2250-0340	**250053**	1190	VGS 2250-1190	**250063**	2040	VGS 2250-2040	**250073**
425	VGS 2250-0425	**250054**	1275	VGS 2250-1275	**250064**	2125	VGS 2250-2125	**250074**
510	VGS 2250-0510	**250055**	1360	VGS 2250-1360	**250065**	2210	VGS 2250-2210	**250075**
595	VGS 2250-0595	**250056**	1445	VGS 2250-1445	**250066**	2295	VGS 2250-2295	**250076**
680	VGS 2250-0680	**250057**	1530	VGS 2250-1530	**250067**	2380	VGS 2250-2380	**250077**
765	VGS 2250-0765	**250058**	1615	VGS 2250-1615	**250068**			
850	VGS 2250-0850	**250059**	1700	VGS 2250-1700	**250069**			


TYPE VGS2-2250



Weight: 8.1 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2250-0935	**250160**	1785	VGS2 2250-1785	**250170**
170	VGS2 2250-0170	**250151**	1020	VGS2 2250-1020	**250161**	1870	VGS2 2250-1870	**250171**
255	VGS2 2250-0255	**250152**	1105	VGS2 2250-1105	**250162**	1955	VGS2 2250-1955	**250172**
340	VGS2 2250-0340	**250153**	1190	VGS2 2250-1190	**250163**	2040	VGS2 2250-2040	**250173**
425	VGS2 2250-0425	**250154**	1275	VGS2 2250-1275	**250164**	2125	VGS2 2250-2125	**250174**
510	VGS2 2250-0510	**250155**	1360	VGS2 2250-1360	**250165**	2210	VGS2 2250-2210	**250175**
595	VGS2 2250-0595	**250156**	1445	VGS2 2250-1445	**250166**	2295	VGS2 2250-2295	**250176**
680	VGS2 2250-0680	**250157**	1530	VGS2 2250-1530	**250167**	2380	VGS2 2250-2380	**250177**
765	VGS2 2250-0765	**250158**	1615	VGS2 2250-1615	**250168**			
850	VGS2 2250-0850	**250159**	1700	VGS2 2250-1700	**250169**			

TYPE VGS3-2250





Weight: 7.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2250-0935	**250260**	1785	VGS3 2250-1785	**250270**
170	VGS3 2250-0170	**250251**	1020	VGS3 2250-1020	**250261**	1870	VGS3 2250-1870	**250271**
255	VGS3 2250-0255	**250252**	1105	VGS3 2250-1105	**250262**	1955	VGS3 2250-1955	**250272**
340	VGS3 2250-0340	**250253**	1190	VGS3 2250-1190	**250263**	2040	VGS3 2250-2040	**250273**
425	VGS3 2250-0425	**250254**	1275	VGS3 2250-1275	**250264**	2125	VGS3 2250-2125	**250274**
510	VGS3 2250-0510	**250255**	1360	VGS3 2250-1360	**250265**	2210	VGS3 2250-2210	**250275**
595	VGS3 2250-0595	**250256**	1445	VGS3 2250-1445	**250266**	2295	VGS3 2250-2295	**250276**
680	VGS3 2250-0680	**250257**	1530	VGS3 2250-1530	**250267**	2380	VGS3 2250-2380	**250277**
765	VGS3 2250-0765	**250258**	1615	VGS3 2250-1615	**250268**			
850	VGS3 2250-0850	**250259**	1700	VGS3 2250-1700	**250269**			

Other widths available on request.

VGS 2250 P1 GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE (SIDE INDENT)

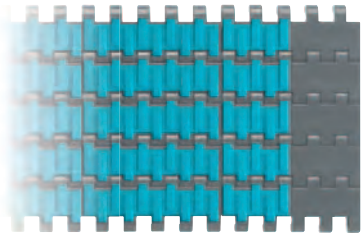

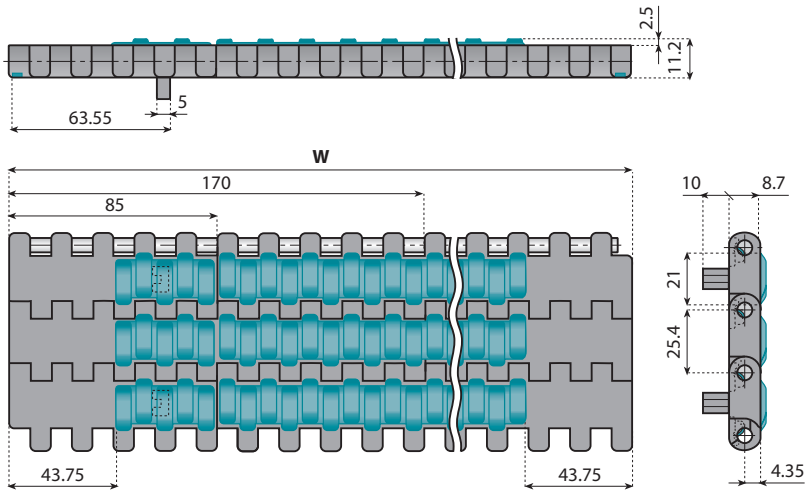


Version with side indent and one positioner
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 | Pages 318⇨320 | Pages 340⇨343


TYPE VGS 2250 P1



Weight: 8.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2250-0935 P1	**250360**	1785	VGS 2250-1785 P1	**250370**
170	-	-	1020	VGS 2250-1020 P1	**250361**	1870	VGS 2250-1870 P1	**250371**
255	VGS 2250-0255 P1	**250352**	1105	VGS 2250-1105 P1	**250362**	1955	VGS 2250-1955 P1	**250372**
340	VGS 2250-0340 P1	**250353**	1190	VGS 2250-1190 P1	**250363**	2040	VGS 2250-2040 P1	**250373**
425	VGS 2250-0425 P1	**250354**	1275	VGS 2250-1275 P1	**250364**	2125	VGS 2250-2125 P1	**250374**
510	VGS 2250-0510 P1	**250355**	1360	VGS 2250-1360 P1	**250365**	2210	VGS 2250-2210 P1	**250375**
595	VGS 2250-0595 P1	**250356**	1445	VGS 2250-1445 P1	**250366**	2295	VGS 2250-2295 P1	**250376**
680	VGS 2250-0680 P1	**250357**	1530	VGS 2250-1530 P1	**250367**	2380	VGS 2250-2380 P1	**250377**
765	VGS 2250-0765 P1	**250358**	1615	VGS 2250-1615 P1	**250368**			
850	VGS 2250-0850 P1	**250359**	1700	VGS 2250-1700 P1	**250369**			


TYPE VGS2-2250 P1



Weight: 8.1 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2250-0935 P1	**250460**	1785	VGS2 2250-1785 P1	**250470**
170	VGS2-2250-0170 P1	**250451**	1020	VGS2 2250-1020 P1	**250461**	1870	VGS2 2250-1870 P1	**250471**
255	VGS2 2250-0255 P1	**250452**	1105	VGS2 2250-1105 P1	**250462**	1955	VGS2 2250-1955 P1	**250472**
340	VGS2 2250-0340 P1	**250453**	1190	VGS2 2250-1190 P1	**250463**	2040	VGS2 2250-2040 P1	**250473**
425	VGS2 2250-0425 P1	**250454**	1275	VGS2 2250-1275 P1	**250464**	2125	VGS2 2250-2125 P1	**250474**
510	VGS2 2250-0510 P1	**250455**	1360	VGS2 2250-1360 P1	**250465**	2210	VGS2 2250-2210 P1	**250475**
595	VGS2 2250-0595 P1	**250456**	1445	VGS2 2250-1445 P1	**250466**	2295	VGS2 2250-2295 P1	**250476**
680	VGS2 2250-0680 P1	**250457**	1530	VGS2 2250-1530 P1	**250467**	2380	VGS2 2250-2380 P1	**250477**
765	VGS2 2250-0765 P1	**250458**	1615	VGS2 2250-1615 P1	**250468**			
850	VGS2 2250-0850 P1	**250459**	1700	VGS2 2250-1700 P1	**250469**			

TYPE VGS3-2250 P1




Weight: 7.8 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2250-0935 P1	**250560**	1785	VGS3 2250-1785 P1	**250570**
170	-	-	1020	VGS3 2250-1020 P1	**250561**	1870	VGS3 2250-1870 P1	**250571**
255	VGS3 2250-0255 P1	**250552**	1105	VGS3 2250-1105 P1	**250562**	1955	VGS3 2250-1955 P1	**250572**
340	VGS3 2250-0340 P1	**250553**	1190	VGS3 2250-1190 P1	**250563**	2040	VGS3 2250-2040 P1	**250573**
425	VGS3 2250-0425 P1	**250554**	1275	VGS3 2250-1275 P1	**250564**	2125	VGS3 2250-2125 P1	**250574**
510	VGS3 2250-0510 P1	**250555**	1360	VGS3 2250-1360 P1	**250565**	2210	VGS3 2250-2210 P1	**250575**
595	VGS3 2250-0595 P1	**250556**	1445	VGS3 2250-1445 P1	**250566**	2295	VGS3 2250-2295 P1	**250576**
680	VGS3 2250-0680 P1	**250557**	1530	VGS3 2250-1530 P1	**250567**	2380	VGS3 2250-2380 P1	**250577**
765	VGS3 2250-0765 P1	**250558**	1615	VGS3 2250-1615 P1	**250568**			
850	VGS3 2250-0850 P1	**250559**	1700	VGS3 2250-1700 P1	**250569**			

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

GRIP BELTS (PITCH 1" - 25.4 MM) WITH HIGH FRICTION SURFACE (SIDE INDENT) VGS 2250 P2

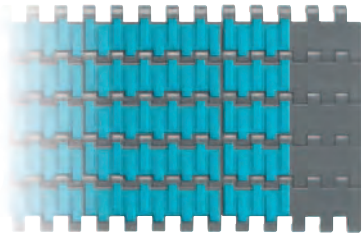

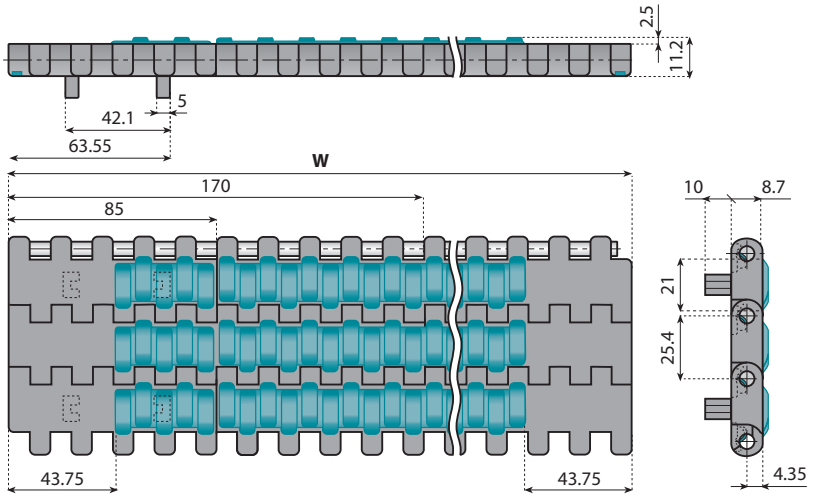


Version with side indent and two positioners
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 25.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤1.700mm: 1,524m belt length
belt width > 1.700mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 318⇨320 Pages 340⇨343


TYPE VGS 2250 P2



Weight: 8.7 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2250-0935 P2	**250660**	1785	VGS 2250-1785 P2	**250670**
170	-	-	1020	VGS 2250-1020 P2	**250661**	1870	VGS 2250-1870 P2	**250671**
255	VGS 2250-0255 P2	**250652**	1105	VGS 2250-1105 P2	**250662**	1955	VGS 2250-1955 P2	**250672**
340	VGS 2250-0340 P2	**250653**	1190	VGS 2250-1190 P2	**250663**	2040	VGS 2250-2040 P2	**250673**
425	VGS 2250-0425 P2	**250654**	1275	VGS 2250-1275 P2	**250664**	2125	VGS 2250-2125 P2	**250674**
510	VGS 2250-0510 P2	**250655**	1360	VGS 2250-1360 P2	**250665**	2210	VGS 2250-2210 P2	**250675**
595	VGS 2250-0595 P2	**250656**	1445	VGS 2250-1445 P2	**250666**	2295	VGS 2250-2295 P2	**250676**
680	VGS 2250-0680 P2	**250657**	1530	VGS 2250-1530 P2	**250667**	2380	VGS 2250-2380 P2	**250677**
765	VGS 2250-0765 P2	**250658**	1615	VGS 2250-1615 P2	**250668**			
850	VGS 2250-0850 P2	**250659**	1700	VGS 2250-1700 P2	**250669**			


TYPE VGS2-2250 P2



Weight: 8.1 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2250-0935 P2	**250760**	1785	VGS2 2250-1785 P2	**250770**
170	VGS2 2250-0170 P2	**250751**	1020	VGS2 2250-1020 P2	**250761**	1870	VGS2 2250-1870 P2	**250771**
255	VGS2 2250-0255 P2	**250752**	1105	VGS2 2250-1105 P2	**250762**	1955	VGS2 2250-1955 P2	**250772**
340	VGS2 2250-0340 P2	**250753**	1190	VGS2 2250-1190 P2	**250763**	2040	VGS2 2250-2040 P2	**250773**
425	VGS2 2250-0425 P2	**250754**	1275	VGS2 2250-1275 P2	**250764**	2125	VGS2 2250-2125 P2	**250774**
510	VGS2 2250-0510 P2	**250755**	1360	VGS2 2250-1360 P2	**250765**	2210	VGS2 2250-2210 P2	**250775**
595	VGS2 2250-0595 P2	**250756**	1445	VGS2 2250-1445 P2	**250766**	2295	VGS2 2250-2295 P2	**250776**
680	VGS2 2250-0680 P2	**250757**	1530	VGS2 2250-1530 P2	**250767**	2380	VGS2 2250-2380 P2	**250777**
765	VGS2 2250-0765 P2	**250758**	1615	VGS2 2250-1615 P2	**250768**			
850	VGS2 2250-0850 P2	**250759**	1700	VGS2 2250-1700 P2	**250769**			

TYPE VGS3-2250 P2



Weight: 7.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2250-0935 P2	**250860**	1785	VGS3 2250-1785 P2	**250870**
170	-	-	1020	VGS3 2250-1020 P2	**250861**	1870	VGS3 2250-1870 P2	**250871**
255	VGS3 2250-0255 P2	**250852**	1105	VGS3 2250-1105 P2	**250862**	1955	VGS3 2250-1955 P2	**250872**
340	VGS3 2250-0340 P2	**250853**	1190	VGS3 2250-1190 P2	**250863**	2040	VGS3 2250-2040 P2	**250873**
425	VGS3 2250-0425 P2	**250854**	1275	VGS3 2250-1275 P2	**250864**	2125	VGS3 2250-2125 P2	**250874**
510	VGS3 2250-0510 P2	**250855**	1360	VGS3 2250-1360 P2	**250865**	2210	VGS3 2250-2210 P2	**250875**
595	VGS3 2250-0595 P2	**250856**	1445	VGS3 2250-1445 P2	**250866**	2295	VGS3 2250-2295 P2	**250876**
680	VGS3 2250-0680 P2	**250857**	1530	VGS3 2250-1530 P2	**250867**	2380	VGS3 2250-2380 P2	**250877**
765	VGS3 2250-0765 P2	**250858**	1615	VGS3 2250-1615 P2	**250868**			
850	VGS3 2250-0850 P2	**250859**	1700	VGS3 2250-1700 P2	**250869**			

Other widths available on request.

2250 BELTS WITH FLIGHTS


Our 2250 series modular plastic belts can now be equipped with flights to convey products up an incline. The flights can be integrated into Flat Top or Flush Grid belts and can be made in different FDA approved materials and in different colors.


The height of the flights is 2 inch, but also 1 inch and 3 inch height can be molded.
The molded quality guarantees a smooth and hygienic product. It is easy to clean.

In order to facilitate a proper support of the belts in the return part of the conveyor, a belt can be made with side indents on the flights.
The side indent can be 17, 34 or 51 mm with 51 mm being the standard indent. For wider belts it is even possible to have 1, 2 or 3 notches in between the flights.

The distance between 2 rows of flights can be made as required. You can just indicate the pitch between the rows that carry the flights.


Example modules:

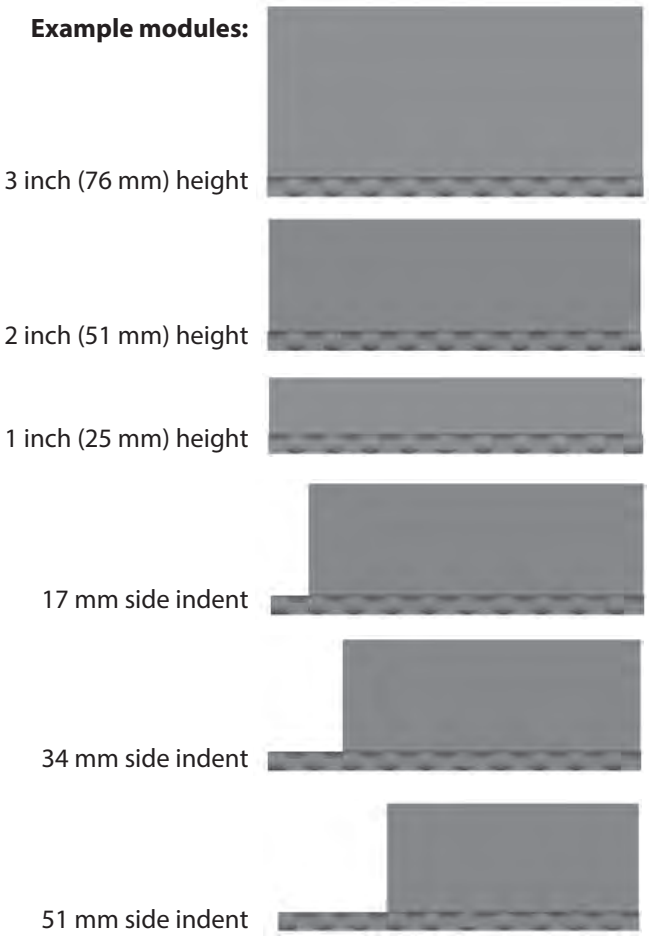


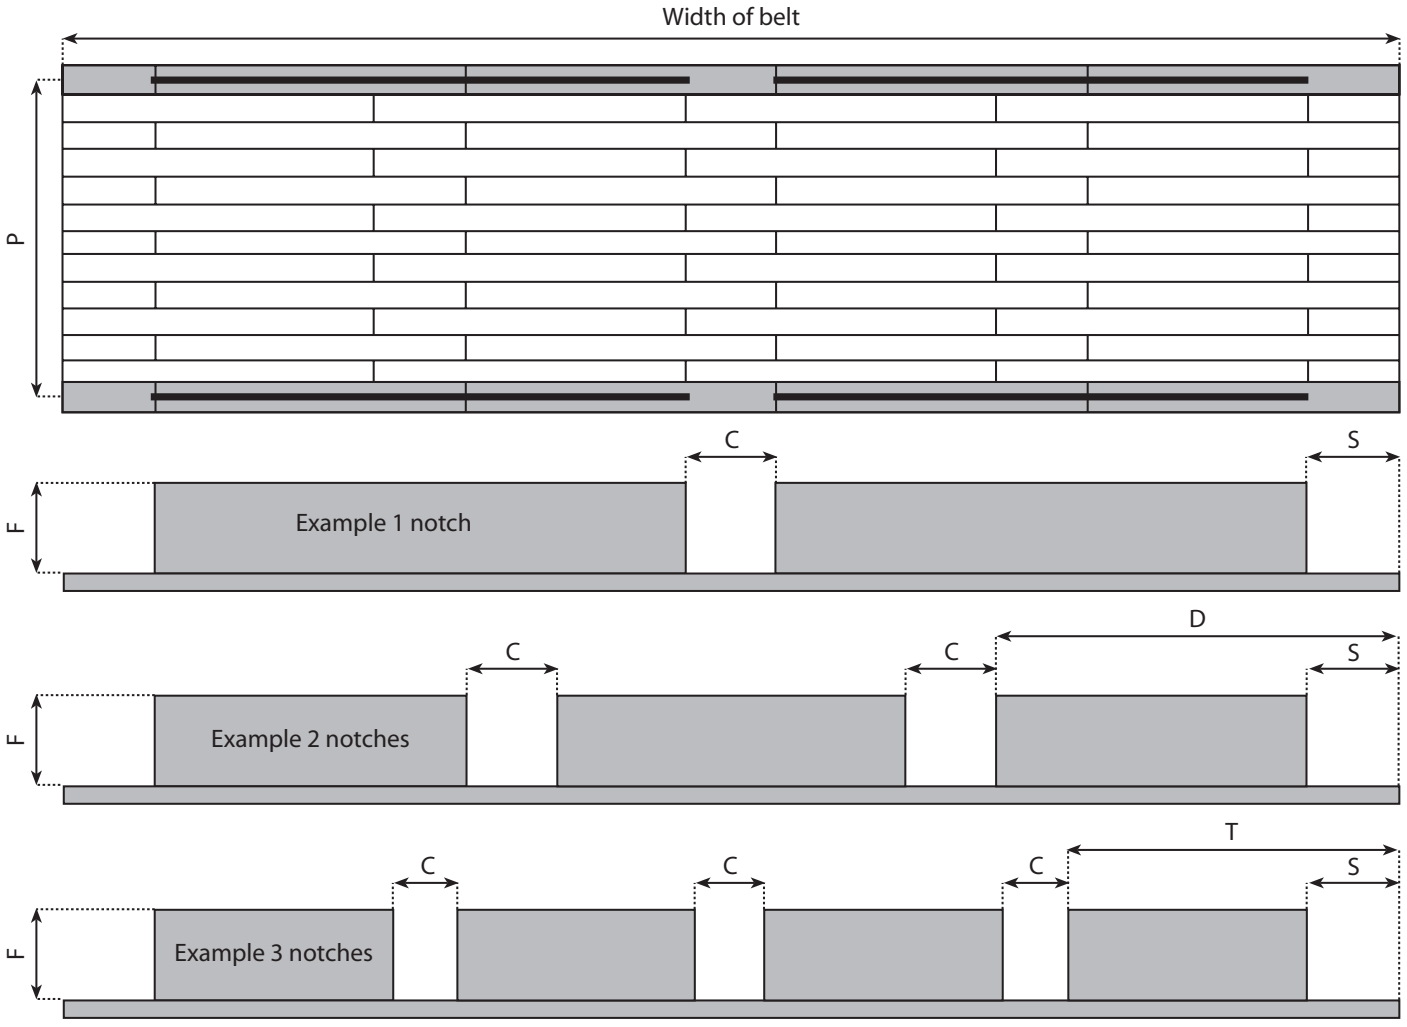


 © System Plast S.r.l. , 2012 - All Rights Reserved


Flat Top

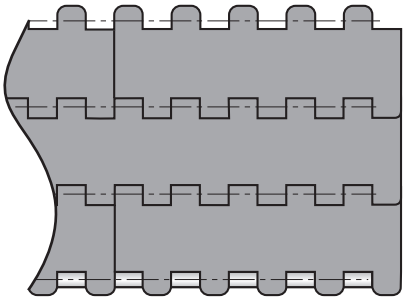



Flush grid

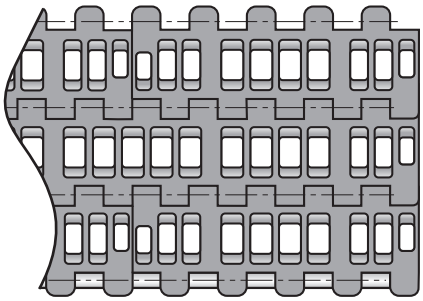







Below you see an example of a questionnaire. If you select the belt version and tick the boxes of the dimensions that you require, we know exactly what belt to produce!

Questionnaire belt with flights			
Series	☐ 2250		
Style	☐ Flat Top ☐ Flush Grid		
Width in mm	☐ Standard: multiples of 85 mm ☐ Special: multiples of 17 mm	☐ ☐	
Material	☐ LFG (POM dark grey) ☐ LFW (POM white) ☐ PPW (PP white)		☐ Different: Color:
Height of flight [F]	☐ Preferred: 2 inch (51 mm)		☐ 1 inch (25 mm) ☐ 3 inch (76 mm; maximum) ☐ Special different: mm
Pitch of flights [P]	1 row of flights every:	☐	pitches
Side indent [S]	☐ Standard: no side indent ☐ Standard: 51 mm		☐ 17 mm ☐ 34 mm ☐ Special different: mm
Notch	☐ Standard: no notch ☐ Standard: 1 notch in centre		☐ Special: 2 notches symmetrical ☐ Special: 3 notches symmetrical
Width of notch(es) [C] in mm	☐ Standard: multiples of 17 mm	☐	☐ Special different: ☐
Distance from side of outer notch to side of belt in mm	☐ 2 notches, distance D ☐ 3 notches, distance T	☐ ☐	

2253 RT ROLLER TOP IMPERIAL SIZE (PITCH 1" - 25.4 mm)

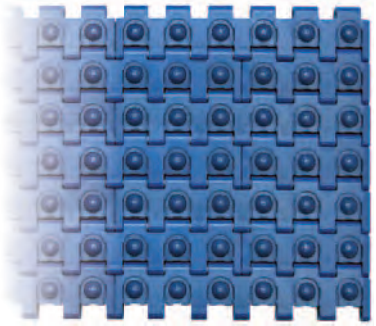

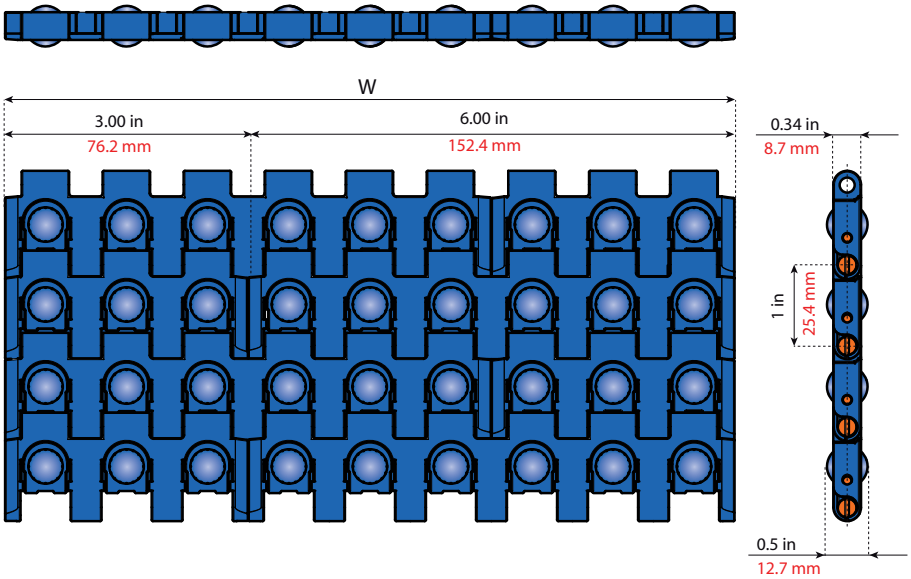



Backflex radius:
40 mm - 1.575 inch.
Max load capacity:
9.000 N/m - 617 lbs/ft
Max load per ball: 0,5 kg
Weight: 10,5 kg/m² - 2.15 lb/ft²
Ball material:.Polyamide
Standard length:
Up to 9 inch width: 1.016 mm - 40 inch
Above 9 inch width: 508 mm - 20 inch
Standard pin material: PBT (white)

Standard Material

LFB

Low Friction Acetal (standard material color Blue)

MATERIAL Pages 4⇨7 Pages 320 Pages 340⇨343


Width W		Belts Ref.	Code
inch	mm		
3.00	76	2253 - 0003 RT	**261400LFB**
6.00	152	2253 - 0006 RT	**261401LFB**
9.00	229	2253 - 0009 RT	**261402LFB**
12.00	305	2253 - 0012 RT	**261403LFB**
15.00	381	2253 - 0015 RT	**261404LFB**
18.00	457	2253 - 0018 RT	**261405LFB**
21.00	533	2253 - 0021 RT	**261406LFB**
24.00	610	2253 - 0024 RT	**261407LFB**
27.00	686	2253 - 0027 RT	**261408LFB**
30.00	762	2253 - 0030 RT	**261409LFB**
33.00	838	2253 - 0033 RT	**261410LFB**
36.00	914	2253 - 0036 RT	**261411LFB**
39.00	991	2253 - 0039 RT	**261412LFB**
42.00	1067	2253 - 0042 RT	**261413LFB**
45.00	1143	2253 - 0045 RT	**261414LFB**

Width W		Belts Ref.	Code
inch	mm		
48.00	1219	2253 - 0048 RT	**261415LFB**
51.00	1295	2253 - 0051 RT	**261416LFB**
54.00	1372	2253 - 0054 RT	**261417LFB**
57.00	1448	2253 - 0057 RT	**261418LFB**
60.00	1524	2253 - 0060 RT	**261419LFB**
63.00	1600	2253 - 0063 RT	**261420LFB**
66.00	1676	2253 - 0066 RT	**261421LFB**
69.00	1753	2253 - 0069 RT	**261422LFB**
72.00	1829	2253 - 0072 RT	**261423LFB**
75.00	1905	2253 - 0075 RT	**261424LFB**
78.00	1981	2253 - 0078 RT	**261425LFB**
81.00	2057	2253 - 0081 RT	**261426LFB**
84.00	2134	2253 - 0084 RT	**261427LFB**
87.00	2210	2253 - 0087 RT	**261428LFB**
90.00	2286	2253 - 0090 RT	**261429LFB**

 © System Plast S.r.l. , 2012 - All Rights Reserved


Double speed

When the belt is moving and the rollers are in contact with a fixed support area, the rollers will start rotating. This will result in movement of the product with a speed that is twice the speed of the belt. This function is very useful when products must be separated from each other. This function enables the belt to run at lower speed, and that improves belt life and reduces energy consumption.

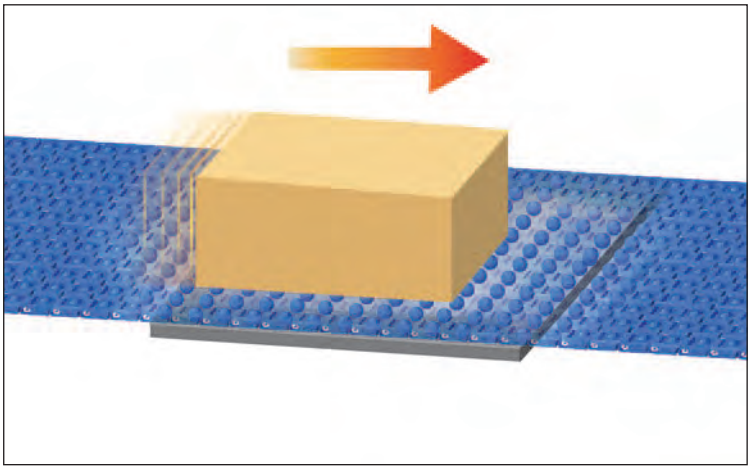

Rotation with product moving


When two parallel running belts are positioned underneath the Roller Top belts, and running in different directions, containers in the middle of the belt will rotate. This condition is ideal for applications where product orientation is important, for example, the infeed to a palletizer. In this case, containers can be moving forward while rotating.

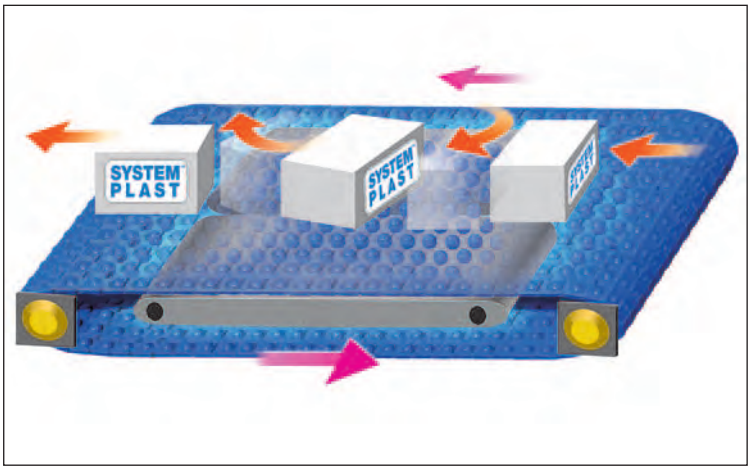

Rotation with product stopped


When using a rotating disc underneath the Roller Top belt, you can have optimum control of the rotation of the product.

The Roller Top belt must be stopped during rotation.

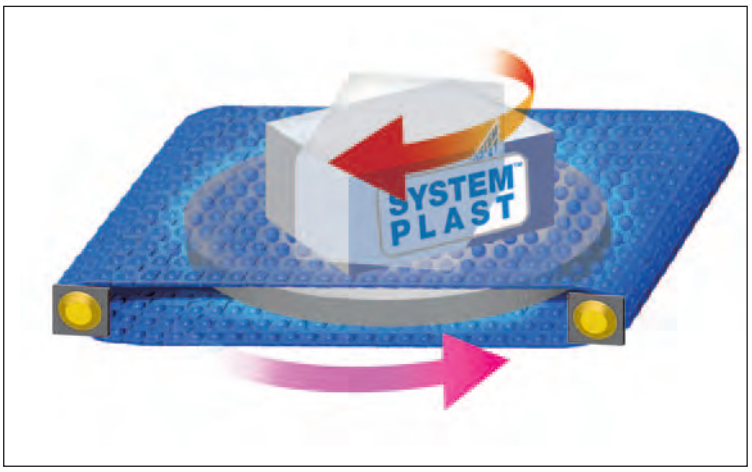



Lateral movement


With a secondary activated belt positioned 90 degrees to the travel direction of the Roller Top belt, the system can transfer your package without external guides. This scenario is ideal for reject conveyors or any application requiring rapid 90 degree transfer of the conveyed item. Product positioning can also be achieved by this configuration.

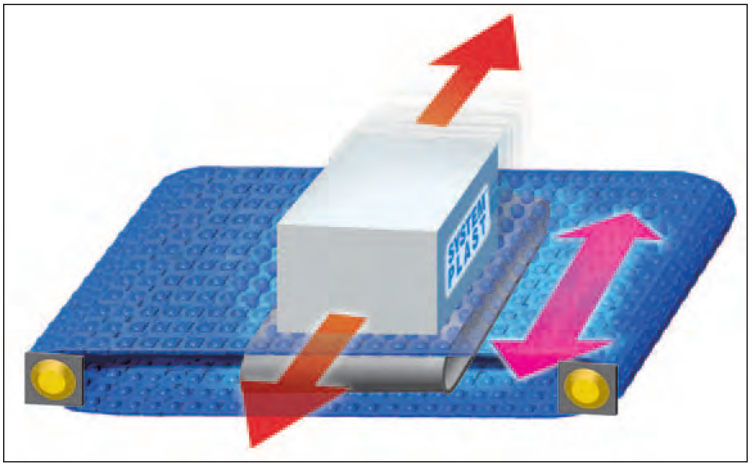


2253 FT FLAT TOP IMPERIAL SIZE BELTS (Pitch 1" - 25.4 mm)

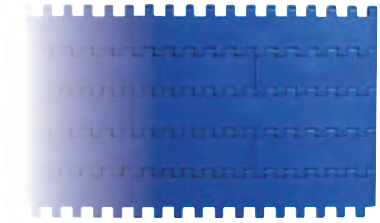

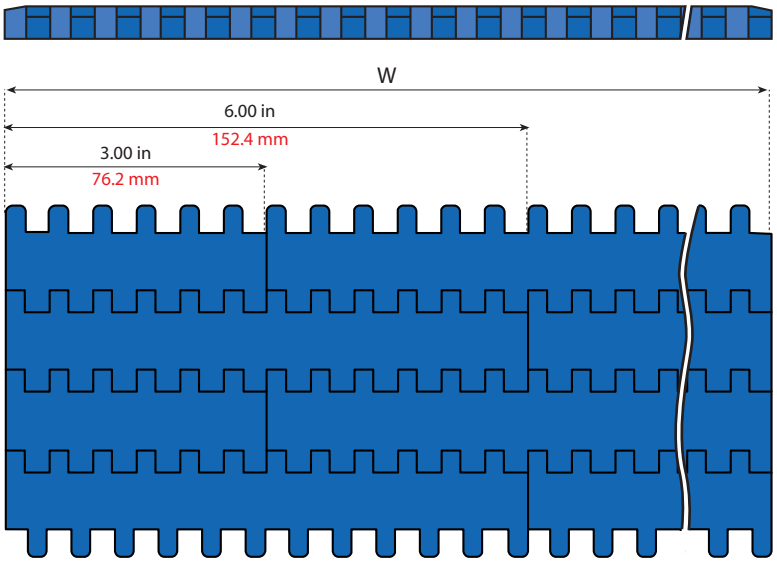

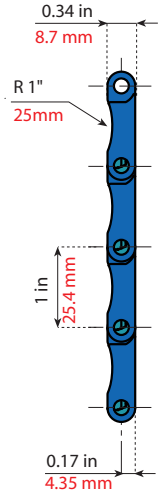



Backflex radius: 40 mm - 1.575 inch.
Max load capacity: 25.000 N/m - 1.710 lbs/ft
Weight: 7.3 Kg/m2 - 1.5 lb/ft2
Standard pin material: PBT (white)
Standard length:
belt width ≤ 15 inch: 3,048m belt length
belt width > 15 inch, but ≤66 inch: 1,524m belt length
belt width > 66 inch: belt length on request

MATERIAL Pages 4⇨7 Pages 320 Pages 340⇨343

For BELTS AVAILABLE IN "NGG" material just add "NGG" to part number (example "code 26550-NGG")

On request and for adequate quantities these chains can be produced in:

LFG	NGG
Low Friction Acetal Resin	New Generation

Standard Material

LFB
Low Friction Acetal (standard material color Blue)

Width W		Belts Ref.	Code
inch	mm		
3.00	76	2253-0003 FT	**26550LFB**
6.00	152	2253-0006 FT	**26551LFB**
9.00	229	2253-0009 FT	**26552LFB**
12.00	305	2253-0012 FT	**26553LFB**
15.00	381	2253-0015 FT	**26554LFB**
18.00	457	2253-0018 FT	**26555LFB**
21.00	533	2253-0021 FT	**26556LFB**
24.00	610	2253-0024 FT	**26557LFB**
27.00	686	2253-0027 FT	**26558LFB**
30.00	762	2253-0030 FT	**26559LFB**

Width W		Belts Ref.	Code
inch	mm		
33.00	838	2253-0033 FT	**26560LFB**
36.00	914	2253-0036 FT	**26561LFB**
39.00	991	2253-0039 FT	**26562LFB**
42.00	1067	2253-0042 FT	**26563LFB**
45.00	1143	2253-0045 FT	**26564LFB**
48.00	1219	2253-0048 FT	**26565LFB**
51.00	1295	2253-0051 FT	**26566LFB**
54.00	1372	2253-0054 FT	**26567LFB**
57.00	1448	2253-0057 FT	**26568LFB**
60.00	1524	2253-0060 FT	**26569LFB**

Width W		Belts Ref.	Code
inch	mm		
63.00	1600	2253-0063 FT	**26570LFB**
66.00	1676	2253-0066 FT	**26571LFB**
69.00	1753	2253-0069 FT	**26572LFB**
72.00	1829	2253-0072 FT	**26573LFB**
75.00	1905	2253-0075 FT	**26574LFB**
78.00	1981	2253-0078 FT	**26575LFB**
81.00	2057	2253-0081 FT	**26576LFB**
84.00	2134	2253-0084 FT	**26577LFB**
87.00	2210	2253-0087 FT	**26578LFB**
90.00	2286	2253-0090 FT	**26579LFB**

Width W		Belts Ref.	Code
inch	mm		
93.00	2362	2253-0093 FT	**26580LFB**
96.00	2438	2253-0096 FT	**26581LFB**
99.00	2515	2253-0099 FT	**26582LFB**
102.00	2591	2253-0102 FT	**26583LFB**
105.00	2667	2253-0105 FT	**26584LFB**
108.00	2743	2253-0108 FT	**26585LFB**
111.00	2819	2253-0111 FT	**26586LFB**
114.00	2896	2253-0114 FT	**26587LFB**
117.00	2972	2253-0117 FT	**26588LFB**
120.00	3048	2253-0120 FT	**26589LFB**

 © System Plast S.r.l. , 2012 - All Rights Reserved

PLASTIC MODULAR CONVEYOR BELT


Series	*Pages*
2251 FT	150 → 159
2251 VG	163 → 168
LBP belts with low noise accumulation rollers	
2251LBP	169 → 171
2252 FT	160 → 161
2252 PT	162


All our straight running belts of the 2251 and 2252 series have a pitch of 25.4 mm (1 inch) and a height of 12.7 mm (½ inch).

BENEFITS AND FEATURES

- EASY INSTALLATION AND MAINTENANCE
- HIGH MECHANICAL STRENGTH AND WEAR RESISTANCE
- NO GAPS BETWEEN PARALLEL CHAINS
- EXCELLENT PRODUCT HANDLING
- INSTALLATION ON STANDARD CONVEYORS WITH 85 mm PITCH BETWEEN TRACKS (2251 SERIES)
- HIGH PERFORMANCE

2251 K330 FLAT TOP BELTS ONE TRACK

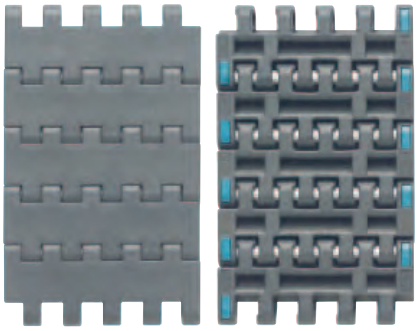

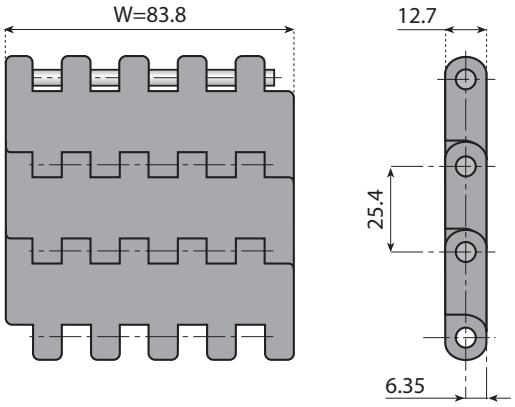

Version standard
Pin material: PBT (white)


Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2251 K330 FT	**25020**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	25	3184	14.00
NGG 2251 K330 FT	**25020NGG**	**NGG** Light Grey							

2251 K330 FTP2 FLAT TOP BELTS ONE TRACK

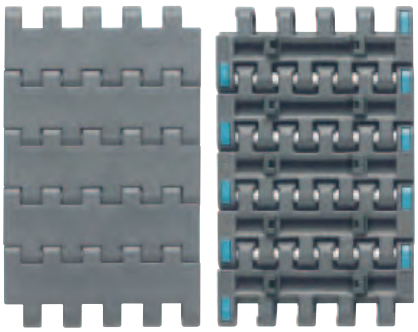

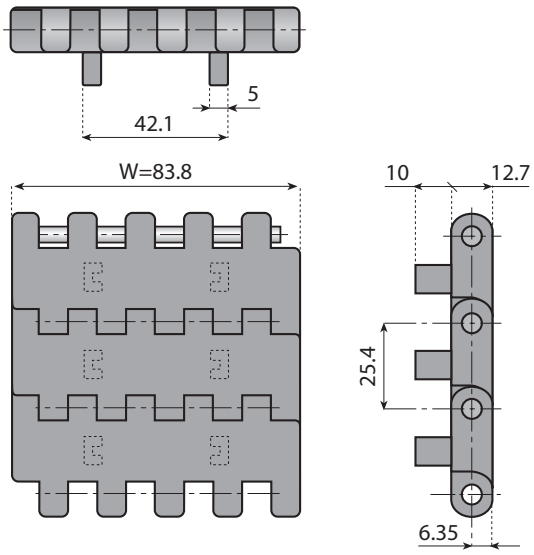

Version with two positioners
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2251 K330 FTP2	**25021**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	25	3184	14.10
NGG 2251 K330 FTP2	**25021NGG**	**NGG** Light Grey							

Standard length: 120 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLAT TOP BELTS ONE TRACK WITH TRANSFER WING 2251 K330 FTTP2

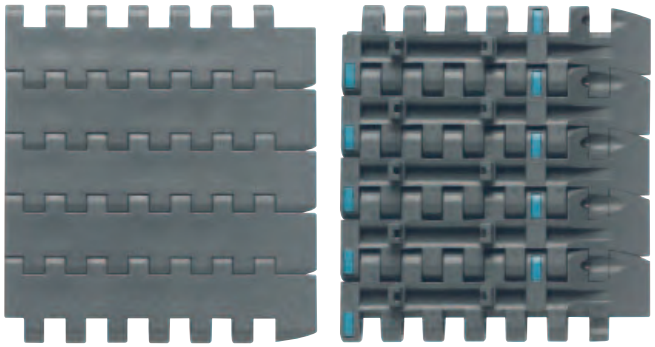

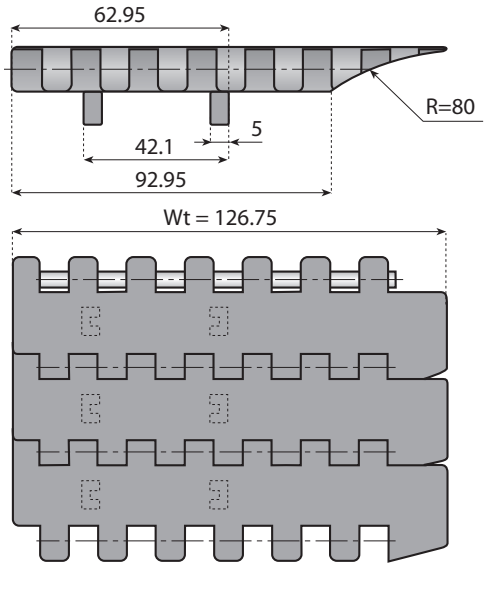

Version with two positioners and integrated active transfer wing
Pin material: PBT (white)


Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm	Max load capacity N	Weight Kg/m²
			mm	inch	mm	inch			
LFG 2251 K330 FTTP2	**25022**	**LFG** Dark Grey	83.8	3.30	25.4	1.00	30	3184	14.20
NGG 2251 K330 FTTP2	**25022NGG**	**NGG** Light Grey							

Standard length: 120 pitches (10 ft. - 3.048 m)

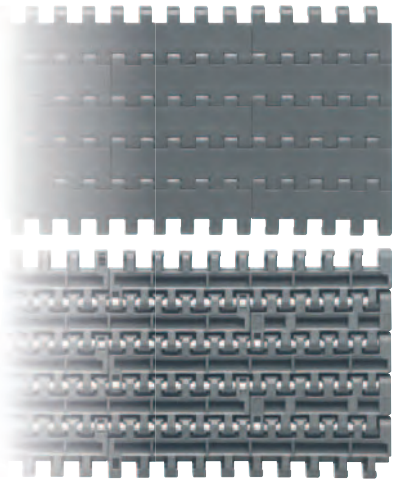

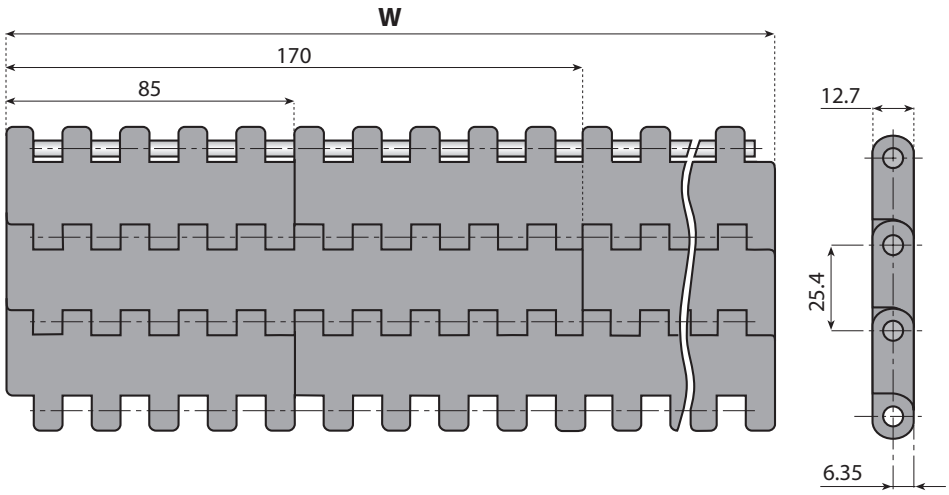

Version standard
Backflex radius: 25 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
Pages 321⇨323
Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251000-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2251-0085 FT	**251000**	935	2251-0935 FT	**251010**	1785	2251-1785 FT	**251020**	2635	2251-2635 FT	**251030**
170	2251-0170 FT	**251001**	1020	2251-1020 FT	**251011**	1870	2251-1870 FT	**251021**	2720	2251-2720 FT	**251031**
255	2251-0255 FT	**251002**	1105	2251-1105 FT	**251012**	1955	2251-1955 FT	**251022**	2805	2251-2805 FT	**251032**
340	2251-0340 FT	**251003**	1190	2251-1190 FT	**251013**	2040	2251-2040 FT	**251023**	2890	2251-2890 FT	**251033**
425	2251-0425 FT	**251004**	1275	2251-1275 FT	**251014**	2125	2251-2125 FT	**251024**	2975	2251-2975 FT	**251034**
510	2251-0510 FT	**251005**	1360	2251-1360 FT	**251015**	2210	2251-2210 FT	**251025**	3060	2251-3060 FT	**251035**
595	2251-0595 FT	**251006**	1445	2251-1445 FT	**251016**	2295	2251-2295 FT	**251026**	3145	2251-3145 FT	**251036**
680	2251-0680 FT	**251007**	1530	2251-1530 FT	**251017**	2380	2251-2380 FT	**251027**	3230	2251-3230 FT	**251037**
765	2251-0765 FT	**251008**	1615	2251-1615 FT	**251018**	2465	2251-2465 FT	**251028**	3315	2251-3315 FT	**251038**
850	2251-0850 FT	**251009**	1700	2251-1700 FT	**251019**	2550	2251-2550 FT	**251029**	3400	2251-3400 FT	**251039**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

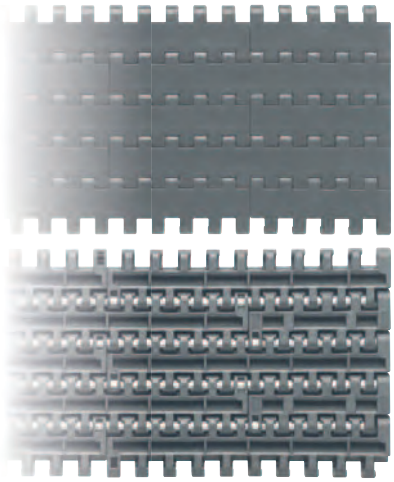

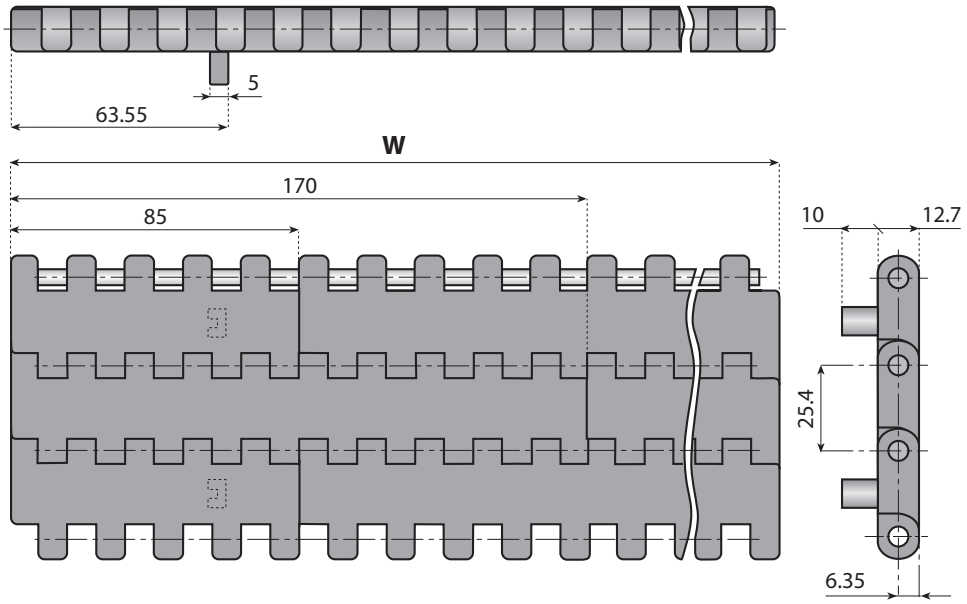

Version with one positioner
Backflex radius: 25 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7
Pages 321⇨323
Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251100-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2251-0085 FTP1	**251100**	935	2251-0935 FTP1	**251110**	1785	2251-1785 FTP1	**251120**	2635	2251-2635 FTP1	**251130**
170	2251-0170 FTP1	**251101**	1020	2251-1020 FTP1	**251111**	1870	2251-1870 FTP1	**251121**	2720	2251-2720 FTP1	**251131**
255	2251-0255 FTP1	**251102**	1105	2251-1105 FTP1	**251112**	1955	2251-1955 FTP1	**251122**	2805	2251-2805 FTP1	**251132**
340	2251-0340 FTP1	**251103**	1190	2251-1190 FTP1	**251113**	2040	2251-2040 FTP1	**251123**	2890	2251-2890 FTP1	**251133**
425	2251-0425 FTP1	**251104**	1275	2251-1275 FTP1	**251114**	2125	2251-2125 FTP1	**251124**	2975	2251-2975 FTP1	**251134**
510	2251-0510 FTP1	**251105**	1360	2251-1360 FTP1	**251115**	2210	2251-2210 FTP1	**251125**	3060	2251-3060 FTP1	**251135**
595	2251-0595 FTP1	**251106**	1445	2251-1445 FTP1	**251116**	2295	2251-2295 FTP1	**251126**	3145	2251-3145 FTP1	**251136**
680	2251-0680 FTP1	**251107**	1530	2251-1530 FTP1	**251117**	2380	2251-2380 FTP1	**251127**	3230	2251-3230 FTP1	**251137**
765	2251-0765 FTP1	**251108**	1615	2251-1615 FTP1	**251118**	2465	2251-2465 FTP1	**251128**	3315	2251-3315 FTP1	**251138**
850	2251-0850 FTP1	**251109**	1700	2251-1700 FTP1	**251119**	2550	2251-2550 FTP1	**251129**	3400	2251-3400 FTP1	**251139**

Other widths available on request.

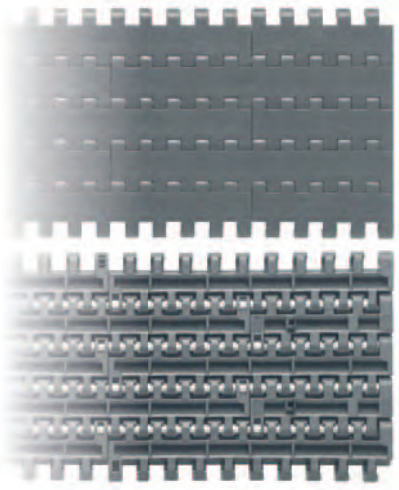

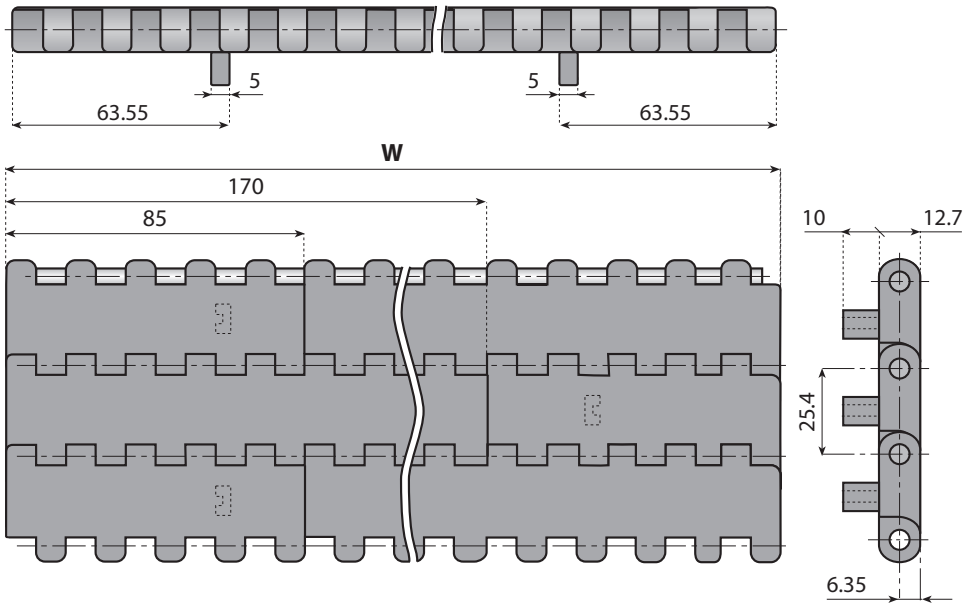

Version with one positioner on both sides
Backflex radius: 25 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 253201-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2251-0935 FTP2B	**253210**	1785	2251-1785 FTP2B	**253220**	2635	2251-2635 FTP2B	**253230**
170	2251-0170 FTP2B	**253201**	1020	2251-1020 FTP2B	**253211**	1870	2251-1870 FTP2B	**253221**	2720	2251-2720 FTP2B	**253231**
255	2251-0255 FTP2B	**253202**	1105	2251-1105 FTP2B	**253212**	1955	2251-1955 FTP2B	**253222**	2805	2251-2805 FTP2B	**253232**
340	2251-0340 FTP2B	**253203**	1190	2251-1190 FTP2B	**253213**	2040	2251-2040 FTP2B	**253223**	2890	2251-2890 FTP2B	**253233**
425	2251-0425 FTP2B	**253204**	1275	2251-1275 FTP2B	**253214**	2125	2251-2125 FTP2B	**253224**	2975	2251-2975 FTP2B	**253234**
510	2251-0510 FTP2B	**253205**	1360	2251-1360 FTP2B	**253215**	2210	2251-2210 FTP2B	**253225**	3060	2251-3060 FTP2B	**253235**
595	2251-0595 FTP2B	**253206**	1445	2251-1445 FTP2B	**253216**	2295	2251-2295 FTP2B	**253226**	3145	2251-3145 FTP2B	**253236**
680	2251-0680 FTP2B	**253207**	1530	2251-1530 FTP2B	**253217**	2380	2251-2380 FTP2B	**253227**	3230	2251-3230 FTP2B	**253237**
765	2251-0765 FTP2B	**253208**	1615	2251-1615 FTP2B	**253218**	2465	2251-2465 FTP2B	**253228**	3315	2251-3315 FTP2B	**253238**
850	2251-0850 FTP2B	**253209**	1700	2251-1700 FTP2B	**253219**	2550	2251-2550 FTP2B	**253229**	3400	2251-3400 FTP2B	**253239**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

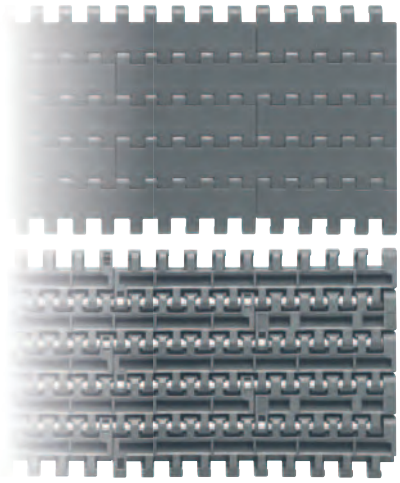

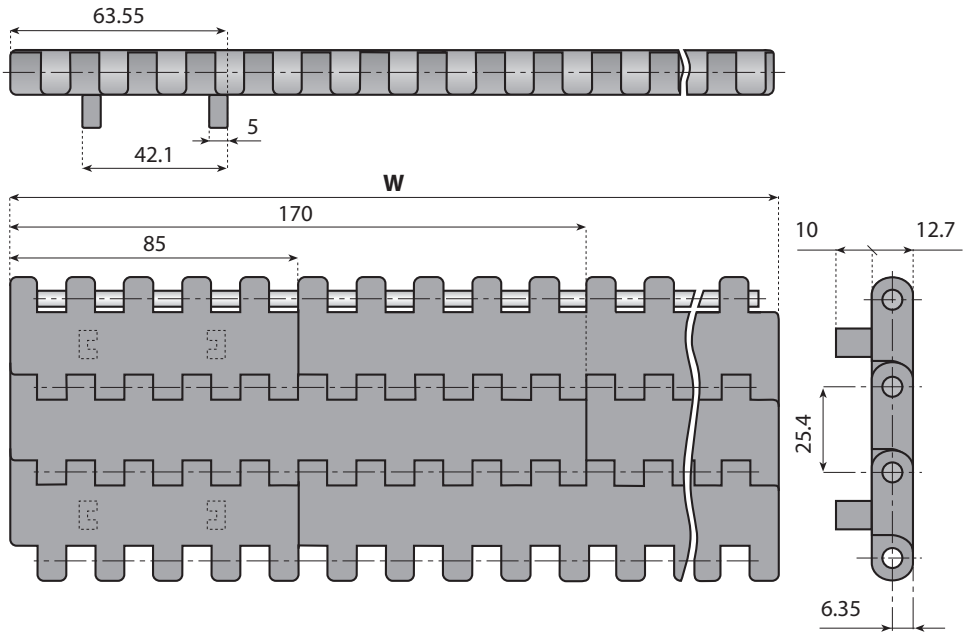

Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width ≥ 340mm, but ≤ 935mm: 1,524m belt length
belt width ≥ 1.935mm: belt lenght on request

Version with two positioners
Backflex radius: 25 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251200-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2251-0085 FTP2	**251200**	935	2251-0935 FTP2	**251210**	1785	2251-1785 FTP2	**251220**	2635	2251-2635 FTP2	**251230**
170	2251-0170 FTP2	**251201**	1020	2251-1020 FTP2	**251211**	1870	2251-1870 FTP2	**251221**	2720	2251-2720 FTP2	**251231**
255	2251-0255 FTP2	**251202**	1105	2251-1105 FTP2	**251212**	1955	2251-1955 FTP2	**251222**	2805	2251-2805 FTP2	**251232**
340	2251-0340 FTP2	**251203**	1190	2251-1190 FTP2	**251213**	2040	2251-2040 FTP2	**251223**	2890	2251-2890 FTP2	**251233**
425	2251-0425 FTP2	**251204**	1275	2251-1275 FTP2	**251214**	2125	2251-2125 FTP2	**251224**	2975	2251-2975 FTP2	**251234**
510	2251-0510 FTP2	**251205**	1360	2251-1360 FTP2	**251215**	2210	2251-2210 FTP2	**251225**	3060	2251-3060 FTP2	**251235**
595	2251-0595 FTP2	**251206**	1445	2251-1445 FTP2	**251216**	2295	2251-2295 FTP2	**251226**	3145	2251-3145 FTP2	**251236**
680	2251-0680 FTP2	**251207**	1530	2251-1530 FTP2	**251217**	2380	2251-2380 FTP2	**251227**	3230	2251-3230 FTP2	**251237**
765	2251-0765 FTP2	**251208**	1615	2251-1615 FTP2	**251218**	2465	2251-2465 FTP2	**251228**	3315	2251-3315 FTP2	**251238**
850	2251-0850 FTP2	**251209**	1700	2251-1700 FTP2	**251219**	2550	2251-2550 FTP2	**251229**	3400	2251-3400 FTP2	**251239**

Other widths available on request.

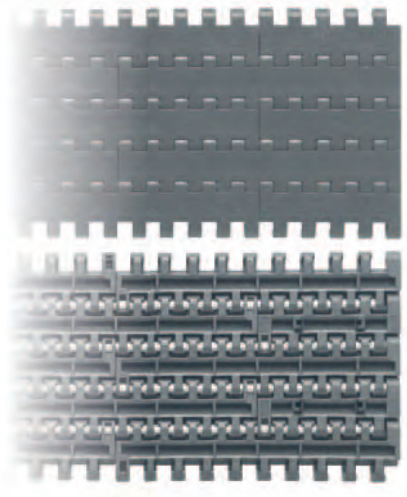

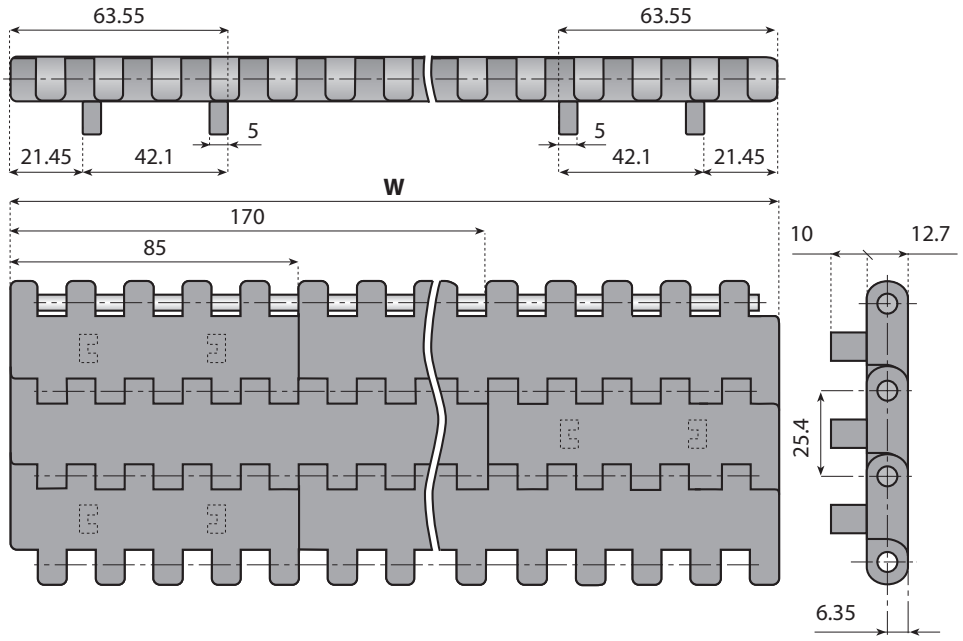

Version with two positioners on both sides
Backflex radius: 25 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 253301-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	2251-0935 FTP2BD	**253310**	1785	2251-1785 FTP2BD	**253320**	2635	2251-2635 FTP2BD	**253330**
170	2251-0170 FTP2BD	**253301**	1020	2251-1020 FTP2BD	**253311**	1870	2251-1870 FTP2BD	**253321**	2720	2251-2720 FTP2BD	**253331**
255	2251-0255 FTP2BD	**253302**	1105	2251-1105 FTP2BD	**253312**	1955	2251-1955 FTP2BD	**253322**	2805	2251-2805 FTP2BD	**253332**
340	2251-0340 FTP2BD	**253303**	1190	2251-1190 FTP2BD	**253313**	2040	2251-2040 FTP2BD	**253323**	2890	2251-2890 FTP2BD	**253333**
425	2251-0425 FTP2BD	**253304**	1275	2251-1275 FTP2BD	**253314**	2125	2251-2125 FTP2BD	**253324**	2975	2251-2975 FTP2BD	**253334**
510	2251-0510 FTP2BD	**253305**	1360	2251-1360 FTP2BD	**253315**	2210	2251-2210 FTP2BD	**253325**	3060	2251-3060 FTP2BD	**253335**
595	2251-0595 FTP2BD	**253306**	1445	2251-1445 FTP2BD	**253316**	2295	2251-2295 FTP2BD	**253326**	3145	2251-3145 FTP2BD	**253336**
680	2251-0680 FTP2BD	**253307**	1530	2251-1530 FTP2BD	**253317**	2380	2251-2380 FTP2BD	**253327**	3230	2251-3230 FTP2BD	**253337**
765	2251-0765 FTP2BD	**253308**	1615	2251-1615 FTP2BD	**253318**	2465	2251-2465 FTP2BD	**253328**	3315	2251-3315 FTP2BD	**253338**
850	2251-0850 FTP2BD	**253309**	1700	2251-1700 FTP2BD	**253319**	2550	2251-2550 FTP2BD	**253329**	3400	2251-3400 FTP2BD	**253339**

Other widths available on request.

 © System Plast S.r.l., 2012 - All Rights Reserved

FLAT TOP BELTS WITH TRANSFER WING (Pitch 1" - 25.4 mm) 2251 FTTP2

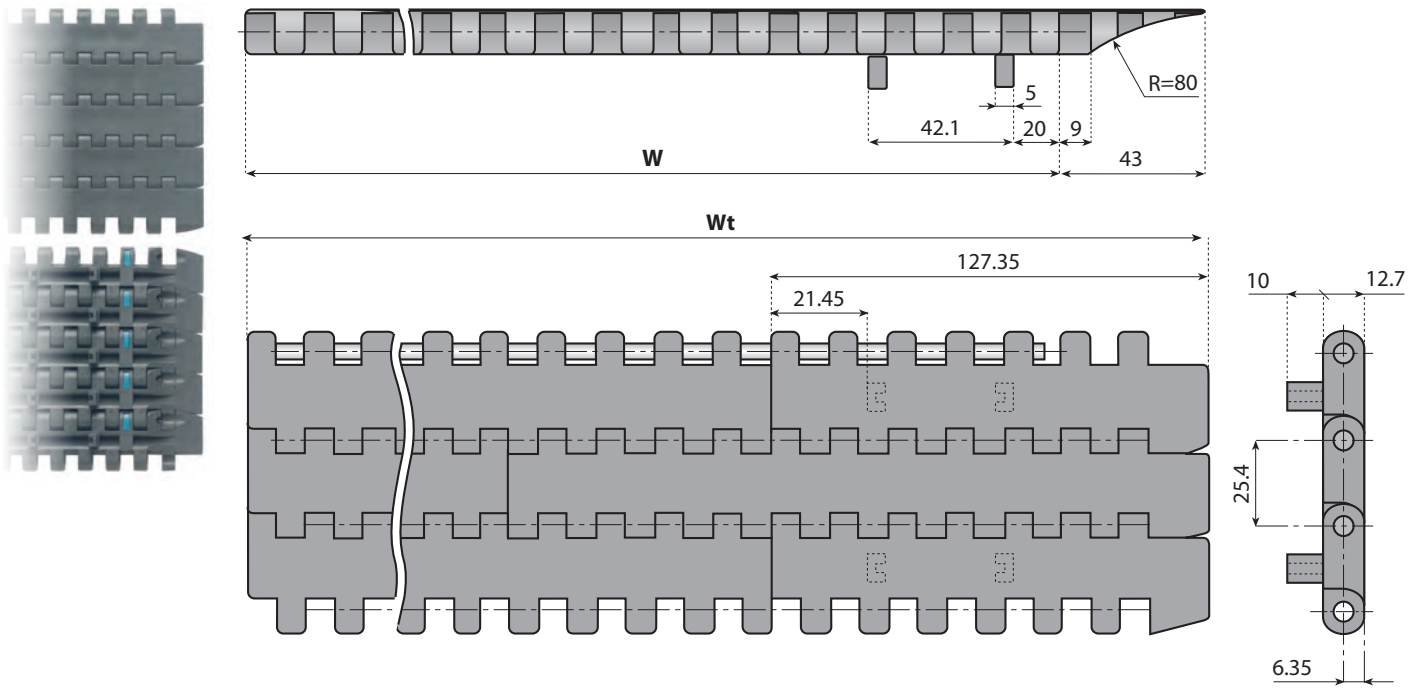

Version with two positioners and integrated active transfer wing
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251300-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2251-0085 FTTP2	**251300**	935	2251-0935 FTTP2	**251310**	1785	2251-1785 FTTP2	**251320**	2635	2251-2635 FTTP2	**251330**
170	2251-0170 FTTP2	**251301**	1020	2251-1020 FTTP2	**251311**	1870	2251-1870 FTTP2	**251321**	2720	2251-2720 FTTP2	**251331**
255	2251-0255 FTTP2	**251302**	1105	2251-1105 FTTP2	**251312**	1955	2251-1955 FTTP2	**251322**	2805	2251-2805 FTTP2	**251332**
340	2251-0340 FTTP2	**251303**	1190	2251-1190 FTTP2	**251313**	2040	2251-2040 FTTP2	**251323**	2890	2251-2890 FTTP2	**251333**
425	2251-0425 FTTP2	**251304**	1275	2251-1275 FTTP2	**251314**	2125	2251-2125 FTTP2	**251324**	2975	2251-2975 FTTP2	**251334**
510	2251-0510 FTTP2	**251305**	1360	2251-1360 FTTP2	**251315**	2210	2251-2210 FTTP2	**251325**	3060	2251-3060 FTTP2	**251335**
595	2251-0595 FTTP2	**251306**	1445	2251-1445 FTTP2	**251316**	2295	2251-2295 FTTP2	**251326**	3145	2251-3145 FTTP2	**251336**
680	2251-0680 FTTP2	**251307**	1530	2251-1530 FTTP2	**251317**	2380	2251-2380 FTTP2	**251327**	3230	2251-3230 FTTP2	**251337**
765	2251-0765 FTTP2	**251308**	1615	2251-1615 FTTP2	**251318**	2465	2251-2465 FTTP2	**251328**	3315	2251-3315 FTTP2	**251338**
850	2251-0850 FTTP2	**251309**	1700	2251-1700 FTTP2	**251319**	2550	2251-2550 FTTP2	**251329**	3400	2251-3400 FTTP2	**251339**

Other widths available on request.

2251 FTTP2-SX FLAT TOP BELTS WITH TRANSFER WING (Pitch 1" - 25.4 mm)

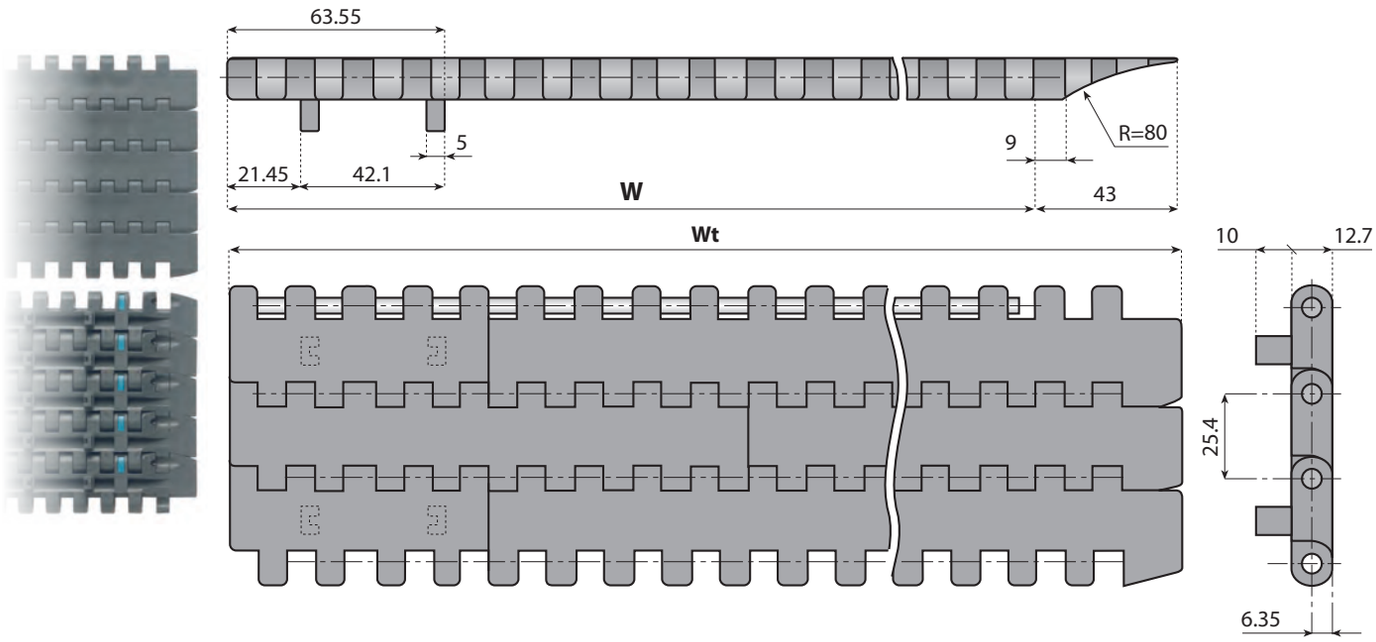

Version with two positioners and integrated active transfer wing
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7 | Pages 321⇨323 | Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251301SX-NGG")

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	2251-0085-FTTP2	**251300**	935	2251-0935-FTTP2-SX	**251310SX**	1785	2251-1785-FTTP2-SX	**251320SX**	2635	2251-2635-FTTP2-SX	**251330SX**
170	2251-0170-FTTP2-SX	**251301SX**	1020	2251-1020-FTTP2-SX	**251311SX**	1870	2251-1870-FTTP2-SX	**251321SX**	2720	2251-2720-FTTP2-SX	**251331SX**
255	2251-0255-FTTP2-SX	**251302SX**	1105	2251-1105-FTTP2-SX	**251312SX**	1955	2251-1955-FTTP2-SX	**251322SX**	2805	2251-2805-FTTP2-SX	**251332SX**
340	2251-0340-FTTP2-SX	**251303SX**	1190	2251-1190-FTTP2-SX	**251313SX**	2040	2251-2040-FTTP2-SX	**251323SX**	2890	2251-2890-FTTP2-SX	**251333SX**
425	2251-0425-FTTP2-SX	**251304SX**	1275	2251-1275-FTTP2-SX	**251314SX**	2125	2251-2125-FTTP2-SX	**251324SX**	2975	2251-2975-FTTP2-SX	**251334SX**
510	2251-0510-FTTP2-SX	**251305SX**	1360	2251-1360-FTTP2-SX	**251315SX**	2210	2251-2210-FTTP2-SX	**251325SX**	3060	2251-3060-FTTP2-SX	**251335SX**
595	2251-0595-FTTP2-SX	**251306SX**	1445	2251-1445-FTTP2-SX	**251316SX**	2295	2251-2295-FTTP2-SX	**251326SX**	3145	2251-3145-FTTP2-SX	**251336SX**
680	2251-0680-FTTP2-SX	**251307SX**	1530	2251-1530-FTTP2-SX	**251317SX**	2380	2251-2380-FTTP2-SX	**251327SX**	3230	2251-3230-FTTP2-SX	**251337SX**
765	2251-0765-FTTP2-SX	**251308SX**	1615	2251-1615-FTTP2-SX	**251318SX**	2465	2251-2465-FTTP2-SX	**251328SX**	3315	2251-3315-FTTP2-SX	**251338SX**
850	2251-0850-FTTP2-SX	**251309SX**	1700	2251-1700-FTTP2-SX	**251319SX**	2550	2251-2550-FTTP2-SX	**251329SX**	3400	2251-3400-FTTP2-SX	**251339SX**

Other widths available on request.

 © System Plast S.r.l., 2012 - All Rights Reserved

FLAT TOP BELTS (Pitch 1" - 25.4 mm)
VERSION WITH LONG TRANSFER WING

2251 FTTLP2


Version with two positioners and long integrated active transfer wing
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Weight: 12.5 Kg/m²
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request


FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 251301L-NGG")

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343

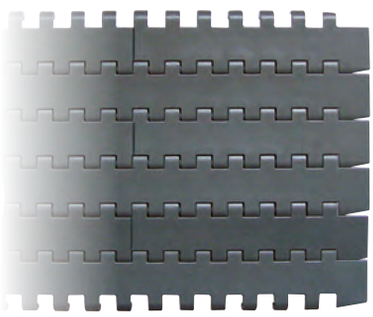


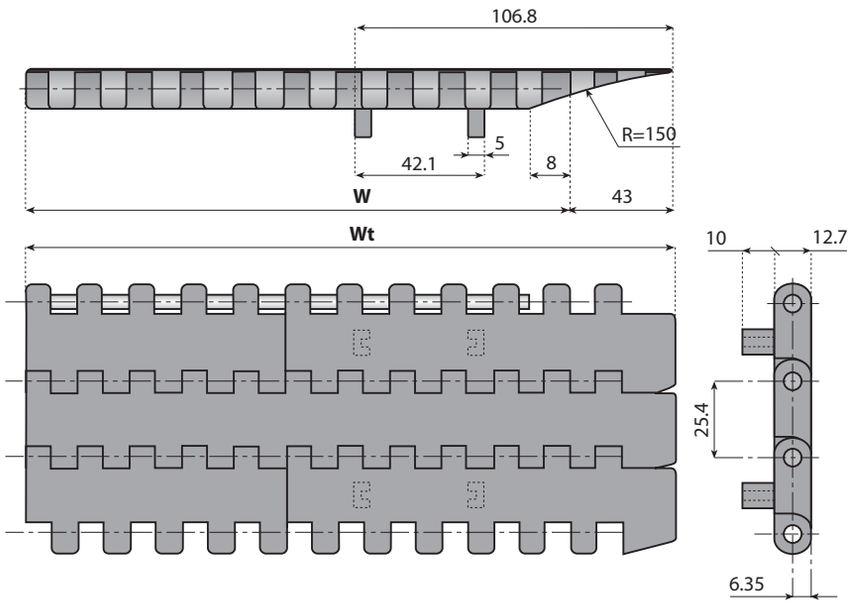

Width W mm	Belts Ref.	Code
85	2251-0085 FTTLP2	**251300L**
170	2251-0170 FTTLP2	**251301L**

Other widths available on request.

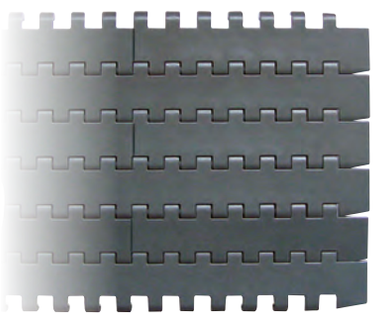

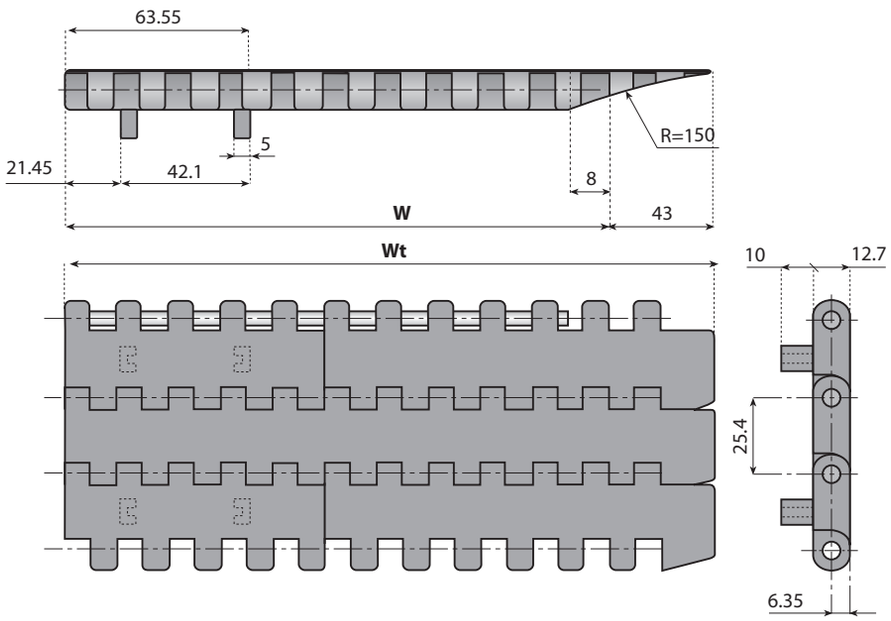



Width W mm	Belts Ref.	Code
170	2251-0170 FTTLP2-SX	**251301SXL**

Other widths available on request.

2252 FT

FLAT TOP IMPERIAL SIZE BELTS ONE TRACK DEDICATED WIDTHS (Pitch 1" - 25.4 mm)

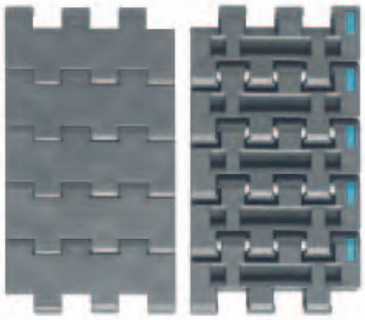

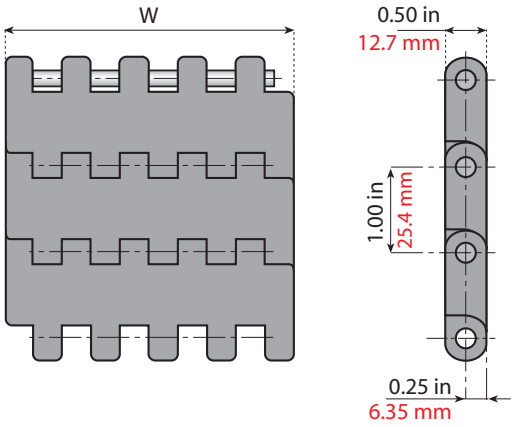

Dedicated widths
Pin material: PBT (white)

Standard materials


LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 | Pages 321⇨323 | Pages 340⇨343

Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N	lbs	Kg/m²	lbs/ft²
LFG 2252 K300 FT	**26000**	**LFG** Dark Grey	76.2	3.00	25.4	1.00	25.4	1.00	2896	651	14.0	2.87
LFG 2252 K325 FT	**26001**		82.6	3.25					3139	705		
LFG 2252 K450 FT	**26002**		114.3	4.50					4343	976		
LFG 2252 K600 FT	**26003**		152.4	6.00					5791	1302		
LFG 2252 K750 FT	**26004**		190.5	7.50					7239	1627		

2252 FTP2

FLAT TOP IMPERIAL SIZE BELTS ONE TRACK DEDICATED WIDTHS (Pitch 1" - 25.4 mm)

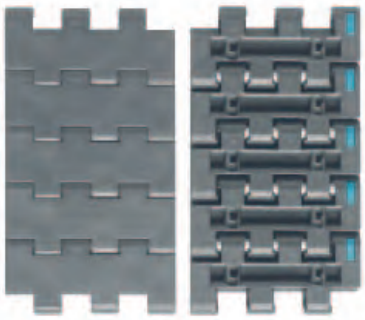

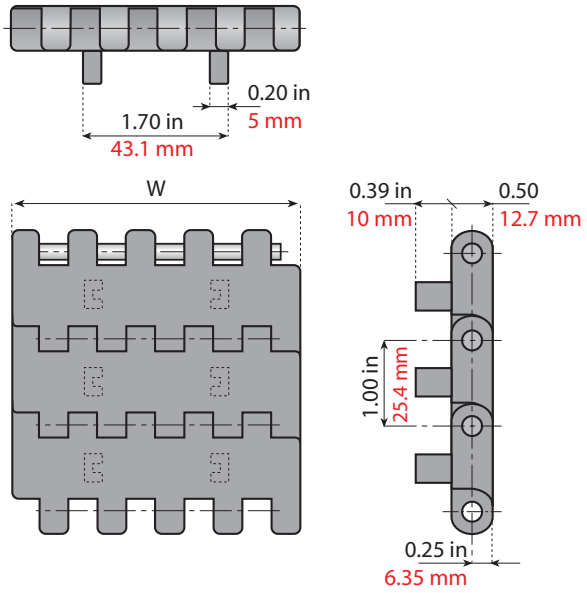

Version with two positioners
Pin material: PBT (white)

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


MATERIAL Pages 4⇨7 | Pages 321⇨323 | Pages 340⇨343


Belts - Ref.	Code	Material	Width W		Pitch P		Backflex radius mm		Max load capacity		Weight	
			mm	inch	mm	inch	mm	inch	N/m	lbs/ft	Kg/m²	lbs/ft²
LFG 2252 K300 FTP2	**26010**	**LFG** Dark Grey	76.2	3.00	25.4	1.00	25.4	1.00	38.000	2604	14.1	2.89
LFG 2252 K325 FTP2	**26011**		82.6	3.25								
LFG 2252 K450 FTP2	**26012**		114.3	4.50								
LFG 2252 K600 FTP2	**26013**		152.4	6.00								
LFG 2252 K750 FTP2	**26014**		190.5	7.50								

Standard length: 120 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved

FLAT TOP IMPERIAL SIZE BELTS (Pitch 1" - 25.4 mm) 2252 FT

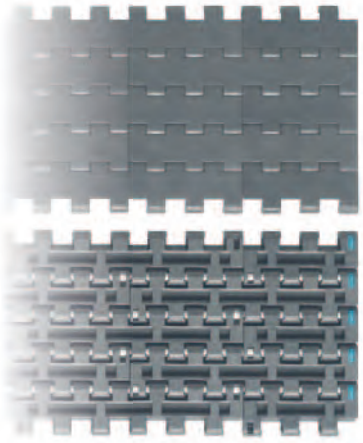

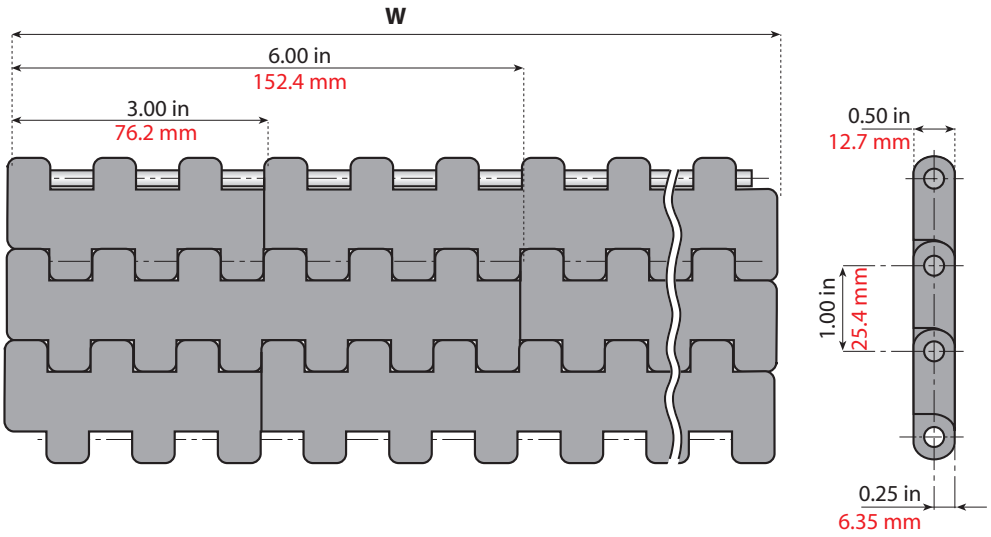

Version standard
Backflex radius: 1 inch, 25.4 mm
Max load capacity: 2604 lbs/ft, 38.000 N/m
Weight: 12.9 Kg/m^2 , 2.6 lbs/ft^2
Pin material: PBT (white)
Standard length:
belt width ≤ 15 inch: 3,048m belt length
belt width > 15 inch, but ≤36 inch: 1,524m belt length
belt width > 36 inch: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Pages 321⇨323
Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26003-NGG")

Width W		Belts Ref.	Code
inch	mm		
3.00	76	2252-0003 FT	**26000**
6.00	152	2252-0006 FT	**26003**
9.00	229	2252-0009 FT	**261002**
12.00	305	2252-0012 FT	**261003**
15.00	381	2252-0015 FT	**261004**
18.00	457	2252-0018 FT	**261005**
21.00	533	2252-0021 FT	**261006**
24.00	610	2252-0024 FT	**261007**
27.00	686	2252-0027 FT	**261008**
30.00	762	2252-0030 FT	**261009**


Width W		Belts Ref.	Code
inch	mm		
33.00	838	2252-0033 FT	**261010**
36.00	914	2252-0036 FT	**261011**
39.00	991	2252-0039 FT	**261012**
42.00	1067	2252-0042 FT	**261013**
45.00	1143	2252-0045 FT	**261014**
48.00	1219	2252-0048 FT	**261015**
51.00	1295	2252-0051 FT	**261016**
54.00	1372	2252-0054 FT	**261017**
57.00	1448	2252-0057 FT	**261018**
60.00	1524	2252-0060 FT	**261019**


Width W		Belts Ref.	Code
inch	mm		
63.00	1600	2252-0063 FT	**261020**
66.00	1676	2252-0066 FT	**261021**
69.00	1753	2252-0069 FT	**261022**
72.00	1829	2252-0072 FT	**261023**
75.00	1905	2252-0075 FT	**261024**
78.00	1981	2252-0078 FT	**261025**
81.00	2057	2252-0081 FT	**261026**
84.00	2134	2252-0084 FT	**261027**
87.00	2210	2252-0087 FT	**261028**
90.00	2286	2252-0090 FT	**261029**

Width W		Belts Ref.	Code
inch	mm		
93.00	2362	2252-0093 FT	**261030**
96.00	2438	2252-0096 FT	**261031**
99.00	2515	2252-0099 FT	**261032**
102.00	2591	2252-0102 FT	**261033**
105.00	2667	2252-0105 FT	**261034**
108.00	2743	2252-0108 FT	**261035**
111.00	2819	2252-0111 FT	**261036**
114.00	2896	2252-0114 FT	**261037**
117.00	2972	2252-0117 FT	**261038**
120.00	3048	2252-0120 FT	**261039**

Other widths available on request.

2252PT PERFORATED TOP IMPERIAL SIZE BELTS (Pitch 1" - 25.4 mm)

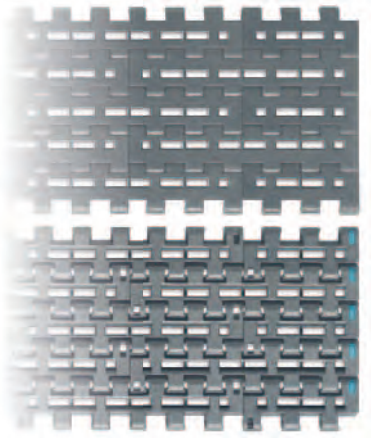

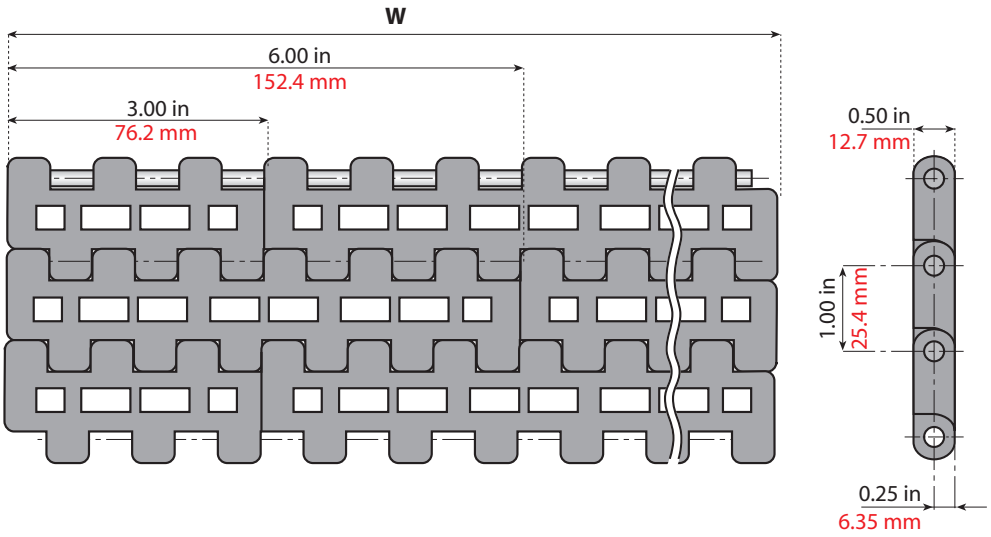

Version standard
Backflex radius: 1 inch., 25.4 mm
Max load capacity: 2604 lbs/ft, 38.000 N/m
Weight: 14.0 Kg/m², 2.87 lbs/ft²
Pin material: PBT (white)
Open surface: 14%
Standard length:
belt width ≤ 15 inch: 3,048m belt length
belt width > 15 inch, but ≤36 inch: 1,524m belt length
belt width > 36 inch: belt length on request

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

MATERIAL Pages 4⇨7
Pages 321⇨323
Pages 340⇨343

FOR BELTS AVAILABLE IN "NGG" MATERIAL JUST ADD "NGG" TO PART NUMBER (EXAMPLE "CODE 26201-NGG")

Width W		Belts Ref.	Code
inch	mm		
3.00	76	2252-0003 PT	**26200**
6.00	152	2252-0006 PT	**26201**
9.00	229	2252-0009 PT	**26202**
12.00	305	2252-0012 PT	**26203**
15.00	381	2252-0015 PT	**26204**
18.00	457	2252-0018 PT	**26205**
21.00	533	2252-0021 PT	**26206**
24.00	610	2252-0024 PT	**26207**
27.00	686	2252-0027 PT	**26208**
30.00	762	2252-0030 PT	**26209**

Width W		Belts Ref.	Code
inch	mm		
33.00	838	2252-0033 PT	**26210**
36.00	914	2252-0036 PT	**26211**
39.00	991	2252-0039 PT	**26212**
42.00	1067	2252-0042 PT	**26213**
45.00	1143	2252-0045 PT	**26214**
48.00	1219	2252-0048 PT	**26215**
51.00	1295	2252-0051 PT	**26216**
54.00	1372	2252-0054 PT	**26217**
57.00	1448	2252-0057 PT	**26218**
60.00	1524	2252-0060 PT	**26219**


Width W		Belts Ref.	Code
inch	mm		
63.00	1600	2252-0063 PT	**26220**
66.00	1676	2252-0066 PT	**26221**
69.00	1753	2252-0069 PT	**26222**
72.00	1829	2252-0072 PT	**26223**
75.00	1905	2252-0075 PT	**26224**
78.00	1981	2252-0078 PT	**26225**
81.00	2057	2252-0081 PT	**26226**
84.00	2134	2252-0084 PT	**26227**
87.00	2210	2252-0087 PT	**26228**
90.00	2286	2252-0090 PT	**26229**


Width W		Belts Ref.	Code
inch	mm		
93.00	2362	2252-0093 PT	**26230**
96.00	2438	2252-0096 PT	**26231**
99.00	2515	2252-0099 PT	**26232**
102.00	2591	2252-0102 PT	**26233**
105.00	2667	2252-0105 PT	**26234**
108.00	2743	2252-0108 PT	**26235**
111.00	2819	2252-0111 PT	**26236**
114.00	2896	2252-0114 PT	**26237**
117.00	2972	2252-0117 PT	**26238**
120.00	3048	2252-0120 PT	**26239**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

HEAVY DUTY GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE VG 2251

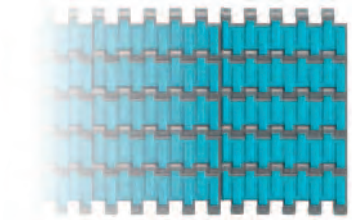

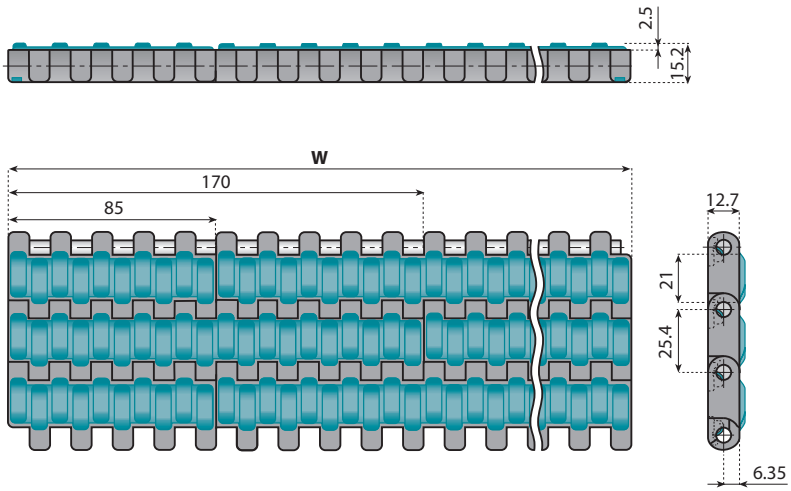


Version standard
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


TYPE VG 2251



Weight: 13.5 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2251-0085	**252000**	935	VG 2251-0935	**252010**	1785	VG 2251-1785	**252020**
170	VG 2251-0170	**252001**	1020	VG 2251-1020	**252011**	1870	VG 2251-1870	**252021**
255	VG 2251-0255	**252002**	1105	VG 2251-1105	**252012**	1955	VG 2251-1955	**252022**
340	VG 2251-0340	**252003**	1190	VG 2251-1190	**252013**	2040	VG 2251-2040	**252023**
425	VG 2251-0425	**252004**	1275	VG 2251-1275	**252014**	2125	VG 2251-2125	**252024**
510	VG 2251-0510	**252005**	1360	VG 2251-1360	**252015**	2210	VG 2251-2210	**252025**
595	VG 2251-0595	**252006**	1445	VG 2251-1445	**252016**	2295	VG 2251-2295	**252026**
680	VG 2251-0680	**252007**	1530	VG 2251-1530	**252017**	2380	VG 2251-2380	**252027**
765	VG 2251-0765	**252008**	1615	VG 2251-1615	**252018**			
850	VG 2251-0850	**252009**	1700	VG 2251-1700	**252019**			


TYPE VG2-2251



Weight: 13.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2251-0085	**252100**	935	VG2 2251-0935	**252110**	1785	VG2 2251-1785	**252120**
170	VG2 2251-0170	**252101**	1020	VG2 2251-1020	**252111**	1870	VG2 2251-1870	**252121**
255	VG2 2251-0255	**252102**	1105	VG2 2251-1105	**252112**	1955	VG2 2251-1955	**252122**
340	VG2 2251-0340	**252103**	1190	VG2 2251-1190	**252113**	2040	VG2 2251-2040	**252123**
425	VG2 2251-0425	**252104**	1275	VG2 2251-1275	**252114**	2125	VG2 2251-2125	**252124**
510	VG2 2251-0510	**252105**	1360	VG2 2251-1360	**252115**	2210	VG2 2251-2210	**252125**
595	VG2 2251-0595	**252106**	1445	VG2 2251-1445	**252116**	2295	VG2 2251-2295	**252126**
680	VG2 2251-0680	**252107**	1530	VG2 2251-1530	**252117**	2380	VG2 2251-2380	**252127**
765	VG2 2251-0765	**252108**	1615	VG2 2251-1615	**252118**			
850	VG2 2251-0850	**252109**	1700	VG2 2251-1700	**252119**			

TYPE VG3-2251





Weight: 12.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2251-0085	**252200**	935	VG3 2251-0935	**252210**	1785	VG3 2251-1785	**252220**
170	VG3 2251-0170	**252201**	1020	VG3 2251-1020	**252211**	1870	VG3 2251-1870	**252221**
255	VG3 2251-0255	**252202**	1105	VG3 2251-1105	**252212**	1955	VG3 2251-1955	**252222**
340	VG3 2251-0340	**252203**	1190	VG3 2251-1190	**252213**	2040	VG3 2251-2040	**252223**
425	VG3 2251-0425	**252204**	1275	VG3 2251-1275	**252214**	2125	VG3 2251-2125	**252224**
510	VG3 2251-0510	**252205**	1360	VG3 2251-1360	**252215**	2210	VG3 2251-2210	**252225**
595	VG3 2251-0595	**252206**	1445	VG3 2251-1445	**252216**	2295	VG3 2251-2295	**252226**
680	VG3 2251-0680	**252207**	1530	VG3 2251-1530	**252217**	2380	VG3 2251-2380	**252227**
765	VG3 2251-0765	**252208**	1615	VG3 2251-1615	**252218**			
850	VG3 2251-0850	**252209**	1700	VG3 2251-1700	**252219**			

Other widths available on request.

VG 2251 P1 HEAVY DUTY GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE



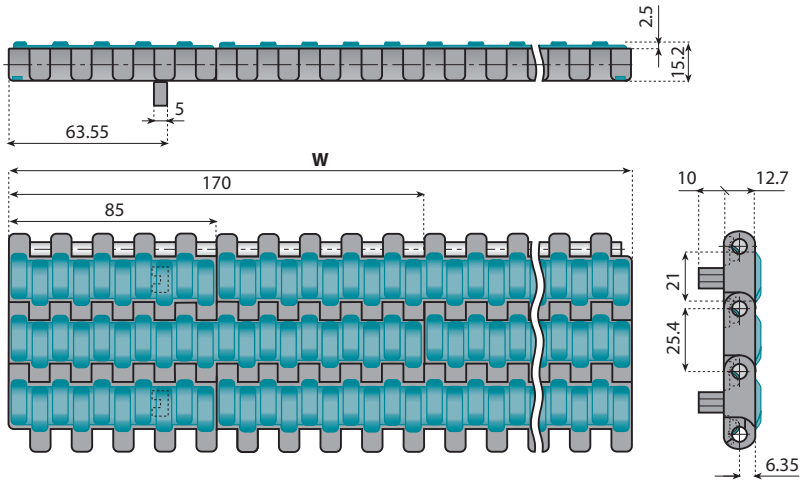


Version with one positioner
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


TYPE VG 2251 P1



Weight: 13.5 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2251-0085 P1	**253400**	935	VG 2251-0935 P1	**253410**	1785	VG 2251-1785 P1	**253420**
170	VG 2251-0170 P1	**253401**	1020	VG 2251-1020 P1	**253411**	1870	VG 2251-1870 P1	**253421**
255	VG 2251-0255 P1	**253402**	1105	VG 2251-1105 P1	**253412**	1955	VG 2251-1955 P1	**253422**
340	VG 2251-0340 P1	**253403**	1190	VG 2251-1190 P1	**253413**	2040	VG 2251-2040 P1	**253423**
425	VG 2251-0425 P1	**253404**	1275	VG 2251-1275 P1	**253414**	2125	VG 2251-2125 P1	**253424**
510	VG 2251-0510 P1	**253405**	1360	VG 2251-1360 P1	**253415**	2210	VG 2251-2210 P1	**253425**
595	VG 2251-0595 P1	**253406**	1445	VG 2251-1445 P1	**253416**	2295	VG 2251-2295 P1	**253426**
680	VG 2251-0680 P1	**253407**	1530	VG 2251-1530 P1	**253417**	2380	VG 2251-2380 P1	**253427**
765	VG 2251-0765 P1	**253408**	1615	VG 2251-1615 P1	**253418**			
850	VG 2251-0850 P1	**253409**	1700	VG 2251-1700 P1	**253419**			


TYPE VG2-2251 P1



Weight: 13.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2251-0085 P1	**253500**	935	VG2 2251-0935 P1	**253510**	1785	VG2 2251-1785 P1	**253520**
170	VG2 2251-0170 P1	**253501**	1020	VG2 2251-1020 P1	**253511**	1870	VG2 2251-1870 P1	**253521**
255	VG2 2251-0255 P1	**253502**	1105	VG2 2251-1105 P1	**253512**	1955	VG2 2251-1955 P1	**253522**
340	VG2 2251-0340 P1	**253503**	1190	VG2 2251-1190 P1	**253513**	2040	VG2 2251-2040 P1	**253523**
425	VG2 2251-0425 P1	**253504**	1275	VG2 2251-1275 P1	**253514**	2125	VG2 2251-2125 P1	**253524**
510	VG2 2251-0510 P1	**253505**	1360	VG2 2251-1360 P1	**253515**	2210	VG2 2251-2210 P1	**253525**
595	VG2 2251-0595 P1	**253506**	1445	VG2 2251-1445 P1	**253516**	2295	VG2 2251-2295 P1	**253526**
680	VG2 2251-0680 P1	**253507**	1530	VG2 2251-1530 P1	**253517**	2380	VG2 2251-2380 P1	**253527**
765	VG2 2251-0765 P1	**253508**	1615	VG2 2251-1615 P1	**253518**			
850	VG2 2251-0850 P1	**253509**	1700	VG2 2251-1700 P1	**253519**			

TYPE VG3-2251 P1




Weight: 12.8 Kg/m²


Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2251-0085 P1	**253600**	935	VG3 2251-0935 P1	**253610**	1785	VG3 2251-1785 P1	**253620**
170	VG3 2251-0170 P1	**253601**	1020	VG3 2251-1020 P1	**253611**	1870	VG3 2251-1870 P1	**253621**
255	VG3 2251-0255 P1	**253602**	1105	VG3 2251-1105 P1	**253612**	1955	VG3 2251-1955 P1	**253622**
340	VG3 2251-0340 P1	**253603**	1190	VG3 2251-1190 P1	**253613**	2040	VG3 2251-2040 P1	**253623**
425	VG3 2251-0425 P1	**253604**	1275	VG3 2251-1275 P1	**253614**	2125	VG3 2251-2125 P1	**253624**
510	VG3 2251-0510 P1	**253605**	1360	VG3 2251-1360 P1	**253615**	2210	VG3 2251-2210 P1	**253625**
595	VG3 2251-0595 P1	**253606**	1445	VG3 2251-1445 P1	**253616**	2295	VG3 2251-2295 P1	**253626**
680	VG3 2251-0680 P1	**253607**	1530	VG3 2251-1530 P1	**253617**	2380	VG3 2251-2380 P1	**253627**
765	VG3 2251-0765 P1	**253608**	1615	VG3 2251-1615 P1	**253618**			
850	VG3 2251-0850 P1	**253609**	1700	VG3 2251-1700 P1	**253619**			

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

HEAVY DUTY GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE VG 2251 P2



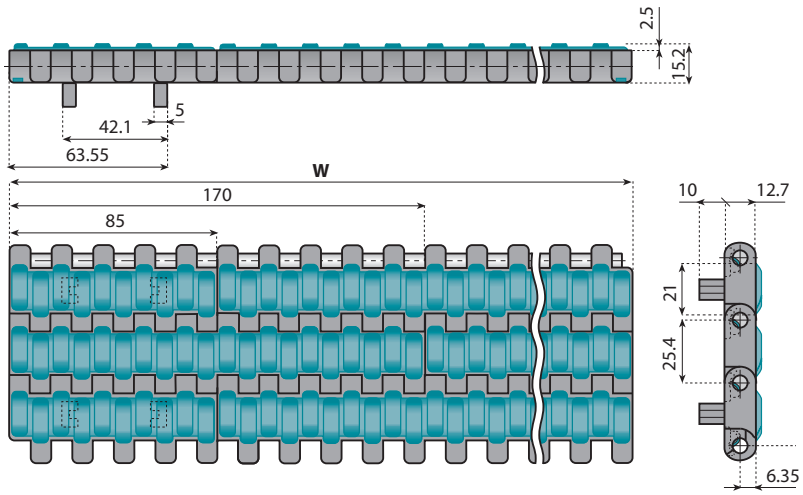


Version with two positioners
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


TYPE VG 2251 P2



Weight: 13.5 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG 2251-0085 P2	**252300**	935	VG 2251-0935 P2	**252310**	1785	VG 2251-1785 P2	**252320**
170	VG 2251-0170 P2	**252301**	1020	VG 2251-1020 P2	**252311**	1870	VG 2251-1870 P2	**252321**
255	VG 2251-0255 P2	**252302**	1105	VG 2251-1105 P2	**252312**	1955	VG 2251-1955 P2	**252322**
340	VG 2251-0340 P2	**252303**	1190	VG 2251-1190 P2	**252313**	2040	VG 2251-2040 P2	**252323**
425	VG 2251-0425 P2	**252304**	1275	VG 2251-1275 P2	**252314**	2125	VG 2251-2125 P2	**252324**
510	VG 2251-0510 P2	**252305**	1360	VG 2251-1360 P2	**252315**	2210	VG 2251-2210 P2	**252325**
595	VG 2251-0595 P2	**252306**	1445	VG 2251-1445 P2	**252316**	2295	VG 2251-2295 P2	**252326**
680	VG 2251-0680 P2	**252307**	1530	VG 2251-1530 P2	**252317**	2380	VG 2251-2380 P2	**252327**
765	VG 2251-0765 P2	**252308**	1615	VG 2251-1615 P2	**252318**			
850	VG 2251-0850 P2	**252309**	1700	VG 2251-1700 P2	**252319**			


TYPE VG2-2251 P2



Weight: 13.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG2 2251-0085 P2	**252400**	935	VG2 2251-0935 P2	**252410**	1785	VG2 2251-1785 P2	**252420**
170	VG2 2251-0170 P2	**252401**	1020	VG2 2251-1020 P2	**252411**	1870	VG2 2251-1870 P2	**252421**
255	VG2 2251-0255 P2	**252402**	1105	VG2 2251-1105 P2	**252412**	1955	VG2 2251-1955 P2	**252422**
340	VG2 2251-0340 P2	**252403**	1190	VG2 2251-1190 P2	**252413**	2040	VG2 2251-2040 P2	**252423**
425	VG2 2251-0425 P2	**252404**	1275	VG2 2251-1275 P2	**252414**	2125	VG2 2251-2125 P2	**252424**
510	VG2 2251-0510 P2	**252405**	1360	VG2 2251-1360 P2	**252415**	2210	VG2 2251-2210 P2	**252425**
595	VG2 2251-0595 P2	**252406**	1445	VG2 2251-1445 P2	**252416**	2295	VG2 2251-2295 P2	**252426**
680	VG2 2251-0680 P2	**252407**	1530	VG2 2251-1530 P2	**252417**	2380	VG2 2251-2380 P2	**252427**
765	VG2 2251-0765 P2	**252408**	1615	VG2 2251-1615 P2	**252418**			
850	VG2 2251-0850 P2	**252409**	1700	VG2 2251-1700 P2	**252419**			

TYPE VG3-2251 P2





Weight: 12.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	VG3 2251-0085 P2	**252500**	935	VG3 2251-0935 P2	**252510**	1785	VG3 2251-1785 P2	**252520**
170	VG3 2251-0170 P2	**252501**	1020	VG3 2251-1020 P2	**252511**	1870	VG3 2251-1870 P2	**252521**
255	VG3 2251-0255 P2	**252502**	1105	VG3 2251-1105 P2	**252512**	1955	VG3 2251-1955 P2	**252522**
340	VG3 2251-0340 P2	**252503**	1190	VG3 2251-1190 P2	**252513**	2040	VG3 2251-2040 P2	**252523**
425	VG3 2251-0425 P2	**252504**	1275	VG3 2251-1275 P2	**252514**	2125	VG3 2251-2125 P2	**252524**
510	VG3 2251-0510 P2	**252505**	1360	VG3 2251-1360 P2	**252515**	2210	VG3 2251-2210 P2	**252525**
595	VG3 2251-0595 P2	**252506**	1445	VG3 2251-1445 P2	**252516**	2295	VG3 2251-2295 P2	**252526**
680	VG3 2251-0680 P2	**252507**	1530	VG3 2251-1530 P2	**252517**	2380	VG3 2251-2380 P2	**252527**
765	VG3 2251-0765 P2	**252508**	1615	VG3 2251-1615 P2	**252518**			
850	VG3 2251-0850 P2	**252509**	1700	VG3 2251-1700 P2	**252519**			

Other widths available on request.

VGS 2251 HEAVY DUTY GRIP BELTS (Pitch 1" - 25.4 mm) WITH HIGH FRICTION SURFACE (SIDE INDENT)



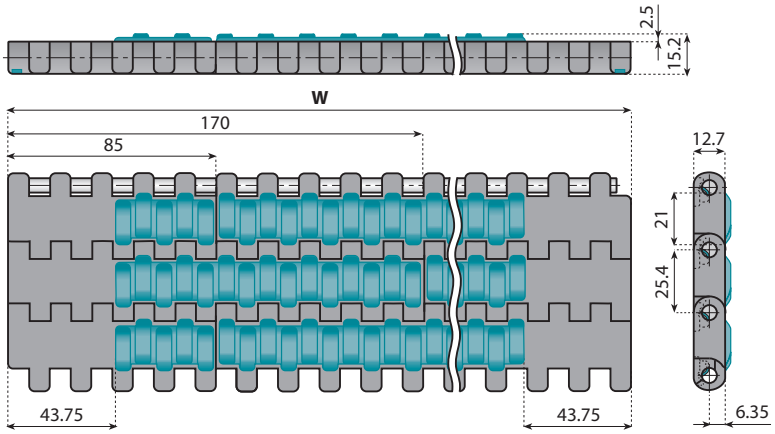


Version with side indent
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


TYPE VGS 2251



Weight: 13.5 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2251-0935	**252610**	1785	VGS 2251-1785	**252620**
170	-	-	1020	VGS 2251-1020	**252611**	1870	VGS 2251-1870	**252621**
255	VGS 2251-0255	**252602**	1105	VGS 2251-1105	**252612**	1955	VGS 2251-1955	**252622**
340	VGS 2251-0340	**252603**	1190	VGS 2251-1190	**252613**	2040	VGS 2251-2040	**252623**
425	VGS 2251-0425	**252604**	1275	VGS 2251-1275	**252614**	2125	VGS 2251-2125	**252624**
510	VGS 2251-0510	**252605**	1360	VGS 2251-1360	**252615**	2210	VGS 2251-2210	**252625**
595	VGS 2251-0595	**252606**	1445	VGS 2251-1445	**252616**	2295	VGS 2251-2295	**252626**
680	VGS 2251-0680	**252607**	1530	VGS 2251-1530	**252617**	2380	VGS 2251-2380	**252627**
765	VGS 2251-0765	**252608**	1615	VGS 2251-1615	**252618**			
850	VGS 2251-0850	**252609**	1700	VGS 2251-1700	**252619**			


TYPE VGS2-2251



Weight: 13.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2251-0935	**252710**	1785	VGS2 2251-1785	**252720**
170	VGS2 2251-0170	**252701**	1020	VGS2 2251-1020	**252711**	1870	VGS2 2251-1870	**252721**
255	VGS2 2251-0255	**252702**	1105	VGS2 2251-1105	**252712**	1955	VGS2 2251-1955	**252722**
340	VGS2 2251-0340	**252703**	1190	VGS2 2251-1190	**252713**	2040	VGS2 2251-2040	**252723**
425	VGS2 2251-0425	**252704**	1275	VGS2 2251-1275	**252714**	2125	VGS2 2251-2125	**252724**
510	VGS2 2251-0510	**252705**	1360	VGS2 2251-1360	**252715**	2210	VGS2 2251-2210	**252725**
595	VGS2 2251-0595	**252706**	1445	VGS2 2251-1445	**252716**	2295	VGS2 2251-2295	**252726**
680	VGS2 2251-0680	**252707**	1530	VGS2 2251-1530	**252717**	2380	VGS2 2251-2380	**252727**
765	VGS2 2251-0765	**252708**	1615	VGS2 2251-1615	**252718**			
850	VGS2 2251-0850	**252709**	1700	VGS2 2251-1700	**252719**			

TYPE VGS3-2251





Weight: 12.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2251-0935	**252810**	1785	VGS3 2251-1785	**252820**
170	VGS3 2251-0170	**252801**	1020	VGS3 2251-1020	**252811**	1870	VGS3 2251-1870	**252821**
255	VGS3 2251-0255	**252802**	1105	VGS3 2251-1105	**252812**	1955	VGS3 2251-1955	**252822**
340	VGS3 2251-0340	**252803**	1190	VGS3 2251-1190	**252813**	2040	VGS3 2251-2040	**252823**
425	VGS3 2251-0425	**252804**	1275	VGS3 2251-1275	**252814**	2125	VGS3 2251-2125	**252824**
510	VGS3 2251-0510	**252805**	1360	VGS3 2251-1360	**252815**	2210	VGS3 2251-2210	**252825**
595	VGS3 2251-0595	**252806**	1445	VGS3 2251-1445	**252816**	2295	VGS3 2251-2295	**252826**
680	VGS3 2251-0680	**252807**	1530	VGS3 2251-1530	**252817**	2380	VGS3 2251-2380	**252827**
765	VGS3 2251-0765	**252808**	1615	VGS3 2251-1615	**252818**			
850	VGS3 2251-0850	**252809**	1700	VGS3 2251-1700	**252819**			

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved



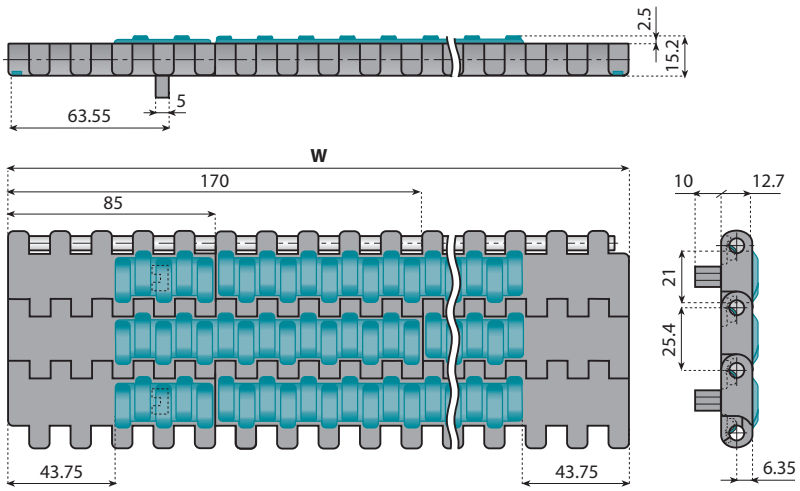


Version with side indent and one positioner
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


TYPE VGS 2251 P1



Weight: 13.5 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2251-0935 P1	**253710**	1785	VGS 2251-1785 P1	**253720**
170	-	-	1020	VGS 2251-1020 P1	**253711**	1870	VGS 2251-1870 P1	**253721**
255	VGS 2251-0255 P1	**253702**	1105	VGS 2251-1105 P1	**253712**	1955	VGS 2251-1955 P1	**253722**
340	VGS 2251-0340 P1	**253703**	1190	VGS 2251-1190 P1	**253713**	2040	VGS 2251-2040 P1	**253723**
425	VGS 2251-0425 P1	**253704**	1275	VGS 2251-1275 P1	**253714**	2125	VGS 2251-2125 P1	**253724**
510	VGS 2251-0510 P1	**253705**	1360	VGS 2251-1360 P1	**253715**	2210	VGS 2251-2210 P1	**253725**
595	VGS 2251-0595 P1	**253706**	1445	VGS 2251-1445 P1	**253716**	2295	VGS 2251-2295 P1	**253726**
680	VGS 2251-0680 P1	**253707**	1530	VGS 2251-1530 P1	**253717**	2380	VGS 2251-2380 P1	**253727**
765	VGS 2251-0765 P1	**253708**	1615	VGS 2251-1615 P1	**253718**			
850	VGS 2251-0850 P1	**253709**	1700	VGS 2251-1700 P1	**253719**			


TYPE VGS2-2251 P1



Weight: 13.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2251-0935 P1	**253810**	1785	VGS2 2251-1785 P1	**253820**
170	VGS2 2251-0170 P1	**253801**	1020	VGS2 2251-1020 P1	**253811**	1870	VGS2 2251-1870 P1	**253821**
255	VGS2 2251-0255 P1	**253802**	1105	VGS2 2251-1105 P1	**253812**	1955	VGS2 2251-1955 P1	**253822**
340	VGS2 2251-0340 P1	**253803**	1190	VGS2 2251-1190 P1	**253813**	2040	VGS2 2251-2040 P1	**253823**
425	VGS2 2251-0425 P1	**253804**	1275	VGS2 2251-1275 P1	**253814**	2125	VGS2 2251-2125 P1	**253824**
510	VGS2 2251-0510 P1	**253805**	1360	VGS2 2251-1360 P1	**253815**	2210	VGS2 2251-2210 P1	**253825**
595	VGS2 2251-0595 P1	**253806**	1445	VGS2 2251-1445 P1	**253816**	2295	VGS2 2251-2295 P1	**253826**
680	VGS2 2251-0680 P1	**253807**	1530	VGS2 2251-1530 P1	**253817**	2380	VGS2 2251-2380 P1	**253827**
765	VGS2 2251-0765 P1	**253808**	1615	VGS2 2251-1615 P1	**253818**			
850	VGS2 2251-0850 P1	**253809**	1700	VGS2 2251-1700 P1	**253819**			

TYPE VGS3-2251 P1





Weight: 12.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2251-0935 P1	**253910**	1785	VGS3 2251-1785 P1	**253920**
170	-	-	1020	VGS3 2251-1020 P1	**253911**	1870	VGS3 2251-1870 P1	**253921**
255	VGS3 2251-0255 P1	**253902**	1105	VGS3 2251-1105 P1	**253912**	1955	VGS3 2251-1955 P1	**253922**
340	VGS3 2251-0340 P1	**253903**	1190	VGS3 2251-1190 P1	**253913**	2040	VGS3 2251-2040 P1	**253923**
425	VGS3 2251-0425 P1	**253904**	1275	VGS3 2251-1275 P1	**253914**	2125	VGS3 2251-2125 P1	**253924**
510	VGS3 2251-0510 P1	**253905**	1360	VGS3 2251-1360 P1	**253915**	2210	VGS3 2251-2210 P1	**253925**
595	VGS3 2251-0595 P1	**253906**	1445	VGS3 2251-1445 P1	**253916**	2295	VGS3 2251-2295 P1	**253926**
680	VGS3 2251-0680 P1	**253907**	1530	VGS3 2251-1530 P1	**253917**	2380	VGS3 2251-2380 P1	**253927**
765	VGS3 2251-0765 P1	**253908**	1615	VGS3 2251-1615 P1	**253918**			
850	VGS3 2251-0850 P1	**253909**	1700	VGS3 2251-1700 P1	**253919**			

Other widths available on request.

VGS 2251 P2 HEAVY DUTY GRIP BELTS (PITCH 1" - 25.4 MM) WITH HIGH FRICTION SURFACE (SIDE INDENT)



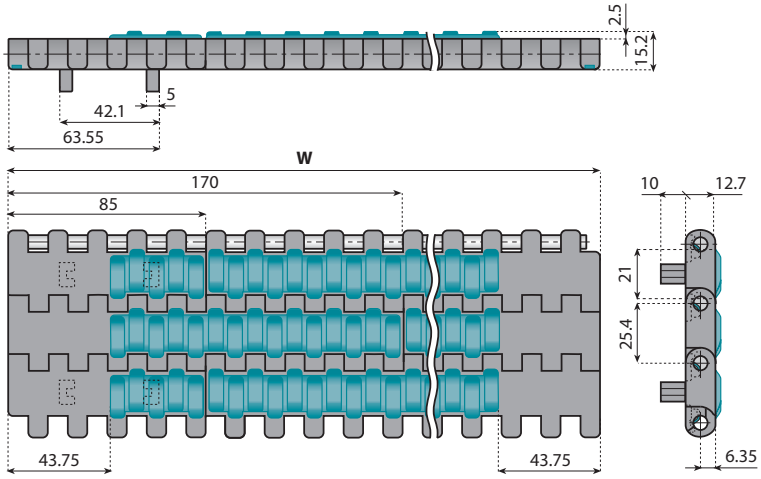


Version with side indent and two positioners
Belt material: low friction acetal resin, dark grey colour
Rubber material: thermoplastic rubber, waterblue colour
Backflex radius: 30 mm
Max load capacity: 38.000 N/m
Standard length: 60 pitches (5 ft - 1.524 m)
Pin material: PBT (white)
Standard length:
belt width ≤ 340mm: 3,048m belt length
belt width > 340mm, but ≤ 935mm: 1,524m belt length
belt width > 935mm: belt length on request

Standard materials

LFG	TPR
Low Friction Acetal Resin	Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 321⇨323 Pages 340⇨343


TYPE VGS 2251 P2



Weight: 13.5 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS 2251-0935 P2	**252910**	1785	VGS 2251-1785 P2	**252920**
170	-	-	1020	VGS 2251-1020 P2	**252911**	1870	VGS 2251-1870 P2	**252921**
255	VGS 2251-0255 P2	**252902**	1105	VGS 2251-1105 P2	**252912**	1955	VGS 2251-1955 P2	**252922**
340	VGS 2251-0340 P2	**252903**	1190	VGS 2251-1190 P2	**252913**	2040	VGS 2251-2040 P2	**252923**
425	VGS 2251-0425 P2	**252904**	1275	VGS 2251-1275 P2	**252914**	2125	VGS 2251-2125 P2	**252924**
510	VGS 2251-0510 P2	**252905**	1360	VGS 2251-1360 P2	**252915**	2210	VGS 2251-2210 P2	**252925**
595	VGS 2251-0595 P2	**252906**	1445	VGS 2251-1445 P2	**252916**	2295	VGS 2251-2295 P2	**252926**
680	VGS 2251-0680 P2	**252907**	1530	VGS 2251-1530 P2	**252917**	2380	VGS 2251-2380 P2	**252927**
765	VGS 2251-0765 P2	**252908**	1615	VGS 2251-1615 P2	**252918**			
850	VGS 2251-0850 P2	**252909**	1700	VGS 2251-1700 P2	**252919**			


TYPE VGS2-2251 P2



Weight: 13.0 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS2 2251-0935 P2	**253010**	1785	VGS2 2251-1785 P2	**253020**
170	VGS2 2251-0170 P2	**253001**	1020	VGS2 2251-1020 P2	**253011**	1870	VGS2 2251-1870 P2	**253021**
255	VGS2 2251-0255 P2	**253002**	1105	VGS2 2251-1105 P2	**253012**	1955	VGS2 2251-1955 P2	**253022**
340	VGS2 2251-0340 P2	**253003**	1190	VGS2 2251-1190 P2	**253013**	2040	VGS2 2251-2040 P2	**253023**
425	VGS2 2251-0425 P2	**253004**	1275	VGS2 2251-1275 P2	**253014**	2125	VGS2 2251-2125 P2	**253024**
510	VGS2 2251-0510 P2	**253005**	1360	VGS2 2251-1360 P2	**253015**	2210	VGS2 2251-2210 P2	**253025**
595	VGS2 2251-0595 P2	**253006**	1445	VGS2 2251-1445 P2	**253016**	2295	VGS2 2251-2295 P2	**253026**
680	VGS2 2251-0680 P2	**253007**	1530	VGS2 2251-1530 P2	**253017**	2380	VGS2 2251-2380 P2	**253027**
765	VGS2 2251-0765 P2	**253008**	1615	VGS2 2251-1615 P2	**253018**			
850	VGS2 2251-0850 P2	**253009**	1700	VGS2 2251-1700 P2	**253019**			

TYPE VGS3-2251 P3



Weight: 12.8 Kg/m²

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	-	-	935	VGS3 2251-0935 P2	**253110**	1785	VGS3 2251-1785 P2	**253120**
170	-	-	1020	VGS3 2251-1020 P2	**253111**	1870	VGS3 2251-1870 P2	**253121**
255	VGS3 2251-0255 P2	**253102**	1105	VGS3 2251-1105 P2	**253112**	1955	VGS3 2251-1955 P2	**253122**
340	VGS3 2251-0340 P2	**253103**	1190	VGS3 2251-1190 P2	**253113**	2040	VGS3 2251-2040 P2	**253123**
425	VGS3 2251-0425 P2	**253104**	1275	VGS3 2251-1275 P2	**253114**	2125	VGS3 2251-2125 P2	**253124**
510	VGS3 2251-0510 P2	**253105**	1360	VGS3 2251-1360 P2	**253115**	2210	VGS3 2251-2210 P2	**253125**
595	VGS3 2251-0595 P2	**253106**	1445	VGS3 2251-1445 P2	**253116**	2295	VGS3 2251-2295 P2	**253126**
680	VGS3 2251-0680 P2	**253107**	1530	VGS3 2251-1530 P2	**253117**	2380	VGS3 2251-2380 P2	**253127**
765	VGS3 2251-0765 P2	**253108**	1615	VGS3 2251-1615 P2	**253118**			
850	VGS3 2251-0850 P2	**253109**	1700	VGS3 2251-1700 P2	**253119**			


Standard length: 40 pitches (5 ft. - 1.524 m)

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

HEAVY DUTY LBP BELTS
(Pitch 1" - 25.4 mm) WITH LOW NOISE ACCUMULATION ROLLERS

LBP 2251

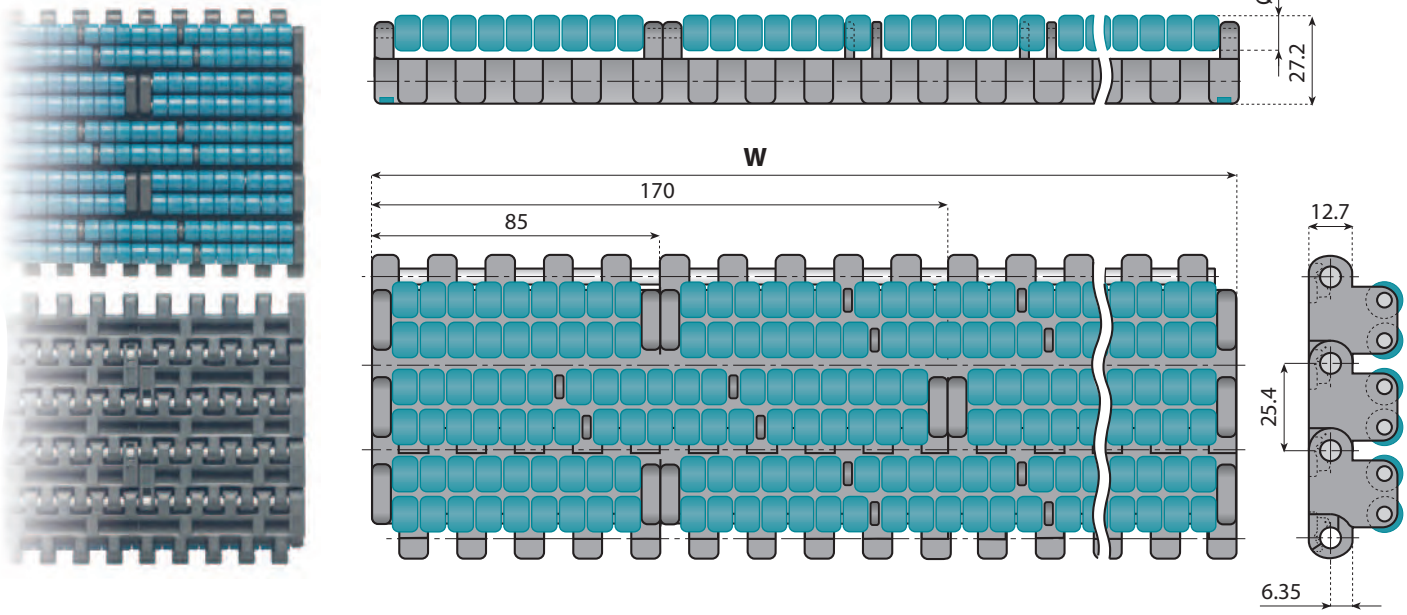

Version standard
Backflex radius: 120 mm
Max load capacity: 38.000 N/m
Weight: 28.8 Kg/m²
Pin material: PBT (white)
Roller shaft material: Stainless Steel AISI 304
Standard length:
belt width ≤ 340mm: 1,524m belt length
belt width > 340mm, but ≤935mm: 0,762m belt length
belt width > 935mm: belt length on request

Standard material


LFG
Low Friction Acetal Resin

MATERIAL Pages 4⇨7
Pages 321⇨323
Pages 340⇨343

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	LBP 2251-0085	**251800**	935	LBP 2251-0935	**251810**	1785	LBP 2251-1785	**251820**	2635	LBP 2251-2635	**251830**
170	LBP 2251-0170	**251801**	1020	LBP 2251-1020	**251811**	1870	LBP 2251-1870	**251821**	2720	LBP 2251-2720	**251831**
255	LBP 2251-0255	**251802**	1105	LBP 2251-1105	**251812**	1955	LBP 2251-1955	**251822**	2805	LBP 2251-2805	**251832**
340	LBP 2251-0340	**251803**	1190	LBP 2251-1190	**251813**	2040	LBP 2251-2040	**251823**	2890	LBP 2251-2890	**251833**
425	LBP 2251-0425	**251804**	1275	LBP 2251-1275	**251814**	2125	LBP 2251-2125	**251824**	2975	LBP 2251-2975	**251834**
510	LBP 2251-0510	**251805**	1360	LBP 2251-1360	**251815**	2210	LBP 2251-2210	**251825**	3060	LBP 2251-3060	**251835**
595	LBP 2251-0595	**251806**	1445	LBP 2251-1445	**251816**	2295	LBP 2251-2295	**251826**	3145	LBP 2251-3145	**251836**
680	LBP 2251-0680	**251807**	1530	LBP 2251-1530	**251817**	2380	LBP 2251-2980	**251827**	3230	LBP 2251-3230	**251837**
765	LBP 2251-0765	**251808**	1615	LBP 2251-1615	**251818**	2465	LBP 2251-2465	**251828**	3315	LBP 2251-3315	**251838**
850	LBP 2251-0850	**251809**	1700	LBP 2251-1700	**251819**	2550	LBP 2251-2550	**251829**	3400	LBP 2251-3400	**251839**

LBP 2251 P1

HEAVY DUTY LBP BELTS (Pitch 1" - 25.4 mm) WITH LOW NOISE ACCUMULATION ROLLERS

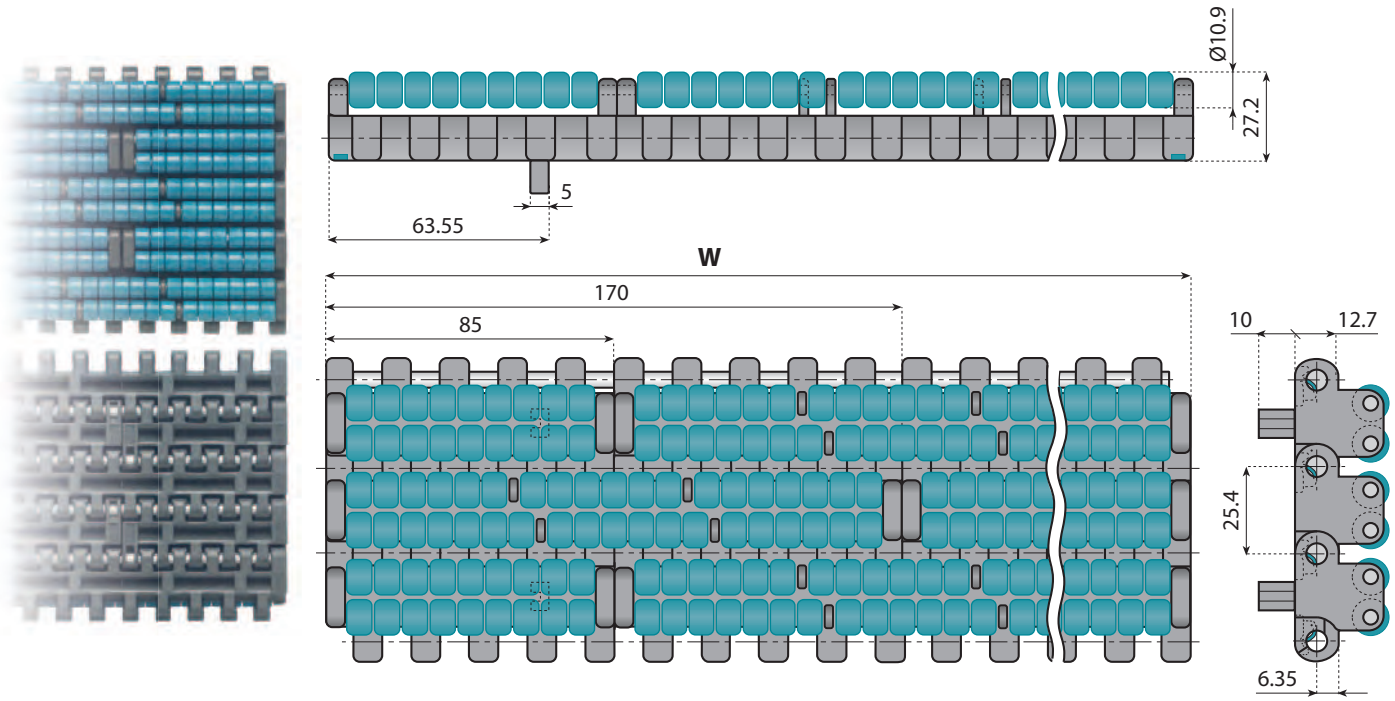

Version with one positioner
Backflex radius: 120 mm
Max load capacity: 38.000 N/m
Weight: 28.8 Kg/m²
Pin material: PBT (white)
Roller shaft material: Stainless Steel AISI 304
Standard length:
belt width ≤ 340mm: 1,524m belt length
belt width > 340mm, but ≤ 935mm: 0,762m belt length
belt width > 935mm: belt length on request

Standard material

LFG
Low Friction Acetal Resin

MATERIAL Pages 4⇨7
Pages 321⇨323
Pages 340⇨343

Width W mm	Belts Ref.	Code
85	LBP 2251-0085 P1	**254000**
170	LBP 2251-0170 P1	**254001**
255	LBP 2251-0255 P1	**254002**
340	LBP 2251-0340 P1	**254003**
425	LBP 2251-0425 P1	**254004**
510	LBP 2251-0510 P1	**254005**
595	LBP 2251-0595 P1	**254006**
680	LBP 2251-0680 P1	**254007**
765	LBP 2251-0765 P1	**254008**
850	LBP 2251-0850 P1	**254009**

Width W mm	Belts Ref.	Code
935	LBP 2251-0935 P1	**254010**
1020	LBP 2251-1020 P1	**254011**
1105	LBP 2251-1105 P1	**254012**
1190	LBP 2251-1190 P1	**254013**
1275	LBP 2251-1275 P1	**254014**
1360	LBP 2251-1360 P1	**254015**
1445	LBP 2251-1445 P1	**254016**
1530	LBP 2251-1530 P1	**254017**
1615	LBP 2251-1615 P1	**254018**
1700	LBP 2251-1700 P1	**254019**


Width W mm	Belts Ref.	Code
1785	LBP 2251-1785 P1	**254020**
1870	LBP 2251-1870 P1	**254021**
1955	LBP 2251-1955 P1	**254022**
2040	LBP 2251-2040 P1	**254023**
2125	LBP 2251-2125 P1	**254024**
2210	LBP 2251-2210 P1	**254025**
2295	LBP 2251-2295 P1	**254026**
2380	LBP 2251-2980 P1	**254027**
2465	LBP 2251-2465 P1	**254028**
2550	LBP 2251-2550 P1	**254029**

Width W mm	Belts Ref.	Code
2635	LBP 2251-2635 P1	**254030**
2720	LBP 2251-2720 P1	**254031**
2805	LBP 2251-2805 P1	**254032**
2890	LBP 2251-2890 P1	**254033**
2975	LBP 2251-2975 P1	**254034**
3060	LBP 2251-3060 P1	**254035**
3145	LBP 2251-3145 P1	**254036**
3230	LBP 2251-3230 P1	**254037**
3315	LBP 2251-3315 P1	**254038**
3400	LBP 2251-3400 P1	**254039**

 © System Plast S.r.l. , 2012 - All Rights Reserved

HEAVY DUTY LBP BELTS
(Pitch 1" - 25.4 mm) WITH LOW NOISE ACCUMULATION ROLLERS

LBP 2251 P2

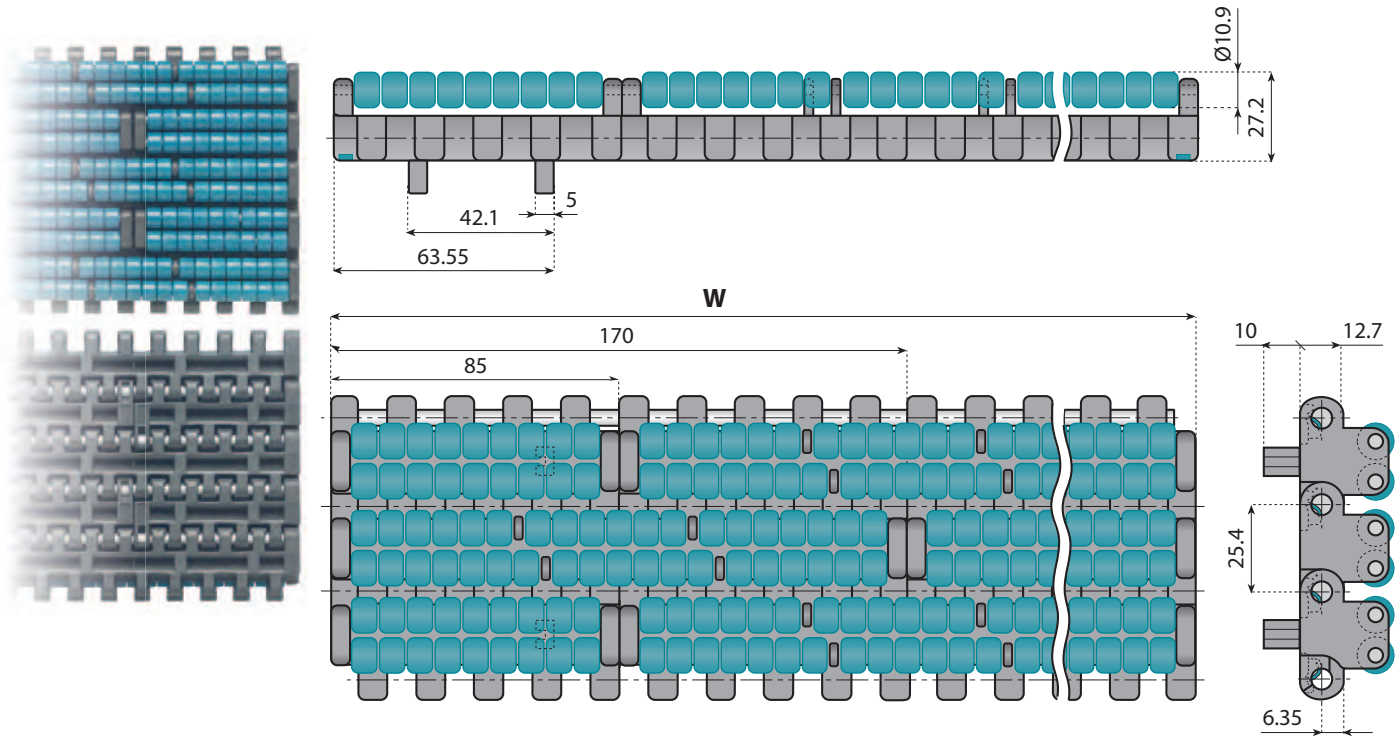

Version with one positioner
Backflex radius: 120 mm
Max load capacity: 38.000 N/m
Weight: 28.8 Kg/m²
Pin material: Acetal Resin (white)
Roller shaft material: Stainless Steel AISI 304
Standard length:
belt width ≤ 340mm: 1,524m belt length
belt width > 340mm, but ≤ 935mm: 0,762m belt length
belt width > 935mm: belt length on request

Standard material

LFG
Low Friction Acetal Resin

MATERIAL Pages 4⇨7
Pages 321⇨323
Pages 340⇨343

Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code	Width W mm	Belts Ref.	Code
85	LBP 2251-0085 P2	**251900**	935	LBP 2251-0935 P2	**251910**	1785	LBP 2251-1785 P2	**251920**	2635	LBP 2251-2635 P2	**251930**
170	LBP 2251-0170 P2	**251901**	1020	LBP 2251-1020 P2	**251911**	1870	LBP 2251-1870 P2	**251921**	2720	LBP 2251-2720 P2	**251931**
255	LBP 2251-0255 P2	**251902**	1105	LBP 2251-1105 P2	**251912**	1955	LBP 2251-1955 P2	**251922**	2805	LBP 2251-2805 P2	**251932**
340	LBP 2251-0340 P2	**251903**	1190	LBP 2251-1190 P2	**251913**	2040	LBP 2251-2040 P2	**251923**	2890	LBP 2251-2890 P2	**251933**
425	LBP 2251-0425 P2	**251904**	1275	LBP 2251-1275 P2	**251914**	2125	LBP 2251-2125 P2	**251924**	2975	LBP 2251-2975 P2	**251934**
510	LBP 2251-0510 P2	**251905**	1360	LBP 2251-1360 P2	**251915**	2210	LBP 2251-2210 P2	**251925**	3060	LBP 2251-3060 P2	**251935**
595	LBP 2251-0595 P2	**251906**	1445	LBP 2251-1445 P2	**251916**	2295	LBP 2251-2295 P2	**251926**	3145	LBP 2251-3145 P2	**251936**
680	LBP 2251-0680 P2	**251907**	1530	LBP 2251-1530 P2	**251917**	2380	LBP 2251-2980 P2	**251927**	3230	LBP 2251-3230 P2	**251937**
765	LBP 2251-0765 P2	**251908**	1615	LBP 2251-1615 P2	**251918**	2465	LBP 2251-2465 P2	**251928**	3315	LBP 2251-3315 P2	**251938**
850	LBP 2251-0850 P2	**251909**	1700	LBP 2251-1700 P2	**251919**	2550	LBP 2251-2550 P2	**251929**	3400	LBP 2251-3400 P2	**251939**

Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

MODULAR BELTS


Series	*Pages*
2500 RR	174 ➔175
2508	176
2630	177


All our 2500 series belts have a pitch of 50.8 mm (2 inch) and a height of 24 mm.

BENEFITS AND FEATURES:

- HIGH STRENGTH.
- OPTIMUM PRODUCT SUPPORT.
- EASY INSTALLATION AND MAINTENANCE WITH PIN-CLIP SYSTEM.
- STABILIZED MATERIAL.
- DESIGNED FOR WARMERS, COOLERS AND PASTEURIZERS FOR CANS AND PET BOTTLES.



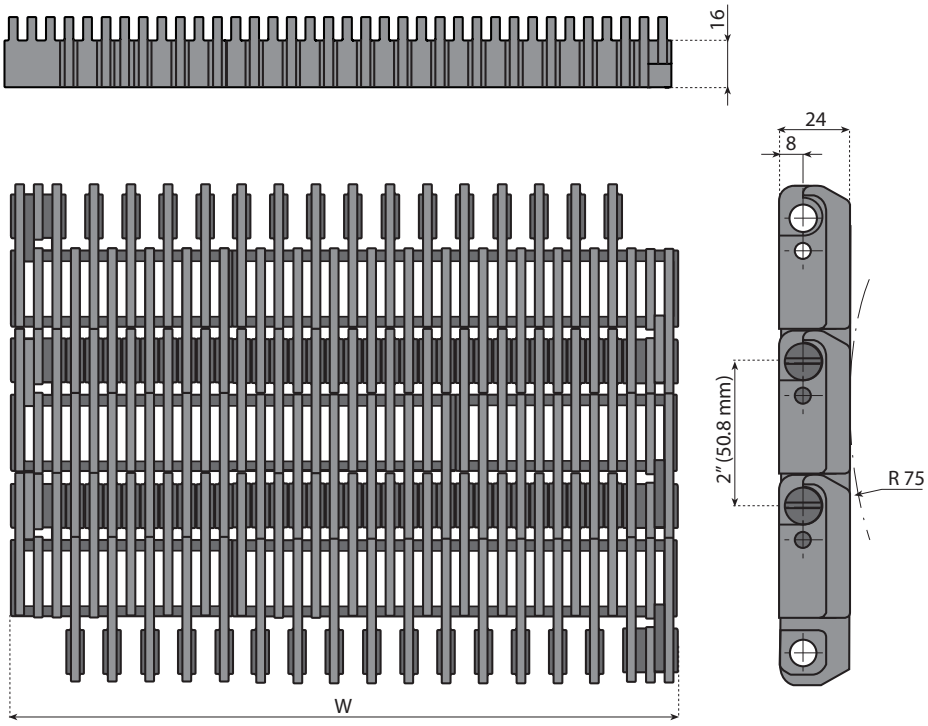

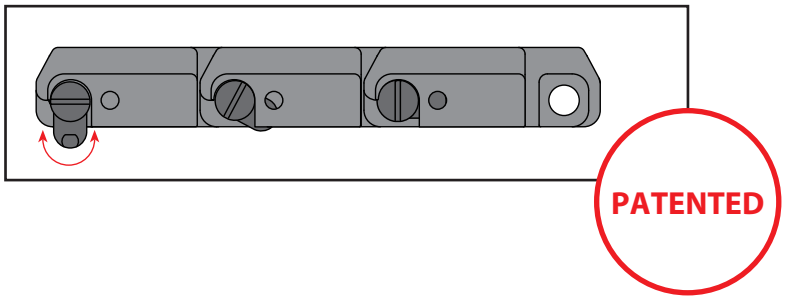

Backflex radius: 75 mm - 2.95 inch.
Max load capacity: 30.000 N/m - 2.056 lbs/ft
Weight: 9.2 Kg/m² - 218.3 lb/ft²
Pin material: Polypropylene
Belt Material: Polypropylene (dark grey)
Open Surface: 27%.
Standard length:
belt width ≤ 15 inch: 3,048m belt length
belt width > 15 inch: 1,016m belt length

Standard materials

PPG
Polypropylene Grey

MATERIAL Pages 4⇨7
Pages 327
Pages 340⇨343

FOR BELTS AVAILABLE IN "LFG" MATERIAL JUST ADD "LFG" TO PART NUMBER (EXAMPLE "CODE 261252-LFG")

Width W		Belts Ref.	Code
inch	mm		
9.00	229	2500-0009RR	**261252**
12.00	305	2500-0012RR	**261253**
15.00	381	2500-0015RR	**261254**
18.00	457	2500-0018RR	**261255**
21.00	533	2500-0021RR	**261256**
24.00	610	2500-0024RR	**261257**
27.00	686	2500-0027RR	**261258**
30.00	762	2500-0030RR	**261259**
33.00	838	2500-0033RR	**261260**
36.00	914	2500-0036RR	**261261**
39.00	991	2500-0039RR	**261262**
42.00	1067	2500-0042RR	**261263**

Width W		Belts Ref.	Code
inch	mm		
45.00	1143	2500-0045RR	**261264**
48.00	1219	2500-0048RR	**261265**
51.00	1295	2500-0051RR	**261266**
54.00	1372	2500-0054RR	**261267**
57.00	1448	2500-0057RR	**261268**
60.00	1524	2500-0060RR	**261269**
63.00	1600	2500-0063RR	**261270**
66.00	1676	2500-0066RR	**261271**
69.00	1753	2500-0069RR	**261272**
72.00	1829	2500-0072RR	**261273**
75.00	1905	2500-0075RR	**261274**
78.00	1981	2500-0078RR	**261275**

Width W		Belts Ref.	Code
inch	mm		
81.00	2057	2500-0081RR	**261276**
84.00	2134	2500-0084RR	**261277**
87.00	2210	2500-0087RR	**261278**
90.00	2286	2500-0090RR	**261279**
93.00	2362	2500-0093RR	**261280**
96.00	2438	2500-0096RR	**261281**
99.00	2515	2500-0099RR	**261282**
102.00	2591	2500-0102RR	**261283**
105.00	2667	2500-0105RR	**261284**
108.00	2743	2500-0108RR	**261285**
111.00	2819	2500-0111RR	**261286**
114.00	2896	2500-0114RR	**261287**


Width W		Belts Ref.	Code
inch	mm		
117.00	2972	2500-0117RR	**261288**
120.00	3048	2500-0120RR	**261289**
123.00	3124	2500-0123RR	**261290**
126.00	3200	2500-0126RR	**261291**
129.00	3277	2500-0129RR	**261292**
132.00	3353	2500-0132RR	**261293**
135.00	3429	2500-0135RR	**261294**
138.00	3505	2500-0138RR	**261295**
141.00	3581	2500-0141RR	**261296**
144.00	3658	2500-0144RR	**261297**
147.00	3734	2500-0147RR	**261298**
150.00	3810	2500-0150RR	**261299**

Other widths available on request.


 © System Plast S.r.l. , 2012 - All Rights Reserved

COMBS FOR RAISED RIB BELT 2”


TYPE 1

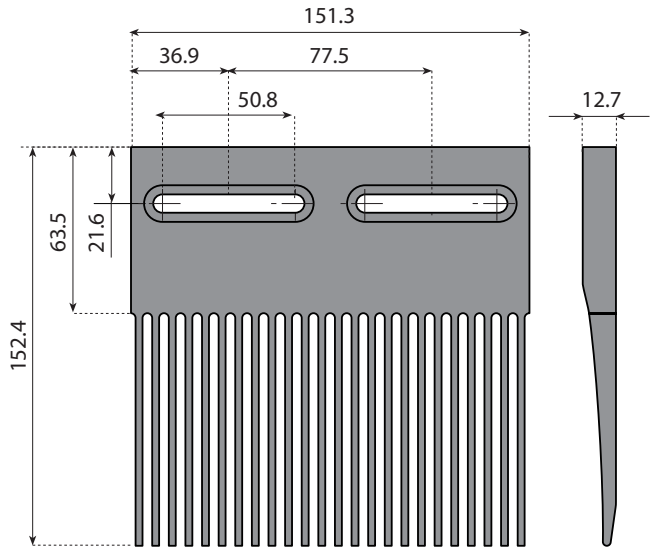

TYPE 2

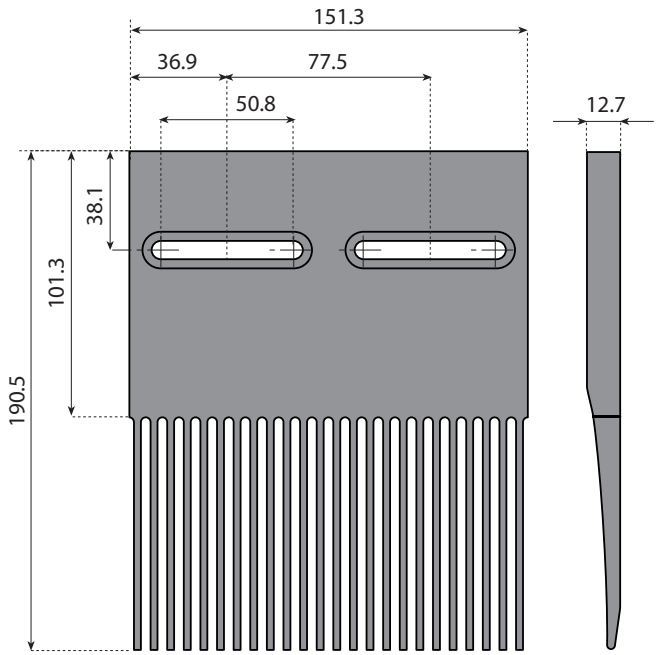

TYPE 3

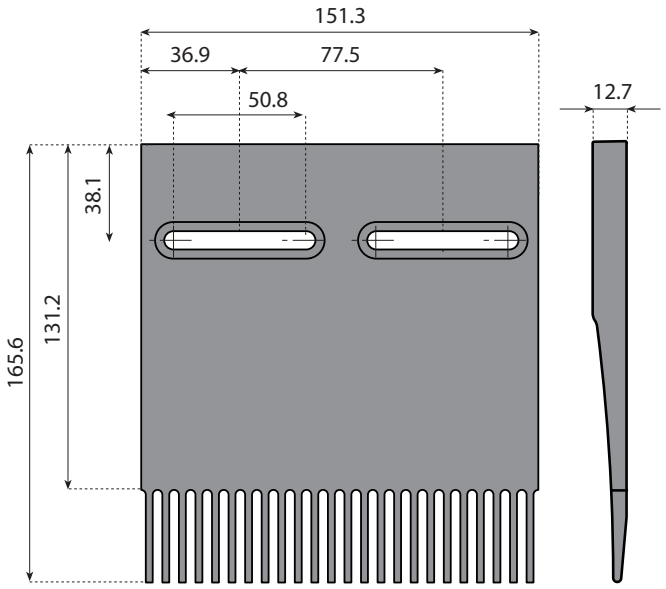


Reinforced

TYPE	CODE
1	**14146**
2	**14147**
3	**14862**


Material: acetal, dark grey.
Note:
- Use shoulder screws (included) for fixing the comb to the conveyor construction.
- Two caps are supplied with each comb to cover the long holes.

x2 included




SHOULDER SCREWS

CODE
831915

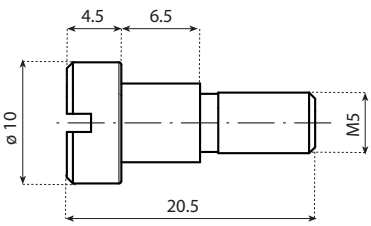


Material: stainless steel.

Shoulder screws are designed to fix the combs to the conveyor construction, but still allow for horizontal movement of the combs. This is required to follow expansion and contraction of the belt. Please consult Technical Support for optimum positioning of the screws.

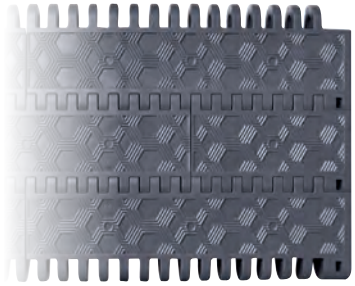

NEW

PATENT PENDING

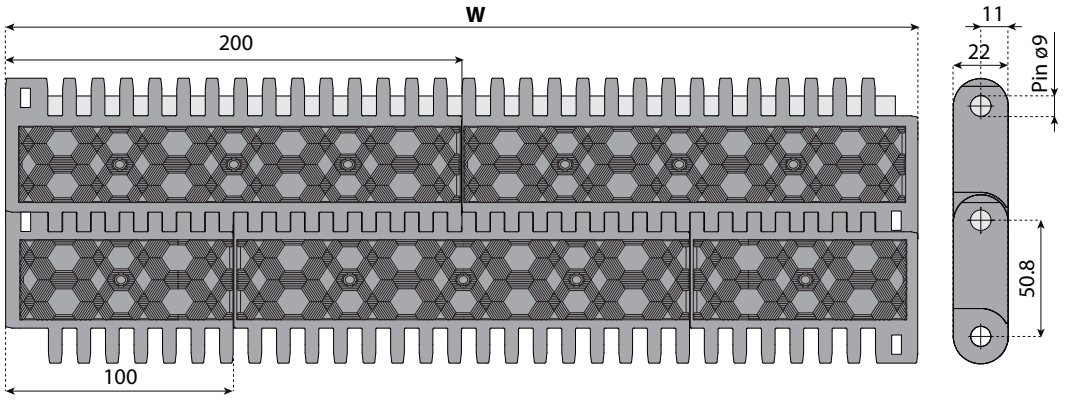

Version standard (LFG material)
Strength and weight data for other materials available on request.
Backflex radius: 55 mm
Max load capacity: 80 kN/m
Weight: 22.5 kg/m²
Standard length:
Belt width ≤ 800 mm: 20 pitches (1,016 m)
Belt width > 800 mm: 15 pitches (0,762 m)
Pin material: PBT (white).
Steel pins optionally available.

MATERIAL Pages 4⇨7
Pages 328
Pages 340⇨343

Standard materials

LFG	PPLG
Low Friction Acetal Resin Dark Grey	Polypropylene Light Grey

Other possible materials

POM-AS	POM-EC	PP-FR-EC
Anti-static Acetal Black	Electrically Conductive Acetal Black	Flame Retardant Electrically Conductive Polypropylene Black

THE CODES BELOW ARE FOR BELTS IN LFG MATERIAL AND WITH PBT PINS. FOR BELTS IN PPLG, JUST ADD "PPLG" TO THE PART NUMBER (example code 26652-PPLG)

Width W mm	Belts Ref.	Code
-	-	-
-	-	-
300	2508-0300 HD	**26652**
400	2508-0400 HD	**26653**
500	2508-0500 HD	**26654**
600	2508-0600 HD	**26655**
700	2508-0700 HD	**26656**
800	2508-0800 HD	**26657**
900	2508-0900 HD	**26658**
1000	2508-1000 HD	**26659**

Width W mm	Belts Ref.	Code
1100	2508-1100 HD	**26660**
1200	2508-1200 HD	**26661**
1300	2508-1300 HD	**26662**
1400	2508-1400 HD	**26663**
1500	2508-1500 HD	**26664**
1600	2508-1600 HD	**26665**
1700	2508-1700 HD	**26666**
1800	2508-1800 HD	**26667**
1900	2508-1900 HD	**26668**
2000	2508-2000 HD	**26669**


Width W mm	Belts Ref.	Code
2100	2508-2100 HD	**26670**
2200	2508-2200 HD	**26671**
2300	2508-2300 HD	**26672**
2400	2508-2400 HD	**26673**
2500	2508-2500 HD	**26674**
2600	2508-2600 HD	**26675**
2700	2508-2700 HD	**26676**
2800	2508-2800 HD	**26677**
2900	2508-2900 HD	**26678**
3000	2508-3000 HD	**26679**

Width W mm	Belts Ref.	Code
3100	2508-3100 HD	**26680**
3200	2508-3200 HD	**26681**
3300	2508-3300 HD	**26682**
3400	2508-3400 HD	**26683**
3500	2508-3500 HD	**26684**
3600	2508-3600 HD	**26685**
3700	2508-3700 HD	**26686**
3800	2508-3800 HD	**26687**
3900	2508-3900 HD	**26688**
4000	2508-4000 HD	**26689**

Width W mm	Belts Ref.	Code
4100	2508-4100 HD	**26690**
4200	2508-4200 HD	**26691**
4300	2508-4300 HD	**26692**
4400	2508-4400 HD	**26693**
4500	2508-4500 HD	**26694**
4600	2508-4600 HD	**26695**
4700	2508-4700 HD	**26696**
4800	2508-4800 HD	**26697**
4900	2508-4900 HD	**26698**
5000	2508-5000 HD	**26699**


Other widths available on request.

 © System Plast S.r.l. , 2012 - All Rights Reserved

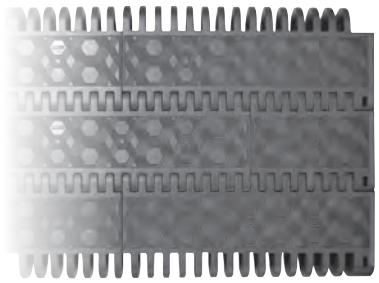

NEW

PATENT PENDING

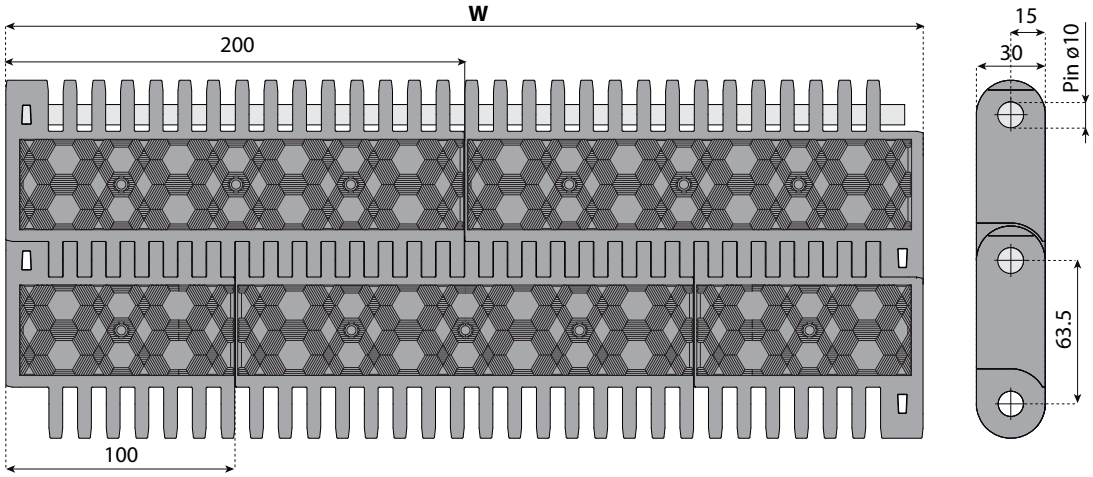

Version standard (LFG material)
Strength and weight data for other materials available on request.
Backflex radius: 60 mm
Max load capacity: 115 kN/m
Weight: 29.5 kg/m²
Standard length:
Belt width ≤ 800 mm: 16 pitches (1,016 m)
Belt width > 800 mm: 12 pitches (0,762 m)
Pin material: PBT (white).
Steel pins optionally available.

MATERIAL Pages 4⇨7
Pages 328
Pages 340⇨343

Standard materials

LFG	PPLG
Low Friction Acetal Resin Dark Grey	Polypropylene Light Grey

Other possible materials

POM-AS	POM-EC	PP-FR-EC
Anti-static Acetal Black	Electrically Conductive Acetal Black	Flame Retardant Electrically Conductive Polypropylene Black

THE CODES BELOW ARE FOR BELTS IN LFG MATERIAL AND WITH PBT PINS. FOR BELTS IN PPLG, JUST ADD "PPLG" TO THE PART NUMBER (example code 26700-PPLG)

Width W mm	Belts Ref.	Code
100	2630-0100 XHD	**26700**
-	-	-
300	2630-0300 XHD	**26702**
400	2630-0400 XHD	**26703**
500	2630-0500 XHD	**26704**
600	2630-0600 XHD	**26705**
700	2630-0700 XHD	**26706**
800	2630-0800 XHD	**26707**
900	2630-0900 XHD	**26708**
1000	2630-1000 XHD	**26709**

Width W mm	Belts Ref.	Code
1100	2630-1100 XHD	**26710**
1200	2630-1200 XHD	**26711**
1300	2630-1300 XHD	**26712**
1400	2630-1400 XHD	**26713**
1500	2630-1500 XHD	**26714**
1600	2630-1600 XHD	**26715**
1700	2630-1700 XHD	**26716**
1800	2630-1800 XHD	**26717**
1900	2630-1900 XHD	**26718**
2000	2630-2000 XHD	**26719**

Width W mm	Belts Ref.	Code
2100	2630-2100 XHD	**26720**
2200	2630-2200 XHD	**26721**
2300	2630-2300 XHD	**26722**
2400	2630-2400 XHD	**26723**
2500	2630-2500 XHD	**26724**
2600	2630-2600 XHD	**26725**
2700	2630-2700 XHD	**26726**
2800	2630-2800 XHD	**26727**
2900	2630-2900 XHD	**26728**
3000	2630-3000 XHD	**26729**

Width W mm	Belts Ref.	Code
3100	2630-3100 XHD	**26730**
3200	2630-3200 XHD	**26731**
3300	2630-3300 XHD	**26732**
3400	2630-3400 XHD	**26733**
3500	2630-3500 XHD	**26734**
3600	2630-3600 XHD	**26735**
3700	2630-3700 XHD	**26736**
3800	2630-3800 XHD	**26737**
3900	2630-3900 XHD	**26738**
4000	2630-4000 XD	**26739**

Width W mm	Belts Ref.	Code
4100	2630-4100 XHD	**26740**
4200	2630-4200 XHD	**26741**
4300	2630-4300 XHD	**26742**
4400	2630-4400 XHD	**26743**
4500	2630-4500 XHD	**26744**
4600	2630-4600 XHD	**26745**
4700	2630-4700 XHD	**26746**
4800	2630-4800 XHD	**26747**
4900	2630-4900 XHD	**26748**
5000	2630-5000 XHD	**26749**

 © System Plast S.r.l. , 2012 - All Rights Reserved

CHAINBELT FOR TAB AND MAGNETIC SYSTEM

Series	*Pages*
2120M	183
2250 M FT - 2250 M FG	
2260 M FT - 2250 TAB FT for TAB and magnetic system	180 ➔ 181
2251 M FT - 2251 TAB FT for TAB and magnetic system	182

BENEFITS:

- HIGH STRENGTH AND HEAVY DUTY FLIGHT DESIGN.
  THE CHAIN MATERIAL THICKNESS AND HINGE DESIGN ENSURE A HIGH WORKING LOAD CAPACITY.
- STANDARDISATION IN CONVEYOR DESIGN.
  THE CHAIN BELTS HAVE THE SAME THICKNESS AS THE 2250 - 2251 SERIES BELTS.
- EASY INSTALLATION.
- OPTIMUM PRODUCT STABILITY.
  THE TOP PLATE DESIGN AND 1“ pitch ALLOWS FOR A MAXIMUM SUPPORT AREA AND SMOOTH PRODUCT TRANSFER.

FOR MAGNETIC TYPES:


- EASY INSTALLATION.
  NO TABS OR BEVEL.
  ALLOWS CHAIN TO BE INSTALLED AND REMOVED QUICKLY.


FEATURES:


THIS SYSTEM OFFERS A UNIQUE SOLUTION FOR SIDEFLEXING APPLICATIONS IN PLANTS WITH MODULAR CONVEYOR BELTS.

2250 M FT SIDEFLEXING FLAT TOP CHAINBELT FOR MAGNETIC SYSTEM



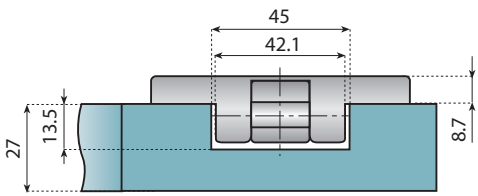

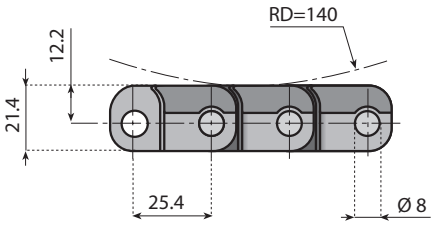

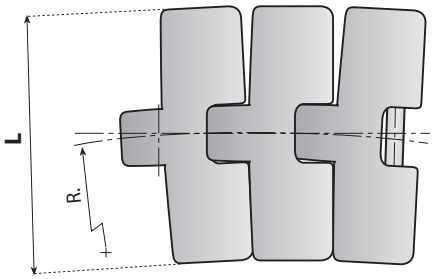

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


Applications:
The chainbelt magnetic system with closed top plates is best suited for conveying glass and pet containers (for example PET bottles with petaloid base).
Pin Material: Ferritic Stainless Steel


Pages 4⇨7 Pages 324⇨325 Pages 238⇨244 Pages 340⇨343


Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m
			mm	inch			
LFG 2250 M K330 FT	**11320**	**LFG** Dark Grey	83.8	3 19/64	500	2.000	1.66
NGG 2250 M K330 FT	**11320NGG**	**NGG** Light Grey					

2250 M FG SIDEFLEXING FLUSH GRID CHAINBELT FOR MAGNETIC SYSTEM



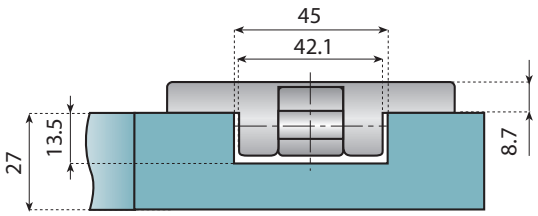

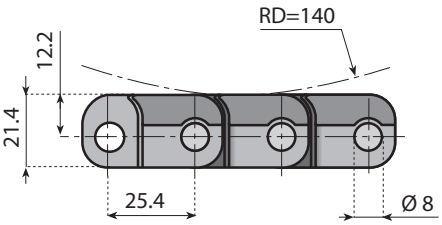

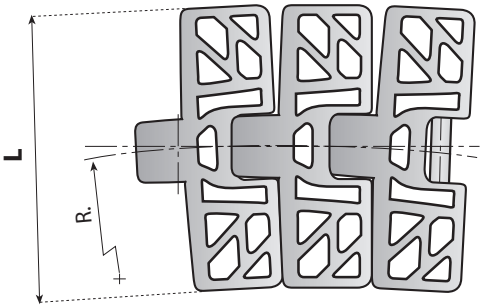

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

Applications:
Flush Grid chainbelt for magnetic system with 20% open area is ideal for can conveying applications.
Pin Material: Ferritic Stainless Steel

Pages 4⇨7 Pages 324⇨325 Pages 238⇨244 Pages 340⇨343

Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m
			mm	inch			
LFG 2250 M K330 FG	**11321**	**LFG** Dark Grey	83.8	3 19/64	500	1.900	1.65
NGG 2250 M K330 FG	**11321NGG**	**NGG** Light Grey					


Standard length: 120 pitches (10 ft. - 3.048 m)


Pin material: Ferritic Stainless Steel


© System Plast S.r.l. , 2012 - All Rights Reserved

SIDEFLEXING FLAT TOP CHAINBELT FOR MAGNETIC SYSTEM 2260 M FT



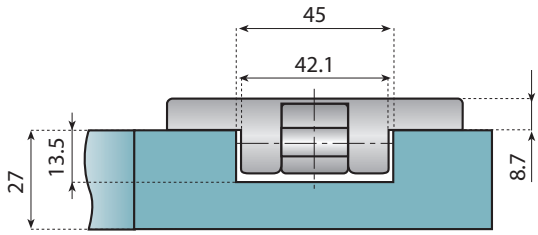

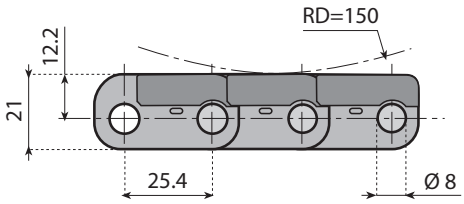

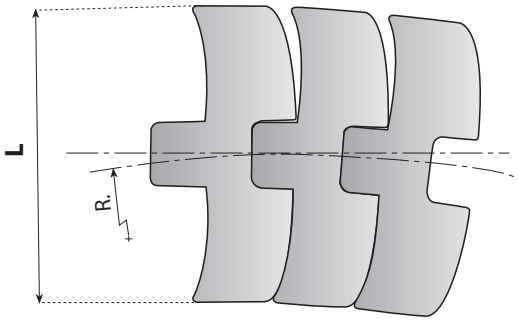

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation


Applications:
The chainbelt magnetic system with closed top plates is best suited for conveying glass and pet containers (for example PET bottles with petaloid base).
Pin Material: Ferritic Stainless Steel


MATERIAL Pages 4⇨7
Pages 324⇨325
Pages 238⇨242
Pages 340⇨343


Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m
			mm	inch			
LFG 2260 M K330 FT	**11329**	**LFG** Dark Grey	83.8	3 19/64	500	2.000	1.66
NGG 2260 M K330 FT	**11329NGG**	**NGG** Light Grey					

SIDEFLEXING FLAT TOP CHAINBELT FOR TAB SYSTEM 2250 TAB FT



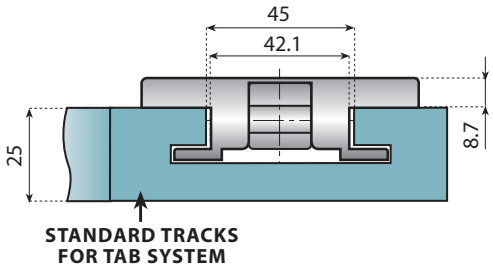

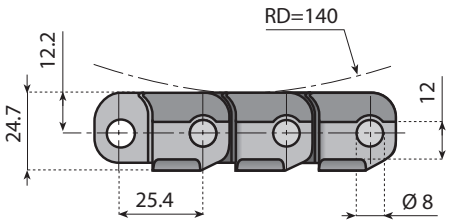

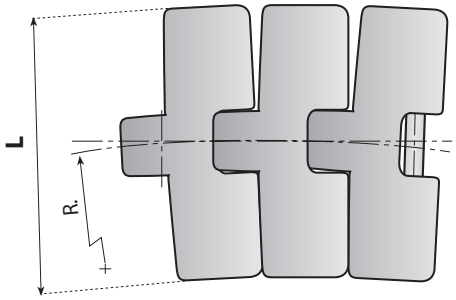

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

Applications:
The chainbelt magnetic system with closed top plates is best suited for conveying glass and pet containers (for example PET bottles with petaloid base).
Pin material: Austenic Steel


MATERIAL Pages 4⇨7
Pages 324⇨325
Pages 256+261
Pages 265+267
Pages 340⇨343


Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m
			mm	inch			
LFG 2250 TAB K330 FT	**11323**	**LFG** Dark Grey	83.8	3 19/64	500	2.000	1.75
NGG 2250 TAB K330 FT	**11323NGG**	**NGG** Light Grey					
LFG 2250 TAB K450 FT	**11324**	**LFG** Dark Grey	114.3	4½			2.04
NGG 2250 TAB K450 FT	**11324NGG**	**NGG** Light Grey					


Standard length: 120 pitches (10 ft. - 3.048 m)

Pin material: Ferritic Stainless Steel


2251 M FT HEAVY DUTY SIDEFLEXING FLAT TOP CHAINBELT FOR MAGNETIC SYSTEM

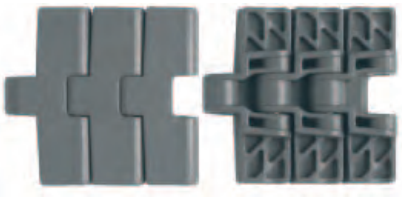

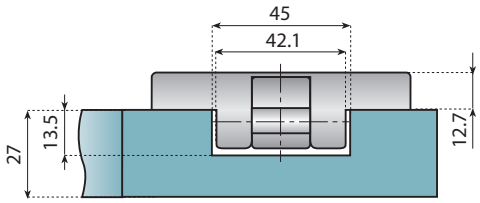

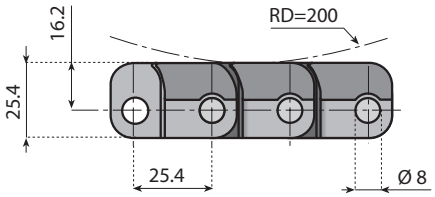

"NOLU-S" CURVES ARE STRONGLY RECOMMENDED WITH THESE CHAINS!

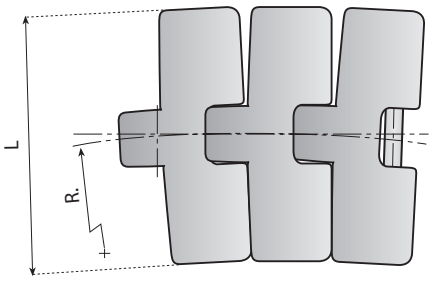

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

Applications:
The chainbelt magnetic system with closed top plates is best suited for conveying glass and PET containers (for example PET bottles with petaloid base).


Pin Material:
Martensitic Stainless Steel


MATERIAL Pages 4⇨7 | Pages 324⇨325 | Pages 245⇨251 | Pages 340⇨343


Belts - Ref.	Code	Material	Width L		R min.	SC	Max load capacity N	Weight Kg/m
			mm	inch				
LFG 2251 M K330 FT	**11322**	**LFG** Dark Grey	83.8	3 19/64	500	45	2000	1.90
NGG 2251 M K330 FT	**11322NGG**	**NGG** Light Grey						
LFG 2251 M K450 FT	**11328**	**LFG** Dark Grey	114.3	4½				2.19
NGG 2251 M K450 FT	**11328NGG**	**NGG** Light Grey						

2251 TAB FT HEAVY DUTY SIDEFLEXING FLAT TOP CHAINBELT FOR TAB SYSTEM



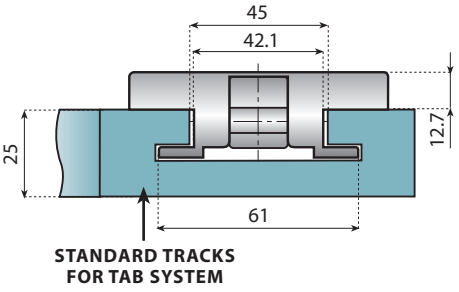

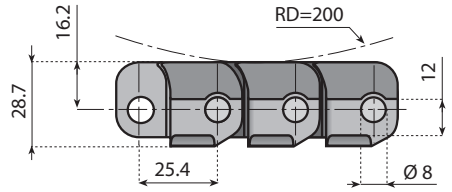

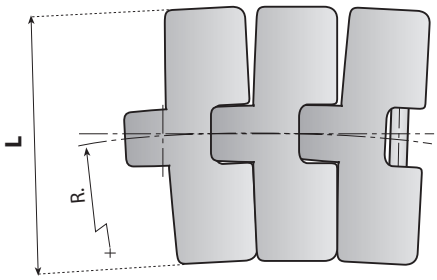

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

Applications:
The chainbelt with closed top plates is best suited for conveying glass and PET containers (for example PET bottles with petaloid base).


Pin Material:
Martensitic Stainless Steel


MATERIAL Pages 4⇨7 | Pages 324⇨325 | Pages 253+261 | Pages 265+267 | Pages 340⇨343


Belts - Ref.	Code	Material	Width L		R min.	SC	Max load capacity N	Weight Kg/m
			mm	inch				
LFG 2251 TAB K330 FT	**11325**	**LFG** Dark Grey	83.8	3 19/64	500	45	2000	1.75
NGG 2251 TAB K330 FT	**11325NGG**	**NGG** Light Grey						
LFG 2251 TAB K450 FT	**11326**	**LFG** Dark Grey	114.3	4½				2.19
NGG 2251 TAB K450 FT	**11326NGG**	**NGG** Light Grey						

Standard length: 120 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved

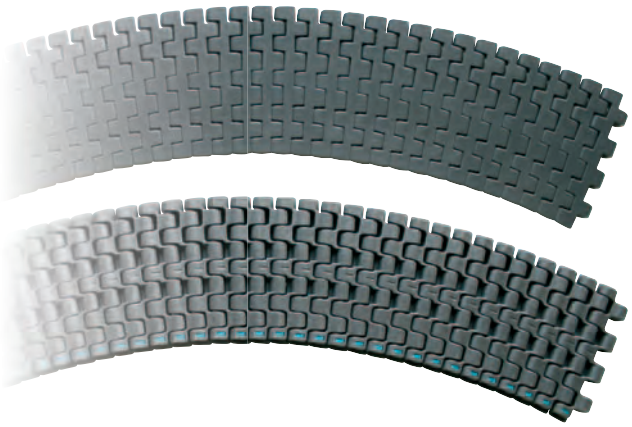

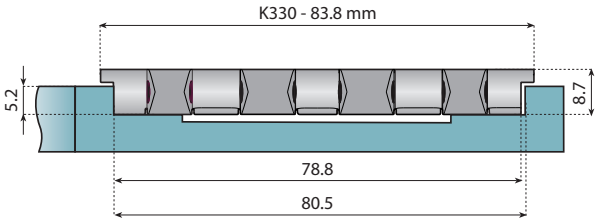

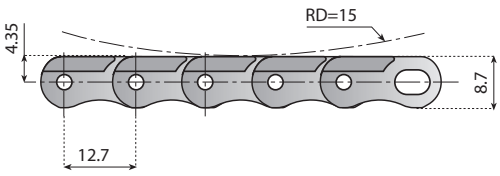

Sideflexing belt for magnetic system

Features:

This system offers a new and unique solution for sideflexing applications in plants with modular conveyors.

Applications:

- To be used in the dry end of the line where bottles or cans run in lanes separated by guides.
- The short pitch makes in-line transfers possible.


Standard length:

240 pitches (10 ft - 3.048 m)

Weight: 13.7 kg/m² - 2.8 lb/ft²

Pin material:

Ferritic Stainless Steel

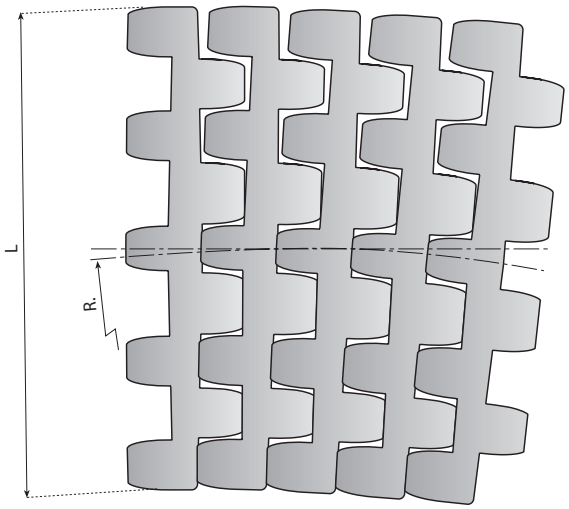

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

Pages 4⇨7 Pages 231⇨237 Pages 312⇨314 +316 Pages 340⇨343


Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m
			mm	inch			
LFG 2120 M K330	**11340**	**LFG** Dark Grey	83.8	3.30	500	2500	1.11
NGG 2120 M K330	**11340NGG**	**NGG** Light Grey				2100	


Standard length: 240 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved

Plastic modular side flex belt

Series	*Pages*
2256	186 → 187
2256 VG	188 → 189
2351 STANDARD	190 + 195
2351 VG	194 + 195
2451 HEAVY DUTY	191 + 195
2551 SMALL RADIUS	192 + 195
2651 HEAVY DUTY - SMALL RADIUS	193 + 195

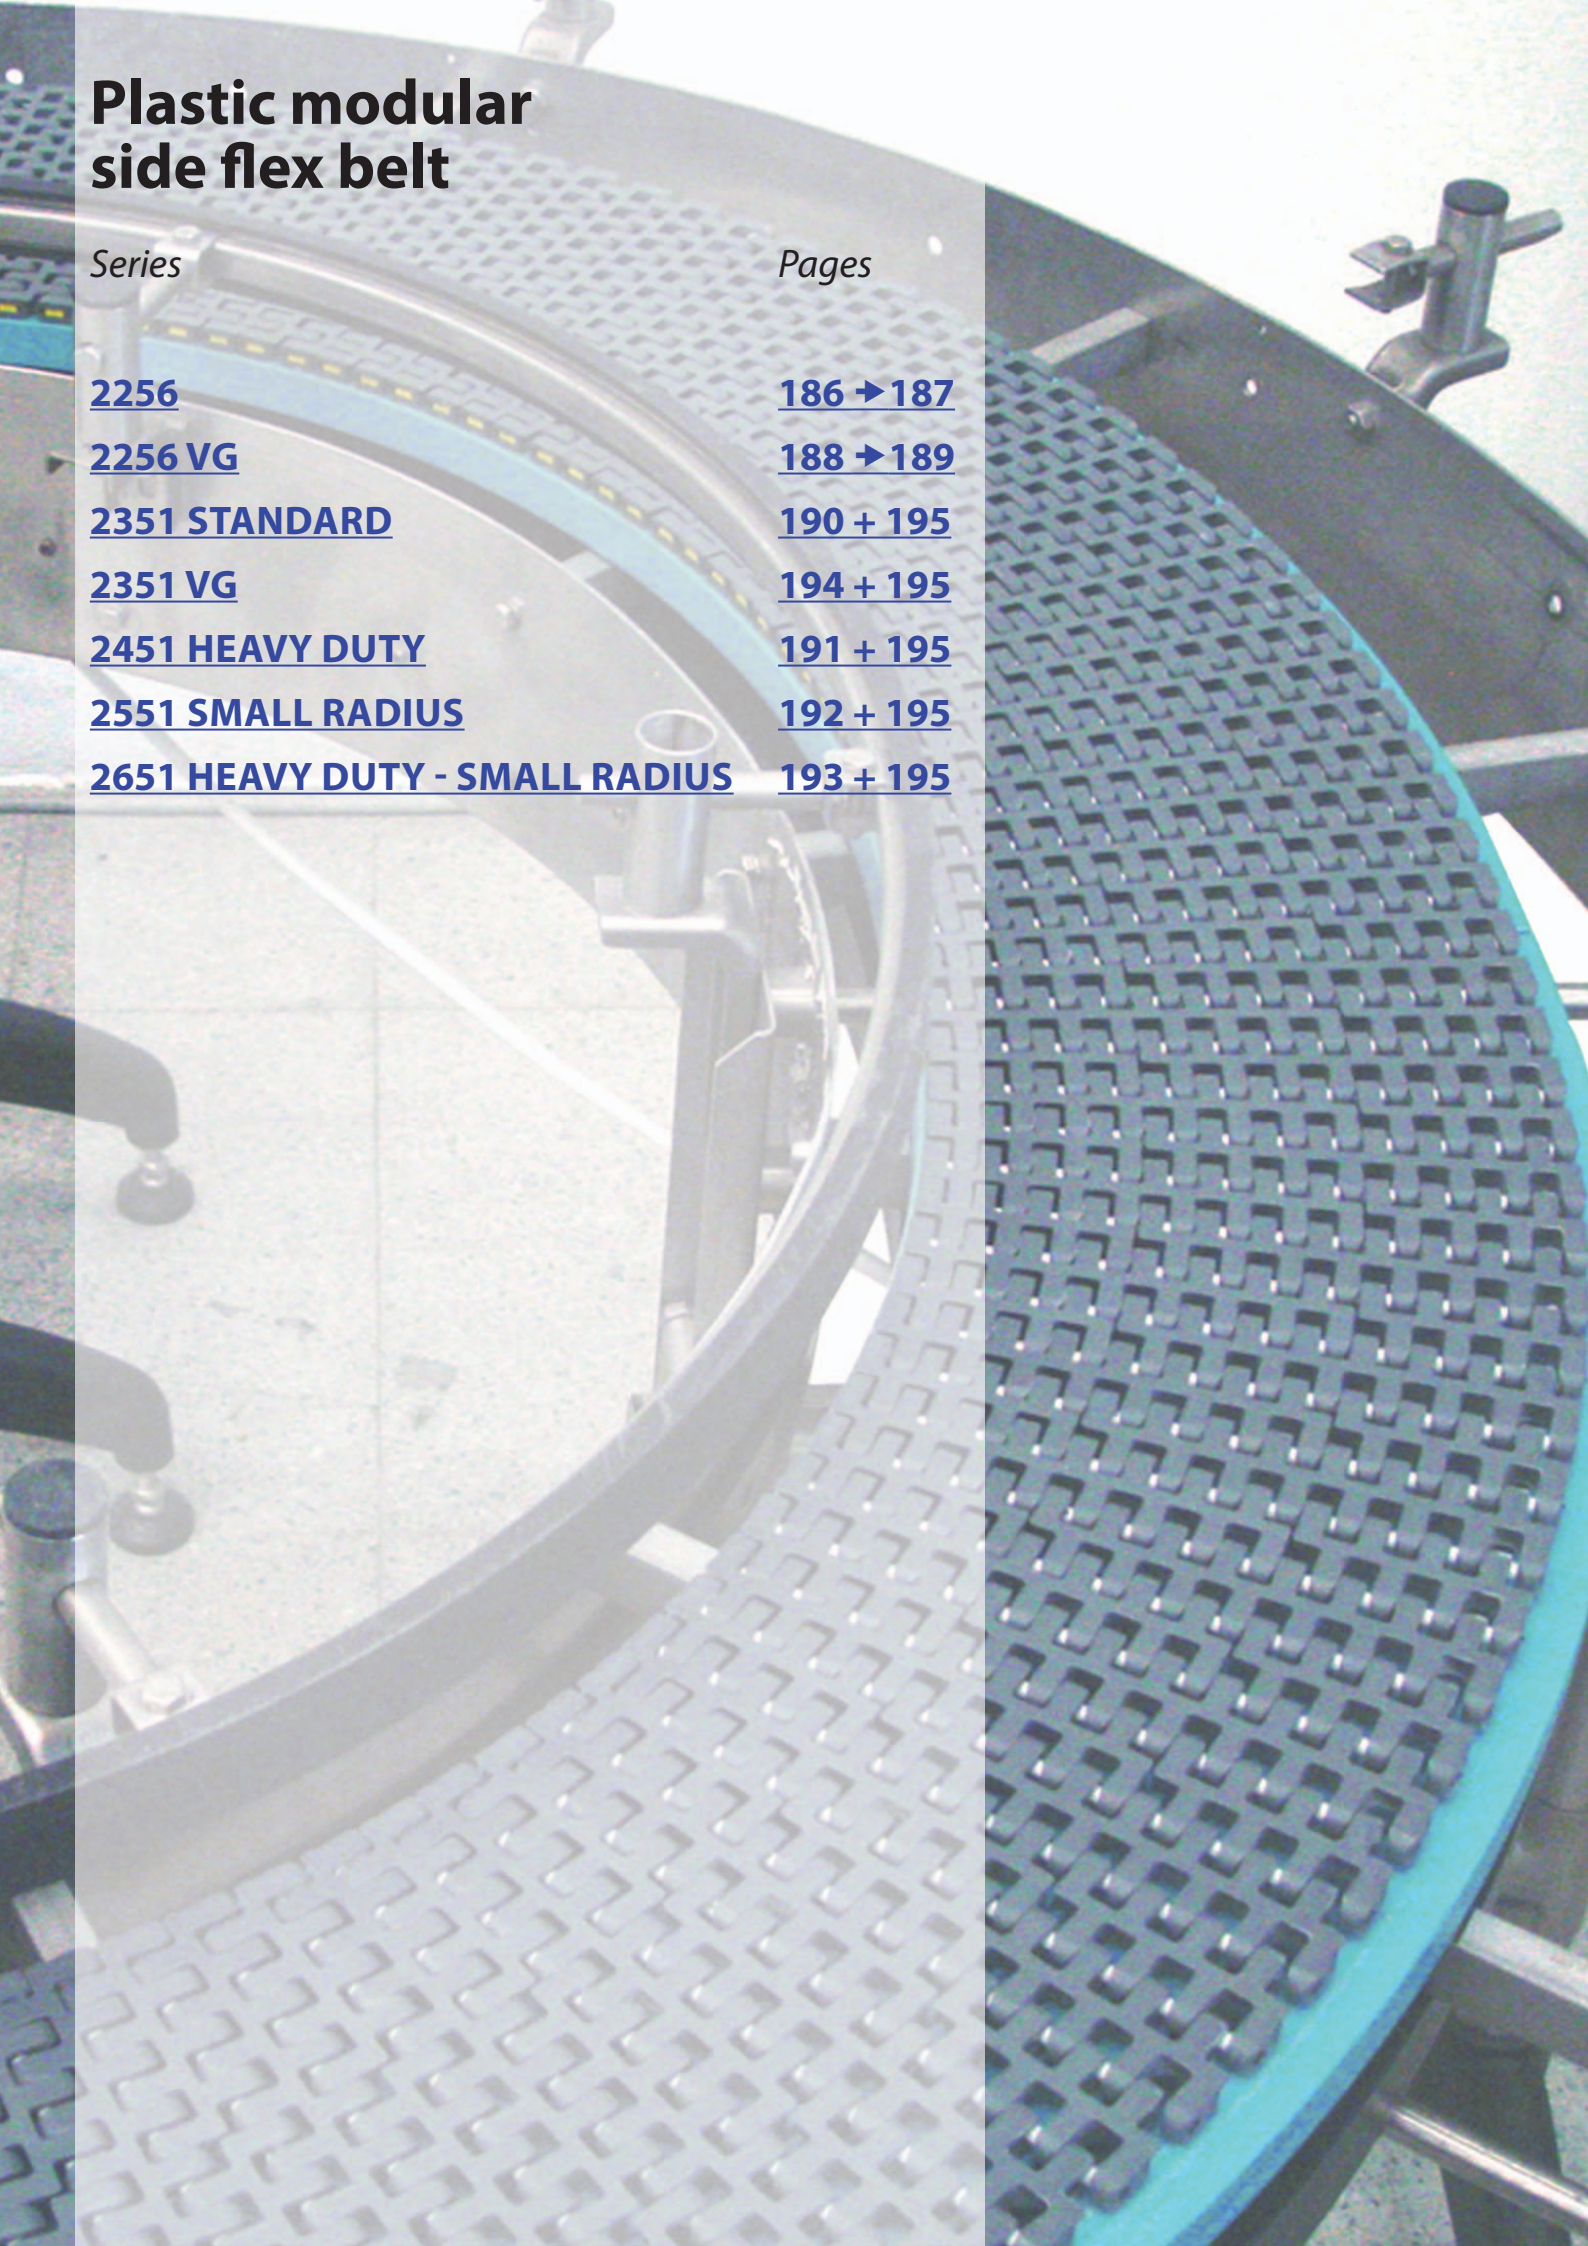



This belt is bi-directional and can make both left and right turns.
Even S-curves are possible if the load allows for that.
The belt is available with several clips and guiding systems:
C-version: just a clip for pin retention;
S-version: attached to the pin retention clip is a slider shoe that can reduce friction and act as a wear part;
T-version: attached to the pin retention clip is a TAB that holds the belt down in the curves;
TP-version: attached to the pin retention clip is a TAB-Positioner combination that holds the belt down in the curves but also guides the belt on straight sections.


For BELTS AVAILABLE IN "NGG" material just add "NGG" to part number (example "code 26625-NGG")

Standard Material


LFB
Low Friction Acetal (standard material color Blue)


On request and for adequate quantities these belts can be produced in:

LFG	NGG
Low Friction Acetal Resin	New Generation

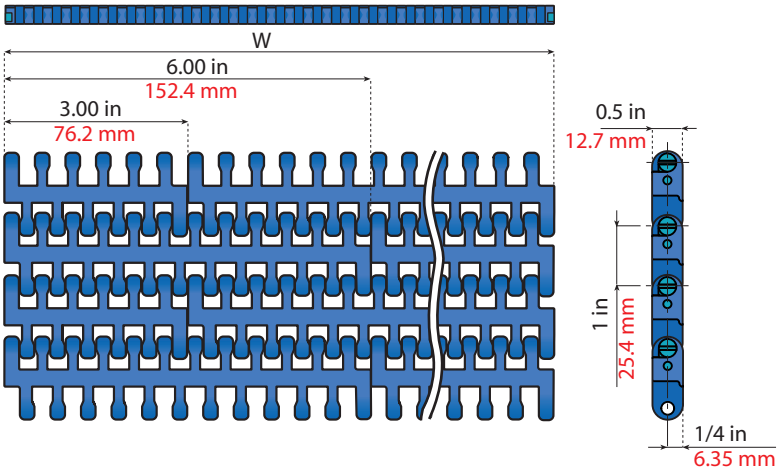


Weight: 8.3 Kg/m² - 1.7 lb/ft²
Pin material: PBT (white)
Standard length:
belt width ≤ 24 inch: 3,048m belt length
belt width > 24 inch: 1,524m belt length






WITHOUT TAB "C" Version




MATERIAL Pages 4⇨7 Pages 326 Pages 340⇨343

Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-C	**26601**	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-C	**26602**	290				
9.00	229	LFB-2256-0009-C	**26603**	435				
12.00	305	LFB-2256-0012-C	**26604**	580				
15.00	381	LFB-2256-0015-C	**26605**	725				
18.00	457	LFB-2256-0018-C	**26606**	890				
21.00	533	LFB-2256-0021-C	**26607**	1040				
24.00	610	LFB-2256-0024-C	**26608**	1250				


Other widths available on request.

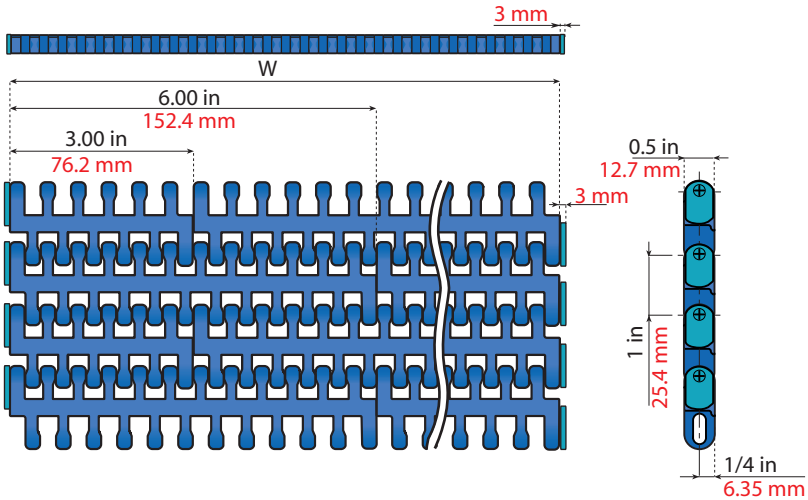






WITH SLIDER SHOE "S" Version




Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-S	**26625**	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-S	**26626**	290				
9.00	229	LFB-2256-0009-S	**26627**	435				
12.00	305	LFB-2256-0012-S	**26628**	580				
15.00	381	LFB-2256-0015-S	**26629**	725				
18.00	457	LFB-2256-0018-S	**26630**	890				
21.00	533	LFB-2256-0021-S	**26631**	1040				
24.00	610	LFB-2256-0024-S	**26632**	1250				

Other widths available on request.


 © System Plast S.r.l. , 2012 - All Rights Reserved

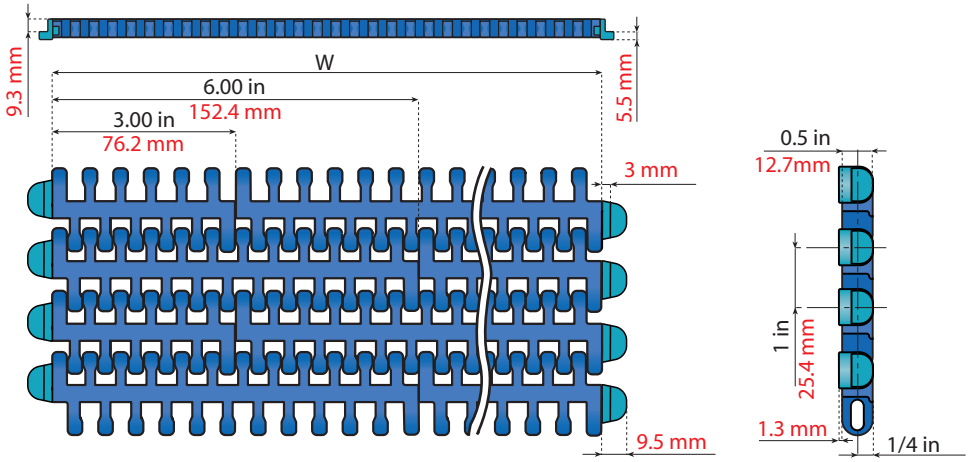






WITH TAB
"T" Version




Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-T	**26609**	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-T	**26610**	290				
9.00	229	LFB-2256-0009-T	**26611**	435				
12.00	305	LFB-2256-0012-T	**26612**	580				
15.00	381	LFB-2256-0015-T	**26613**	725				
18.00	457	LFB-2256-0018-T	**26614**	890				
21.00	533	LFB-2256-0021-T	**26615**	1040				
24.00	610	LFB-2256-0024-T	**26616**	1250				


Other widths available on request.

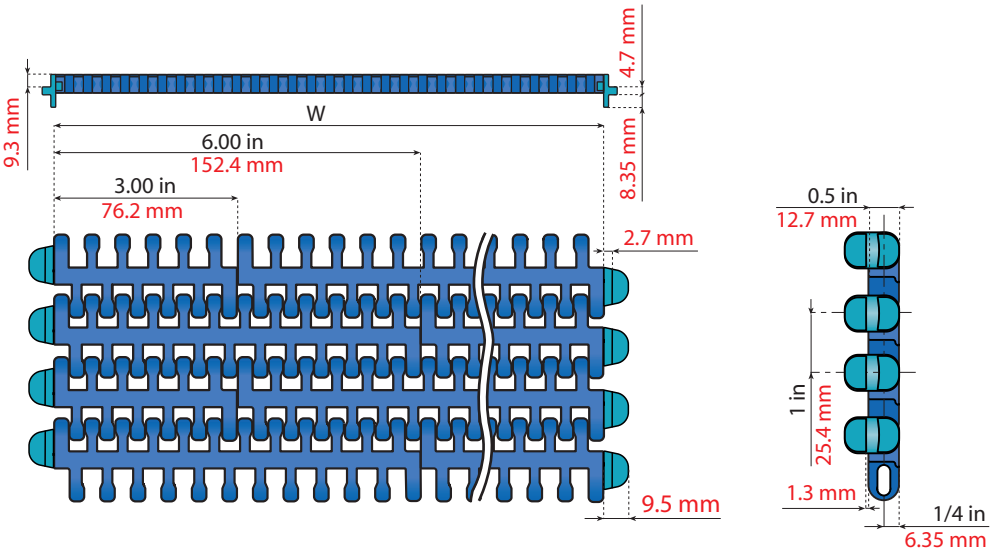






WITH TAB
AND POSITIONER
"TP" Version



Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-TP	**26617**	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-TP	**26618**	290				
9.00	229	LFB-2256-0009-TP	**26619**	435				
12.00	305	LFB-2256-0012-TP	**26620**	580				
15.00	381	LFB-2256-0015-TP	**26621**	725				
18.00	457	LFB-2256-0018-TP	**26622**	890				
21.00	533	LFB-2256-0021-TP	**26623**	1040				
24.00	610	LFB-2256-0024-TP	**26624**	1250				





This belt is bi-directional and can make both left and right turns.
Even S-curves are possible if the load allows for that.
The belt is available with several clips and guiding systems:
C-version: just a clip for pin retention;
S-version: attached to the pin retention clip is a slider shoe that can reduce friction and act as a wear part;
T-version: attached to the pin retention clip is a TAB that holds the belt down in the curves;
TP-version: attached to the pin retention clip is a TAB-Positioner combination that holds the belt down in the curves but also guides the belt on straight sections.

Standard Material


LFB
Low Friction Acetal (standard material color Blue)
TPR
Thermoplastic Rubber

MATERIAL Pages 4⇨7 Pages 326 Pages 340⇨343

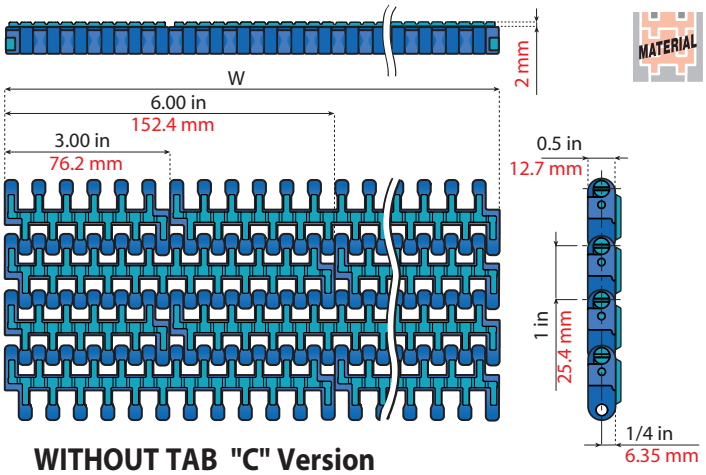

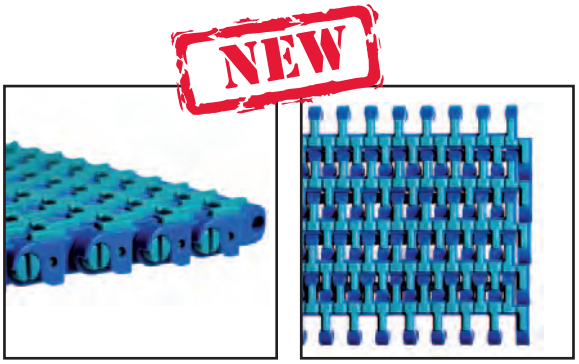


WITHOUT TAB "C" Version




Belt material: low friction acetal resin, dark blue colour
Rubber material: thermoplastic rubber, waterblue colour
Pin material: PBT (white)
Standard length:
belt width ≤ 24 inch: 3,048 m belt length
belt width > 24 inch: 1,524 m belt length


Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	VG-2256-0003-C	**26751**	145	30.000	2.000	25	7.75
6.00	152	VG-2256-0006-C	**26752**	290				
9.00	229	VG-2256-0009-C	**26753**	435				
12.00	305	VG-2256-0012-C	**26754**	580				
15.00	381	VG-2256-0015-C	**26755**	725				
18.00	457	VG-2256-0018-C	**26756**	890				
21.00	533	VG-2256-0021-C	**26757**	1040				
24.00	610	VG-2256-0024-C	**26758**	1250				

Other widths available on request.

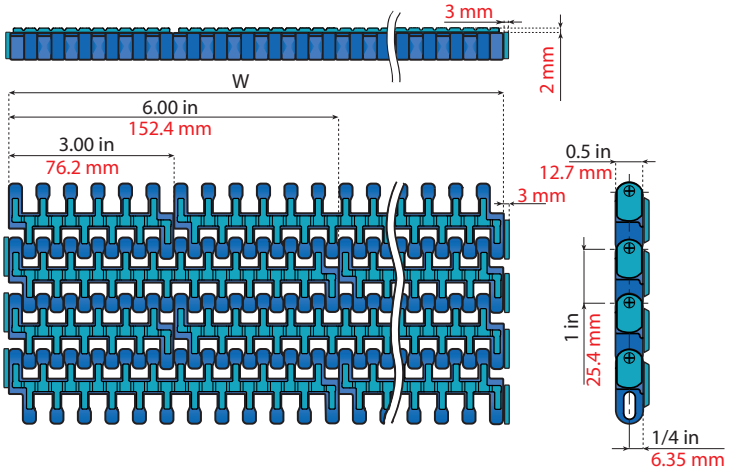

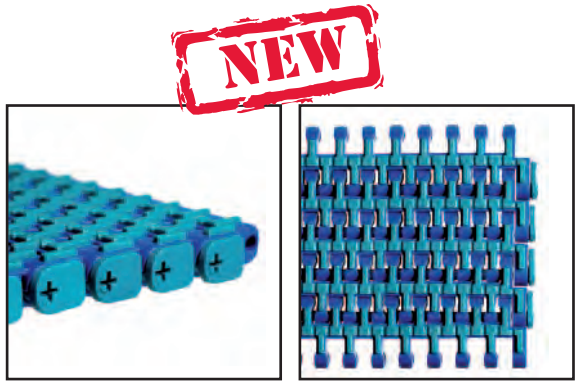

WITH SLIDER SHOE "S" Version





Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	VG-2256-0003-S	**26787**	145	30.000	2.000	25	7.75
6.00	152	VG-2256-0006-S	**26788**	290				
9.00	229	VG-2256-0009-S	**26789**	435				
12.00	305	VG-2256-0012-S	**26790**	580				
15.00	381	VG-2256-0015-S	**26791**	725				
18.00	457	VG-2256-0018-S	**26792**	890				
21.00	533	VG-2256-0021-S	**26793**	1040				
24.00	610	VG-2256-0024-S	**26794**	1250				

Other widths available on request.


 © System Plast S.r.l. , 2012 - All Rights Reserved

SIDE FLEX BELTS WITH HIGH FRICTION SURFACE 2256VG

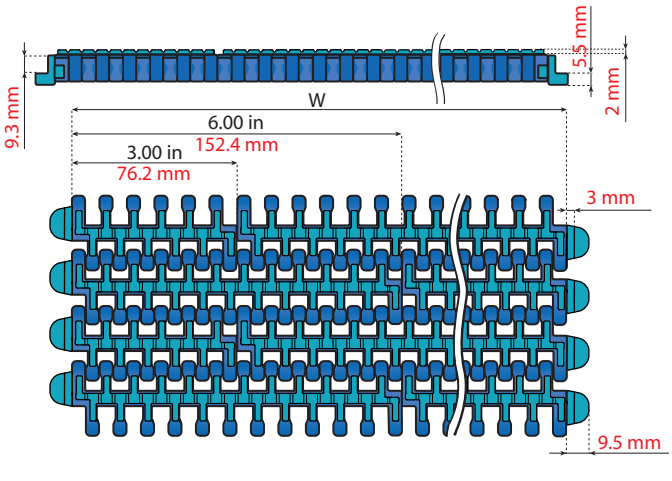




NEW







WITH TAB
"T" Version




Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	VG-2256-0003-T	**26763**	145	30.000	2.000	25	7.75
6.00	152	VG-2256-0006-T	**26764**	290				
9.00	229	VG-2256-0009-T	**26765**	435				
12.00	305	VG-2256-0012-T	**26766**	580				
15.00	381	VG-2256-0015-T	**26767**	725				
18.00	457	VG-2256-0018-T	**26768**	890				
21.00	533	VG-2256-0021-T	**26769**	1040				
24.00	610	VG-2256-0024-T	**26770**	1250				


Other widths available on request.

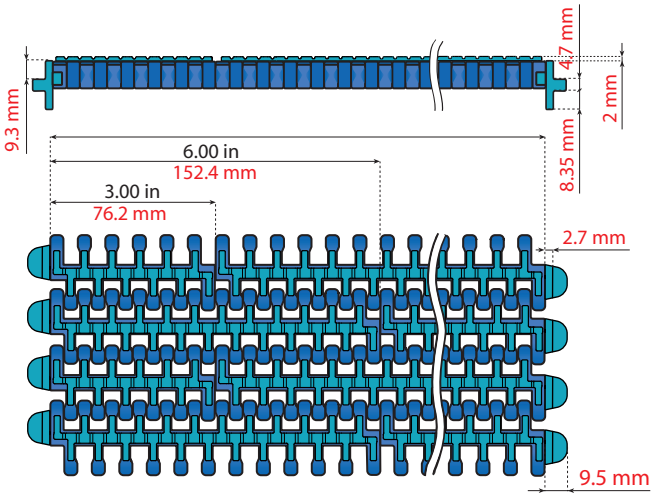




NEW






WITH TAB
AND POSITIONER
"TP" Version




Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
					Straight N/m	Curve N		
3.00	76	VG-2256-0003-TP	**26775**	145	30.000	2.000	25	7.75
6.00	152	VG-2256-0006-TP	**26776**	290				
9.00	229	VG-2256-0009-TP	**26777**	435				
12.00	305	VG-2256-0012-TP	**26778**	580				
15.00	381	VG-2256-0015-TP	**26779**	725				
18.00	457	VG-2256-0018-TP	**26780**	890				
21.00	533	VG-2256-0021-TP	**26781**	1040				
24.00	610	VG-2256-0024-TP	**26782**	1250				

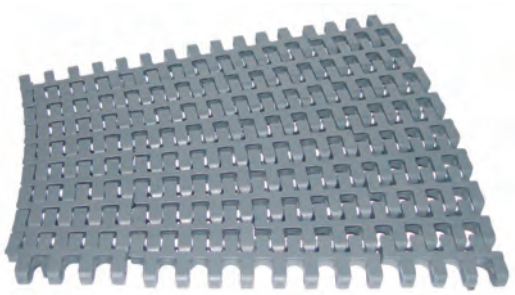


RADIUS WIDTH RATIO MIN. 1.6


MATERIAL Pages 4⇨7
Pages 326
Pages 340⇨343

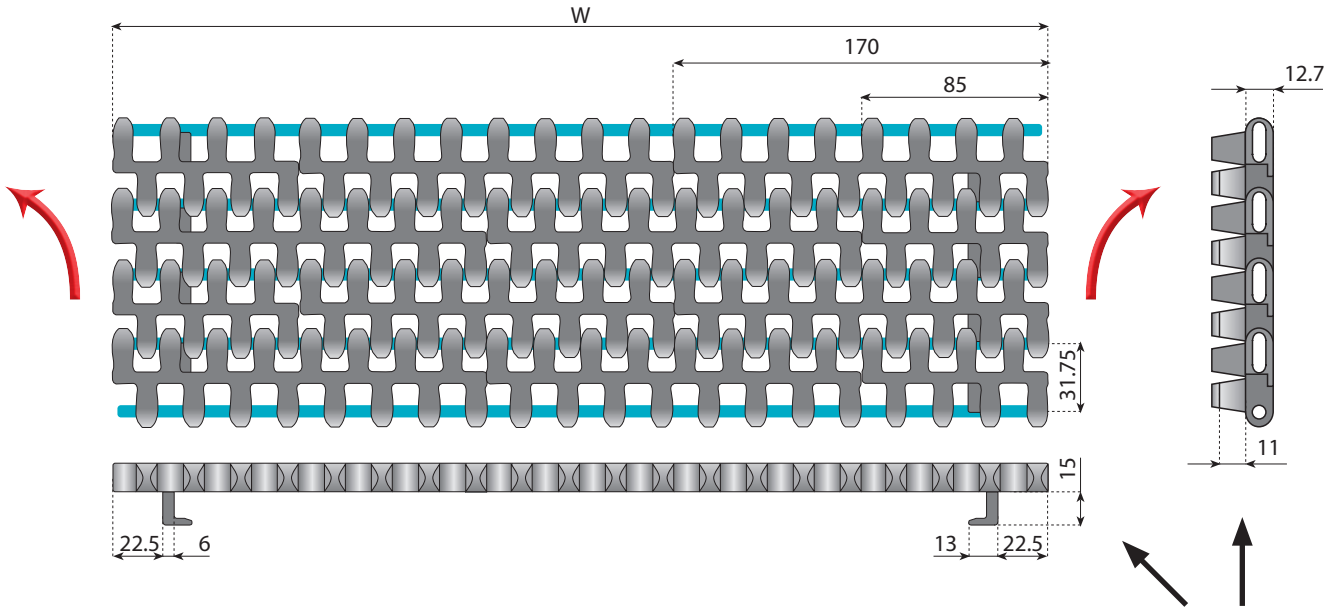

Features:
- Radius – width ratio min. 1.6
- For left or right L- or U-turns
- Can also be used in S-curves
- Strong design
- Optimum product support
- Easy installation and maintenance

Pin Material: PBT water blue
Weight: 9.0 kg/m²
Standard length:
belt width ≤ 850mm: 1,524m belt length
belt width > 850mm: belt length on request




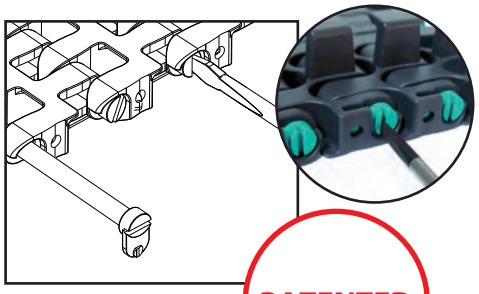

PATENTED


For BELTS AVAILABLE IN "LFW" material just add "LFW" to part number (example "code 27322-LFW")

LFG	LFW
Low Friction Acetal Resin (standard material color Dark Grey)	**Low Friction Acetal Resin** (Color White)



WITHOUT TAB

Width W mm	Belts Ref.	Code
255	2351-0255-NT	**27322**
340	2351-0340-NT	**27323**
425	2351-0425-NT	**27324**
510	2351-0510-NT	**27325**
595	2351-0595-NT	**27326**
680	2351-0680-NT	**27327**
765	2351-0765-NT	**27328**
850	2351-0850-NT	**27329**




WITH TAB BOTH SIDES

Width W mm	Belts Ref.	Code
255	2351-0255-ST2	**27312**
340	2351-0340-ST2	**27313**
425	2351-0425-ST2	**27314**
510	2351-0510-ST2	**27315**
595	2351-0595-ST2	**27316**
680	2351-0680-ST2	**27317**
765	2351-0765-ST2	**27318**
850	2351-0850-ST2	**27319**

Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
	Straight N/m	Curve N		
408	30.000	2.500	25	8.8
545				
680				
840				
980				
1150				
1300				
1450				

 © System Plast S.r.l. , 2012 - All Rights Reserved

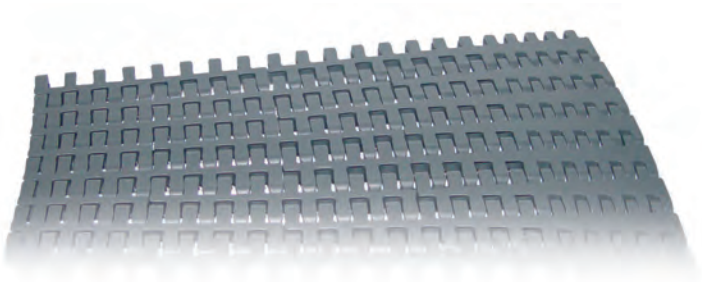


RADIUS WIDTH RATIO MIN. 1.6

MATERIAL Pages 4⇨7


Pages 326


Pages 340⇨343

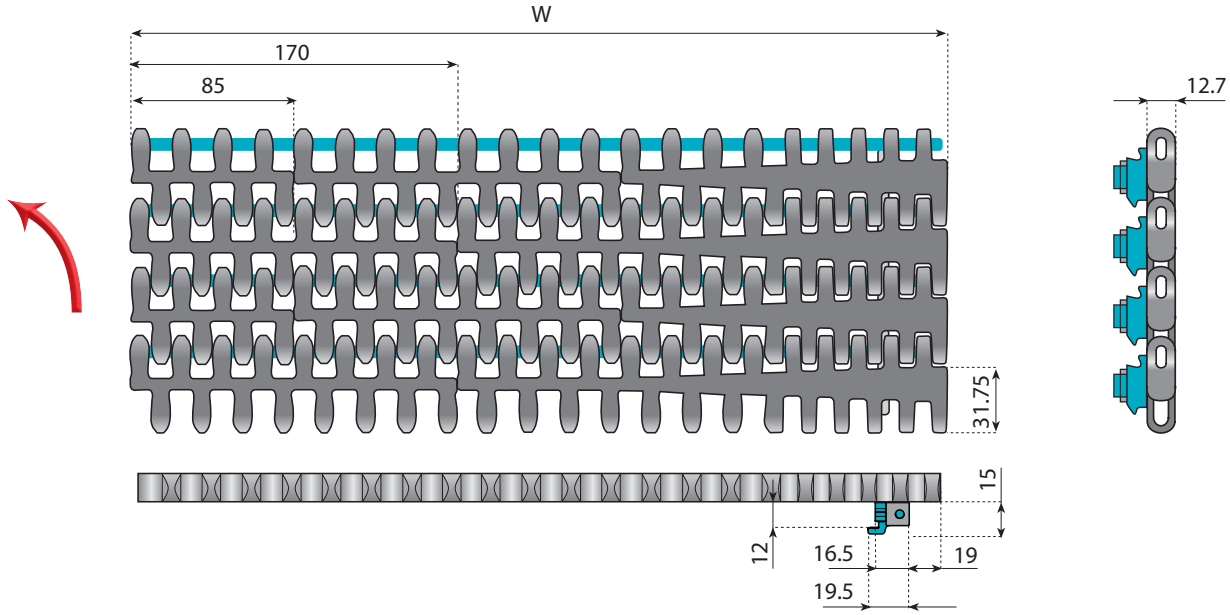

Features:
- Radius – width ratio min. 1.6
- Heavy Duty extra strong design
- For left or right L- or U-turns
- Optimum combination of materials
- Optimum product support
- Easy installation and maintenance

Pin Material: PBT water blue
Weight: 9.7 kg/m²
Standard length:
belt width ≤ 850mm: 1,524m belt length
belt width > 850mm: belt length on request



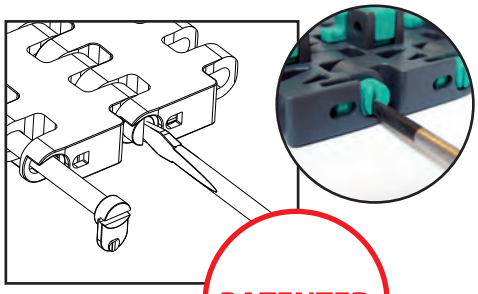


For BELTS AVAILABLE IN "LFW" material just add "LFW" to part number (example "code 27433-LFW")

LFG	LFW
Low Friction Acetal Resin (standard material color Dark Grey)	**Low Friction Acetal Resin** (Color White)

Width W mm	Belts Ref.	Code
-	-	-
340	2451-0340-HDT	**27433**
425	2451-0425-HDT	**27434**
510	2451-0510-HDT	**27435**
595	2451-0595-HDT	**27436**
680	2451-0680-HDT	**27437**
765	2451-0765-HDT	**27438**
850	2451-0850-HDT	**27439**


Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
	Straight N/m	Curve N		
-	30.000	3.500	25	9.8
545				
680				
840				
980				
1150				
1300				
1450				

 © System Plast S.r.l., 2012 - All Rights Reserved

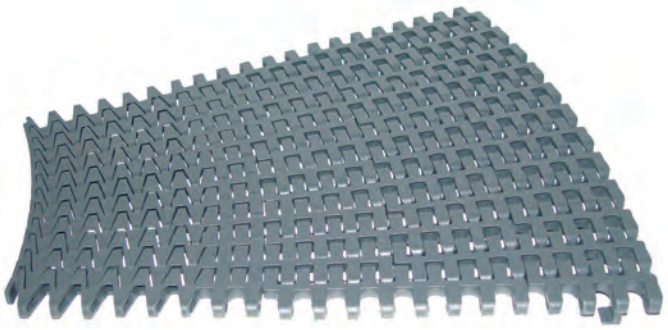


RADIUS WIDTH RATIO MIN. 1.0

MATERIAL Pages 4⇨7
Pages 326
Pages 340⇨343

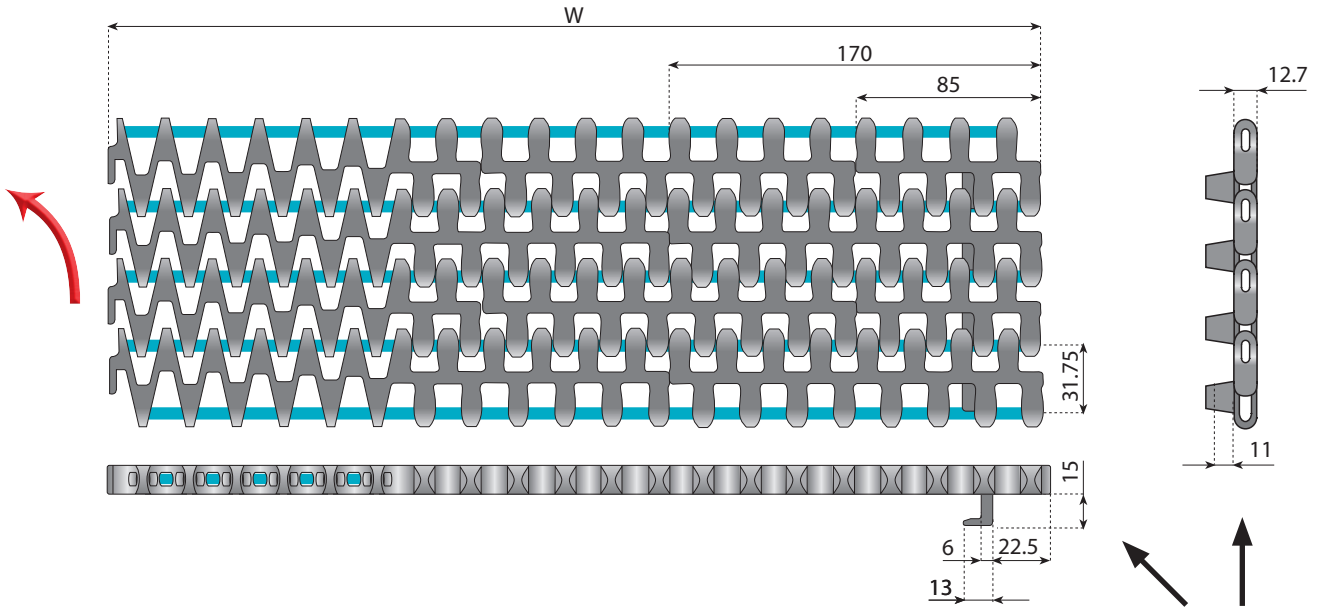

Features:
- Radius – width ratio min. 1.0 for tight curves
- For left or right L- or U-turns
- Strong design
- Optimum product support
- Easy installation and maintenance


Pin Material: PBT water blue
Weight: 8.2 kg/m²
Standard length:
belt width ≤ 850mm: 1,524m belt length
belt width > 850mm: belt length on request

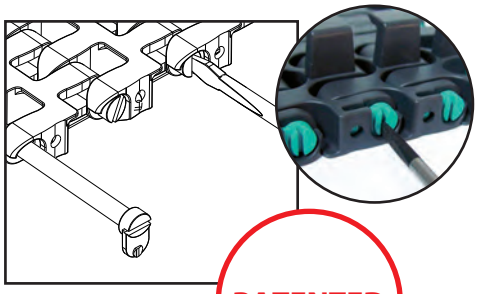


PATENTED

For BELTS AVAILABLE IN "LFW" material just add "LFW" to part number (example "code 27563-LFW")

LFG	LFW
Low Friction Acetal Resin (standard material color Dark Grey)	**Low Friction Acetal Resin** (Color White)



WITHOUT TAB




WITH TAB ONE SIDES

Width W mm	Belts Ref.	Code
-	-	-
340	2551-0340-SR	**27563**
425	2551-0425-SR	**27564**
510	2551-0510-SR	**27565**
595	2551-0595-SR	**27566**
680	2551-0680-SR	**27567**
765	2551-0765-SR	**27568**
850	2551-0850-SR	**27569**

Width W mm	Belts Ref.	Code
-	-	-
340	2551-0340-SRT	**27543**
425	2551-0425-SRT	**27544**
510	2551-0510-SRT	**27545**
595	2551-0595-SRT	**27546**
680	2551-0680-SRT	**27547**
765	2551-0765-SRT	**27548**
850	2551-0850-SRT	**27549**


Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
	Straight N/m	Curve N		
-	30.000	2.500	25	7.8
340				
425				
510				
595				
680				
850				
1050				

 © System Plast S.r.l. , 2012 - All Rights Reserved

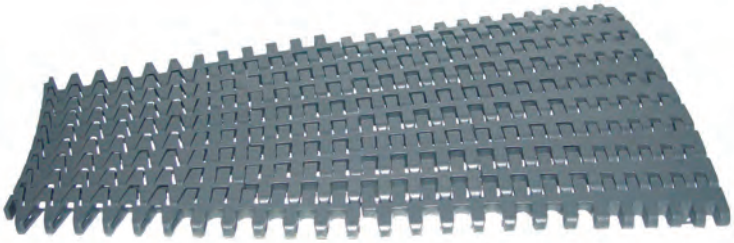

RADIUS WIDTH RATIO MIN. 1.0


MATERIAL Pages 4⇨7
Pages 326
Pages 340⇨343

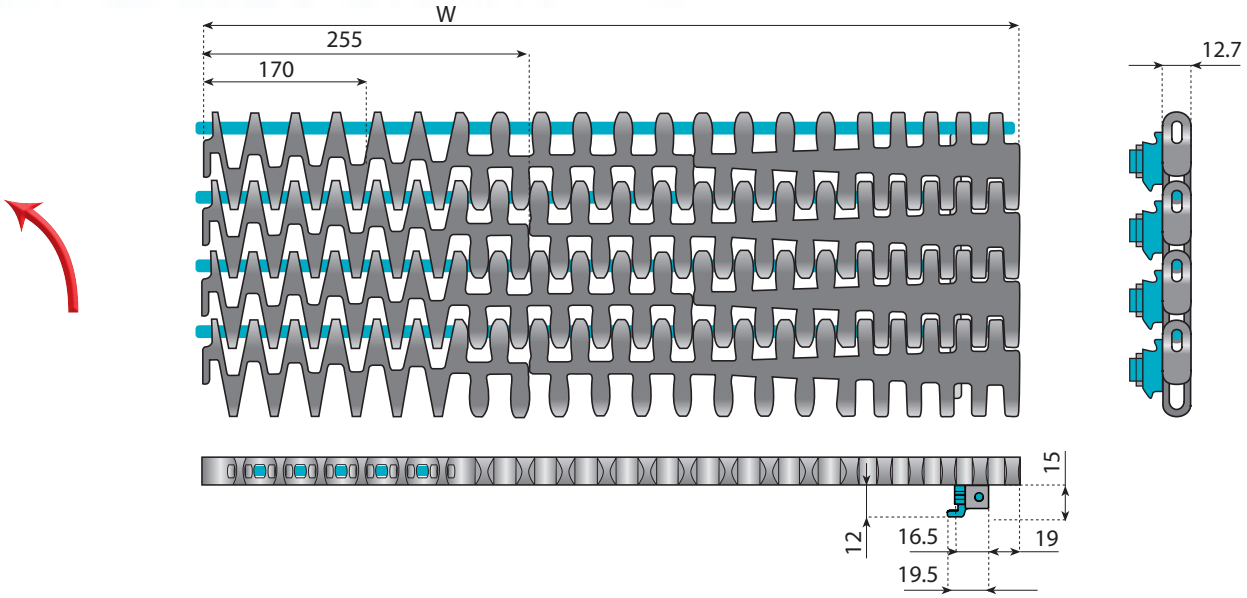


Features:
- Heavy Duty extra strong design
- Radius – width ratio min. 1.0 for tight curves
- For left or right L- or U-turns
- Optimum combination of materials
- Optimum product support
- Easy installation and maintenance

Pin Material: PBT water blue

Standard length:
belt width ≤ 850mm: 1,524m belt length
belt width > 850mm: belt length on request



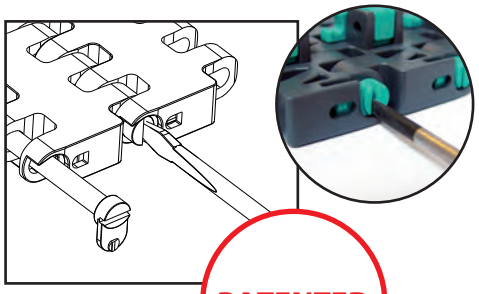

For BELTS AVAILABLE IN "LFW" material just add "LFW" to part number (example "code 27433-LFW")

LFG	LFW
Low Friction Acetal Resin (standard material color Dark Grey)	Low Friction Acetal Resin (Color White)

Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
				Straight N/m	Curve N		
-	-	-	-	30.000	3.500	25	8.8
-	-	-	-				
425	2651-0425-HDSRT	**27634**	425				
510	2651-0510-HDSRT	**27635**	510				
595	2651-0595-HDSRT	**27636**	595				
680	2651-0680-HDSRT	**27637**	680				
765	2651-0765-HDSRT	**27638**	850				
850	2651-0850-HDSRT	**27639**	1050				


NEW

RADIUS WIDTH RATIO MIN. 1.6


MATERIAL Pages 4➔7


Pages 326

Pages 339➔343

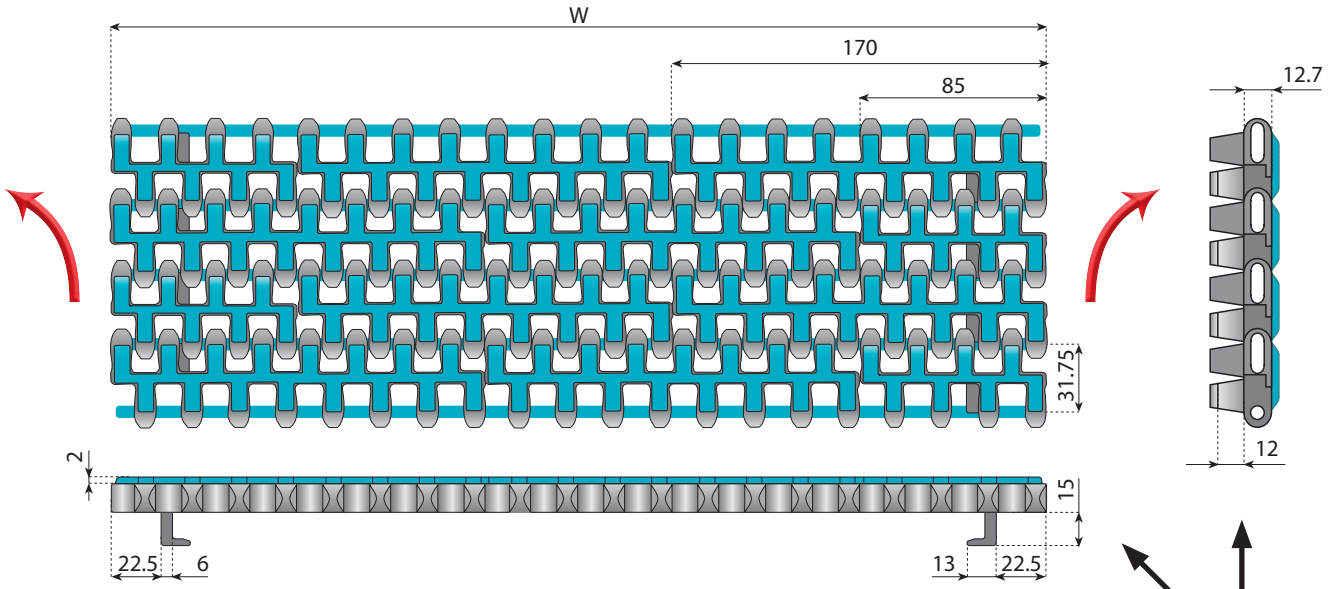

"NT" version without TAB!



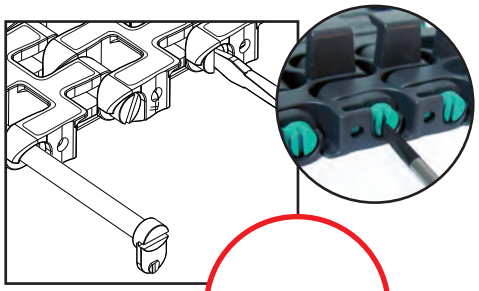


PATENTED

Features:


- Radius – width ratio min. 1.6
- For left or right L- or U-turns
- Can also be used in S-curves
- Strong design
- Optimum product support
- Easy installation and maintenance

For BELTS AVAILABLE IN "LFW" material just add "LFW" to part number (example "code 27346-LFW")

LFG	LFW
Low Friction Acetal Resin (standard material color Dark Grey)	**Low Friction Acetal Resin** (Color White)



WITHOUT TAB



WITH TAB BOTH SIDES

Width W mm	Belts Ref.	Code
255	2351VG-0255-NT	**27346**
340	2351VG-0340-NT	**27347**
425	2351VG-0425-NT	**27348**
510	2351VG-0510-NT	**27349**
595	2351VG-0595-NT	**27350**
680	2351VG-0680-NT	**27351**
765	2351VG-0765-NT	**27352**
850	2351VG-0850-NT	**27353**


Width W mm	Belts Ref.	Code
255	2351VG-0255-ST2	**27338**
340	2351VG-0340-ST2	**27339**
425	2351VG-0425-ST2	**27340**
510	2351VG-0510-ST2	**27341**
595	2351VG-0595-ST2	**27342**
680	2351VG-0680-ST2	**27343**
765	2351VG-0765-ST2	**27344**
850	2351VG-0850-ST2	**27345**


Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
	Straight N/m	Curve N		
408	22.000	2.500	25	8.8
545				
680				
840				
980				
1150				
1300				
1450				

Standard length: 96 pitches (10 ft. - 3.048 m)

 © System Plast S.r.l. , 2012 - All Rights Reserved

2351 - 2551 CURVE GUIDE PROFILES

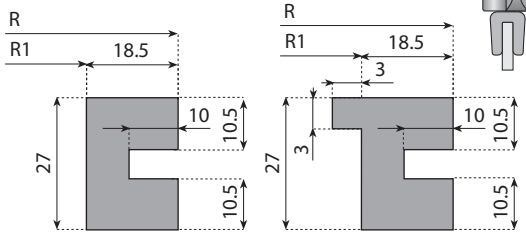

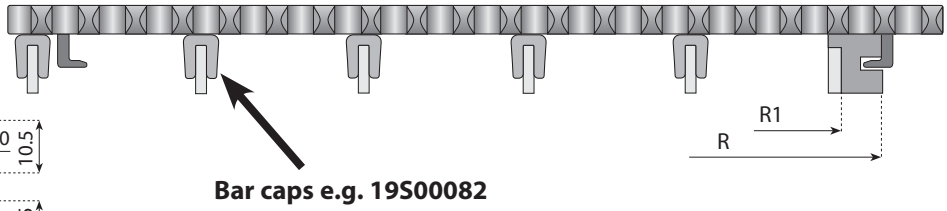



Bar caps e.g. 19S00082

Code		Belt Width mm	Min radius for 2351		Min radius for 2551	
			R	R1	R	R1
		255	634.5	616	-	-
		340	856.5	838	651.5	633
		425	1076.5	1058	821.5	803
		510	1321.5	1303	991.5	973
		595	1546.5	1528	1161.5	1143
190276	190276N	680	1801.5	1783	1331.5	1313
		765	2036.5	2018	1586.5	1568
		850	2271.5	2253	1871.5	1853

Material: Nolu-SR
Standard length: 3 meter

2451 - 2651 CURVE GUIDE PROFILES

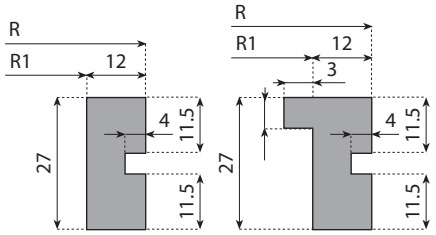

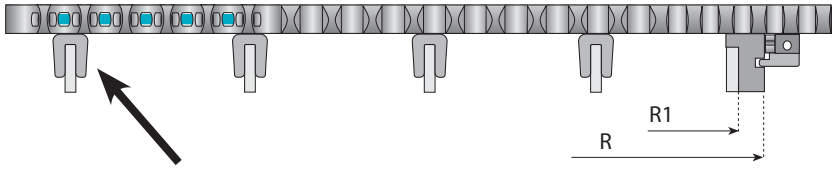


Bar caps e.g. 19S00082

Code		Belt Width mm	Min radius for 2451		Min radius for 2651	
			R	R1	R	R1
		340	850	838	-	-
		425	1070	1058	815	803
		510	1315	1303	985	973
		595	1540	1528	1155	1143
190277	190277N	680	1795	1783	1325	1313
		765	2030	2018	1580	1568
		850	2265	2253	1865	1853


Material: Nolu-SR
Standard length: 3 meter

2351 - 2551 without tab CURVE GUIDE PROFILES

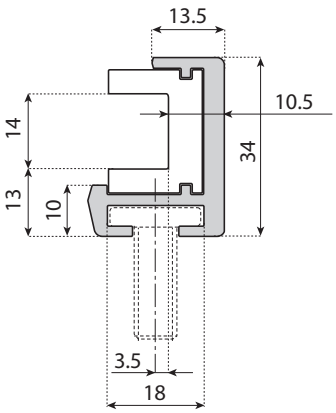


MBG - SUPPORT FOR CHAIN AND BELTS

Aluminum and Nolu-S guide rail for use in guiding the sides of selected plastic modular conveyor belts through turns. Minimum radius 457 mm (inside edge).
Replaceable Nolu-S strips, light grey.
Standard length: 3 meter




Code	Ref.
19S00035-3M	VG-MBG-50-NS-3M
Insert Replacement 19S00077-3M	VG-PMBG-50-NS-3M


STAINLESS STEEL T-HEAD SCREW M8
Supply unit: 10 pieces



Code	Ref.	Standard length L mm
13S00255	VG-1568M-01	16
13S00256	VG-1568M-02	19
13S00258	VG-1568M-04	32

On request we can also supply complete compact curves according to your specifications.See example drawing.

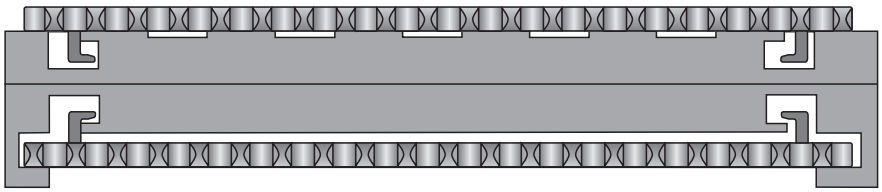

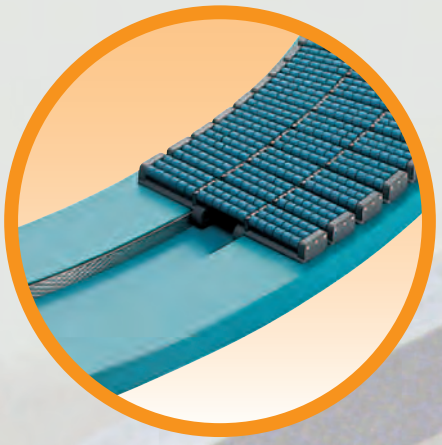


NEW MAGNETIC SYSTEM WITH METAL STRIP: "EXTRA" CURVES
System Plast has recently developed a new magnetic corner retention system for dry-running applications.

The system, sets new performance standards in magnet curve technology due to the inclusion of a unique metal strip mounted in the inside bearing face of the top section. This area is constantly under load due to the pressure/speed factor.

Main advantages:
- Extreme dissipation of heat significantly reduces wear.
- Under test conditions, lowest noise decibel levels were recorded.
- "Extra" curves are strongly recommended with plastic chains only!


MATERIAL
The standard upper section of the Dual Magnetic System curve is produced from 1200 grade UHMW-PE (Ultra High Molecular Weight Polyethylene) with the molecular weight exceeding 7.3 million g/mol., which ensures optimum wear life. The standard colour is waterblue, but it is also available in different colours subject to minimum order quantity. The upper part of the Dual Magnetic System is available, on request, for special high speed or extremely abrasive applications. The return track is available in standard regenerated 1000 grade UHMW-PE with a ultra high molecular polyethylene weight exceeding 4 million g/mol. This ensures a cost saving advantage for the end - user, as the wear on the return track is normally less significant than the top section. Full materials are anhydrous which prevents curve swelling and distortion when exposed to water or moisture for lubrication purposes.
- Nolu-s material is now available! It is strongly recommended for plastic chains.

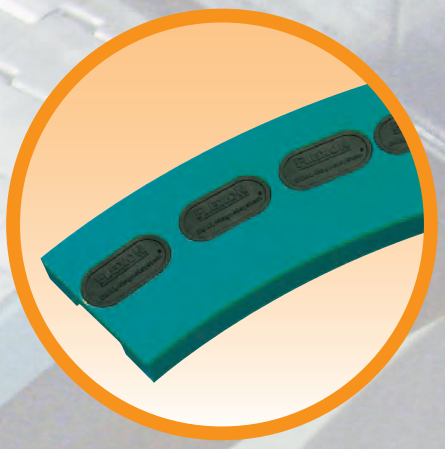




MAGNETIC PACKS
System Plast has developed special magnetic packs for the Dual Magnetic System curves. These unique magnet holders are located into slots machined in the upper section of the curve.

DESIGN AND FUNCTIONALITY
Dual Magnetic System curves have the magnets positioned on the outside of the centre line radius of each track which results in a more effective magnetic field through the curve. The positioning of the magnets in the Dual Magnetic System does not increase the chain load or friction, unlike other similar systems.

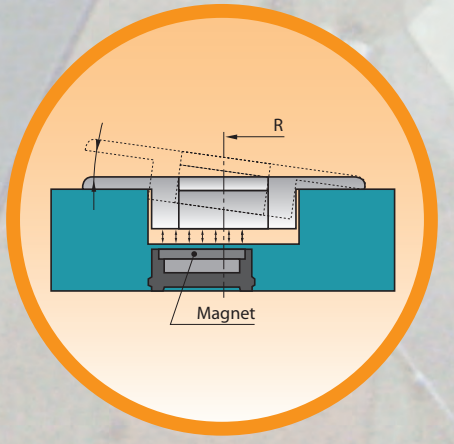


DUAL MAGNETIC CORNER TRACKS

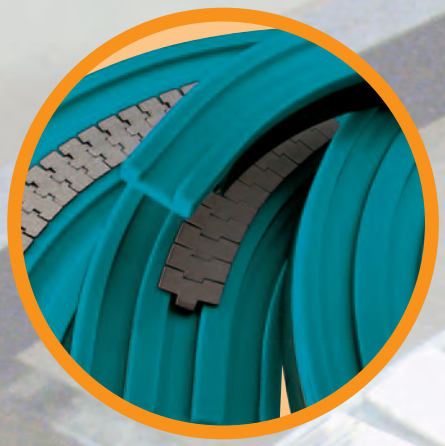

CHARACTERISTICS

The Dual Magnetic System curves are a new development, made under license, as per patented magnetic curve system. The Dual Magnetic System curves are used in conjunction with stainless steel or plastic chains.The chains are retained in the system by the magnetic field created by the magnets that are located into the curve. The Dual Magnetic System chains and curves, compared to the older tab or bevel system, offer the user greater flexibility and improved efficiency as the design allows for easy removal of the chains from the curve - for cleaning and maintenance purposes.In this way, magnetic corner tracks contribute to TPM (Total Productive Maintenance) programs.

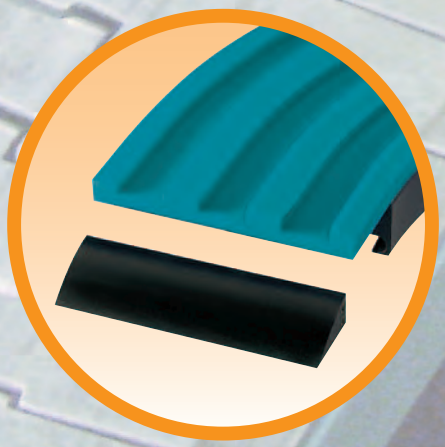

ADVANTAGES

Steel and plastic chains can be used in the same curves which means simpler conveyor construction, reduced inventories and ultimately lower costs. Stainless Steel sideflexing magnetic retained chain has the same hinge width as the 815 series straight running chain and therefore uses the identical
sprockets to the 815 series


Easier maintenance construction

Magnetic retained chains do not incorporate the use of tab or bevel shoes, which allows the chain to be removed from the curve, without dismantling
the chain. Maintenance is therefore quicker and simpler, which reduces
downtime.

NOLU-S - MATERIAL WITH BUILT - IN LUBRICATION

WHAT IS NOLU-S ?


Nolu-S material is a unique compound of UHMW and a solid lubricant.
Reduces drastically the coefficient of friction, maintaining the characteristics of UHMW.
Nolu-S has a better thermal conductivity compared with UHMW.

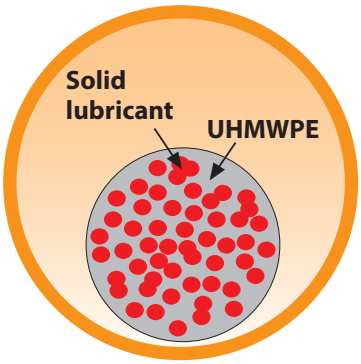


WHAT IS NOLU-S ?


BENEFITS AND FEATURES

- **Nolu-S** makes very high speeds possible, especially when running dry.
- **Nolu-S** has an extremely low coefficient of friction.
- **Nolu-S** reduces noise and squeaking.
- **Nolu-S** reduces chain pull.
- **Nolu-S** extends the life of the chain.
- **Nolu-S** does not damage and scratch the surface of PET.
- **Nolu-S** reduces the consumption of energy.
- **Nolu-S** is a UHMW-PE1000 with a solid lubricant, FDA approved.

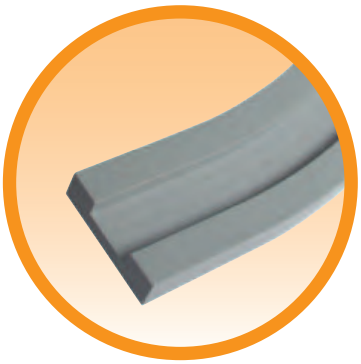


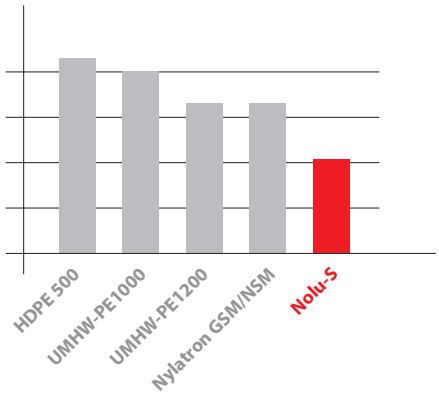


COEFFICIENT OF FRICTION
AVERAGE COEFFICIENT OF FRICTION

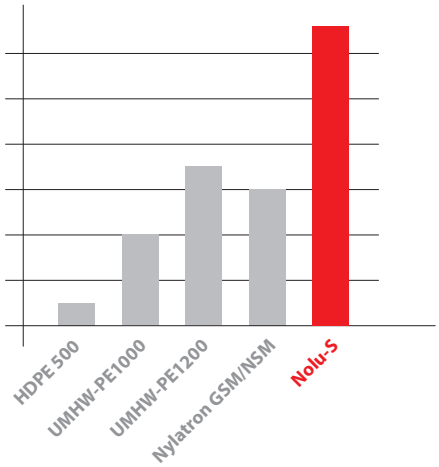

RELATIVE WEARLIFE

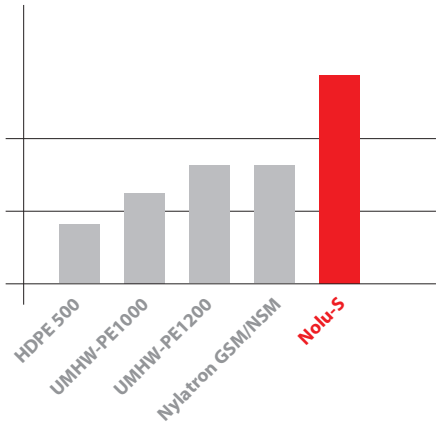

MAX. SPEED
MAX. RECOMMENDED SURFACE SPEED (DRY - ACETAL LF CHAIN)

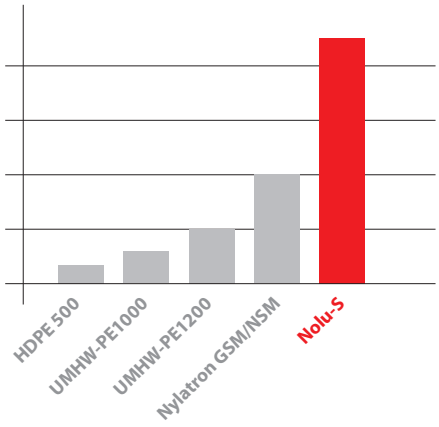

PV - LIMIT

NOLU-S CHARACTERISTICS

 © System Plast S.r.l. , 2012 - All Rights Reserved

CURVE CONFIGURATION

CALL OUR ENGINEERING EXPERTS

To order the products you have selected, or to get expert advice in choosing the right ones for your application, call our Engineering Department or fax your specifications.
We will be pleased to quote on curves manufactured to your special requirements.
This page can be used when extensive modifications or a special design is required.

COMPANY NAME _____

ADDRESS: _____ CITY: _____ STATE/PROVINCE: _____ POSTAL CODE: _____


CONTACT: _____ POSITION: _____ PHONE: _____ FAX: _____

Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing


Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.

Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.

For further information contact our
Technical Support Department

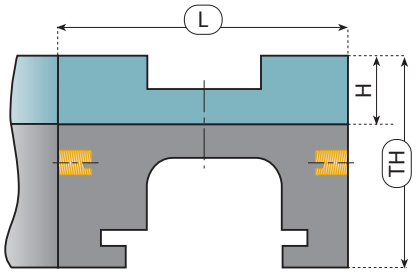


SEC. A-A **ONE TRACK**

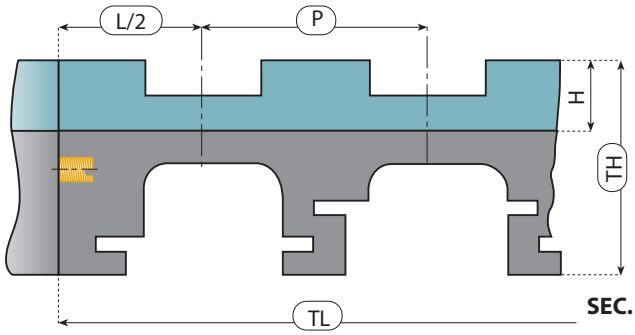


SEC. A-A

MULTI TRACKS

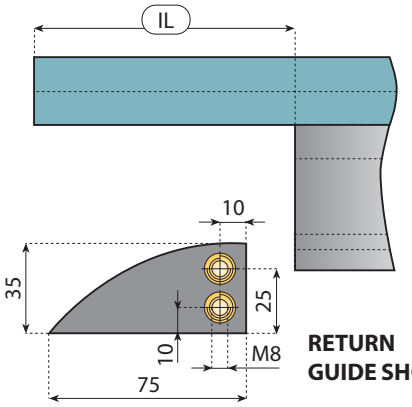

RETURN GUIDE SHOE

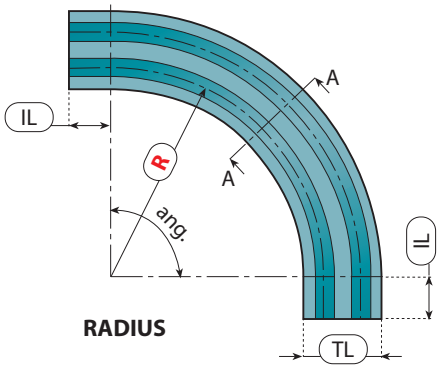

RADIUS

SELECTION TABLES

Explanation of curve reference (Example ordering information)

KMD (FL) . 02 . 90 . 03 . B

KMD (FL) — Dual Magnetic System Curve


02 — Model
Radius R = 500 mm
Pitch P = 90 mm
Basic width L = 100 mm
Total Height TH = 82 mm
Chain K = 82.5 mm


90 — Angle Segment 90°


03 — Number of Tracks 3 Tracks

B — Infeed Length
A • Without infeed
B • IL = 100 mm
C • IL = 125 mm
D • IL = 50 mm


SELECTION TABLES









STEEL CHAIN




PLASTIC CHAINS


For chains series	Radius R (mm)	Pitch P (mm)	Basic width L (mm)	Total width TL (mm)	Infeed Length IL (mm)	Top Track Height H (mm)	Total Height TH (mm)	Version Series K	Reference Number	See Page
For chains with Lg 82.5 mm - K325" and Lg 83.8 mm - K330 Plate Width - Hinge L. 42.1 mm										
879 M - K325 879 M VG - K 325 880 M - K325 880 M - K330 881 MO - K325 881 MO - K330	500	85	100	(PxN° of tracks–1) + L	0	27	82-90	K7	KMD.03._ _._ _.A	202
			110		100		90	K6	KMD.03._ _._ _.B	203
			111					K10	KMD.61._ _._ _.B	204
		89	100					K4	KMD.05._ _._ _.B	205
		90			125		82	K1	KMD.01._ _._ _.C	206
			110		100			K2	KMD.02._ _._ _.B	207
	590	180	100		0			K3	KMD.04._ _._ _.A	208
	680	-			100			K5B	KMD.06._ _._ _.B	209
	750	85						K5A	KMD.07._ _._ _.B	210
			111				82-90	K8	KMD.08._ _._ _.B	211
		90	110				90	K42	KMD.11._ _._ _.B	212
	860	-	100				82	K9	KMD.62._ _._ _.B	213
	1.000				125			K5C	KMD.09._ _._ _.C	210
					0			K5D	KMD.10._ _._ _.A	210
		85	111		100		90	K43	KMD.12._ _._ _.B	214
For chains with Lg 114.3 mm - K450" Plate Width - Hinge L. 42.1 mm										
879 M - K450 880 M - K450 881 M - K450	500	120	129	(PxN° of tracks–1) + L	125	27	90	K21A	KMD.21._ _._ _.C	215
	610							K22A	KMD.22._ _._ _.C	216
		117			0			K27	KMD.23._ _._ _.A	217
For chains with Lg 190.5 mm - K750" Plate Width - Hinge L. 42.1 mm										
880 M - K750 881 M - K750	500	192	214	(PxN° of tracks–1) + L	0	27	90	K60	KMD.38._ _._ _.A	218
	610	196			125			K61	KMD.31._ _._ _.C	219
	750	-			0		82	K62	KMD.37._ _._ _.A	220
	860							K66	KMD.32._ _._ _.A	220
	1.000							K65	KMD.33._ _._ _.A	220








STEEL CHAIN




PLASTIC CHAINS

For chains series	Radius R (mm)	Pitch P (mm)	Basic width L (mm)	Total width TL (mm)	Infeed Length IL (mm)	Top Track Height H (mm)	Total Height TH (mm)	Version Series K	Reference Number	See Page
For chains with Lg 190.5 mm - K750" Plate Width - Hinge L. 57 mm										
882 M - K750 882 M VG - K750 8857 M - K750	610	195	200	(PxN° of tracks–1) + L	100	32	95	K81 *	KMD.40._ _._ _.B	221
	750						87/95	K85	KMD.42._ _._ _.B	222
	860	200	214		0			K86	KMD.41._ _._ _.A	223
	1.000	195	200		100			K80	KMD.39._ _._ _.B	224
For chains with Lg 254 mm - K1000" Plate Width - Hinge L. 57 mm										
882 M - K1000 882 M VG - K1000	860	-	270	(PxN° of tracks–1) + L	0	32	95	K93	KMD.48._ _._ _.A	225
	1.000							K94	KMD.49._ _._ _.A	225
For chains with Lg 304.8 mm - K1200" Plate Width - Hinge L. 57 mm										
882 M - K1200 882 M VG - K1200	860	-	320	-	0	32	95	K97	KMD.52._ _._ _.A	226
	1.000							K98	KMD.53._ _._ _.A	226









For chains series	Radius R (mm)	Pitch P (mm)	Basic width L (mm)	Total width TL (mm)	Infeed Length IL (mm)	Top Track Height H (mm)	Total Height TH (mm)	Version Series K	Reference Number	See Page
For LBP chains with Lg 82.5 mm - K325" Plate Width - Hinge L. 42.1 mm										
LBP 879 M - K325	500	85	100	(PxN° of tracks–1) + L	0	27	102	**LBP68C**	KMD.68._ _._ _.A	227


*** Only for plastic chains**


 © System Plast S.r.l. , 2012 - All Rights Reserved



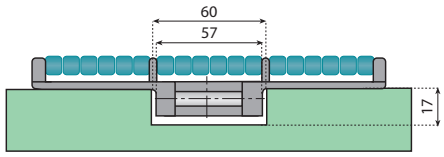


For chains series	Radius R (mm)	Pitch P (mm)	Basic width L (mm)	Total width TL (mm)	Infeed Length IL (mm)	Top Track Height H (mm)	Total Height TH (mm)	Version Series K	Reference Number	See Page
For LBP chains with Lg 190.5 mm - K750" Plate Width - Hinge L. 57 mm										
LBP 882 M - K750	860	200	214	(PxN° of tracks–1) + L	0	32	95	LBP86C	KMD.71._ _._ _.AC	228
For LBP chains with Lg 254 mm - K1000" Plate Width - Hinge L. 57 mm										
LBP 882 M - K1000	860	-	270	(PxN° of tracks–1) + L	0	32	95	LBP93C	KMD.78._ _._ _.AC	229
	1.000							LBP94C	KMD.79._ _._ _.AC	229
For LBP chains with Lg 304.8 mm - K1200" Plate Width - Hinge L. 57 mm										
LBP 882 M - K1200	860	-	320	-	0	32	95	LBP97C	KMD.82._ _._ _.AC	230
	1.000							LBP98C	KMD.83._ _._ _.AC	230



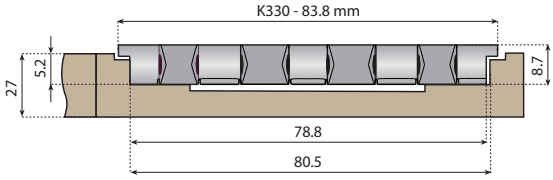



For belt series	Radius R (mm)	Pitch P (mm)	Basic width L (mm)	Total width TL (mm)	Infeed Length IL (mm)	Top Track Height H (mm)	Total Height TH (mm)	Version Series K	Reference Number	See Page
For chainbelts with Lg 83.8 mm - K330" Plate Width - Hinge L. 42.1 mm - Plate Height 12.7 mm										
2120M	500	85	100	(PxN° of tracks–1) + L	0	27	82/90	KA7	KMD.24._ _._ _.A	231
					100		90	KA6	KMD.25._ _._ _.B	232
			111					KA4	KMD.26._ _._ _.B	233
	750		100					KA8	KMD.27._ _._ _.B	234
			111					KA42	KMD.28._ _._ _.B	235
	1.000							KA43	KMD.29._ _._ _.B	236
			100		0			KA5D	KMD.30._ _._ _.A	237






For chains series	Radius R (mm)	Pitch P (mm)	Basic width L (mm)	Total width TL (mm)	Infeed Length IL (mm)	Top Track Height H (mm)	Total Height TH (mm)	Version Series K	Reference Number	See Page
For chainbelts with Lg 83.8 mm - K330" Plate Width - Hinge L. 42.1 mm - Plate Height 8.7 mm										
2250 M - K330 FT **2250 M - K330 FG** **2260 M - K330 FT**	500	85	100	(PxN° of tracks–1) + L	0	27	82/90	KB7	KMD.90._ _._ _.A	238
					100		90	KB6	KMD.91._ _._ _.B	239
			111					KB4	KMD.92._ _._ _.B	240
	750		100					KB8	KMD.93._ _._ _.B	241
	1.000				0			KB5D	KMD.96._ _._ _.A	242
For chainbelts with Lg 114.3 mm - K450" Plate Width - Hinge L. 42.1 mm - Plate Height 8.7 mm										
2250 M - K450 FT	500	117	129	(PxN° of tracks–1) + L	100	27	90	KB22	KMD.54._ _._ _.B	243
	610							KB27	KMD.56._ _._ _.B	244






For chains series	Radius R (mm)	Pitch P (mm)	Basic width L (mm)	Total width TL (mm)	Infeed Length IL (mm)	Top Track Height H (mm)	Total Height TH (mm)	Version Series K	Reference Number	See Page
For chainbelts with Lg 83.8 mm - K330" Plate Width - Hinge L. 42.1 mm - Plate Height 12.7 mm										
2251 M - K330 FT	500	85	100	(PxN° of tracks–1) + L	0	27	82/90	KC7	KMD.84._ _._ _.A	245
					100		90	KC6	KMD.85._ _._ _.B	246
			111					KC4	KMD.86._ _._ _.B	247
	750		100					KC8	KMD.87._ _._ _.B	248
	1.000				0			KC5D	KMD.97._ _._ _.A	249
For chainbelts with Lg 114.3 mm - K450" Plate Width - Hinge L. 42.1 mm - Plate Height 12.7 mm										
2251 M - K450 FT	500	117	129	(PxN° of tracks–1) + L	100	27	90	KC22	KMD.64._ _._ _.B	250
	610							KC27	KMD.66._ _._ _.B	251

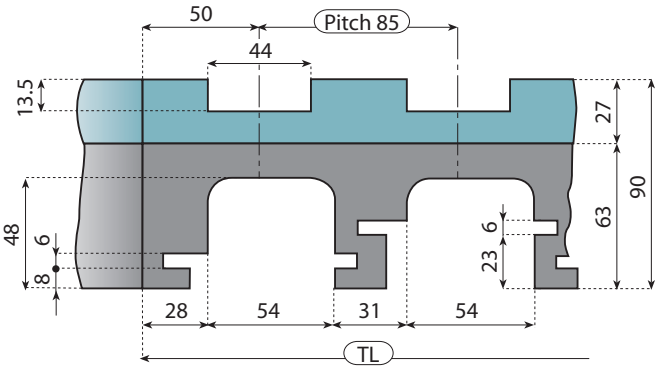


MULTI TRACKS

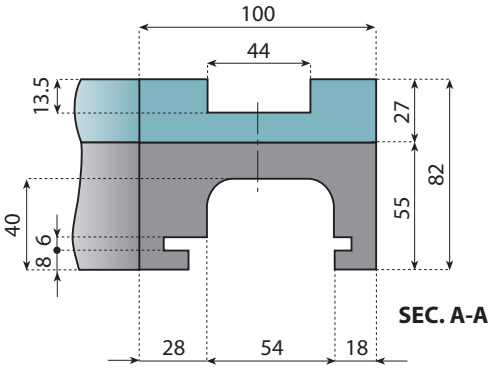


SEC. A-A

ONE TRACK

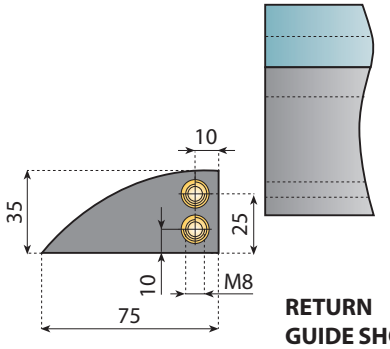

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.03.15.01.A	KMD.03.30.01.A	KMD.03.45.01.A	KMD.03.60.01.A	KMD.03.75.01.A	KMD.03.90.01.A
2	185	KMD.03.15.02.A	KMD.03.30.02.A	KMD.03.45.02.A	KMD.03.60.02.A	KMD.03.75.02.A	KMD.03.90.02.A
3	270	KMD.03.15.03.A	KMD.03.30.03.A	KMD.03.45.03.A	KMD.03.60.03.A	KMD.03.75.03.A	KMD.03.90.03.A
4	355	KMD.03.15.04.A	KMD.03.30.04.A	KMD.03.45.04.A	KMD.03.60.04.A	KMD.03.75.04.A	KMD.03.90.04.A
5	440	KMD.03.15.05.A	KMD.03.30.05.A	KMD.03.45.05.A	KMD.03.60.05.A	KMD.03.75.05.A	KMD.03.90.05.A
6	525	KMD.03.15.06.A	KMD.03.30.06.A	KMD.03.45.06.A	KMD.03.60.06.A	KMD.03.75.06.A	KMD.03.90.06.A
7	610	KMD.03.15.07.A	KMD.03.30.07.A	KMD.03.45.07.A	KMD.03.60.07.A	KMD.03.75.07.A	KMD.03.90.07.A
8	695	KMD.03.15.08.A	KMD.03.30.08.A	KMD.03.45.08.A	KMD.03.60.08.A	KMD.03.75.08.A	KMD.03.90.08.A

 © System Plast S.r.l. , 2012 - All Rights Reserved

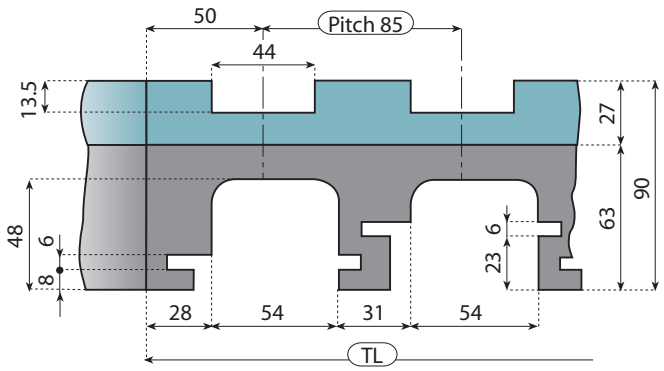


MULTI TRACKS

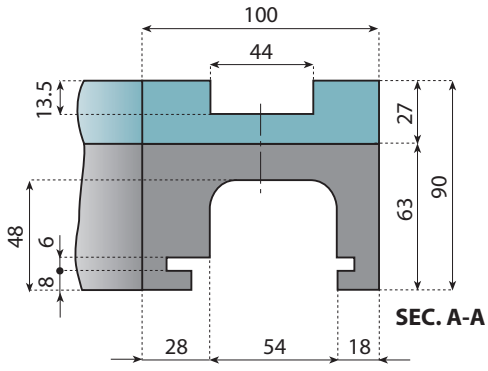


SEC. A-A

ONE TRACK

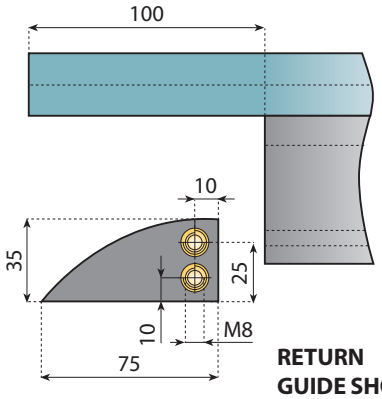

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.03.15.01.B	KMD.03.30.01.B	KMD.03.45.01.B	KMD.03.60.01.B	KMD.03.75.01.B	KMD.03.90.01.B*
2	185	KMD.03.15.02.B	KMD.03.30.02.B	KMD.03.45.02.B	KMD.03.60.02.B	KMD.03.75.02.B	KMD.03.90.02.B
3	270	KMD.03.15.03.B	KMD.03.30.03.B	KMD.03.45.03.B	KMD.03.60.03.B	KMD.03.75.03.B	KMD.03.90.03.B
4	355	KMD.03.15.04.B	KMD.03.30.04.B	KMD.03.45.04.B	KMD.03.60.04.B	KMD.03.75.04.B	KMD.03.90.04.B
5	440	KMD.03.15.05.B	KMD.03.30.05.B	KMD.03.45.05.B	KMD.03.60.05.B	KMD.03.75.05.B	KMD.03.90.05.B
6	525	KMD.03.15.06.B	KMD.03.30.06.B	KMD.03.45.06.B	KMD.03.60.06.B	KMD.03.75.06.B	KMD.03.90.06.B
7	610	KMD.03.15.07.B	KMD.03.30.07.B	KMD.03.45.07.B	KMD.03.60.07.B	KMD.03.75.07.B	KMD.03.90.07.B
8	695	KMD.03.15.08.B	KMD.03.30.08.B	KMD.03.45.08.B	KMD.03.60.08.B	KMD.03.75.08.B	KMD.03.90.08.B

*** These curves are now available ex stock in Nolu-S material, part number KMD.03.90.01.B-NS**

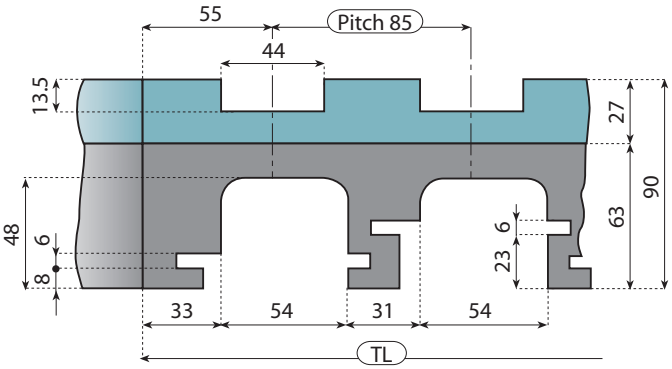


MULTI TRACKS

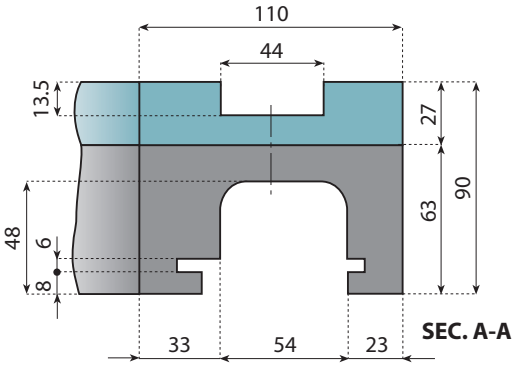


SEC. A-A

ONE TRACK

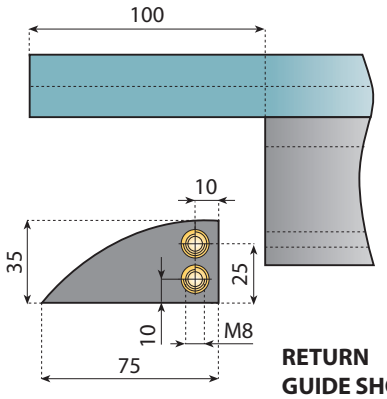

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 22-23-39-57


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	110	KMD.61.15.01.B	KMD.61.30.01.B	KMD.61.45.01.B	KMD.61.60.01.B	KMD.61.75.01.B	KMD.61.90.01.B
2	195	KMD.61.15.02.B	KMD.61.30.02.B	KMD.61.45.02.B	KMD.61.60.02.B	KMD.61.75.02.B	KMD.61.90.02.B
3	280	KMD.61.15.03.B	KMD.61.30.03.B	KMD.61.45.03.B	KMD.61.60.03.B	KMD.61.75.03.B	KMD.61.90.03.B
4	365	KMD.61.15.04.B	KMD.61.30.04.B	KMD.61.45.04.B	KMD.61.60.04.B	KMD.61.75.04.B	KMD.61.90.04.B
5	450	KMD.61.15.05.B	KMD.61.30.05.B	KMD.61.45.05.B	KMD.61.60.05.B	KMD.61.75.05.B	KMD.61.90.05.B
6	535	KMD.61.15.06.B	KMD.61.30.06.B	KMD.61.45.06.B	KMD.61.60.06.B	KMD.61.75.06.B	KMD.61.90.06.B
7	620	KMD.61.15.07.B	KMD.61.30.07.B	KMD.61.45.07.B	KMD.61.60.07.B	KMD.61.75.07.B	KMD.61.90.07.B
8	705	KMD.61.15.08.B	KMD.61.30.08.B	KMD.61.45.08.B	KMD.61.60.08.B	KMD.61.75.08.B	KMD.61.90.08.B

 © System Plast S.r.l. , 2012 - All Rights Reserved

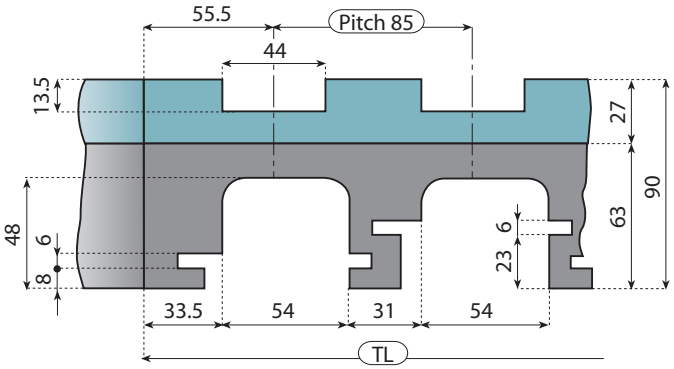


MULTI TRACKS

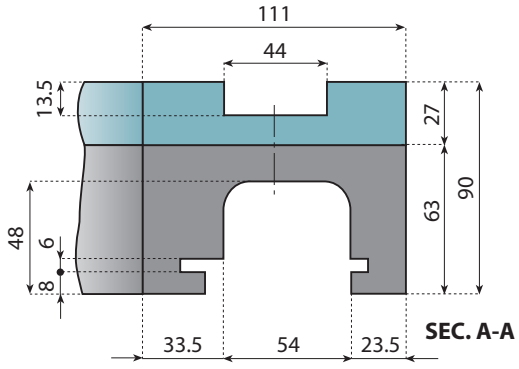


SEC. A-A

ONE TRACK

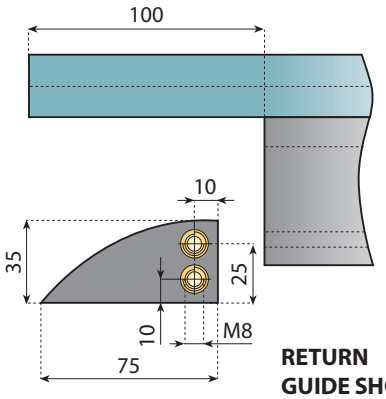

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.05.15.01.B	KMD.05.30.01.B	KMD.05.45.01.B	KMD.05.60.01.B	KMD.05.75.01.B	KMD.05.90.01.B
2	196	KMD.05.15.02.B	KMD.05.30.02.B	KMD.05.45.02.B	KMD.05.60.02.B	KMD.05.75.02.B	KMD.05.90.02.B
3	281	KMD.05.15.03.B	KMD.05.30.03.B	KMD.05.45.03.B	KMD.05.60.03.B	KMD.05.75.03.B	KMD.05.90.03.B
4	366	KMD.05.15.04.B	KMD.05.30.04.B	KMD.05.45.04.B	KMD.05.60.04.B	KMD.05.75.04.B	KMD.05.90.04.B
5	451	KMD.05.15.05.B	KMD.05.30.05.B	KMD.05.45.05.B	KMD.05.60.05.B	KMD.05.75.05.B	KMD.05.90.05.B
6	536	KMD.05.15.06.B	KMD.05.30.06.B	KMD.05.45.06.B	KMD.05.60.06.B	KMD.05.75.06.B	KMD.05.90.06.B
7	621	KMD.05.15.07.B	KMD.05.30.07.B	KMD.05.45.07.B	KMD.05.60.07.B	KMD.05.75.07.B	KMD.05.90.07.B
8	706	KMD.05.15.08.B	KMD.05.30.08.B	KMD.05.45.08.B	KMD.05.60.08.B	KMD.05.75.08.B	KMD.05.90.08.B

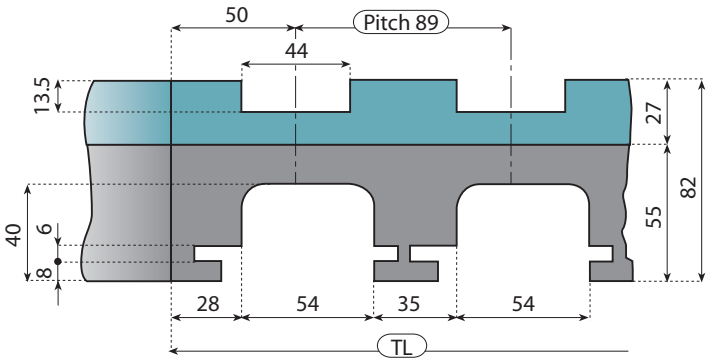


MULTI TRACKS

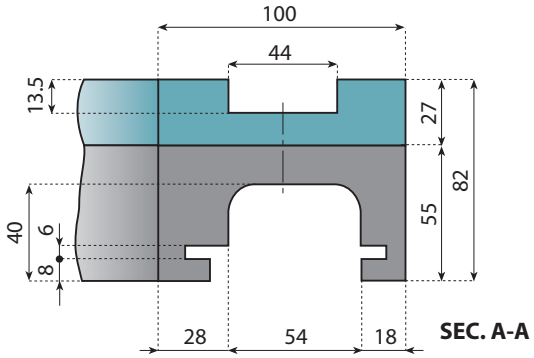


SEC. A-A

ONE TRACK

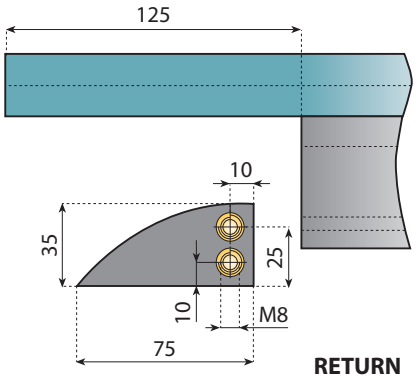

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.01.15.01.C	KMD.01.30.01.C	KMD.01.45.01.C	KMD.01.60.01.C	KMD.01.75.01.C	KMD.01.90.01.C
2	189	KMD.01.15.02.C	KMD.01.30.02.C	KMD.01.45.02.C	KMD.01.60.02.C	KMD.01.75.02.C	KMD.01.90.02.C
3	278	KMD.01.15.03.C	KMD.01.30.03.C	KMD.01.45.03.C	KMD.01.60.03.C	KMD.01.75.03.C	KMD.01.90.03.C
4	367	KMD.01.15.04.C	KMD.01.30.04.C	KMD.01.45.04.C	KMD.01.60.04.C	KMD.01.75.04.C	KMD.01.90.04.C
5	456	KMD.01.15.05.C	KMD.01.30.05.C	KMD.01.45.05.C	KMD.01.60.05.C	KMD.01.75.05.C	KMD.01.90.05.C
6	545	KMD.01.15.06.C	KMD.01.30.06.C	KMD.01.45.06.C	KMD.01.60.06.C	KMD.01.75.06.C	KMD.01.90.06.C
7	634	KMD.01.15.07.C	KMD.01.30.07.C	KMD.01.45.07.C	KMD.01.60.07.C	KMD.01.75.07.C	KMD.01.90.07.C
8	723	KMD.01.15.08.C	KMD.01.30.08.C	KMD.01.45.08.C	KMD.01.60.08.C	KMD.01.75.08.C	KMD.01.90.08.C

 © System Plast S.r.l. , 2012 - All Rights Reserved

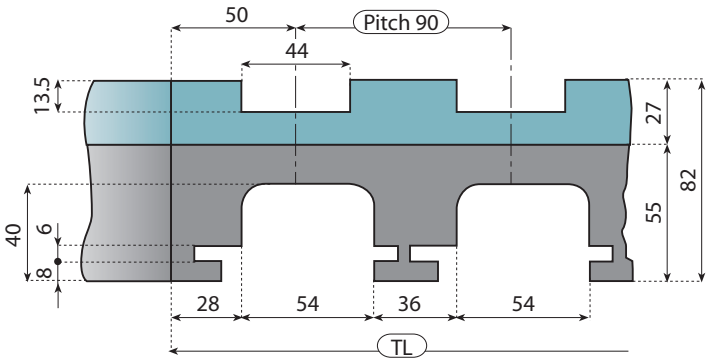


MULTI TRACKS

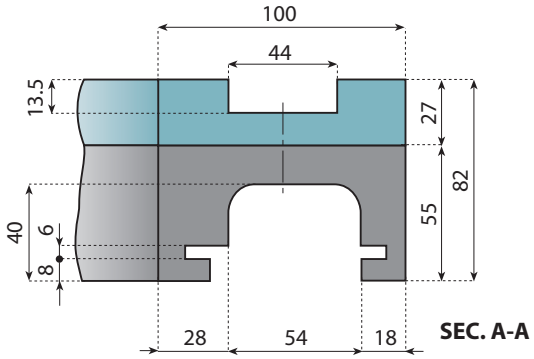


SEC. A-A

ONE TRACK

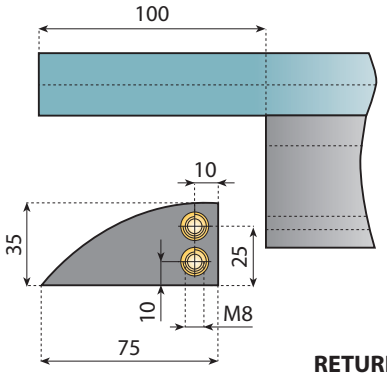

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.02.15.01.B	KMD.02.30.01.B	KMD.02.45.01.B	KMD.02.60.01.B	KMD.02.75.01.B	KMD.02.90.01.B
2	190	KMD.02.15.02.B	KMD.02.30.02.B	KMD.02.45.02.B	KMD.02.60.02.B	KMD.02.75.02.B	KMD.02.90.02.B
3	280	KMD.02.15.03.B	KMD.02.30.03.B	KMD.02.45.03.B	KMD.02.60.03.B	KMD.02.75.03.B	KMD.02.90.03.B
4	370	KMD.02.15.04.B	KMD.02.30.04.B	KMD.02.45.04.B	KMD.02.60.04.B	KMD.02.75.04.B	KMD.02.90.04.B
5	460	KMD.02.15.05.B	KMD.02.30.05.B	KMD.02.45.05.B	KMD.02.60.05.B	KMD.02.75.05.B	KMD.02.90.05.B
6	550	KMD.02.15.06.B	KMD.02.30.06.B	KMD.02.45.06.B	KMD.02.60.06.B	KMD.02.75.06.B	KMD.02.90.06.B
7	640	KMD.02.15.07.B	KMD.02.30.07.B	KMD.02.45.07.B	KMD.02.60.07.B	KMD.02.75.07.B	KMD.02.90.07.B
8	730	KMD.02.15.08.B	KMD.02.30.08.B	KMD.02.45.08.B	KMD.02.60.08.B	KMD.02.75.08.B	KMD.02.90.08.B

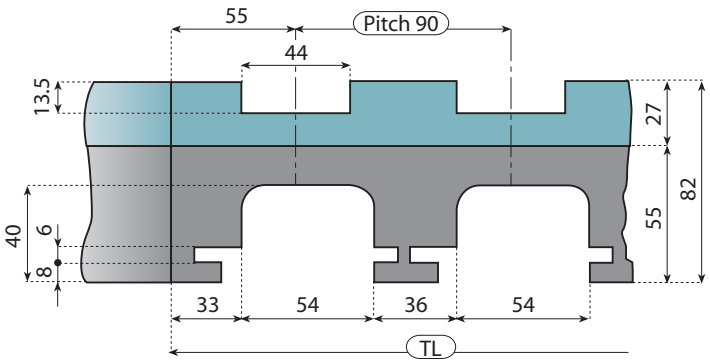


MULTI TRACKS

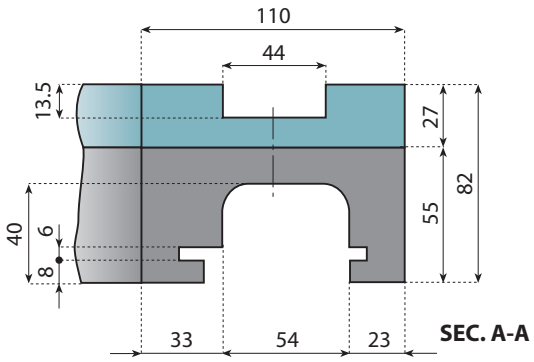


SEC. A-A

ONE TRACK

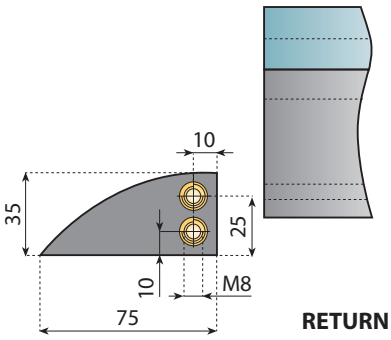

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 22-23-39-57

Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	110	KMD.04.15.01.A	KMD.04.30.01.A	KMD.04.45.01.A	KMD.04.60.01.A	KMD.04.75.01.A	KMD.04.90.01.A
2	200	KMD.04.15.02.A	KMD.04.30.02.A	KMD.04.45.02.A	KMD.04.60.02.A	KMD.04.75.02.A	KMD.04.90.02.A
3	290	KMD.04.15.03.A	KMD.04.30.03.A	KMD.04.45.03.A	KMD.04.60.03.A	KMD.04.75.03.A	KMD.04.90.03.A
4	380	KMD.04.15.04.A	KMD.04.30.04.A	KMD.04.45.04.A	KMD.04.60.04.A	KMD.04.75.04.A	KMD.04.90.04.A
5	470	KMD.04.15.05.A	KMD.04.30.05.A	KMD.04.45.05.A	KMD.04.60.05.A	KMD.04.75.05.A	KMD.04.90.05.A
6	560	KMD.04.15.06.A	KMD.04.30.06.A	KMD.04.45.06.A	KMD.04.60.06.A	KMD.04.75.06.A	KMD.04.90.06.A
7	650	KMD.04.15.07.A	KMD.04.30.07.A	KMD.04.45.07.A	KMD.04.60.07.A	KMD.04.75.07.A	KMD.04.90.07.A
8	740	KMD.04.15.08.A	KMD.04.30.08.A	KMD.04.45.08.A	KMD.04.60.08.A	KMD.04.75.08.A	KMD.04.90.08.A

 © System Plast S.r.l. , 2012 - All Rights Reserved

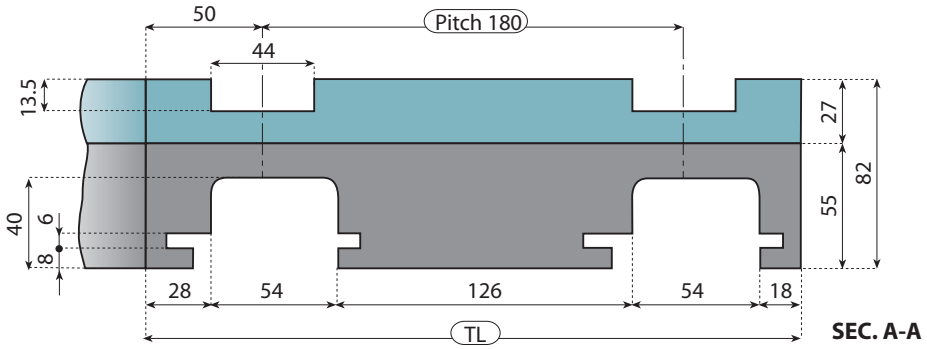


SEC. A-A

MULTI TRACKS

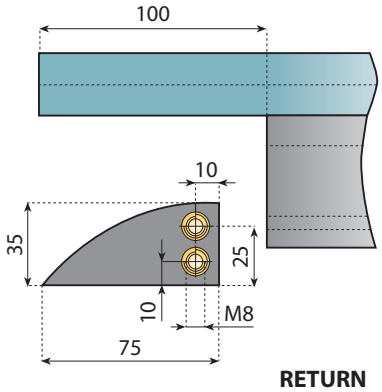

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- Different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 22-23-39-57


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
2	280	KMD.06.15.02.B	KMD.06.30.02.B	KMD.06.45.02.B	KMD.06.60.02.B	KMD.06.75.02.B	KMD.06.90.02.B

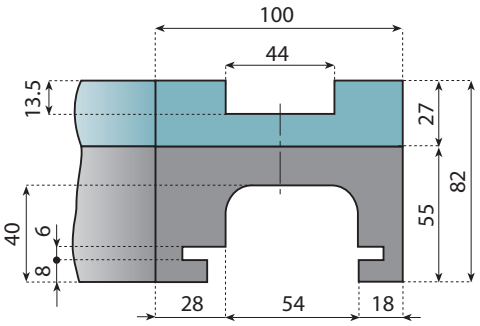


ONE TRACK

SEC. A-A

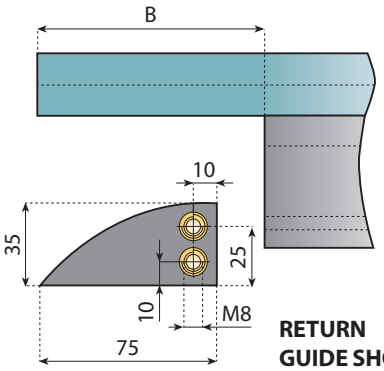

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type: 881 M - 881 MO



For plastic magnetic chains, type: 879 M - 880 M

For magnetic chains type see pages 22-23-39-57

Pages 196⇨197

K5A

Tracks	R	Total width TL mm	Infeed Length B mm	15°	30°	45°	60°	75°	90°
1	680	100	100	KMD.07.15.01.B	KMD.07.30.01.B	KMD.07.45.01.B	KMD.07.60.01.B	KMD.07.75.01.B	KMD.07.90.01.B


K5C

Tracks	R	Total width TL mm	Infeed Length B mm	15°	30°	45°	60°	75°	90°
1	860	100	125	KMD.09.15.01.C	KMD.09.30.01.C	KMD.09.45.01.C	KMD.09.60.01.C	KMD.09.75.01.C	KMD.09.90.01.C


K5D

Tracks	R	Total width TL mm	Infeed Length B mm	15°	30°	45°	60°	75°	90°
1	1000	100	0	KMD.10.15.01.A	KMD.10.30.01.A	KMD.10.45.01.A	KMD.10.60.01.A	KMD.10.75.01.A	KMD.10.90.01.A


 © System Plast S.r.l. , 2012 - All Rights Reserved

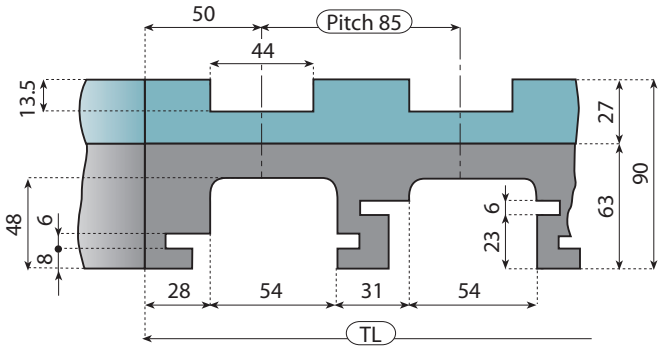


MULTI TRACKS

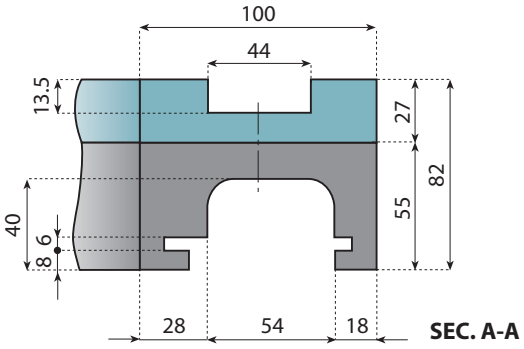

ONE TRACK

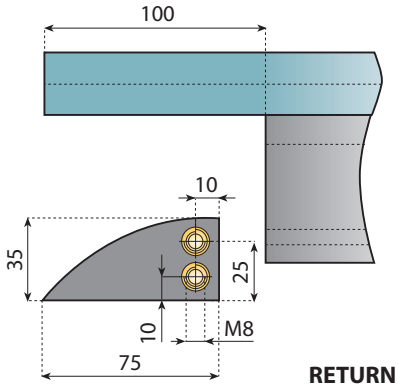

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.08.15.01.B	KMD.08.30.01.B	KMD.08.45.01.B	KMD.08.60.01.B	KMD.08.75.01.B	KMD.08.90.01.B
2	185	KMD.08.15.02.B	KMD.08.30.02.B	KMD.08.45.02.B	KMD.08.60.02.B	KMD.08.75.02.B	KMD.08.90.02.B
3	270	KMD.08.15.03.B	KMD. 08.30.03.B	KMD.08.45.03.B	KMD.08.60.03.B	KMD.08.75.03.B	KMD.08.90.03.B
4	355	KMD.08.15.04.B	KMD.08.30.04.B	KMD.08.45.04.B	KMD.08.60.04.B	KMD.08.75.04.B	KMD.08.90.04.B
5	440	KMD.08.15.05.B	KMD.08.30.05.B	KMD.08.45.05.B	KMD.08.60.05.B	KMD.08.75.05.B	KMD.08.90.05.B
6	525	KMD.08.15.06.B	KMD.08.30.06.B	KMD.08.45.06.B	KMD.08.60.06.B	KMD.08.75.06.B	KMD.08.90.06.B
7	610	KMD.08.15.07.B	KMD.08.30.07.B	KMD.08.45.07.B	KMD.08.60.07.B	KMD.08.75.07.B	KMD.08.90.07.B
8	695	KMD.08.15.08.B	KMD.08.30.08.B	KMD.08.45.08.B	KMD.08.60.08.B	KMD.08.75.08.B	KMD.08.90.08.B

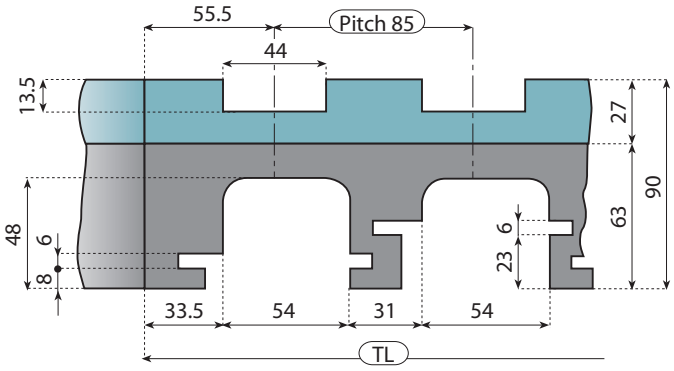


MULTI TRACKS

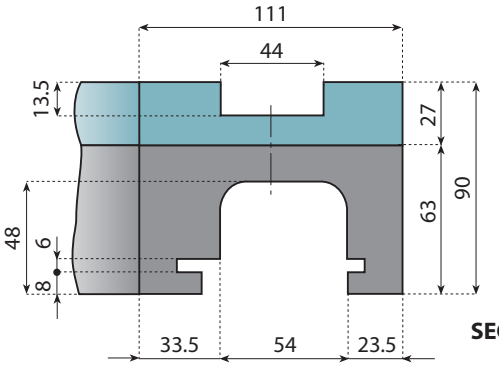


SEC. A-A

ONE TRACK

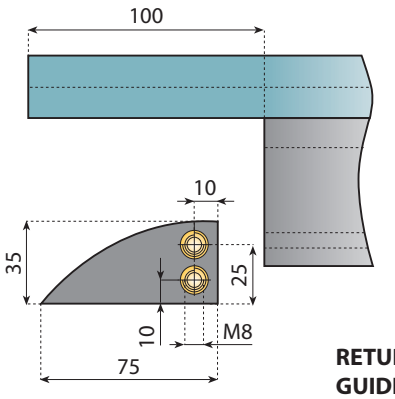

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.11.15.01.B	KMD.11.30.01.B	KMD.11.45.01.B	KMD.11.60.01.B	KMD.11.75.01.B	KMD.11.90.01.B
2	196	KMD.11.15.02.B	KMD.11.30.02.B	KMD.11.45.02.B	KMD.11.60.02.B	KMD.11.75.02.B	KMD.11.90.02.B
3	281	KMD.11.15.03.B	KMD. 11.30.03.B	KMD.11.45.03.B	KMD.11.60.03.B	KMD.11.75.03.B	KMD.11.90.03.B
4	366	KMD.11.15.04.B	KMD.11.30.04.B	KMD.11.45.04.B	KMD.11.60.04.B	KMD.11.75.04.B	KMD.11.90.04.B
5	451	KMD.11.15.05.B	KMD.11.30.05.B	KMD.11.45.05.B	KMD.11.60.05.B	KMD.11.75.05.B	KMD.11.90.05.B
6	536	KMD.11.15.06.B	KMD.11.30.06.B	KMD.11.45.06.B	KMD.11.60.06.B	KMD.11.75.06.B	KMD.11.90.06.B
7	621	KMD.11.15.07.B	KMD.11.30.07.B	KMD.11.45.07.B	KMD.11.60.07.B	KMD.11.75.07.B	KMD.11.90.07.B
8	706	KMD.11.15.08.B	KMD.11.30.08.B	KMD.11.45.08.B	KMD.11.60.08.B	KMD.11.75.08.B	KMD.11.90.08.B

 © System Plast S.r.l. , 2012 - All Rights Reserved

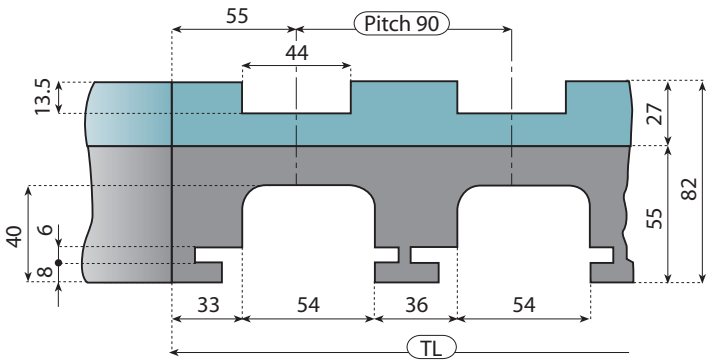


MULTI TRACKS

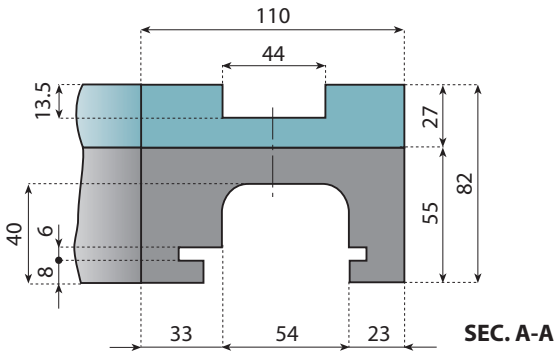


SEC. A-A

ONE TRACK

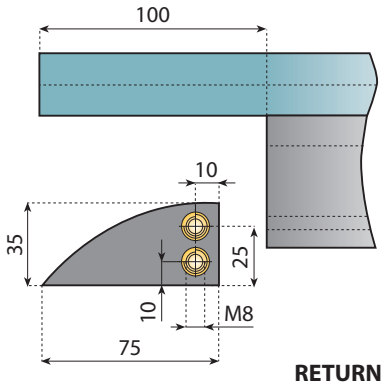

RETURN GUIDE SHOE

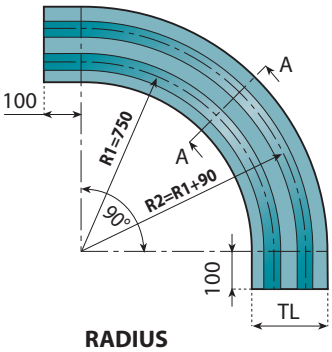

RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	110	KMD.62.15.01.B	KMD.62.30.01.B	KMD.62.45.01.B	KMD.62.60.01.B	KMD.62.75.01.B	KMD.62.90.01.B
2	200	KMD.62.15.02.B	KMD.62.30.02.B	KMD.62.45.02.B	KMD.62.60.02.B	KMD.62.75.02.B	KMD.62.90.02.B
3	290	KMD.62.15.03.B	KMD. 62.30.03.B	KMD.62.45.03.B	KMD.62.60.03.B	KMD.62.75.03.B	KMD.62.90.03.B
4	380	KMD.62.15.04.B	KMD.62.30.04.B	KMD.62.45.04.B	KMD.62.60.04.B	KMD.62.75.04.B	KMD.62.90.04.B
5	470	KMD.62.15.05.B	KMD.62.30.05.B	KMD.62.45.05.B	KMD.62.60.05.B	KMD.62.75.05.B	KMD.62.90.05.B
6	560	KMD.62.15.06.B	KMD.62.30.06.B	KMD.62.45.06.B	KMD.62.60.06.B	KMD.62.75.06.B	KMD.62.90.06.B
7	650	KMD.62.15.07.B	KMD.62.30.07.B	KMD.62.45.07.B	KMD.62.60.07.B	KMD.62.75.07.B	KMD.62.90.07.B
8	740	KMD.62.15.08.B	KMD.62.30.08.B	KMD.62.45.08.B	KMD.62.60.08.B	KMD.62.75.08.B	KMD.62.90.08.B

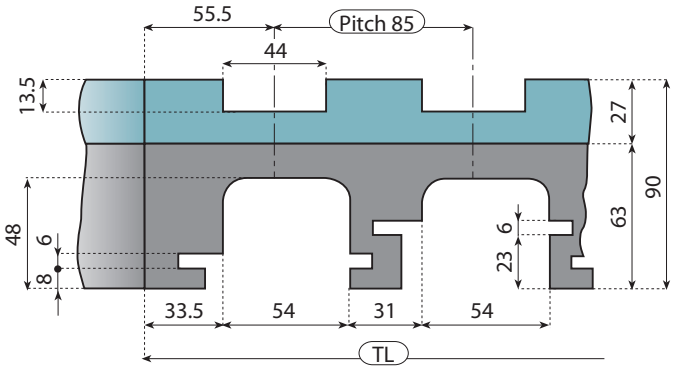


MULTI TRACKS

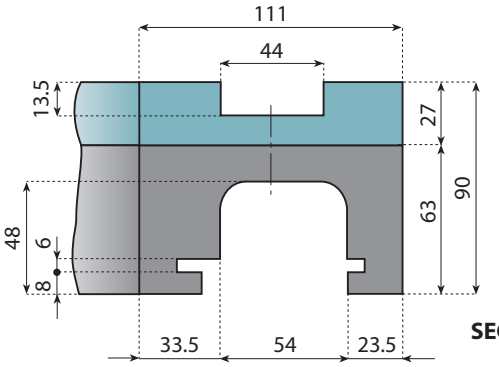


SEC. A-A

ONE TRACK

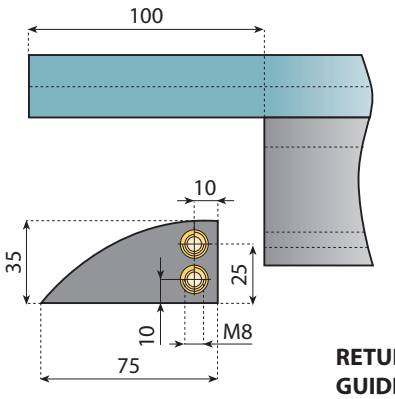

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M - 881 MO




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.12.15.01.B	KMD.12.30.01.B	KMD.12.45.01.B	KMD.12.60.01.B	KMD.12.75.01.B	KMD.12.90.01.B
2	196	KMD.12.15.02.B	KMD.12.30.02.B	KMD.12.45.02.B	KMD.12.60.02.B	KMD.12.75.02.B	KMD.12.90.02.B
3	281	KMD.12.15.03.B	KMD. 12.30.03.B	KMD.12.45.03.B	KMD.12.60.03.B	KMD.12.75.03.B	KMD.12.90.03.B
4	366	KMD.12.15.04.B	KMD.12.30.04.B	KMD.12.45.04.B	KMD.12.60.04.B	KMD.12.75.04.B	KMD.12.90.04.B
5	451	KMD.12.15.05.B	KMD.12.30.05.B	KMD.12.45.05.B	KMD.12.60.05.B	KMD.12.75.05.B	KMD.12.90.05.B
6	536	KMD.12.15.06.B	KMD.12.30.06.B	KMD.12.45.06.B	KMD.12.60.06.B	KMD.12.75.06.B	KMD.12.90.06.B
7	621	KMD.12.15.07.B	KMD.12.30.07.B	KMD.12.45.07.B	KMD.12.60.07.B	KMD.12.75.07.B	KMD.12.90.07.B
8	706	KMD.12.15.08.B	KMD.12.30.08.B	KMD.12.45.08.B	KMD.12.60.08.B	KMD.12.75.08.B	KMD.12.90.08.B

 © System Plast S.r.l. , 2012 - All Rights Reserved

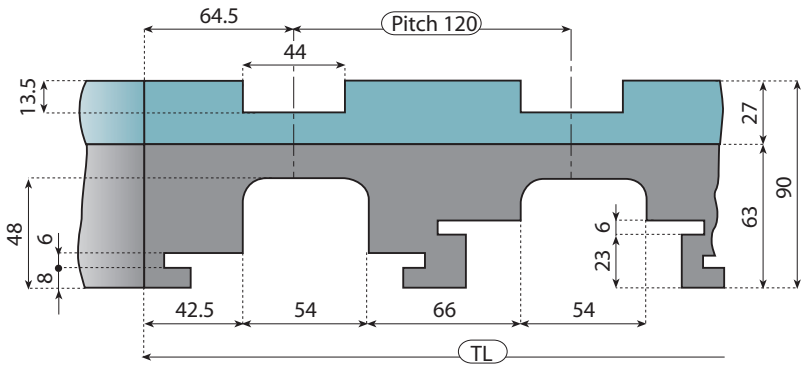


MULTI TRACKS

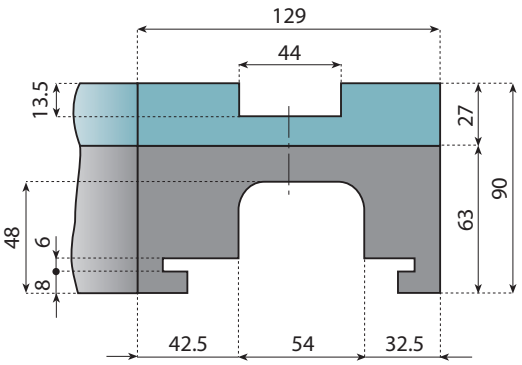


ONE TRACK

SEC. A-A

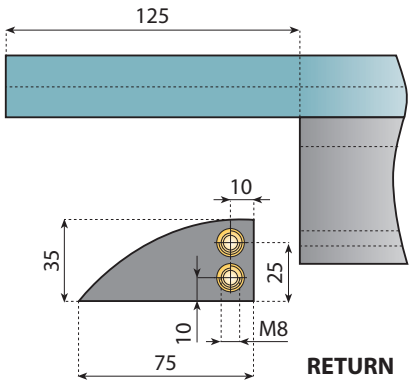

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-23-39-57




Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	129	KMD.21.15.01.C	KMD.21.30.01.C	KMD.21.45.01.C	KMD.21.60.01.C	KMD.21.75.01.C	KMD.21.90.01.C
2	249	KMD.21.15.02.C	KMD.21.30.02.C	KMD.21.45.02.C	KMD.21.60.02.C	KMD.21.75.02.C	KMD.21.90.02.C
3	369	KMD.21.15.03.C	KMD.21.30.03.C	KMD.21.45.03.C	KMD.21.60.03.C	KMD.21.75.03.C	KMD.21.90.03.C
4	489	KMD.21.15.04.C	KMD.21.30.04.C	KMD.21.45.04.C	KMD.21.60.04.C	KMD.21.75.04.C	KMD.21.90.04.C
5	609	KMD.21.15.05.C	KMD.21.30.05.C	KMD.21.45.05.C	KMD.21.60.05.C	KMD.21.75.05.C	KMD.21.90.05.C
6	729	KMD.21.15.06.C	KMD.21.30.06.C	KMD.21.45.06.C	KMD.21.60.06.C	KMD.21.75.06.C	KMD.21.90.06.C
7	849	KMD.21.15.07.C	KMD.21.30.07.C	KMD.21.45.07.C	KMD.21.60.07.C	KMD.21.75.07.C	KMD.21.90.07.C
8	969	KMD.21.15.08.C	KMD.21.30.08.C	KMD.21.45.08.C	KMD.21.60.08.C	KMD.21.75.08.C	KMD.21.90.08.C

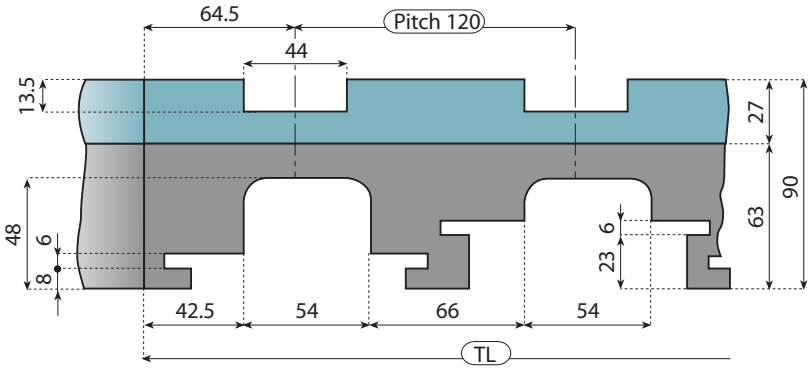


MULTI TRACKS

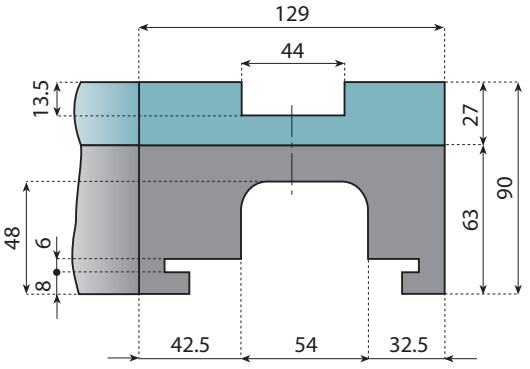

ONE TRACK **SEC. A-A**

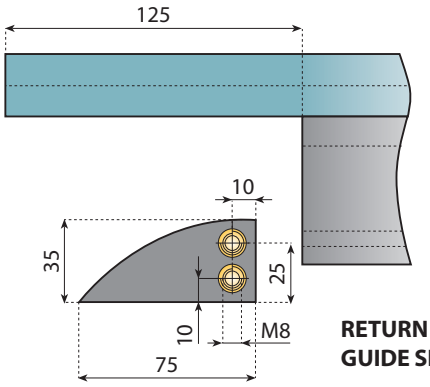

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-39




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	129	KMD.22.15.01.C	KMD.22.30.01.C	KMD.22.45.01.C	KMD.22.60.01.C	KMD.22.75.01.C	KMD.22.90.01.C
2	249	KMD.22.15.02.C	KMD.22.30.02.C	KMD.22.45.02.C	KMD.22.60.02.C	KMD.22.75.02.C	KMD.22.90.02.C
3	369	KMD.22.15.03.C	KMD.22.30.03.C	KMD.22.45.03.C	KMD.22.60.03.C	KMD.22.75.03.C	KMD.22.90.03.C
4	489	KMD.22.15.04.C	KMD.22.30.04.C	KMD.22.45.04.C	KMD.22.60.04.C	KMD.22.75.04.C	KMD.22.90.04.C
5	609	KMD.22.15.05.C	KMD.22.30.05.C	KMD.22.45.05.C	KMD.22.60.05.C	KMD.22.75.05.C	KMD.22.90.05.C
6	729	KMD.22.15.06.C	KMD.22.30.06.C	KMD.22.45.06.C	KMD.22.60.06.C	KMD.22.75.06.C	KMD.22.90.06.C
7	849	KMD.22.15.07.C	KMD.22.30.07.C	KMD.22.45.07.C	KMD.22.60.07.C	KMD.22.75.07.C	KMD.22.90.07.C
8	969	KMD.22.15.08.C	KMD.22.30.08.C	KMD.22.45.08.C	KMD.22.60.08.C	KMD.22.75.08.C	KMD.22.90.08.C


 © System Plast S.r.l. , 2012 - All Rights Reserved

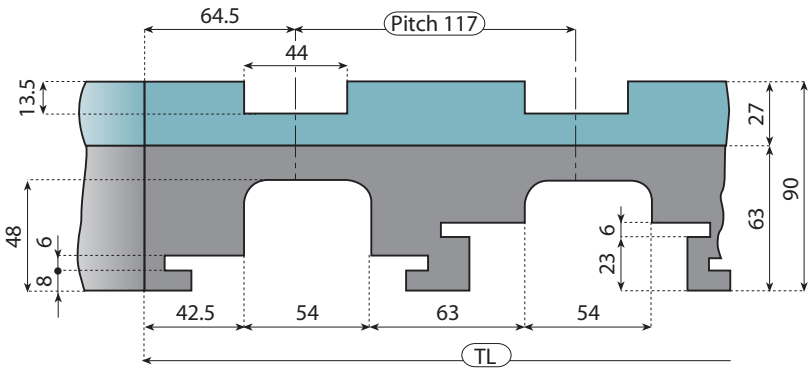


MULTI TRACKS

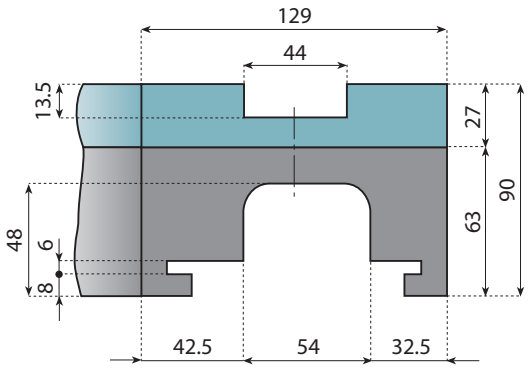

ONE TRACK SEC. A-A

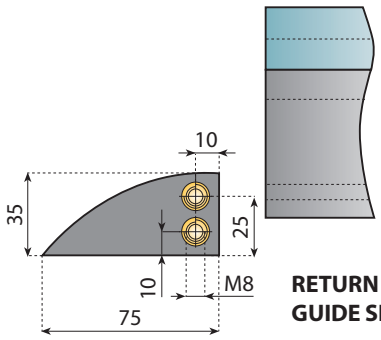

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M




For plastic magnetic chains, type:
879 M - 880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 22-39




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	129	KMD.23.15.01.A	KMD.23.30.01.A	KMD.23.45.01.A	KMD.23.60.01.A	KMD.23.75.01.A	KMD.23.90.01.A
2	246	KMD.23.15.02.A	KMD.23.30.02.A	KMD.23.45.02.A	KMD.23.60.02.A	KMD.23.75.02.A	KMD.23.90.02.A
3	363	KMD.23.15.03.A	KMD.23.30.03.A	KMD.23.45.03.A	KMD.23.60.03.A	KMD.23.75.03.A	KMD.23.90.03.A
4	480	KMD.23.15.04.A	KMD.23.30.04.A	KMD.23.45.04.A	KMD.23.60.04.A	KMD.23.75.04.A	KMD.23.90.04.A
5	597	KMD.23.15.05.A	KMD.23.30.05.A	KMD.23.45.05.A	KMD.23.60.05.A	KMD.23.75.05.A	KMD.23.90.05.A
6	714	KMD.23.15.06.A	KMD.23.30.06.A	KMD.23.45.06.A	KMD.23.60.06.A	KMD.23.75.06.A	KMD.23.90.06.A
7	831	KMD.23.15.07.A	KMD.23.30.07.A	KMD.23.45.07.A	KMD.23.60.07.A	KMD.23.75.07.A	KMD. 23.90.07.A
8	948	KMD.23.15.08.A	KMD.23.30.08.A	KMD.23.45.08.A	KMD.23.60.08.A	KMD.23.75.08.A	KMD.23.90.08.A

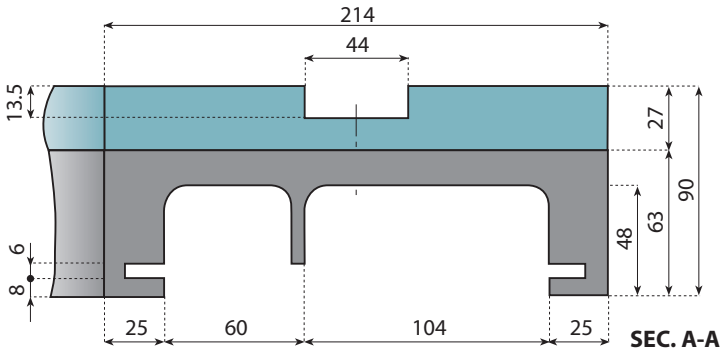


SEC. A-A


ONE TRACK

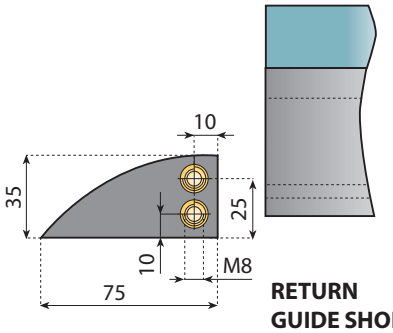

RETURN GUIDE SHOE

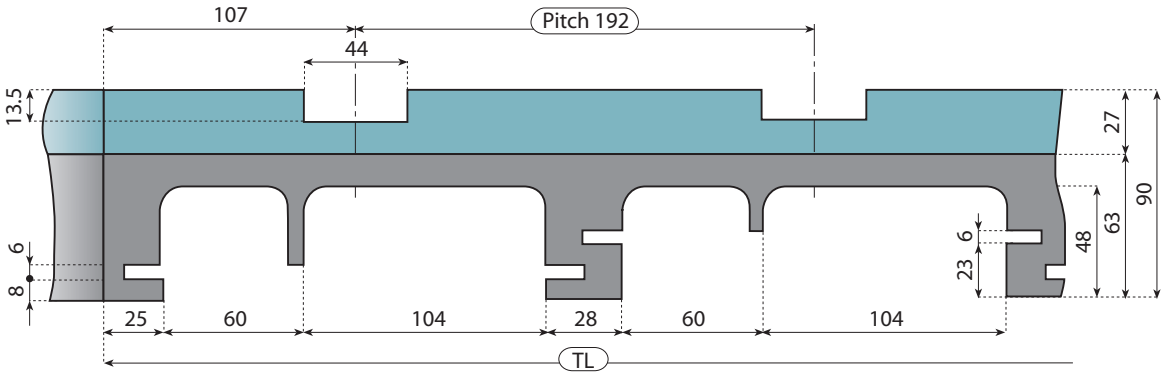

MULTI TRACKS



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
881 M




For plastic magnetic chains, type:
880 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 22-39


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	214	KMD.38.15.01.A	KMD.38.30.01.A	KMD.38.45.01.A	KMD.38.60.01.A	KMD.38.75.01.A	KMD.38.90.01.A
2	406	KMD.38.15.02.A	KMD.38.30.02.A	KMD.38.45.02.A	KMD.38.60.02.A	KMD.38.75.02.A	KMD.38.90.02.A
3	602	KMD.38.15.03.A	KMD.38.30.03.A	KMD.38.45.03.A	KMD.38.60.03.A	KMD.38.75.03.A	KMD.38.90.03.A


 © System Plast S.r.l. , 2012 - All Rights Reserved

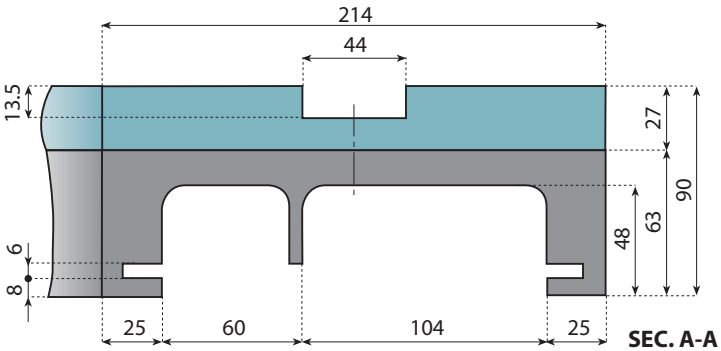


ONE TRACK

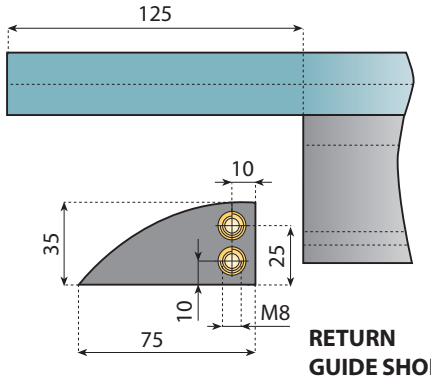

RETURN GUIDE SHOE

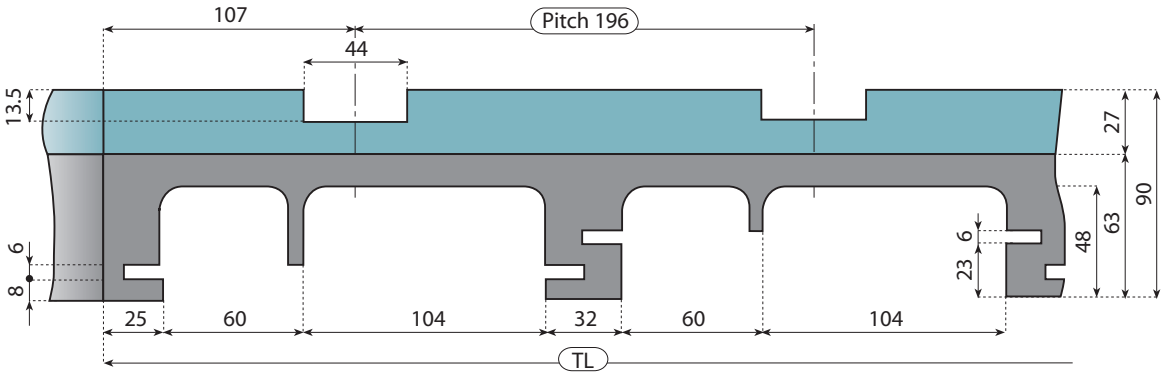


MULTI TRACKS



RADIUS



For (stainless) steel magnetic chains, type:
881 M



For plastic magnetic chains, type:
880 M

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198


- More tracks and different angles available on request.



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.


For magnetic chains type see pages 22-39

Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	214	KMD.31.15.01.C	KMD.31.30.01.C	KMD.31.45.01.C	KMD.31.60.01.C	KMD.31.75.01.C	KMD.31.90.01.C
2	410	KMD.31.15.02.C	KMD.31.30.02.C	KMD.31.45.02.C	KMD.31.60.02.C	KMD.31.75.02.C	KMD.31.90.02.C
3	606	KMD.31.15.03.C	KMD.31.30.03.C	KMD.31.45.03.C	KMD.31.60.03.C	KMD.31.75.03.C	KMD.31.90.03.C
4	802	KMD.31.15.04.C	KMD.31.30.04.C	KMD.31.45.04.C	KMD.31.60.04.C	KMD.31.75.04.C	KMD.31.90.04.C
5	998	KMD.31.15.05.C	KMD.31.30.05.C	KMD.31.45.05.C	KMD.31.60.05.C	KMD.31.75.05.C	KMD.31.90.05.C
6	1194	KMD.31.15.06.C	KMD.31.30.06.C	KMD.31.45.06.C	KMD.31.60.06.C	KMD.31.75.06.C	KMD.31.90.06.C

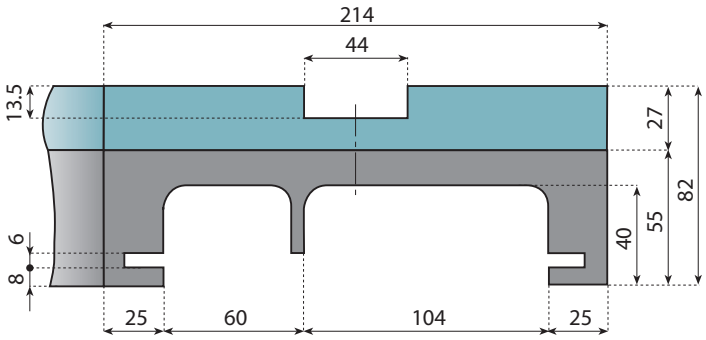

ONE TRACK SEC. A-A

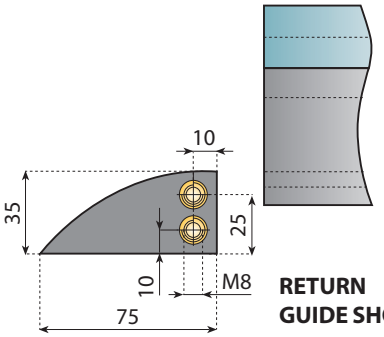

RETURN GUIDE SHOE



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type: 881 M



For plastic magnetic chains, type: 880 M

For magnetic chains type see pages 22-39

Pages 196⇨197

K62

Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	750	214	KMD.37.15.01.A	KMD.37.30.01.A	KMD.37.45.01.A	KMD.37.60.01.A	KMD.37.75.01.A	KMD.37.90.01.A


K66

Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	860	214	KMD.32.15.01.A	KMD.32.30.01.A	KMD.32.45.01.A	KMD.32.60.01.A	KMD.32.75.01.A	KMD.32.90.01.A


K65

Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	1000	214	KMD.33.15.01.A	KMD.33.30.01.A	KMD.33.45.01.A	KMD.33.60.01.A	KMD.33.75.01.A	KMD.33.90.01.A

 © System Plast S.r.l. , 2012 - All Rights Reserved

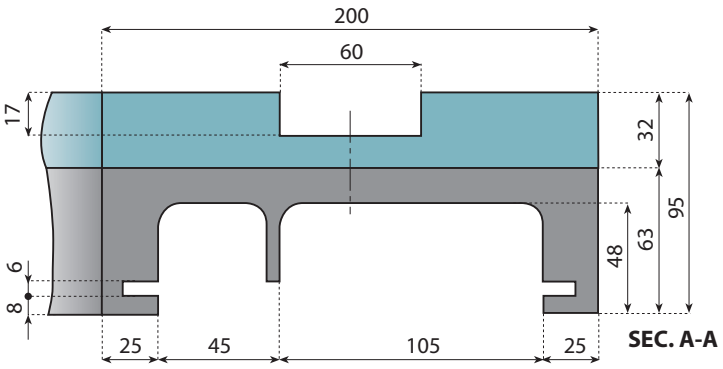


ONE TRACK

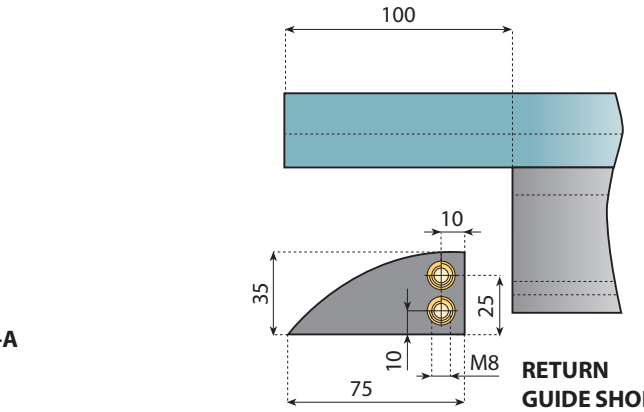


SEC. A-A

RETURN GUIDE SHOE

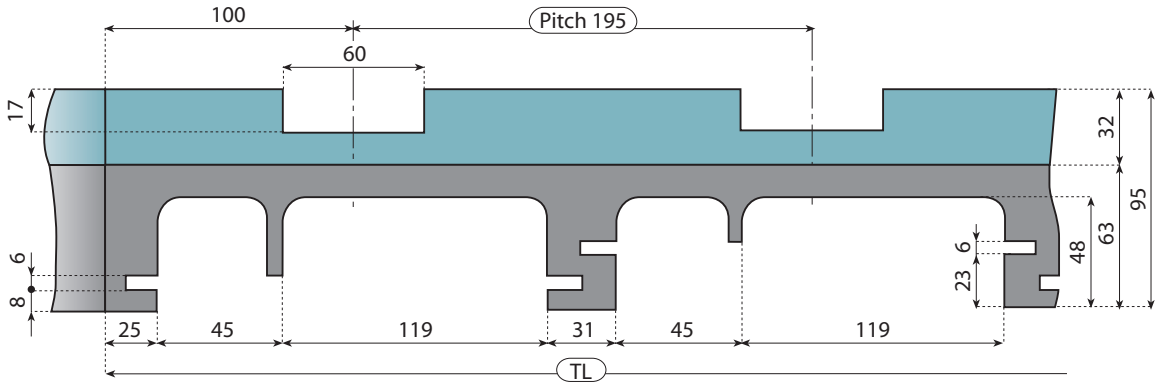

MULTI TRACKS



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !


For further information see page 198

- More tracks and different angles available on request.

ONLY FOR PLASTIC CHAINS

For magnetic chains type see pages 43-58

Pages 196⇨197




For plastic magnetic chains, type:
882 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.




Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	200	KMD.40.15.01.B	KMD.40.30.01.B	KMD.40.45.01.B	KMD.40.60.01.B	KMD.40.75.01.B	KMD.40.90.01.B
2	395	KMD.40.15.02.B	KMD.40.30.02.B	KMD.40.45.02.B	KMD.40.60.02.B	KMD.40.75.02.B	KMD.40.90.02.B
3	590	KMD.40.15.03.B	KMD.40.30.03.B	KMD.40.45.03.B	KMD.40.60.03.B	KMD.40.75.03.B	KMD.40.90.03.B

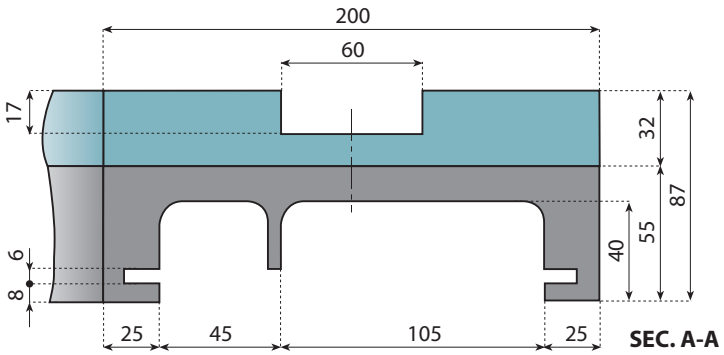


SEC. A-A


ONE TRACK

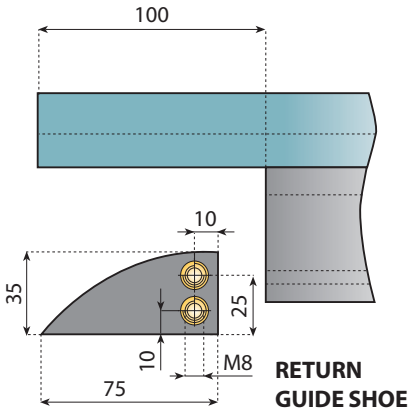

RETURN GUIDE SHOE

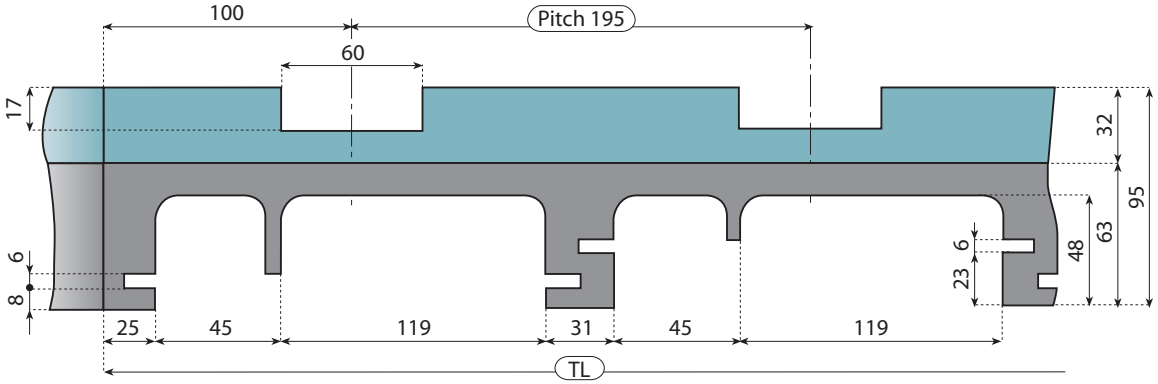

MULTI TRACKS




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For (stainless) steel magnetic chains, type:
8857 M



For plastic magnetic chains, type:
882 M


- More tracks and different angles available on request.



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 23-30-43-58




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	200	KMD.42.15.01.B	KMD.42.30.01.B	KMD.42.45.01.B	KMD.42.60.01.B	KMD.42.75.01.B	KMD.42.90.01.B
2	395	KMD.42.15.02.B	KMD.42.30.02.B	KMD.42.45.02.B	KMD.42.60.02.B	KMD.42.75.02.B	KMD.42.90.02.B
3	590	KMD.42.15.03.B	KMD.42.30.03.B	KMD.42.45.03.B	KMD.42.60.03.B	KMD.42.75.03.B	KMD.42.90.03.B

 © System Plast S.r.l. , 2012 - All Rights Reserved

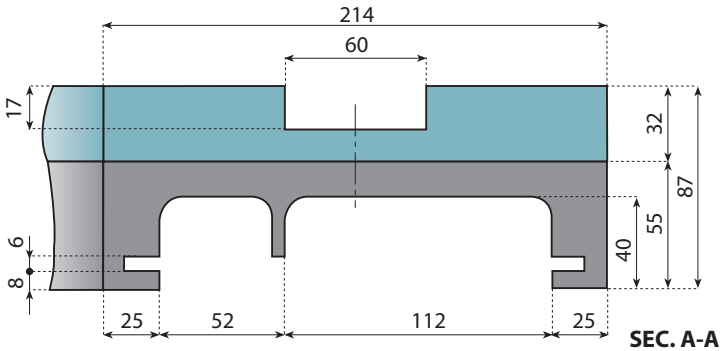


ONE TRACK

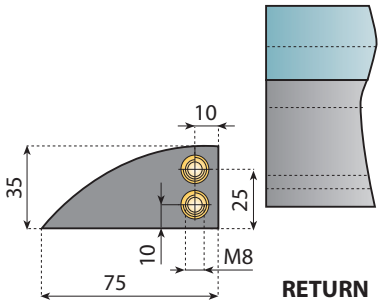


SEC. A-A

RETURN GUIDE SHOE

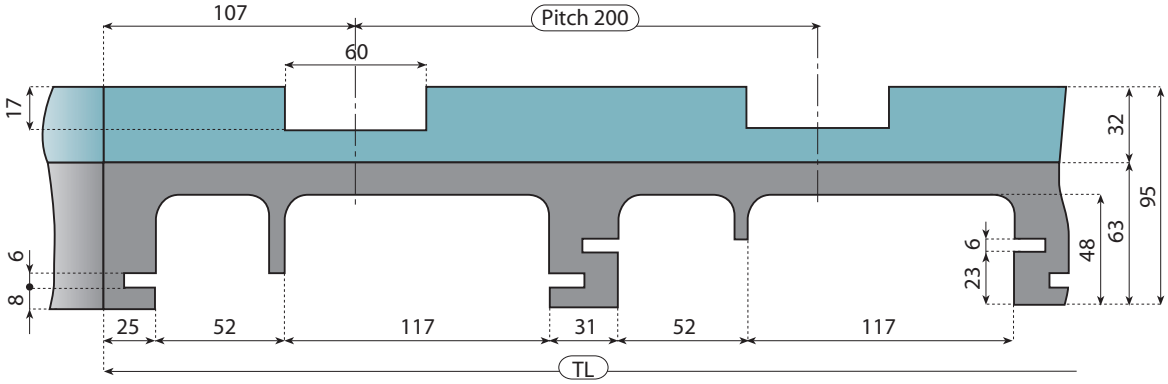

MULTI TRACKS



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type: 8857 M




For plastic magnetic chains, type: 882 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 23-30-43-58


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	214	KMD.41.15.01.A	KMD.41.30.01.A	KMD.41.45.01.A	KMD.41.60.01.A	KMD.41.75.01.A	KMD.41.90.01.A
2	414	KMD.41.15.02.A	KMD.41.30.02.A	KMD.41.45.02.A	KMD.41.60.02.A	KMD.41.75.02.A	KMD.41.90.02.A
3	614	KMD.41.15.03.A	KMD.41.30.03.A	KMD.41.45.03.A	KMD.41.60.03.A	KMD.41.75.03.A	KMD.41.90.03.A

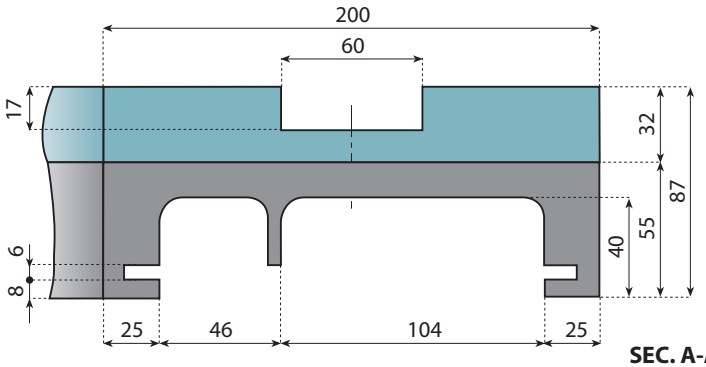


SEC. A-A


ONE TRACK

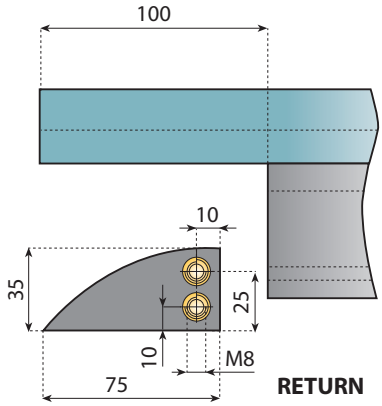

RETURN GUIDE SHOE

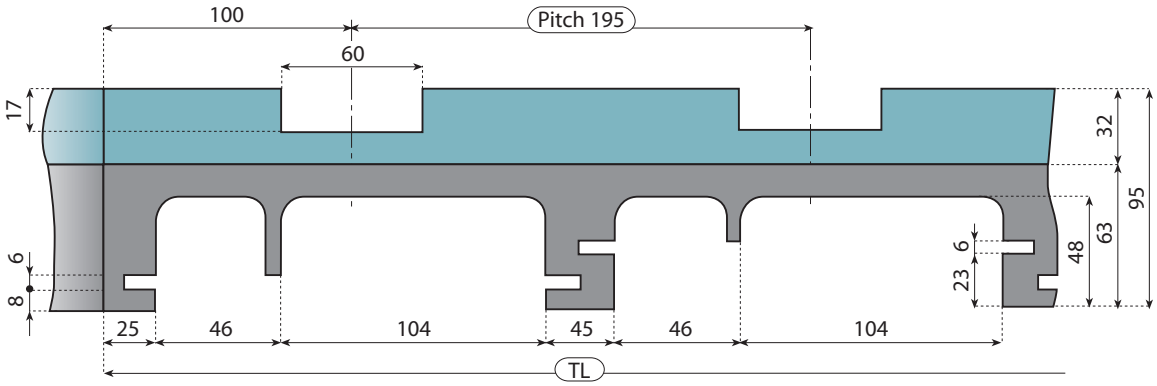

MULTI TRACKS



RADIUS


NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For (stainless) steel magnetic chains, type:
8857 M




For plastic magnetic chains, type:
882 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 23-30-43-58




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	200	KMD.39.15.01.B	KMD.39.30.01.B	KMD.39.45.01.B	KMD.39.60.01.B	KMD.39.75.01.B	KMD.39.90.01.B
2	395	KMD.39.15.02.B	KMD.39.30.02.B	KMD.39.45.02.B	KMD.39.60.02.B	KMD.39.75.02.B	KMD.39.90.02.B
3	590	KMD.39.15.03.B	KMD.39.30.03.B	KMD.39.45.03.B	KMD.39.60.03.B	KMD.39.75.03.B	KMD.39.90.03.B


 © System Plast S.r.l. , 2012 - All Rights Reserved

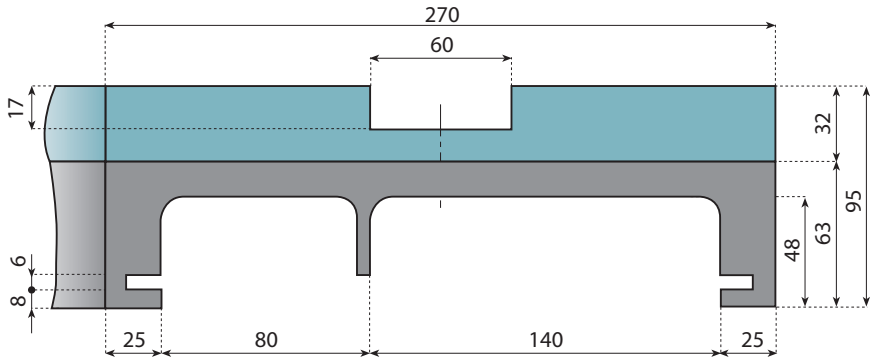

ONE TRACK **SEC. A-A**

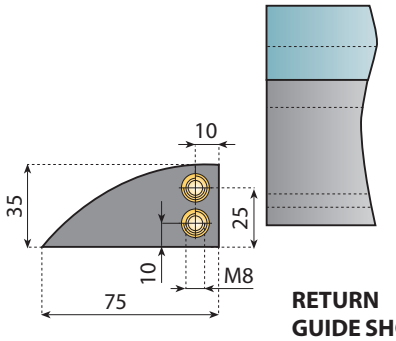

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For plastic magnetic chains, type:
882 M

For magnetic chains type see pages 43-58


Pages 196⇨197

K93


Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	860	270	KMD.48.15.01.A	KMD.48.30.01.A	KMD.48.45.01.A	KMD.48.60.01.A	KMD.48.75.01.A	KMD.48.90.01.A

K94


Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	1000	270	KMD.49.15.01.A	KMD.49.30.01.A	KMD.49.45.01.A	KMD.49.60.01.A	KMD.49.75.01.A	KMD.49.90.01.A

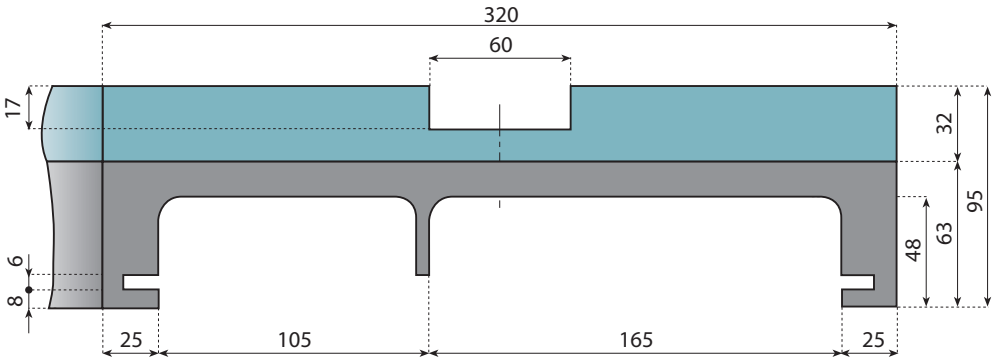

ONE TRACK **SEC. A-A**

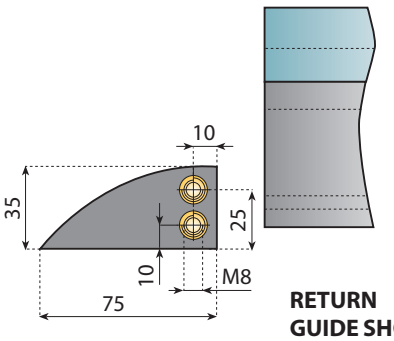

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.



For plastic magnetic chains, type:
882 M

For magnetic chains type see pages 43-58

Pages 196⇨197


K97

Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	860	320	KMD.52.15.01.A	KMD.52.30.01.A	KMD.52.45.01.A	KMD.52.60.01.A	KMD.52.75.01.A	KMD.52.90.01.A


K98

Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	1000	320	KMD.53.15.01.A	KMD.53.30.01.A	KMD.53.45.01.A	KMD.53.60.01.A	KMD.53.75.01.A	KMD.53.90.01.A

 © System Plast S.r.l. , 2012 - All Rights Reserved

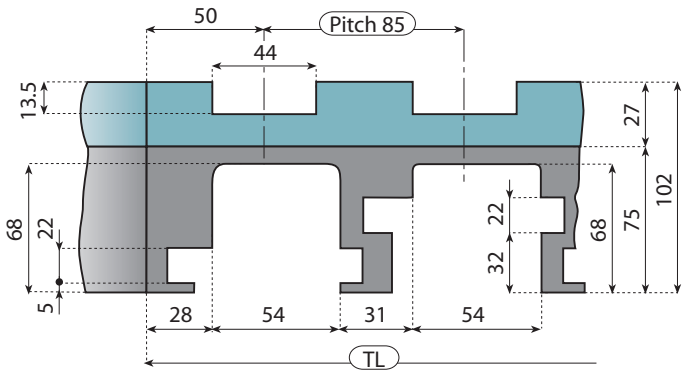


MULTI TRACKS

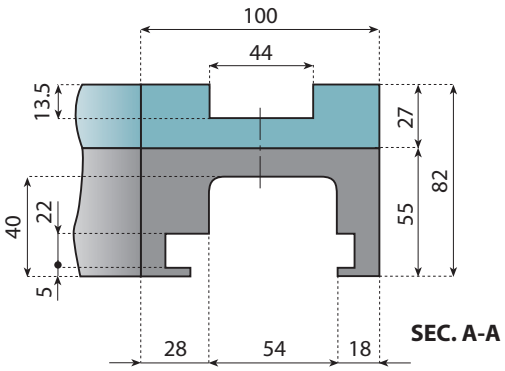


SEC. A-A

ONE TRACK

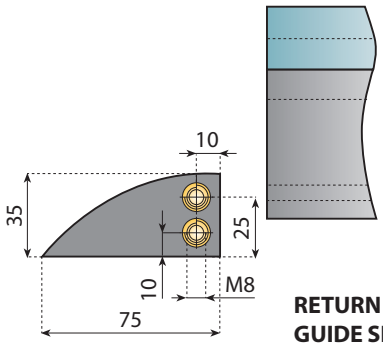

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For plastic magnetic chains, type:
879 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 49




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.68.15.01.A	KMD.68.30.01.A	KMD.68.45.01.A	KMD.68.60.01.A	KMD.68.75.01.A	KMD.68.90.01.A
2	185	KMD.68.15.02.A	KMD.68.30.02.A	KMD.68.45.02.A	KMD.68.60.02.A	KMD.68.75.02.A	KMD.68.90.02.A
3	270	KMD.68.15.03.A	KMD.68.30.03.A	KMD.68.45.03.A	KMD.68.60.03.A	KMD.68.75.03.A	KMD.68.90.03.A
4	355	KMD.68.15.04.A	KMD.68.30.04.A	KMD.68.45.04.A	KMD.68.60.04.A	KMD.68.75.04.A	KMD.68.90.04.A
5	440	KMD.68.15.05.A	KMD.68.30.05.A	KMD.68.45.05.A	KMD.68.60.05.A	KMD.68.75.05.A	KMD.68.90.05.A
6	525	KMD.68.15.06.A	KMD.68.30.06.A	KMD.68.45.06.A	KMD.68.60.06.A	KMD.68.75.06.A	KMD.68.90.06.A
7	610	KMD.68.15.07.A	KMD.68.30.07.A	KMD.68.45.07.A	KMD.68.60.07.A	KMD.68.75.07.A	KMD.68.90.07.A
8	695	KMD.68.15.08.A	KMD.68.30.08.A	KMD.68.45.08.A	KMD.68.60.08.A	KMD.68.75.08.A	KMD.68.90.08.A

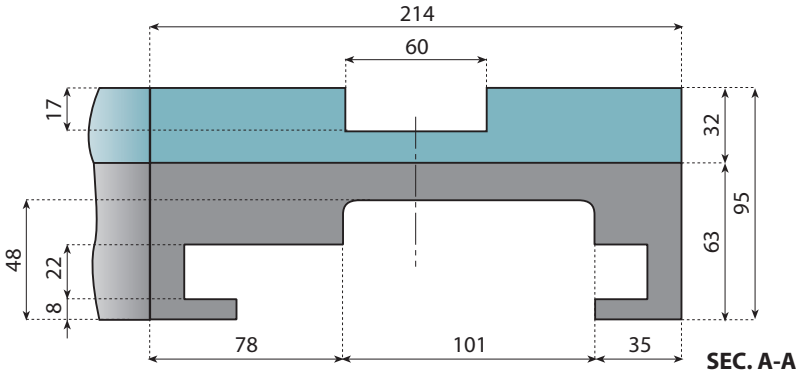


ONE TRACK

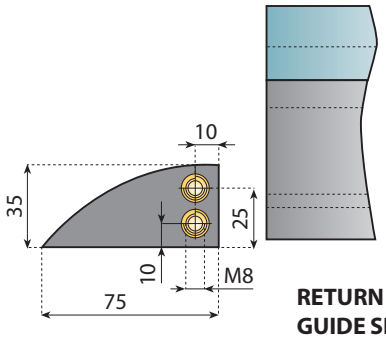


SEC. A-A

RETURN GUIDE SHOE

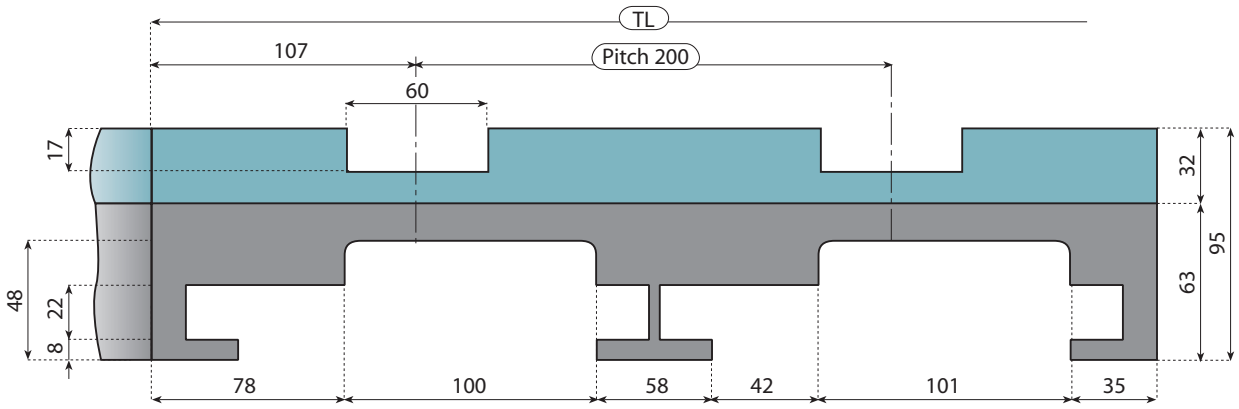

MULTI TRACKS




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For plastic magnetic chains, type:
882 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 52


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	214	KMD.71.15.01.AC	KMD.71.30.01.AC	KMD.71.45.01.AC	KMD.71.60.01.AC	KMD.71.75.01.AC	KMD.71.90.01.AC
2	414	KMD.71.15.02.AC	KMD.71.30.02.AC	KMD.71.45.02.AC	KMD.71.60.02.AC	KMD.71.75.02.AC	KMD.71.90.02.AC
3	614	KMD.71.15.03.AC	KMD.71.30.03.AC	KMD.71.45.03.AC	KMD.71.60.03.AC	KMD.71.75.03.AC	KMD.71.90.03.AC


 © System Plast S.r.l. , 2012 - All Rights Reserved

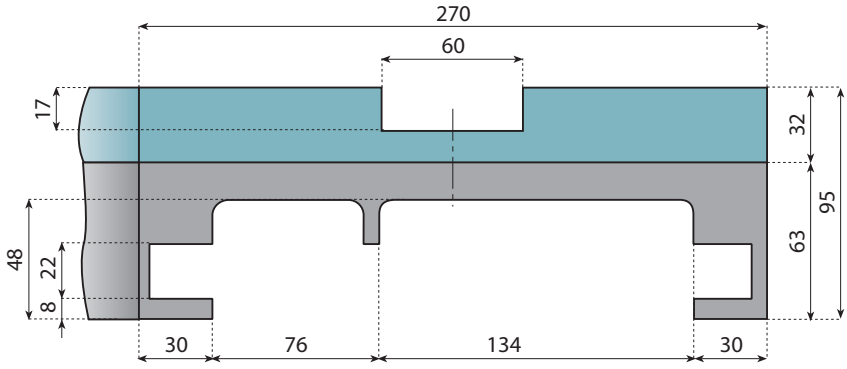

ONE TRACK

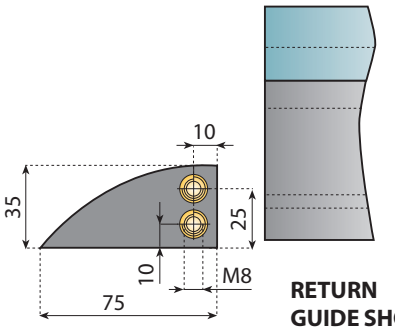


RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For plastic magnetic chains, type:
882M

- More tracks and different angles available on request.

For magnetic chains type see pages 52


Pages 196⇨197

LBP 93 C


Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	860	270	KMD.78.15.01.AC	KMD.78.30.01.AC	KMD.78.45.01.AC	KMD.78.60.01.AC	KMD.78.75.01.AC	KMD.78.90.01.AC

LBP 94 C


Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	1000	270	KMD.79.15.01.AC	KMD.79.30.01.AC	KMD.79.45.01.AC	KMD.79.60.01.AC	KMD.79.75.01.AC	KMD.79.90.01.AC

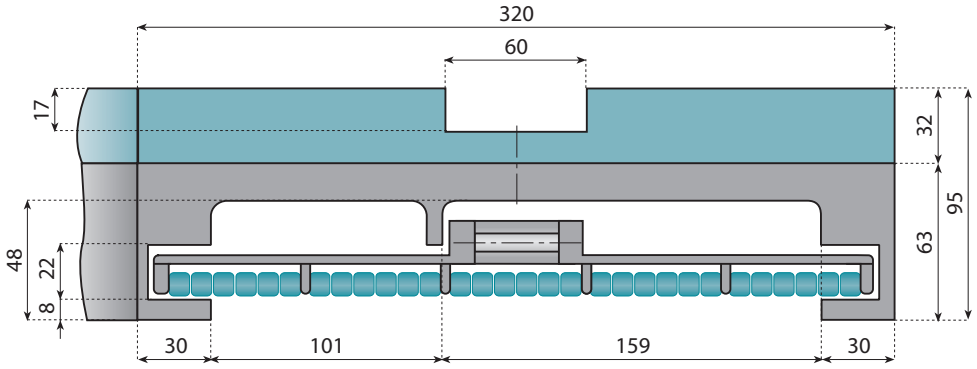

ONE TRACK

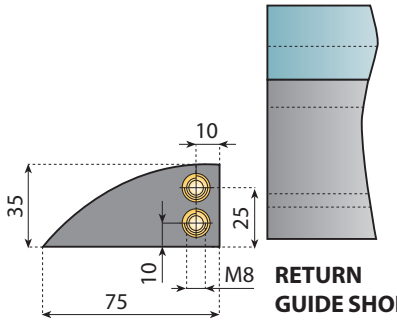


RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For plastic magnetic chains, type:
882M

- More tracks and different angles available on request.

For magnetic chains type see pages 52

Pages 196⇨197


LBP 97 C

Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	860	320	KMD.82.15.01.AC	KMD.82.30.01.AC	KMD.82.45.01.AC	KMD.82.60.01.AC	KMD.82.75.01.AC	KMD.82.90.01.AC


LBP 98 C

Tracks	R	Total width TL mm	15°	30°	45°	60°	75°	90°
1	1000	320	KMD.83.15.01.AC	KMD.83.30.01.AC	KMD.83.45.01.AC	KMD.83.60.01.AC	KMD.83.75.01.AC	KMD.83.90.01.AC

 © System Plast S.r.l. , 2012 - All Rights Reserved

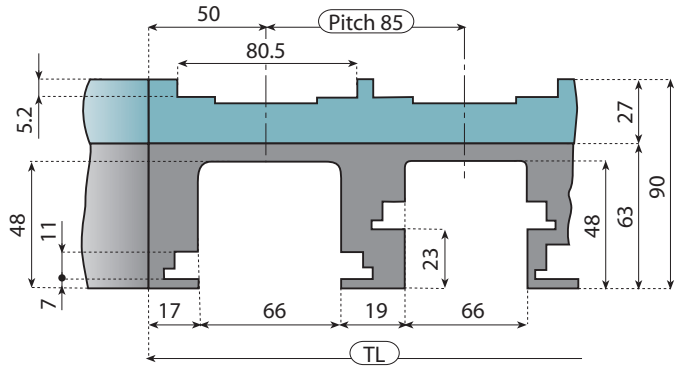


MULTI TRACKS

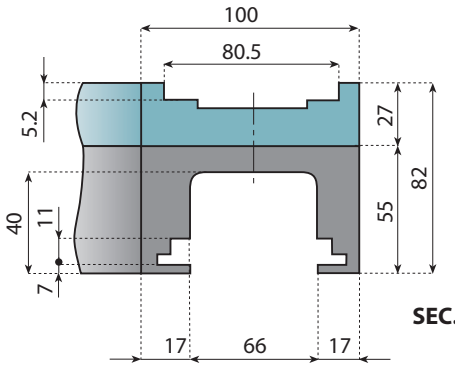


SEC. A-A

ONE TRACK

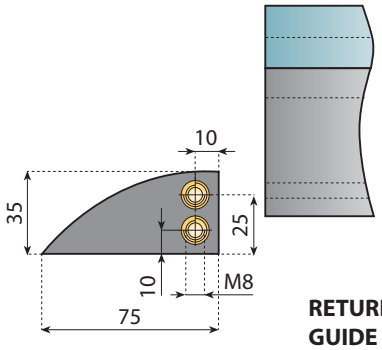

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing belts, type:
2120 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.


For magnetic chains type see pages 183

Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.24.15.01.A	KMD.24.30.01.A	KMD.24.45.01.A	KMD.24.60.01.A	KMD.24.75.01.A	KMD.24.90.01.A
2	185	KMD.24.15.02.A	KMD.24.30.02.A	KMD.24.45.02.A	KMD.24.60.02.A	KMD.24.75.02.A	KMD.24.90.02.A
3	270	KMD.24.15.03.A	KMD.24.30.03.A	KMD.24.45.03.A	KMD.24.60.03.A	KMD.24.75.03.A	KMD.24.90.03.A
4	355	KMD.24.15.04.A	KMD.24.30.04.A	KMD.24.45.04.A	KMD.24.60.04.A	KMD.24.75.04.A	KMD.24.90.04.A
5	440	KMD.24.15.05.A	KMD.24.30.05.A	KMD.24.45.05.A	KMD.24.60.05.A	KMD.24.75.05.A	KMD.24.90.05.A
6	525	KMD.24.15.06.A	KMD.24.30.06.A	KMD.24.45.06.A	KMD.24.60.06.A	KMD.24.75.06.A	KMD.24.90.06.A
7	610	KMD.24.15.07.A	KMD.24.30.07.A	KMD.24.45.07.A	KMD.24.60.07.A	KMD.24.75.07.A	KMD.24.90.07.A
8	695	KMD.24.15.08.A	KMD.24.30.08.A	KMD.24.45.08.A	KMD.24.60.08.A	KMD.24.75.08.A	KMD.24.90.08.A

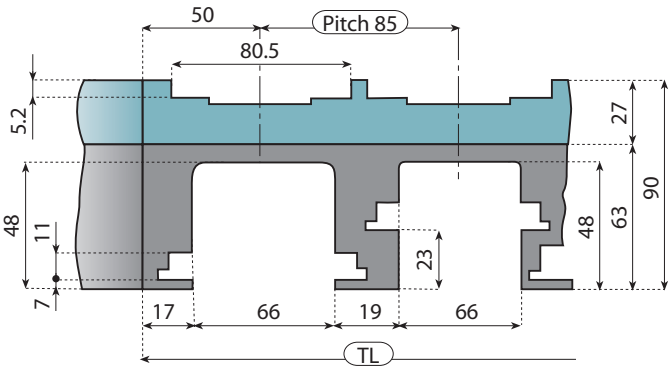


MULTI TRACKS

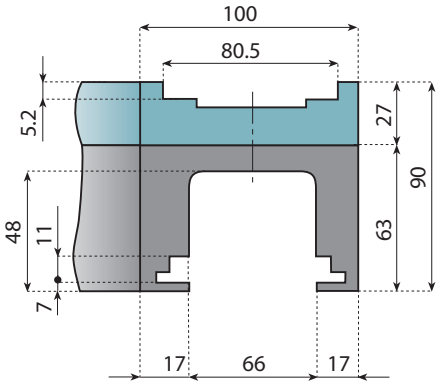

ONE TRACK

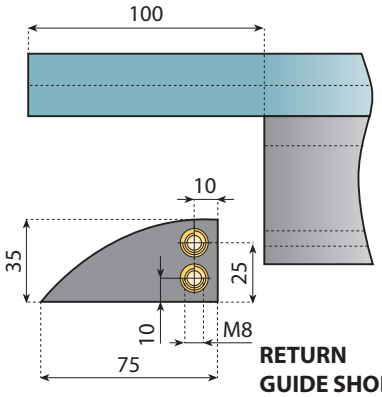

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing belts, type:
2120 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 183




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.25.15.01.B	KMD.25.30.01.B	KMD.25.45.01.B	KMD.25.60.01.B	KMD.25.75.01.B	KMD.25.90.01.B
2	185	KMD.25.15.02.B	KMD.25.30.02.B	KMD.25.45.02.B	KMD.25.60.02.B	KMD.25.75.02.B	KMD.25.90.02.B
3	270	KMD.25.15.03.B	KMD.25.30.03.B	KMD.25.45.03.B	KMD.25.60.03.B	KMD.25.75.03.B	KMD.25.90.03.B
4	355	KMD.25.15.04.B	KMD.25.30.04.B	KMD.25.45.04.B	KMD.25.60.04.B	KMD.25.75.04.B	KMD.25.90.04.B
5	440	KMD.25.15.05.B	KMD.25.30.05.B	KMD.25.45.05.B	KMD.25.60.05.B	KMD.25.75.05.B	KMD.25.90.05.B
6	525	KMD.25.15.06.B	KMD.25.30.06.B	KMD.25.45.06.B	KMD.25.60.06.B	KMD.25.75.06.B	KMD.25.90.06.B
7	610	KMD.25.15.07.B	KMD.25.30.07.B	KMD.25.45.07.B	KMD.25.60.07.B	KMD.25.75.07.B	KMD.25.90.07.B
8	695	KMD.25.15.08.B	KMD.25.30.08.B	KMD.25.45.08.B	KMD.25.60.08.B	KMD.25.75.08.B	KMD.25.90.08.B


 © System Plast S.r.l. , 2012 - All Rights Reserved

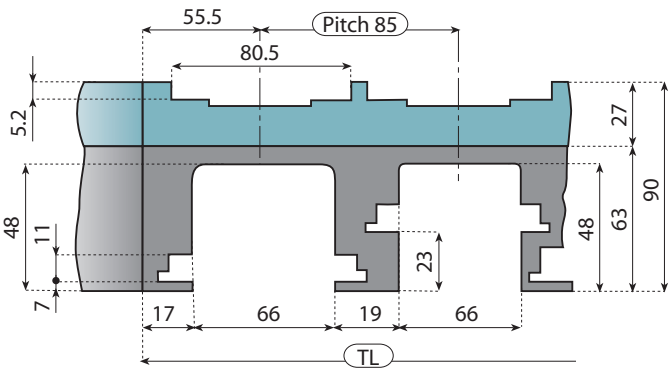


MULTI TRACKS

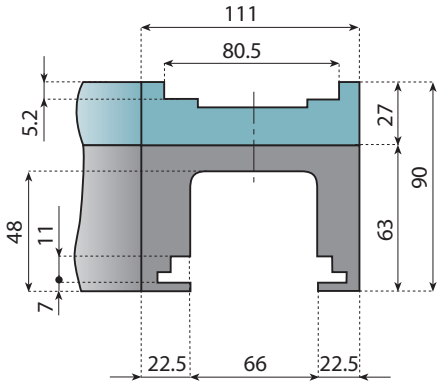

ONE TRACK

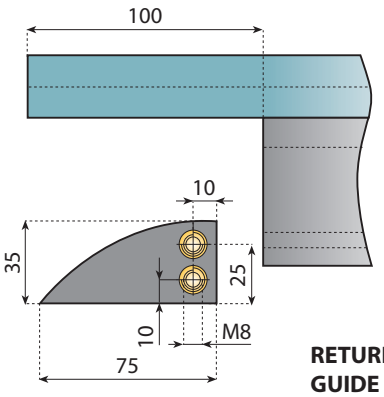

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing belts, type:
2120 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 183




Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.26.15.01.B	KMD.26.30.01.B	KMD.26.45.01.B	KMD.26.60.01.B	KMD.26.75.01.B	KMD.26.90.01.B
2	196	KMD.26.15.02.B	KMD.26.30.02.B	KMD.26.45.02.B	KMD.26.60.02.B	KMD.26.75.02.B	KMD.26.90.02.B
3	281	KMD.26.15.03.B	KMD.26.30.03.B	KMD.26.45.03.B	KMD.26.60.03.B	KMD.26.75.03.B	KMD.26.90.03.B
4	366	KMD.26.15.04.B	KMD.26.30.04.B	KMD.26.45.04.B	KMD.26.60.04.B	KMD.26.75.04.B	KMD.26.90.04.B
5	451	KMD.26.15.05.B	KMD.26.30.05.B	KMD.26.45.05.B	KMD.26.60.05.B	KMD.26.75.05.B	KMD.26.90.05.B
6	536	KMD.26.15.06.B	KMD.26.30.06.B	KMD.26.45.06.B	KMD.26.60.06.B	KMD.26.75.06.B	KMD.26.90.06.B
7	621	KMD.26.15.07.B	KMD.26.30.07.B	KMD.26.45.07.B	KMD.26.60.07.B	KMD.26.75.07.B	KMD.26.90.07.B
8	706	KMD.26.15.08.B	KMD.26.30.08.B	KMD.26.45.08.B	KMD.26.60.08.B	KMD.26.75.08.B	KMD.26.90.08.B

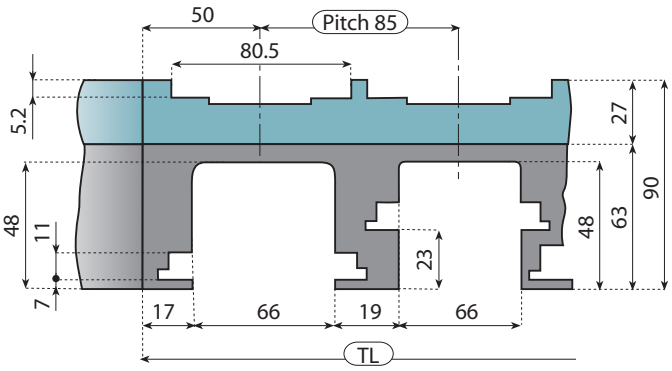


MULTI TRACKS

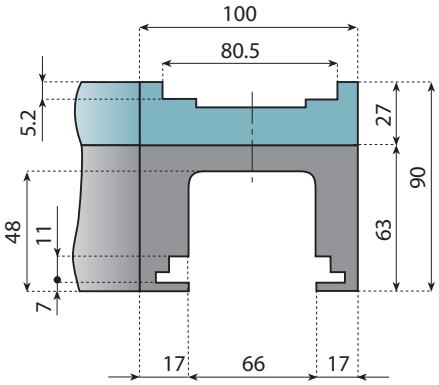

ONE TRACK

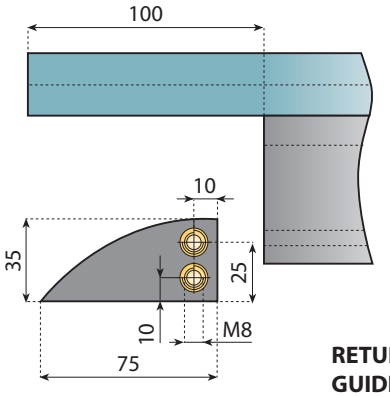

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing belts, type:
2120 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 183




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.27.15.01.B	KMD.27.30.01.B	KMD.27.45.01.B	KMD.27.60.01.B	KMD.27.75.01.B	KMD.27.90.01.B
2	185	KMD.27.15.02.B	KMD.27.30.02.B	KMD.27.45.02.B	KMD.27.60.02.B	KMD.27.75.02.B	KMD.27.90.02.B
3	270	KMD.27.15.03.B	KMD.27.30.03.B	KMD.27.45.03.B	KMD.27.60.03.B	KMD.27.75.03.B	KMD.27.90.03.B
4	355	KMD.27.15.04.B	KMD.27.30.04.B	KMD.27.45.04.B	KMD.27.60.04.B	KMD.27.75.04.B	KMD.27.90.04.B
5	440	KMD.27.15.05.B	KMD.27.30.05.B	KMD.27.45.05.B	KMD.27.60.05.B	KMD.27.75.05.B	KMD.27.90.05.B
6	525	KMD.27.15.06.B	KMD.27.30.06.B	KMD.27.45.06.B	KMD.27.60.06.B	KMD.27.75.06.B	KMD.27.90.06.B
7	610	KMD.27.15.07.B	KMD.27.30.07.B	KMD.27.45.07.B	KMD.27.60.07.B	KMD.27.75.07.B	KMD.27.90.07.B
8	695	KMD.27.15.08.B	KMD.27.30.08.B	KMD.27.45.08.B	KMD.27.60.08.B	KMD.27.75.08.B	KMD.27.90.08.B


 © System Plast S.r.l. , 2012 - All Rights Reserved

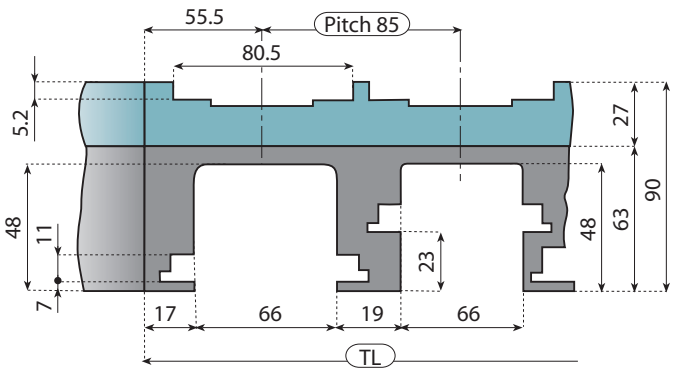


MULTI TRACKS

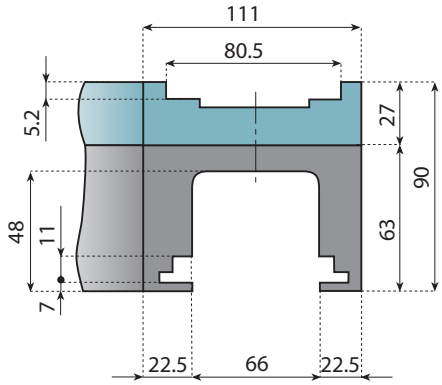

ONE TRACK

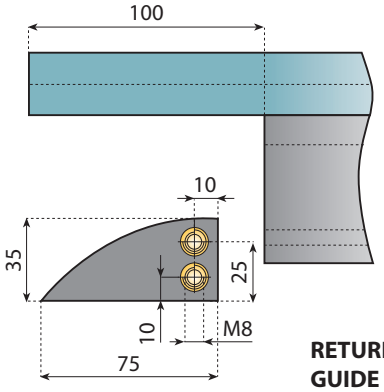

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing belts, type:
2120 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 183




Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.28.15.01.B	KMD.28.30.01.B	KMD.28.45.01.B	KMD.28.60.01.B	KMD.28.75.01.B	KMD.28.90.01.B
2	196	KMD.28.15.02.B	KMD.28.30.02.B	KMD.28.45.02.B	KMD.28.60.02.B	KMD.28.75.02.B	KMD.28.90.02.B
3	281	KMD.28.15.03.B	KMD.28.30.03.B	KMD.28.45.03.B	KMD.28.60.03.B	KMD.28.75.03.B	KMD.28.90.03.B
4	366	KMD.28.15.04.B	KMD.28.30.04.B	KMD.28.45.04.B	KMD.28.60.04.B	KMD.28.75.04.B	KMD.28.90.04.B
5	451	KMD.28.15.05.B	KMD.28.30.05.B	KMD.28.45.05.B	KMD.28.60.05.B	KMD.28.75.05.B	KMD.28.90.05.B
6	536	KMD.28.15.06.B	KMD.28.30.06.B	KMD.28.45.06.B	KMD.28.60.06.B	KMD.28.75.06.B	KMD.28.90.06.B
7	621	KMD.28.15.07.B	KMD.28.30.07.B	KMD.28.45.07.B	KMD.28.60.07.B	KMD.28.75.07.B	KMD.28.90.07.B
8	706	KMD.28.15.08.B	KMD.28.30.08.B	KMD.28.45.08.B	KMD.28.60.08.B	KMD.28.75.08.B	KMD.28.90.08.B

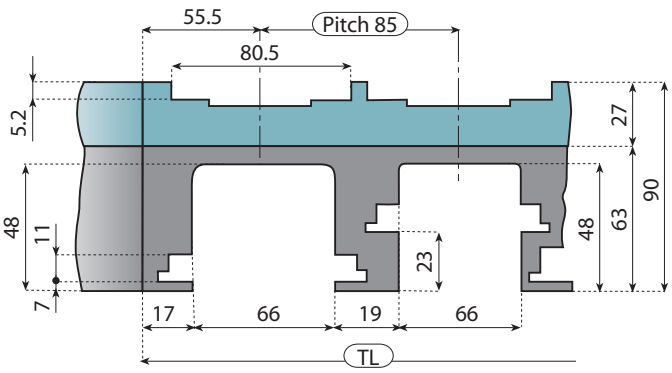


MULTI TRACKS

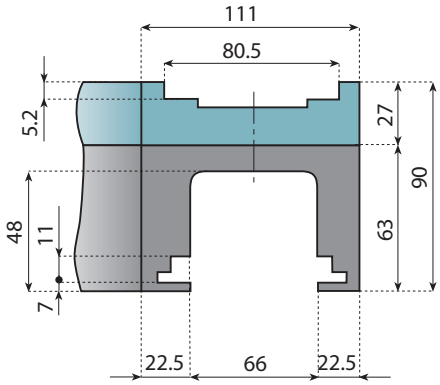

ONE TRACK

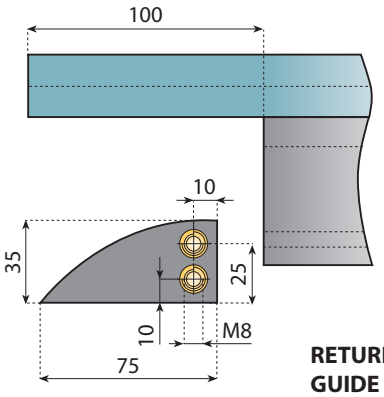

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing belts, type:
2120 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 183


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.29.15.01.B	KMD.29.30.01.B	KMD.29.45.01.B	KMD.29.60.01.B	KMD.29.75.01.B	KMD.29.90.01.B
2	196	KMD.29.15.02.B	KMD.29.30.02.B	KMD.29.45.02.B	KMD.29.60.02.B	KMD.29.75.02.B	KMD.29.90.02.B
3	281	KMD.29.15.03.B	KMD.29.30.03.B	KMD.29.45.03.B	KMD.29.60.03.B	KMD.29.75.03.B	KMD.29.90.03.B
4	366	KMD.29.15.04.B	KMD.29.30.04.B	KMD.29.45.04.B	KMD.29.60.04.B	KMD.29.75.04.B	KMD.29.90.04.B
5	451	KMD.29.15.05.B	KMD.29.30.05.B	KMD.29.45.05.B	KMD.29.60.05.B	KMD.29.75.05.B	KMD.29.90.05.B
6	536	KMD.29.15.06.B	KMD.29.30.06.B	KMD.29.45.06.B	KMD.29.60.06.B	KMD.29.75.06.B	KMD.29.90.06.B
7	621	KMD.29.15.07.B	KMD.29.30.07.B	KMD.29.45.07.B	KMD.29.60.07.B	KMD.29.75.07.B	KMD.29.90.07.B
8	706	KMD.29.15.08.B	KMD.29.30.08.B	KMD.29.45.08.B	KMD.29.60.08.B	KMD.29.75.08.B	KMD.29.90.08.B


 © System Plast S.r.l. , 2012 - All Rights Reserved

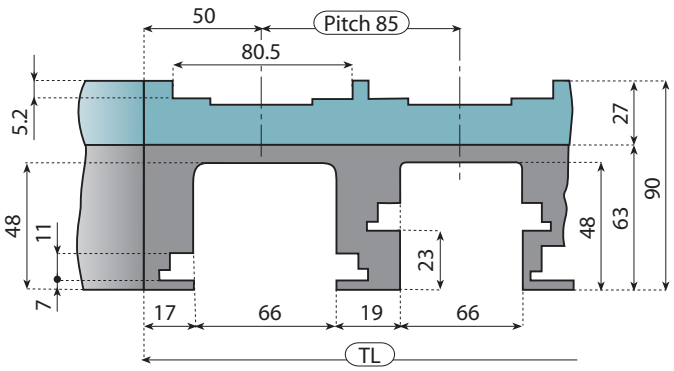


MULTI TRACKS

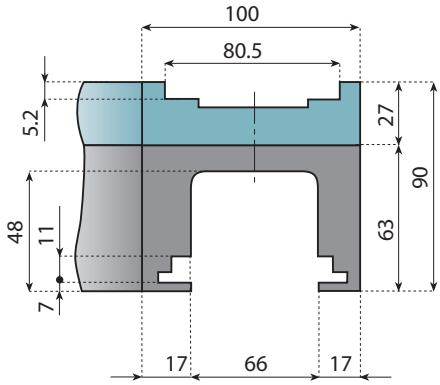

ONE TRACK

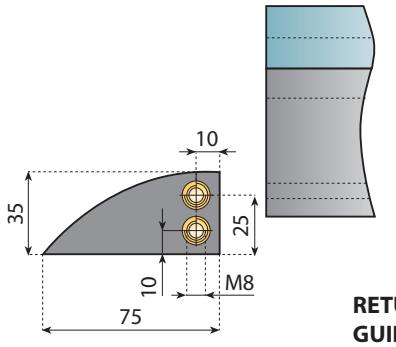

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing belts, type:
2120 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.


For magnetic chains type see pages 183

Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.30.15.01.A	KMD.30.30.01.A	KMD.30.45.01.A	KMD.30.60.01.A	KMD.30.75.01.A	KMD.30.90.01.A
2	185	KMD.30.15.02.A	KMD.30.30.02.A	KMD.30.45.02.A	KMD.30.60.02.A	KMD.30.75.02.A	KMD.30.90.02.A
3	270	KMD.30.15.03.A	KMD.30.30.03.A	KMD.30.45.03.A	KMD.30.60.03.A	KMD.30.75.03.A	KMD.30.90.03.A
4	355	KMD.30.15.04.A	KMD.30.30.04.A	KMD.30.45.04.A	KMD.30.60.04.A	KMD.30.75.04.A	KMD.30.90.04.A
5	440	KMD.30.15.05.A	KMD.30.30.05.A	KMD.30.45.05.A	KMD.30.60.05.A	KMD.30.75.05.A	KMD.30.90.05.A
6	525	KMD.30.15.06.A	KMD.30.30.06.A	KMD.30.45.06.A	KMD.30.60.06.A	KMD.30.75.06.A	KMD.30.90.06.A
7	610	KMD.30.15.07.A	KMD.30.30.07.A	KMD.30.45.07.A	KMD.30.60.07.A	KMD.30.75.07.A	KMD.30.90.07.A
8	695	KMD.30.15.08.A	KMD.30.30.08.A	KMD.30.45.08.A	KMD.30.60.08.A	KMD.30.75.08.A	KMD.30.90.08.A

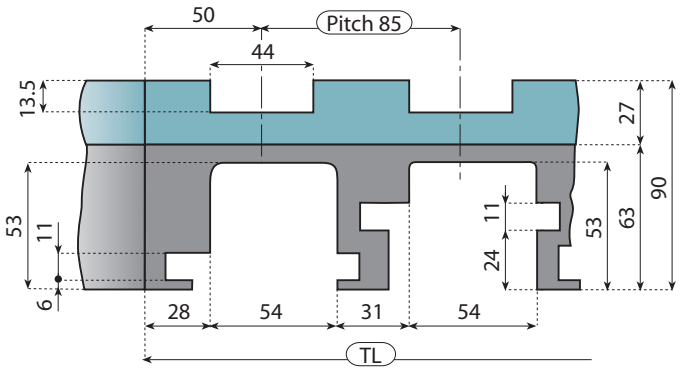


MULTI TRACKS

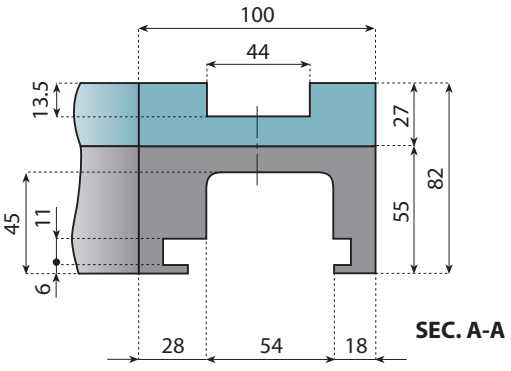


ONE TRACK

SEC. A-A

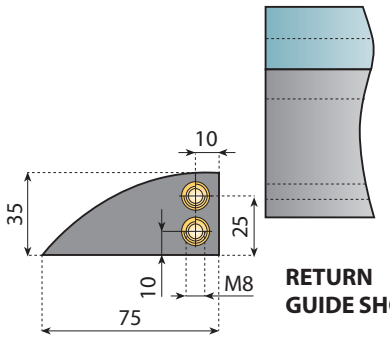

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2250M - 2260M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 180-181


MATERIAL Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.90.15.01.A	KMD.90.30.01.A	KMD.90.45.01.A	KMD.90.60.01.A	KMD.90.75.01.A	KMD.90.90.01.A
2	185	KMD.90.15.02.A	KMD.90.30.02.A	KMD.90.45.02.A	KMD.90.60.02.A	KMD.90.75.02.A	KMD.90.90.02.A
3	270	KMD.90.15.03.A	KMD.90.30.03.A	KMD.90.45.03.A	KMD.90.60.03.A	KMD.90.75.03.A	KMD.90.90.03.A
4	355	KMD.90.15.04.A	KMD.90.30.04.A	KMD.90.45.04.A	KMD.90.60.04.A	KMD.90.75.04.A	KMD.90.90.04.A
5	440	KMD.90.15.05.A	KMD.90.30.05.A	KMD.90.45.05.A	KMD.90.60.05.A	KMD.90.75.05.A	KMD.90.90.05.A
6	525	KMD.90.15.06.A	KMD.90.30.06.A	KMD.90.45.06.A	KMD.90.60.06.A	KMD.90.75.06.A	KMD.90.90.06.A
7	610	KMD.90.15.07.A	KMD.90.30.07.A	KMD.90.45.07.A	KMD.90.60.07.A	KMD.90.75.07.A	KMD.90.90.07.A
8	695	KMD.90.15.08.A	KMD.90.30.08.A	KMD.90.45.08.A	KMD.90.60.08.A	KMD.90.75.08.A	KMD.90.90.08.A

 © System Plast S.r.l. , 2012 - All Rights Reserved

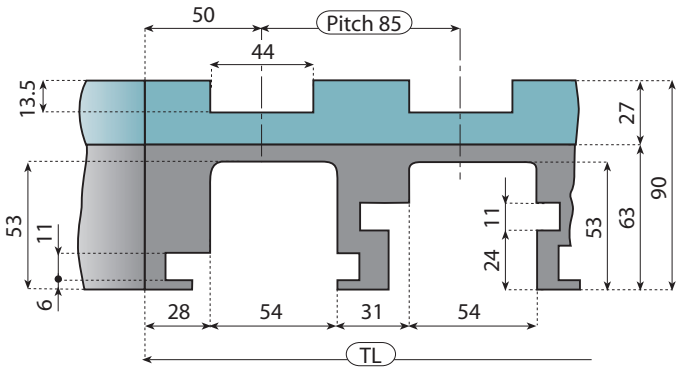


MULTI TRACKS

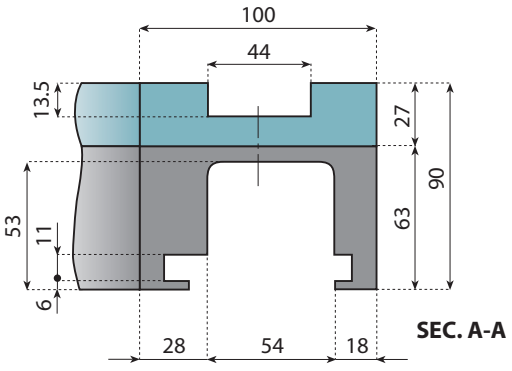


SEC. A-A

ONE TRACK

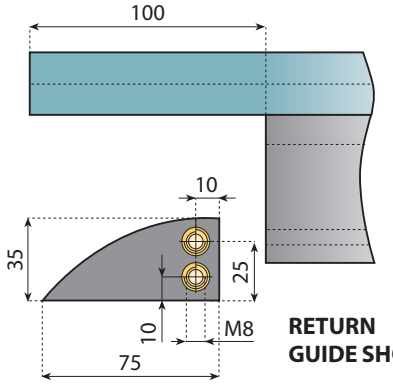

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2250M - 2260M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 180-181




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.91.15.01.B	KMD.91.30.01.B	KMD.91.45.01.B	KMD.91.60.01.B	KMD.91.75.01.B	KMD.91.90.01.B
2	185	KMD.91.15.02.B	KMD.91.30.02.B	KMD.91.45.02.B	KMD.91.60.02.B	KMD.91.75.02.B	KMD.91.90.02.B
3	270	KMD.91.15.03.B	KMD.91.30.03.B	KMD.91.45.03.B	KMD.91.60.03.B	KMD.91.75.03.B	KMD.91.90.03.B
4	355	KMD.91.15.04.B	KMD.91.30.04.B	KMD.91.45.04.B	KMD.91.60.04.B	KMD.91.75.04.B	KMD.91.90.04.B
5	440	KMD.91.15.05.B	KMD.91.30.05.B	KMD.91.45.05.B	KMD.91.60.05.B	KMD.91.75.05.B	KMD.91.90.05.B
6	525	KMD.91.15.06.B	KMD.91.30.06.B	KMD.91.45.06.B	KMD.91.60.06.B	KMD.91.75.06.B	KMD.91.90.06.B
7	610	KMD.91.15.07.B	KMD.91.30.07.B	KMD.91.45.07.B	KMD.91.60.07.B	KMD.91.75.07.B	KMD.91.90.07.B
8	695	KMD.91.15.08.B	KMD.91.30.08.B	KMD.91.45.08.B	KMD.91.60.08.B	KMD.91.75.08.B	KMD.91.90.08.B

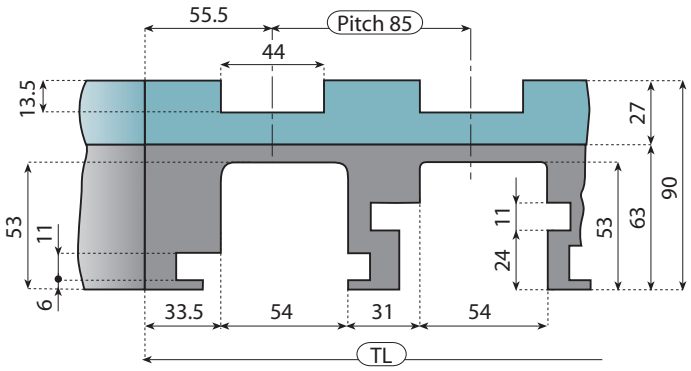


MULTI TRACKS

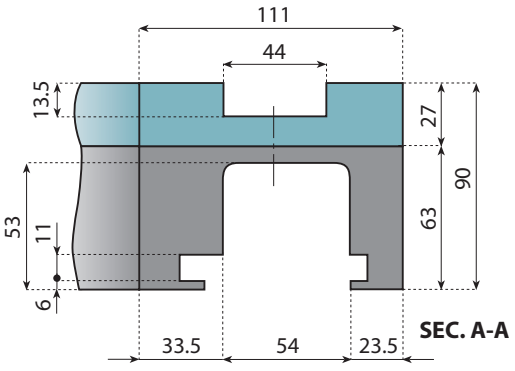


ONE TRACK

SEC. A-A

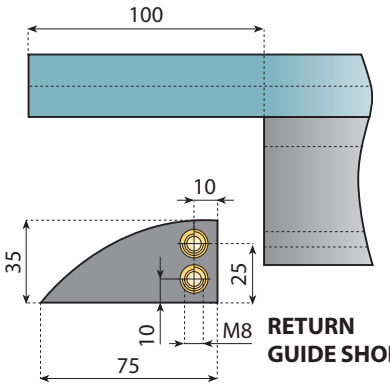

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2250M - 2260M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 180-181


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.92.15.01.B	KMD.92.30.01.B	KMD.92.45.01.B	KMD.92.60.01.B	KMD.92.75.01.B	KMD.92.90.01.B
2	196	KMD.92.15.02.B	KMD.92.30.02.B	KMD.92.45.02.B	KMD.92.60.02.B	KMD.92.75.02.B	KMD.92.90.02.B
3	281	KMD.92.15.03.B	KMD.92.30.03.B	KMD.92.45.03.B	KMD.92.60.03.B	KMD.92.75.03.B	KMD.92.90.03.B
4	366	KMD.92.15.04.B	KMD.92.30.04.B	KMD.92.45.04.B	KMD.92.60.04.B	KMD.92.75.04.B	KMD.92.90.04.B
5	451	KMD.92.15.05.B	KMD.92.30.05.B	KMD.92.45.05.B	KMD.92.60.05.B	KMD.92.75.05.B	KMD.92.90.05.B
6	536	KMD.92.15.06.B	KMD.92.30.06.B	KMD.92.45.06.B	KMD.92.60.06.B	KMD.92.75.06.B	KMD.92.90.06.B
7	621	KMD.92.15.07.B	KMD.92.30.07.B	KMD.92.45.07.B	KMD.92.60.07.B	KMD.92.75.07.B	KMD.92.90.07.B
8	706	KMD.92.15.08.B	KMD.92.30.08.B	KMD.92.45.08.B	KMD.92.60.08.B	KMD.92.75.08.B	KMD.92.90.08.B

 © System Plast S.r.l. , 2012 - All Rights Reserved

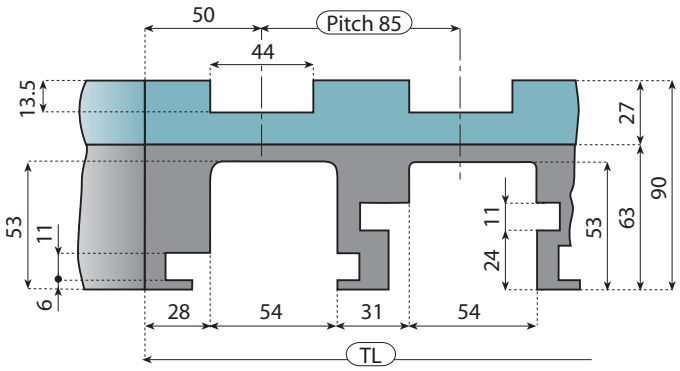


MULTI TRACKS

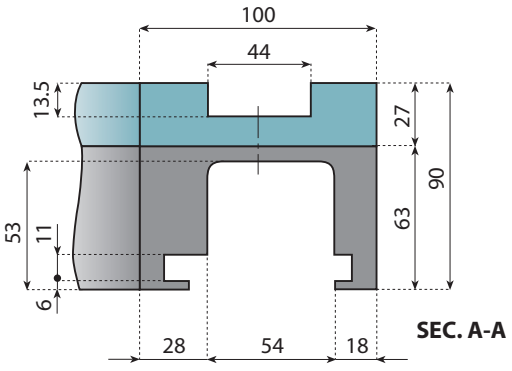


SEC. A-A

ONE TRACK

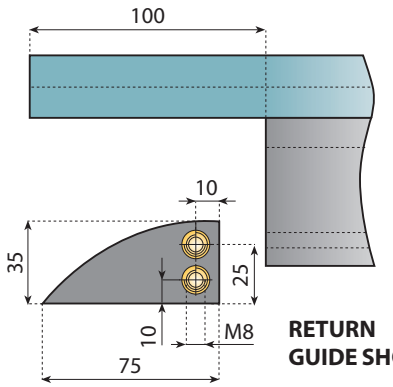

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2250M - 2260M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 180-181




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.93.15.01.B	KMD.93.30.01.B	KMD.93.45.01.B	KMD.93.60.01.B	KMD.93.75.01.B	KMD.93.90.01.B
2	185	KMD.93.15.02.B	KMD.93.30.02.B	KMD.93.45.02.B	KMD.93.60.02.B	KMD.93.75.02.B	KMD.93.90.02.B
3	270	KMD.93.15.03.B	KMD.93.30.03.B	KMD.93.45.03.B	KMD.93.60.03.B	KMD.93.75.03.B	KMD.93.90.03.B
4	355	KMD.93.15.04.B	KMD.93.30.04.B	KMD.93.45.04.B	KMD.93.60.04.B	KMD.93.75.04.B	KMD.93.90.04.B
5	440	KMD.93.15.05.B	KMD.93.30.05.B	KMD.93.45.05.B	KMD.93.60.05.B	KMD.93.75.05.B	KMD.93.90.05.B
6	525	KMD.93.15.06.B	KMD.93.30.06.B	KMD.93.45.06.B	KMD.93.60.06.B	KMD.93.75.06.B	KMD.93.90.06.B
7	610	KMD.93.15.07.B	KMD.93.30.07.B	KMD.93.45.07.B	KMD.93.60.07.B	KMD.93.75.07.B	KMD.93.90.07.B
8	695	KMD.93.15.08.B	KMD.93.30.08.B	KMD.93.45.08.B	KMD.93.60.08.B	KMD.93.75.08.B	KMD.93.90.08.B

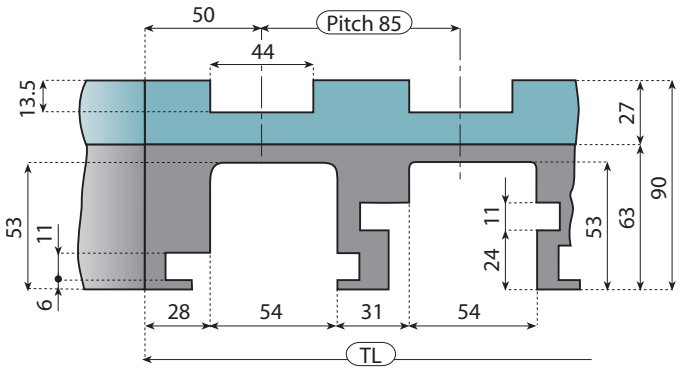


MULTI TRACKS

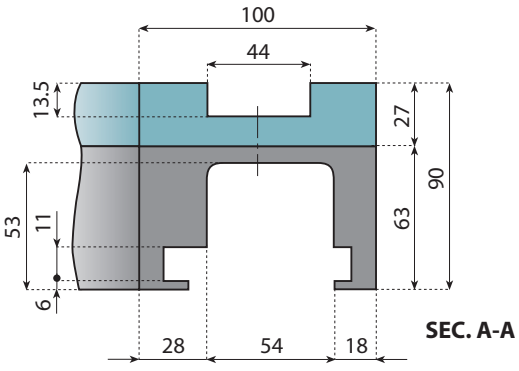


ONE TRACK

SEC. A-A

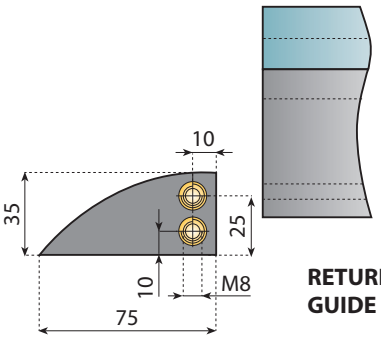

RETURN GUIDE SHOE




RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2250M - 2260M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 180-181


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.96.15.01.A	KMD.96.30.01.A	KMD.96.45.01.A	KMD.96.60.01.A	KMD.96.75.01.A	KMD.96.90.01.A
2	185	KMD.96.15.02.A	KMD.96.30.02.A	KMD.96.45.02.A	KMD.96.60.02.A	KMD.96.75.02.A	KMD.96.90.02.A
3	270	KMD.96.15.03.A	KMD.96.30.03.A	KMD.96.45.03.A	KMD.96.60.03.A	KMD.96.75.03.A	KMD.96.90.03.A
4	355	KMD.96.15.04.A	KMD.96.30.04.A	KMD.96.45.04.A	KMD.96.60.04.A	KMD.96.75.04.A	KMD.96.90.04.A
5	440	KMD.96.15.05.A	KMD.96.30.05.A	KMD.96.45.05.A	KMD.96.60.05.A	KMD.96.75.05.A	KMD.96.90.05.A
6	525	KMD.96.15.06.A	KMD.96.30.06.A	KMD.96.45.06.A	KMD.96.60.06.A	KMD.96.75.06.A	KMD.96.90.06.A
7	610	KMD.96.15.07.A	KMD.96.30.07.A	KMD.96.45.07.A	KMD.96.60.07.A	KMD.96.75.07.A	KMD.96.90.07.A
8	695	KMD.96.15.08.A	KMD.96.30.08.A	KMD.96.45.08.A	KMD.96.60.08.A	KMD.96.75.08.A	KMD.96.90.08.A


 © System Plast S.r.l. , 2012 - All Rights Reserved

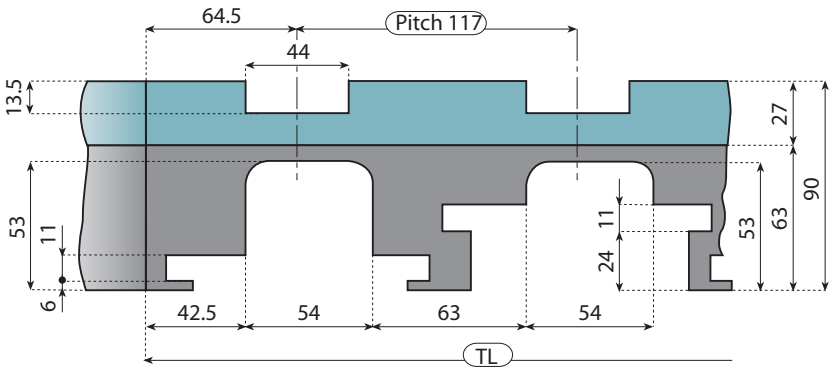


MULTI TRACKS

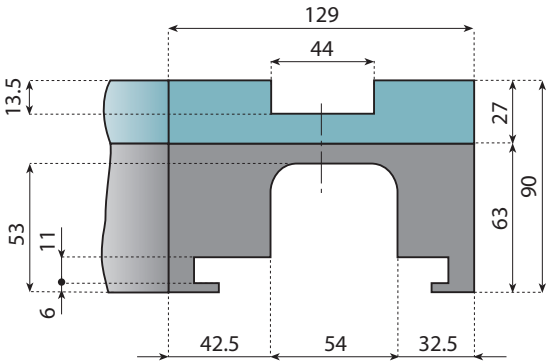

ONE TRACK SEC. A-A

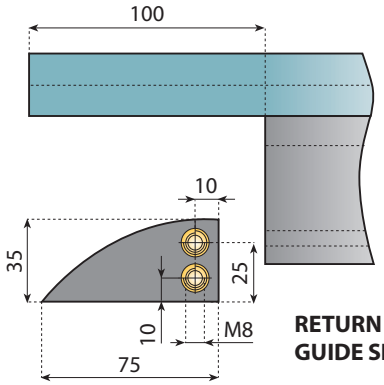

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2250 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 180




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	129	KMD.54.15.01.B	KMD.54.30.01.B	KMD.54.45.01.B	KMD.54.60.01.B	KMD.54.75.01.B	KMD.54.90.01.B
2	246	KMD.54.15.02.B	KMD.54.30.02.B	KMD.54.45.02.B	KMD.54.60.02.B	KMD.54.75.02.B	KMD.54.90.02.B
3	363	KMD.54.15.03.B	KMD.54.30.03.B	KMD.54.45.03.B	KMD.54.60.03.B	KMD.54.75.03.B	KMD.54.90.03.B
4	480	KMD.54.15.04.B	KMD.54.30.04.B	KMD.54.45.04.B	KMD.54.60.04.B	KMD.54.75.04.B	KMD.54.90.04.B

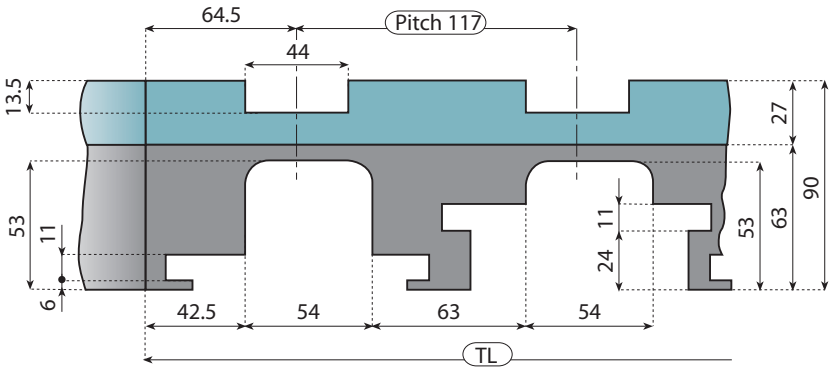


MULTI TRACKS

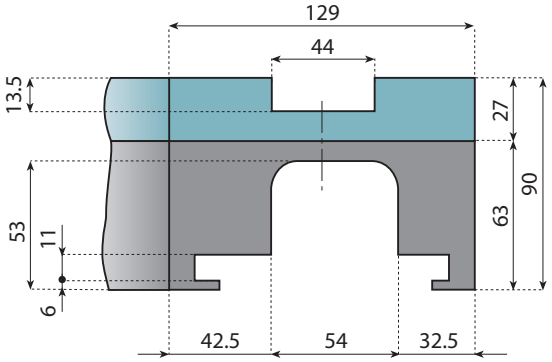


ONE TRACK

SEC. A-A

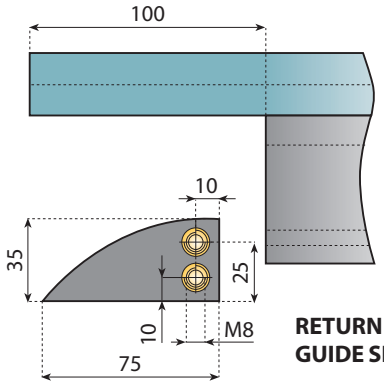

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.

For sideflexing chainbelts, type:
2250 M

Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.

Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.


Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 180


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	129	KMD.56.15.01.B	KMD.56.30.01.B	KMD.56.45.01.B	KMD.56.60.01.B	KMD.56.75.01.B	KMD.56.90.01.B
2	246	KMD.56.15.02.B	KMD.56.30.02.B	KMD.56.45.02.B	KMD.56.60.02.B	KMD.56.75.02.B	KMD.56.90.02.B
3	363	KMD.56.15.03.B	KMD.56.30.03.B	KMD.56.45.03.B	KMD.56.60.03.B	KMD.56.75.03.B	KMD.56.90.03.B
4	480	KMD.56.15.04.B	KMD.56.30.04.B	KMD.56.45.04.B	KMD.56.60.04.B	KMD.56.75.04.B	KMD.56.90.04.B

 © System Plast S.r.l., 2012 - All Rights Reserved

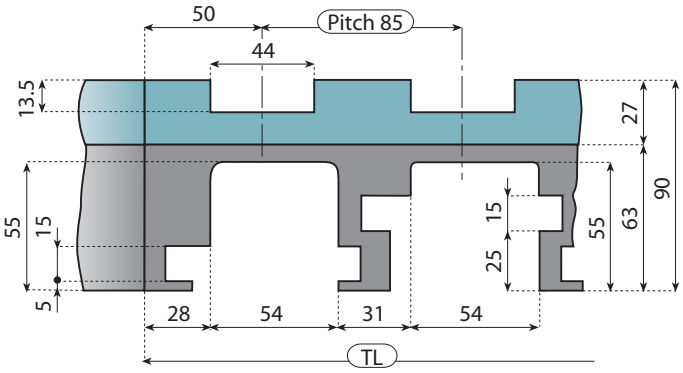


MULTI TRACKS

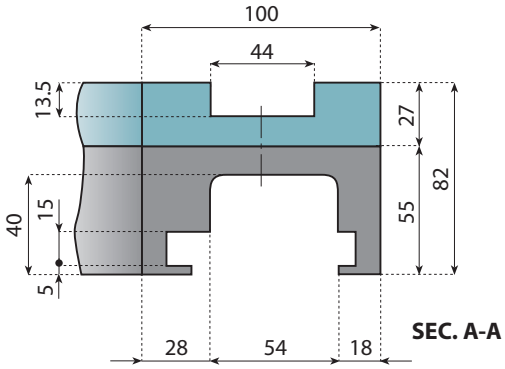


SEC. A-A

ONE TRACK

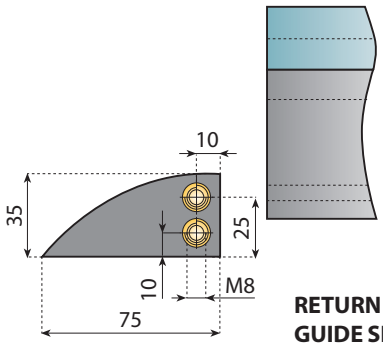

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2251 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 182




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.84.15.01.A	KMD.84.30.01.A	KMD.84.45.01.A	KMD.84.60.01.A	KMD.84.75.01.A	KMD.84.90.01.A
2	185	KMD.84.15.02.A	KMD.84.30.02.A	KMD.84.45.02.A	KMD.84.60.02.A	KMD.84.75.02.A	KMD.84.90.02.A
3	270	KMD.84.15.03.A	KMD.84.30.03.A	KMD.84.45.03.A	KMD.84.60.03.A	KMD.84.75.03.A	KMD.84.90.03.A
4	355	KMD.84.15.04.A	KMD.84.30.04.A	KMD.84.45.04.A	KMD.84.60.04.A	KMD.84.75.04.A	KMD.84.90.04.A
5	440	KMD.84.15.05.A	KMD.84.30.05.A	KMD.84.45.05.A	KMD.84.60.05.A	KMD.84.75.05.A	KMD.84.90.05.A
6	525	KMD.84.15.06.A	KMD.84.30.06.A	KMD.84.45.06.A	KMD.84.60.06.A	KMD.84.75.06.A	KMD.84.90.06.A
7	610	KMD.84.15.07.A	KMD.84.30.07.A	KMD.84.45.07.A	KMD.84.60.07.A	KMD.84.75.07.A	KMD.84.90.07.A
8	695	KMD.84.15.08.A	KMD.84.30.08.A	KMD.84.45.08.A	KMD.84.60.08.A	KMD.84.75.08.A	KMD.84.90.08.A

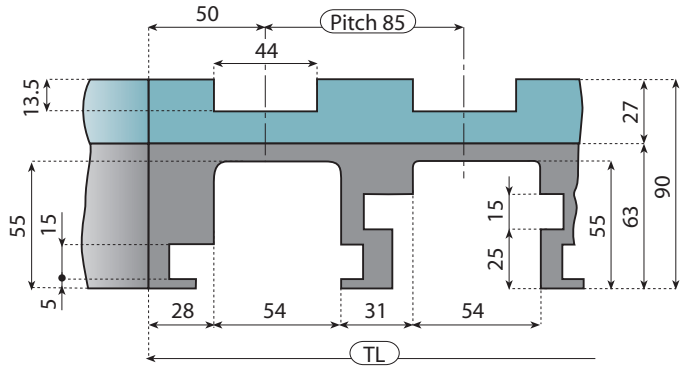


MULTI TRACKS

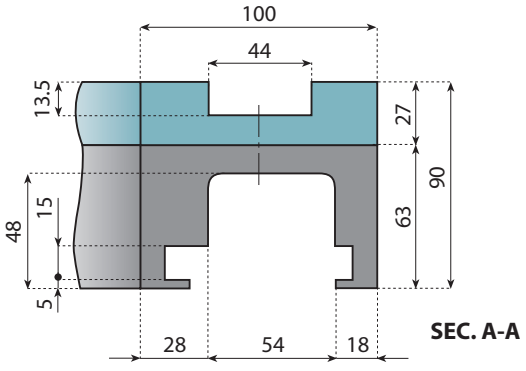


SEC. A-A

ONE TRACK

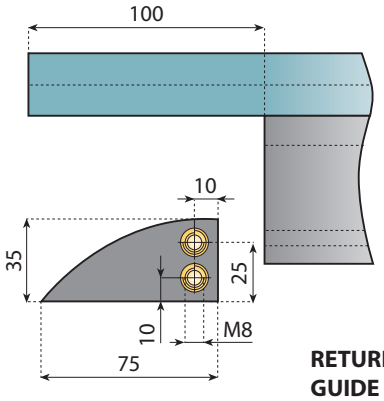

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2251 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 182




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.85.15.01.B	KMD.85.30.01.B	KMD.85.45.01.B	KMD.85.60.01.B	KMD.85.75.01.B	KMD.85.90.01.B
2	185	KMD.85.15.02.B	KMD.85.30.02.B	KMD.85.45.02.B	KMD.85.60.02.B	KMD.85.75.02.B	KMD.85.90.02.B
3	270	KMD.85.15.03.B	KMD.85.30.03.B	KMD.85.45.03.B	KMD.85.60.03.B	KMD.85.75.03.B	KMD.85.90.03.B
4	355	KMD.85.15.04.B	KMD.85.30.04.B	KMD.85.45.04.B	KMD.85.60.04.B	KMD.85.75.04.B	KMD.85.90.04.B
5	440	KMD.85.15.05.B	KMD.85.30.05.B	KMD.85.45.05.B	KMD.85.60.05.B	KMD.85.75.05.B	KMD.85.90.05.B
6	525	KMD.85.15.06.B	KMD.85.30.06.B	KMD.85.45.06.B	KMD.85.60.06.B	KMD.85.75.06.B	KMD.85.90.06.B
7	610	KMD.85.15.07.B	KMD.85.30.07.B	KMD.85.45.07.B	KMD.85.60.07.B	KMD.85.75.07.B	KMD.85.90.07.B
8	695	KMD.85.15.08.B	KMD.85.30.08.B	KMD.85.45.08.B	KMD.85.60.08.B	KMD.85.75.08.B	KMD.85.90.08.B

 © System Plast S.r.l. , 2012 - All Rights Reserved

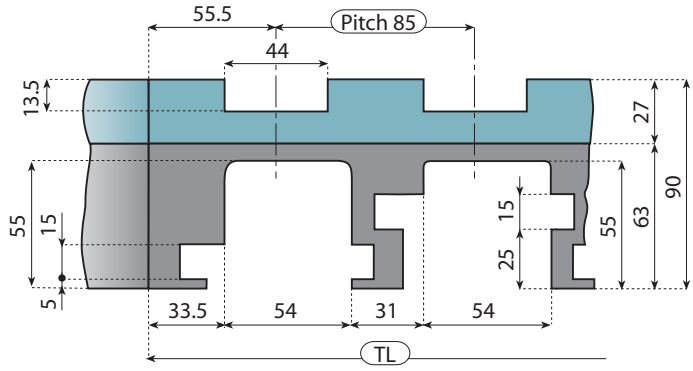


MULTI TRACKS

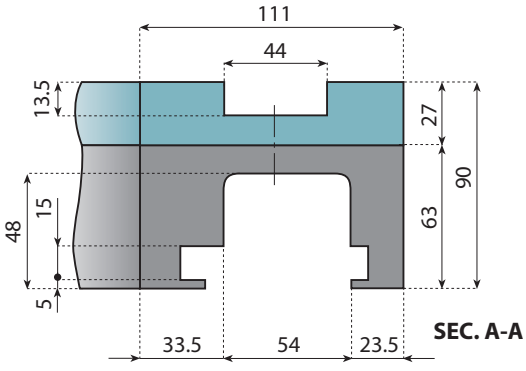


SEC. A-A

ONE TRACK

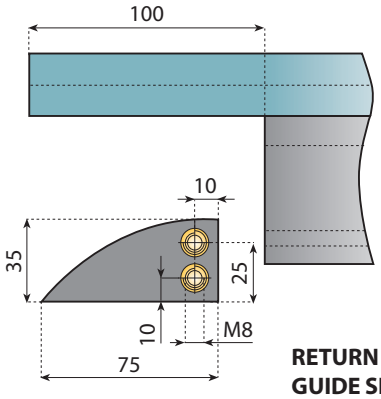

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2251 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 182




Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	111	KMD.86.15.01.B	KMD.86.30.01.B	KMD.86.45.01.B	KMD.86.60.01.B	KMD.86.75.01.B	KMD.86.90.01.B
2	196	KMD.86.15.02.B	KMD.86.30.02.B	KMD.86.45.02.B	KMD.86.60.02.B	KMD.86.75.02.B	KMD.86.90.02.B
3	281	KMD.86.15.03.B	KMD.86.30.03.B	KMD.86.45.03.B	KMD.86.60.03.B	KMD.86.75.03.B	KMD.86.90.03.B
4	366	KMD.86.15.04.B	KMD.86.30.04.B	KMD.86.45.04.B	KMD.86.60.04.B	KMD.86.75.04.B	KMD.86.90.04.B
5	451	KMD.86.15.05.B	KMD.86.30.05.B	KMD.86.45.05.B	KMD.86.60.05.B	KMD.86.75.05.B	KMD.86.90.05.B
6	536	KMD.86.15.06.B	KMD.86.30.06.B	KMD.86.45.06.B	KMD.86.60.06.B	KMD.86.75.06.B	KMD.86.90.06.B
7	621	KMD.86.15.07.B	KMD.86.30.07.B	KMD.86.45.07.B	KMD.86.60.07.B	KMD.86.75.07.B	KMD.86.90.07.B
8	706	KMD.86.15.08.B	KMD.86.30.08.B	KMD.86.45.08.B	KMD.86.60.08.B	KMD.86.75.08.B	KMD.86.90.08.B

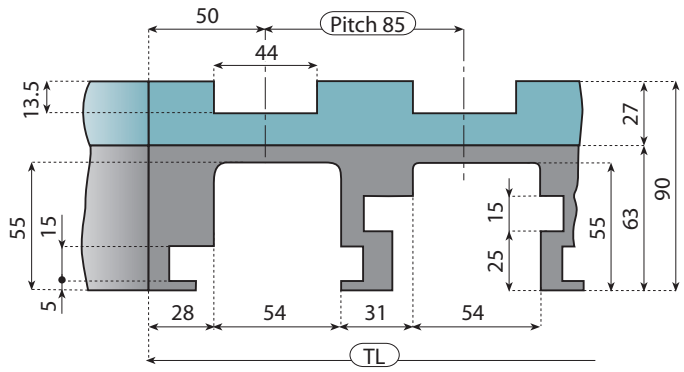


MULTI TRACKS

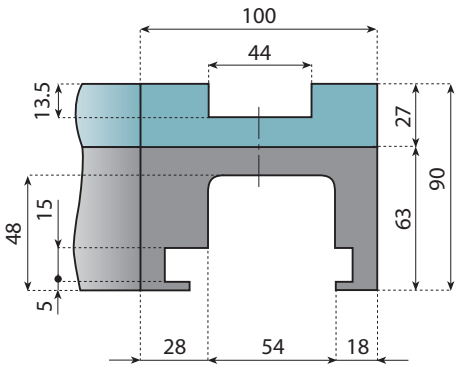

ONE TRACK

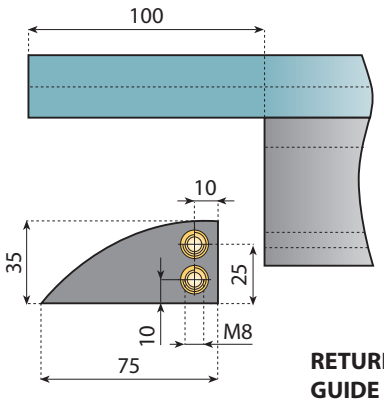

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2251 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.




Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.

For magnetic chains type see pages 182


Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.87.15.01.B	KMD.87.30.01.B	KMD.87.45.01.B	KMD.87.60.01.B	KMD.87.75.01.B	KMD.87.90.01.B
2	185	KMD.87.15.02.B	KMD.87.30.02.B	KMD.87.45.02.B	KMD.87.60.02.B	KMD.87.75.02.B	KMD.87.90.02.B
3	270	KMD.87.15.03.B	KMD.87.30.03.B	KMD.87.45.03.B	KMD.87.60.03.B	KMD.87.75.03.B	KMD.87.90.03.B
4	355	KMD.87.15.04.B	KMD.87.30.04.B	KMD.87.45.04.B	KMD.87.60.04.B	KMD.87.75.04.B	KMD.87.90.04.B
5	440	KMD.87.15.05.B	KMD.87.30.05.B	KMD.87.45.05.B	KMD.87.60.05.B	KMD.87.75.05.B	KMD.87.90.05.B
6	525	KMD.87.15.06.B	KMD.87.30.06.B	KMD.87.45.06.B	KMD.87.60.06.B	KMD.87.75.06.B	KMD.87.90.06.B
7	610	KMD.87.15.07.B	KMD.87.30.07.B	KMD.87.45.07.B	KMD.87.60.07.B	KMD.87.75.07.B	KMD.87.90.07.B
8	695	KMD.87.15.08.B	KMD.87.30.08.B	KMD.87.45.08.B	KMD.87.60.08.B	KMD.87.75.08.B	KMD.87.90.08.B

 © System Plast S.r.l. , 2012 - All Rights Reserved

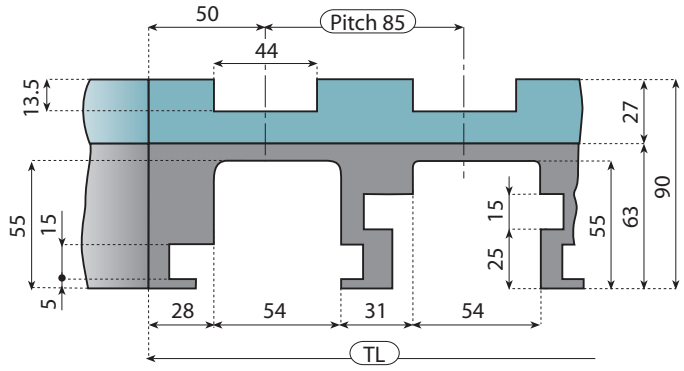


MULTI TRACKS

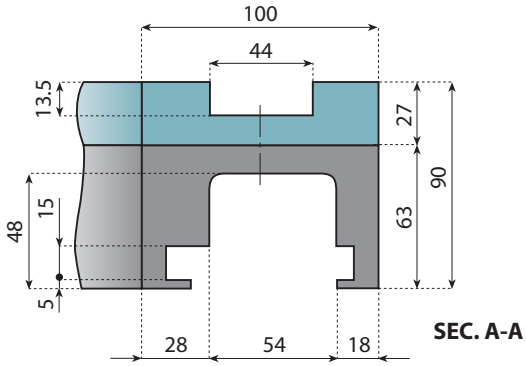


SEC. A-A

ONE TRACK

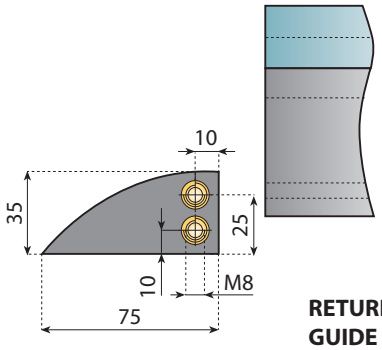

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2251 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 182




Pages 196⇨197


Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	100	KMD.97.15.01.A	KMD.97.30.01.A	KMD.97.45.01.A	KMD.97.60.01.A	KMD.97.75.01.A	KMD.97.90.01.A
2	185	KMD.97.15.02.A	KMD.97.30.02.A	KMD.97.45.02.A	KMD.97.60.02.A	KMD.97.75.02.A	KMD.97.90.02.A
3	270	KMD.97.15.03.A	KMD.97.30.03.A	KMD.97.45.03.A	KMD.97.60.03.A	KMD.97.75.03.A	KMD.97.90.03.A
4	355	KMD.97.15.04.A	KMD.97.30.04.A	KMD.97.45.04.A	KMD.97.60.04.A	KMD.97.75.04.A	KMD.97.90.04.A
5	440	KMD.97.15.05.A	KMD.97.30.05.A	KMD.97.45.05.A	KMD.97.60.05.A	KMD.97.75.05.A	KMD.97.90.05.A
6	525	KMD.97.15.06.A	KMD.97.30.06.A	KMD.97.45.06.A	KMD.97.60.06.A	KMD.97.75.06.A	KMD.97.90.06.A
7	610	KMD.97.15.07.A	KMD.97.30.07.A	KMD.97.45.07.A	KMD.97.60.07.A	KMD.97.75.07.A	KMD.97.90.07.A
8	695	KMD.97.15.08.A	KMD.97.30.08.A	KMD.97.45.08.A	KMD.97.60.08.A	KMD.97.75.08.A	KMD.97.90.08.A

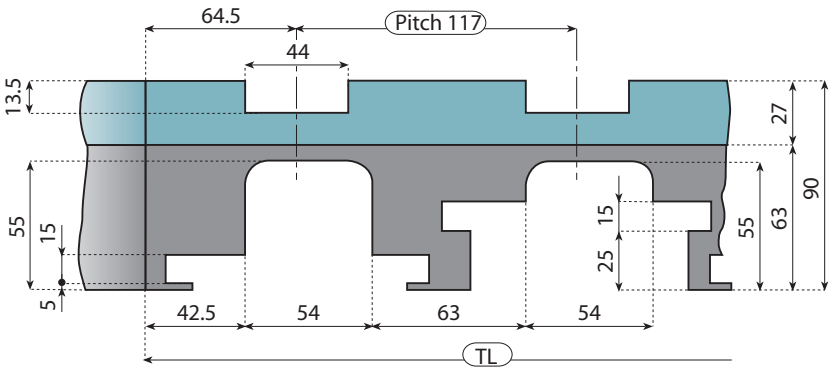


MULTI TRACKS

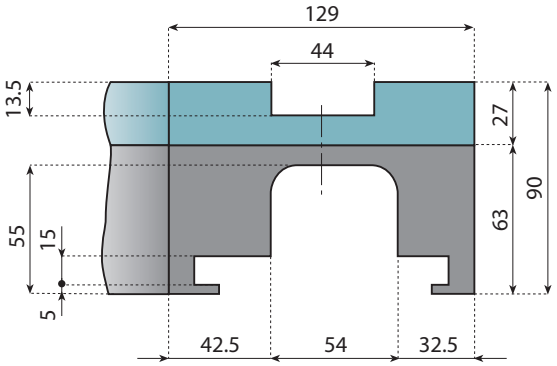

ONE TRACK

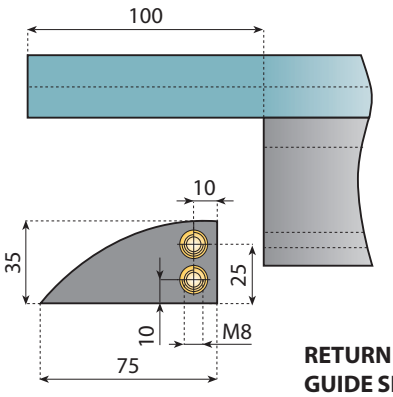

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2251 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.




For magnetic chains type see pages 182




Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	129	KMD.64.15.01.B	KMD.64.30.01.B	KMD.64.45.01.B	KMD.64.60.01.B	KMD.64.75.01.B	KMD.64.90.01.B
2	246	KMD.64.15.02.B	KMD.64.30.02.B	KMD.64.45.02.B	KMD.64.60.02.B	KMD.64.75.02.B	KMD.64.90.02.B
3	363	KMD.64.15.03.B	KMD.64.30.03.B	KMD.64.45.03.B	KMD.64.60.03.B	KMD.64.75.03.B	KMD.64.90.03.B
4	480	KMD.64.15.04.B	KMD.64.30.04.B	KMD.64.45.04.B	KMD.64.60.04.B	KMD.64.75.04.B	KMD.64.90.04.B


 © System Plast S.r.l. , 2012 - All Rights Reserved

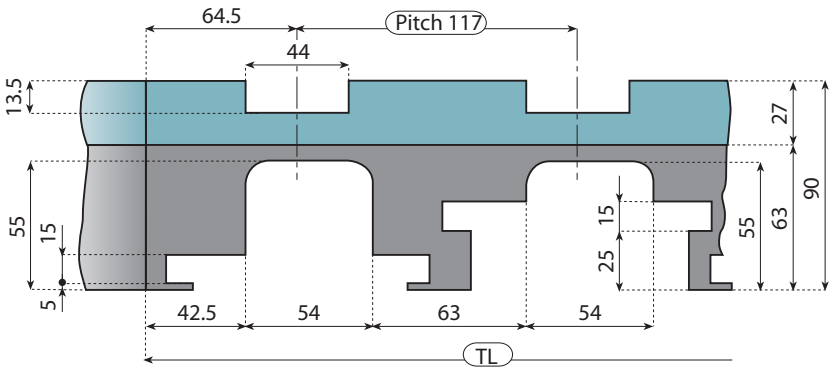


MULTI TRACKS

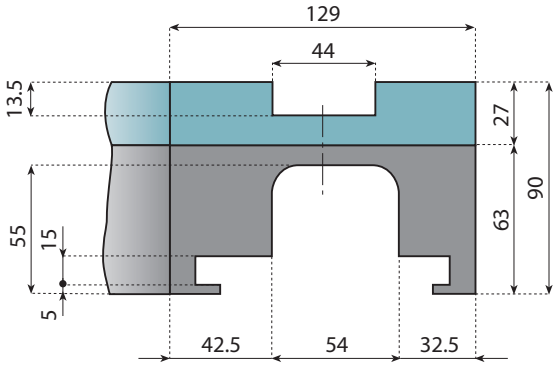

ONE TRACK

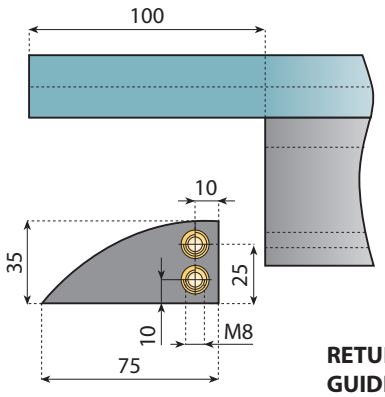

RETURN GUIDE SHOE



RADIUS

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks and different angles available on request.




For sideflexing chainbelts, type:
2251 M



Magnetic corner tracks special materials
On request magnetic corner tracks for high speed and extremely abrasive applications can be supplied.



Magnetic corner tracks special dimensions
On request magnetic corner tracks with special dimensions can be produced.



Inserts
The magnetic corner tracks can be supplied with M8 or M10 brass inserts to your detailed drawing.



For magnetic chains type see pages 182



Pages 196⇨197

Tracks	Total width TL mm	15°	30°	45°	60°	75°	90°
1	129	KMD.66.15.01.B	KMD.66.30.01.B	KMD.66.45.01.B	KMD.66.60.01.B	KMD.66.75.01.B	KMD.66.90.01.B
2	246	KMD.66.15.02.B	KMD.66.30.02.B	KMD.66.45.02.B	KMD.66.60.02.B	KMD.66.75.02.B	KMD.66.90.02.B
3	363	KMD.66.15.03.B	KMD.66.30.03.B	KMD.66.45.03.B	KMD.66.60.03.B	KMD.66.75.03.B	KMD.66.90.03.B
4	480	KMD.66.15.04.B	KMD.66.30.04.B	KMD.66.45.04.B	KMD.66.60.04.B	KMD.66.75.04.B	KMD.66.90.04.B



Safe Transfer Module


Features

- Safe and smooth Transfer of instable products
- Compact design, one solid piece, no edges
- Easy installation

Note

- For TAB system and BEVEL system one set can be used as left or right transfer
- For MAGNETIC system left or right has to be specified when ordering.

NOW AVAILABLE IN "NOLU-S" MATERIAL !




Inserts:
The Safe Transfer Module can be supplied with M8 or M10 brass inserts to your detailed drawing



Safe Transfer Module Special Dimensions
On request Safe Transfer Module with special dimensions can be produced.




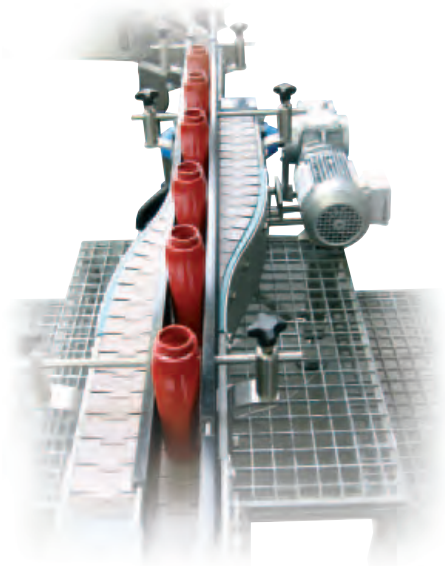


Standard Version

Compact Version

Application Example

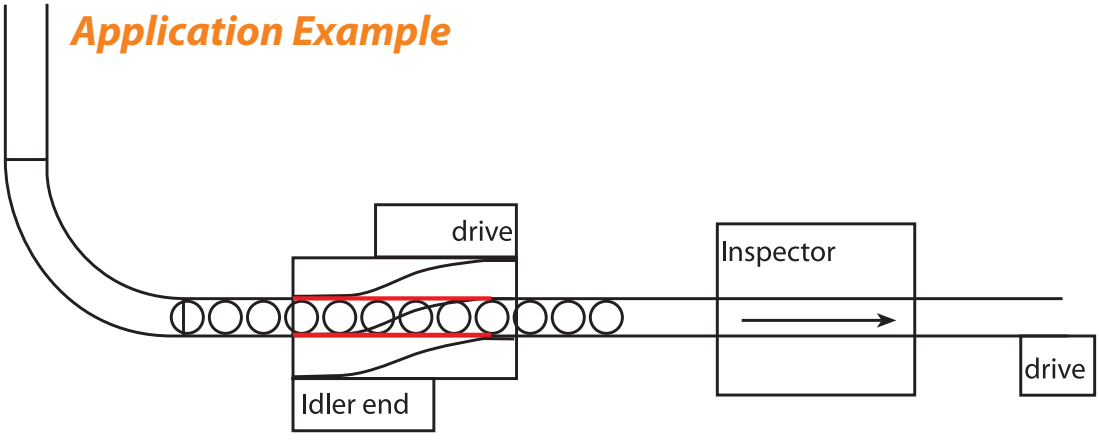


 © System Plast S.r.l. , 2012 - All Rights Reserved

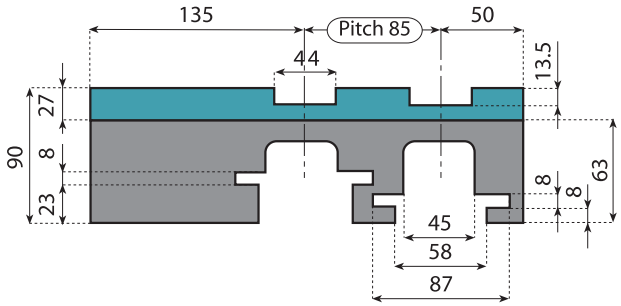


MAGNETIC SYSTEM

Version	Left	Right
Standard	KMD-LM032002B	KMD-RM032002B
Compact	KMD-LM032002BC	KMD-RM032002BC

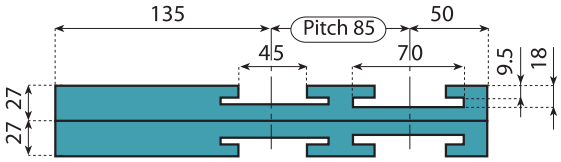


TAB SYSTEM

Version	Left / Right
Standard	KMD-T032002B
Compact	KMD-T032002BC

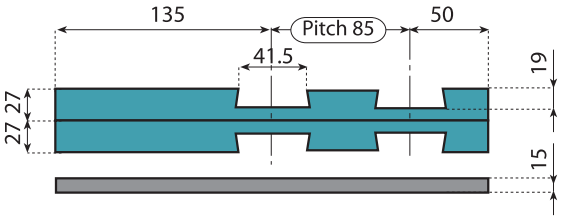


BEVEL SYSTEM


Version	Left / Right
Standard	KMD-B032002B
Compact	KMD-B032002BC

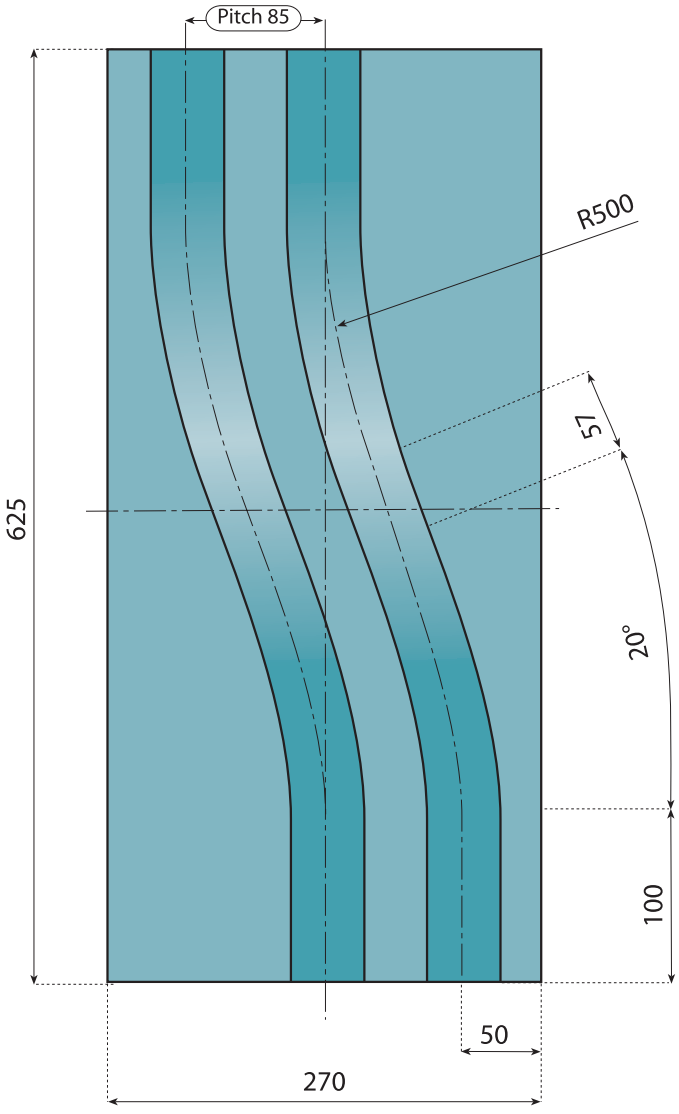

Standard Version (view from above)

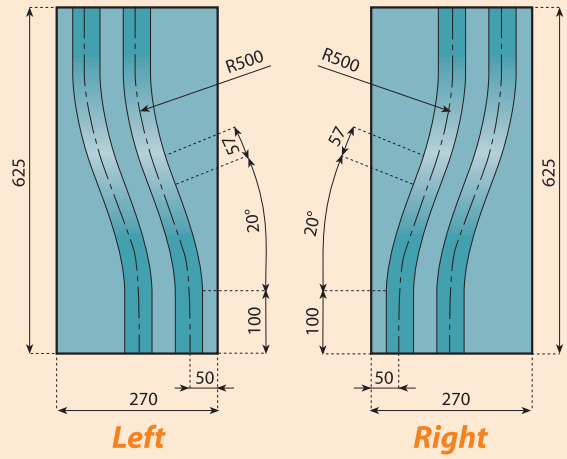

Compact Version (view from above)

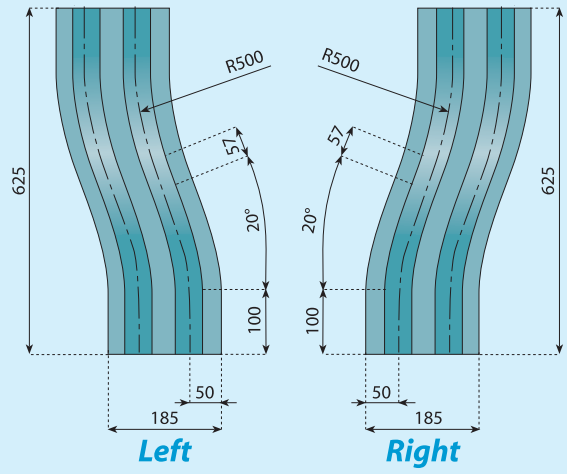

 © System Plast S.r.l. , 2012 - All Rights Reserved

CORNER TRACKS

Pages

For steel chains and plastic chains 256 → 264

STRAIGHT TRACKS

Pages

For steel chains and plastic chains 265 → 272

FOR OUR CORNER TRACKS AND STRAIGHT TRACKS WE USE FOLLOWING MATERIALS:

Material: UHMW- PE (Ultra High Molecular Weight) is our standard track material. It is a proprietary blend of resins and reground UHMW that minimizes wear and friction. It is suitable for most applications.
Colour: black.

Material: Nolu-S is a patented compound of UHMW and dry lubricants that maintains good wear characteristics while significantly reducing the coefficient of friction. Recommended for dry running applications with plastic chains.
Colour: light grey.




CORNER TRACKS FOR TAB CHAINS
878 TAB - 879 TAB - 880 TAB - 881 TAB - 881O TAB - 2250 TAB - 2251 TAB FT






For chains, type see page:
21 - 29 - 38
40 - 49 - 56 - 62
181 - 182




For steel chains, type:
881 TAB
881O TAB



For plastic chains, type:
878 TAB • 879 TAB
880 TAB
2250 TAB • 2251 TAB

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19017NS"

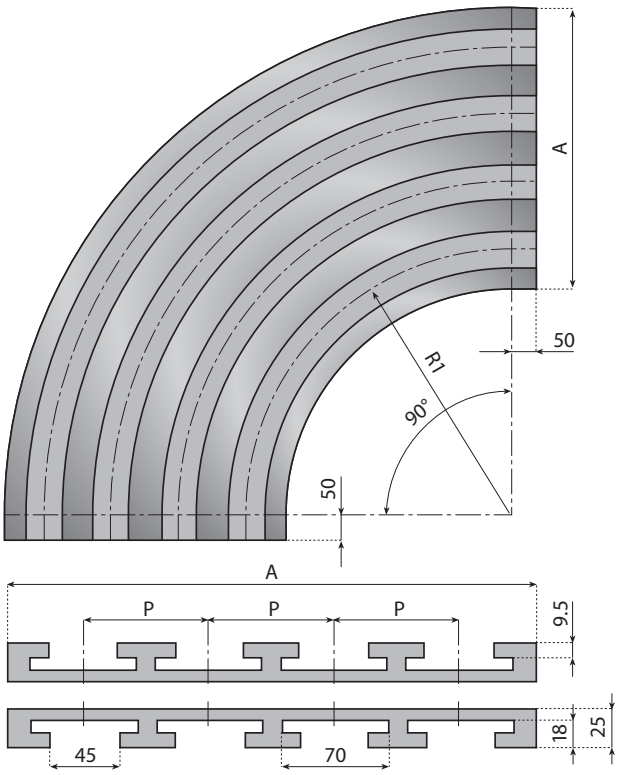

Tab chains **K325** pitch **85 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	100	**19017***	19125	19131	19137	19143
2	185	19149	19154	19159	19164	19169
3	270	19150	19155	19160	19165	19170
4	355	19151	19156	19161	19166	19171
5	440	19152	19157	19162	19167	19172
6	525	19153	19158	19163	19168	19173

Tab chains **K325** pitch **88 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	100	**19017***	19125	19131	19137	19143
2	188	19120	19126	19132	19138	19144
3	276	19121	19127	19133	19139	19145
4	364	19122	19128	19134	19140	19146
5	452	19123	19129	19135	19141	19147
6	540	19124	19130	19136	19142	19148

Tab chains **K325 - K350** pitch **90 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	100	**19017***	19125	19131	19137	19143
2	190	19465	19470	19475	19480	19485
3	280	19466	19471	19476	19481	19486
4	370	19467	19472	19477	19482	19487
5	460	19468	19473	19478	19483	19488
6	550	19469	19474	19479	19484	19489

Tab chains **K450** pitch **120 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	130	-	**19018***	19175	19177	19179
2	250	-	19174	19176	19178	19180
3	370	-	19445	19449	19453	19457
4	490	-	19446	19450T	19454	19458
5	610	-	19447	19451T	19455	19459
6	730	-	19448	19452T	19456	19460T

Tab chains **K750** pitch **195 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	200	-	19181	19183	19185	19187
2	395	-	19182	19184	19186	19188
3	590	-	19490	19492	19494	19496
4	785	-	19491	19493	19495	19497

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

* These curves are now available ex stock in Nolu-S material, part number 19017-NS and 19018-NS

• More tracks available on request.

Material: UHMW- PE, colour: black.

Material: Nolu-S, colour: light grey.

Supply: corner tracks are supplied complete with carry and return plates.


 © System Plast S.r.l. , 2012 - All Rights Reserved

CORNER TRACKS FOR BEVEL CHAINS 879 - 880 - 881 - 881O - 881VG







For chains, type see page: 20 - 29 - 36 - 37



For steel chains, type: 881 • 881O



For plastic chains, type: 879 • 880

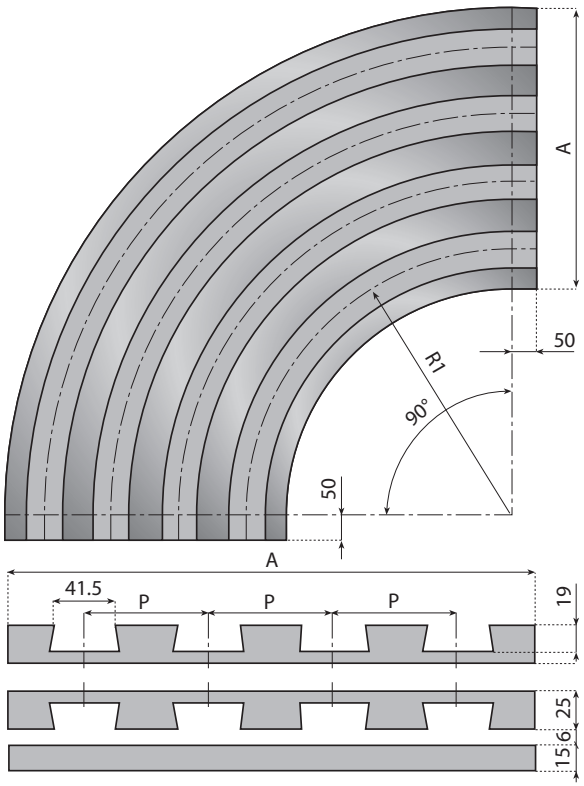

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19015NS"

BEVEL chains **K325** pitch **85 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	100	19015	19279	19285	19291	19297
2	185	19303	19308	19313	19318	19323
3	270	19304	19309	19314	19319	19324
4	355	19305	19310	19315	19320	19325
5	440	19306	19311	19316	19321	19326
6	525	19307	19312	19317	19322	19327

BEVEL chains **K325** pitch **88 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	100	19015	19279	19285	19291	19297
2	188	19274	19280	19286	19292	19298
3	276	19275	19281	19287	19293	19299
4	364	19276	19282	19288	19294	19300
5	452	19277	19283	19289	19295	19301
6	540	19278	19284	19290	19296	19302

BEVEL chains **K325 - K350** pitch **90 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	100	19015	19279	19285	19291	19297
2	190	19914	19919	19924	19929	19934
3	280	19915	19920	19925	19930	19935
4	370	19916	19921	19926	19931	19936
5	460	19917	19922	19927	19932	19937
6	550	19918	19923	19928	19933	19938

BEVEL chains **K450** pitch **120 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	130	-	19016	19330	19332	19334
2	250	-	19329	19331	19333	19335
3	370	-	19896	19897	19898	19899
4	490	-	19901	19904	19907	19910
5	610	-	19902	19905	19908	19911
6	730	-	19903	19906	19909	19912

BEVEL chains **K750** pitch **195 mm**						
Tracks	**Total width A mm**	**Radius R1 = 500**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	200	-	19336	19338	19340	19342
2	395	-	19337	19339	19341	19343
3	590	-	19939	19941	19943	19945
4	785	-	19940	19942	19944	19946

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198


• More tracks available on request.

Material: UHMW- PE, colour: black.

Material: Nolu-S, colour: light grey.


Supply: corner tracks are supplied complete with carry and return plates.

882 TAB - LBP 882 TAB - 882 TAB VG CORNER TRACKS FOR TAB CHAINS

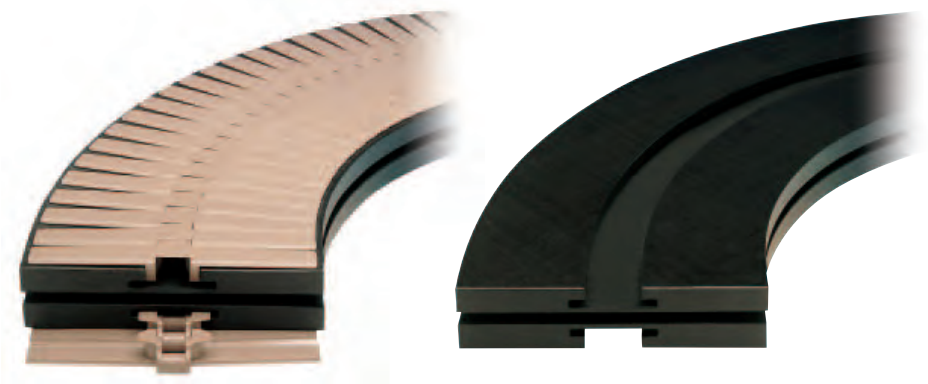




For chains, type see page: 42 - 50 - 51 - 57



For plastic chains, type: 882 TAB

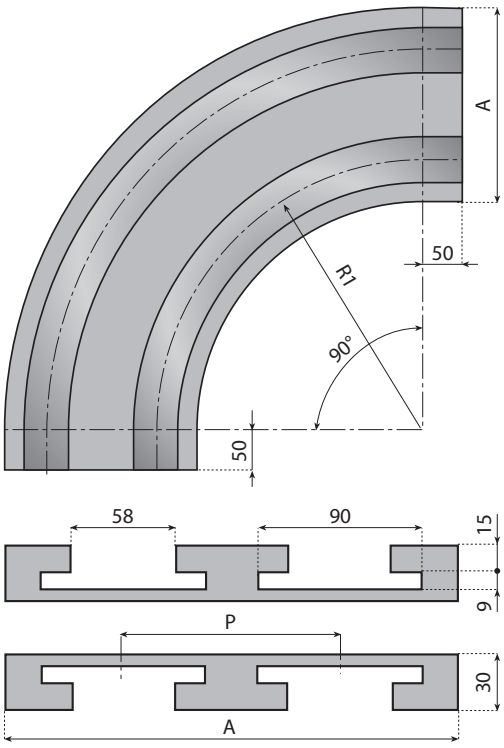

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19102NS"

Tab chains **K450** pitch **120 mm**					
Tracks	**Total width A mm**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	130	**19102**	**19190**	**19192**	**19194**
2	250	**19189**	**19191**	**19193**	**19195**
3	370	**19950**	**19954**	**19958**	**19962**
4	490	**19951**	**19955**	**19959**	**19963**
5	610	**19952**	**19956**	**19960**	**19964**
6	730	**19953**	**19957**	**19961**	**19965**

Tab chains **K750** pitch **195 mm**					
Tracks	**Total width A mm**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	200	**19103**	**19197**	**19199**	**19201**
2	395	**19196**	**19198**	**19200**	**19202**
3	590	**19966**	**19968**	**19970**	**19972**
4	785	**19967**	**19969**	**19971**	**19973**

Tab chains **K1000** pitch **260 mm**					
Tracks	**Total width A mm**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	270	**19104**	**19204**	**19206**	**19208**
2	530	**19203**	**19205**	**19207**	**19209**
3	790	**19974**	**19976**	**19978**	**19980**
4	1050	**19975**	**19977**	**19979**	**19981**

Tab chains **K1200** pitch **310 mm**					
Tracks	**Total width A mm**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	320	**19105**	**19211**	**19213**	**19215**
2	630	**19210**	**19212**	**19214**	**19216**
3	940	**19982**	**19984**	**19986**	**19988**
4	1250	**19983**	**19985**	**19987**	**19989**

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

• More tracks available on request.


Material: UHMW- PE, colour: black.

Material: Nolu-S, colour: light grey.

Supply: corner tracks are supplied complete with carry and return plates.


 © System Plast S.r.l. , 2012 - All Rights Reserved

CORNER TRACKS FOR BEVEL CHAINS 882

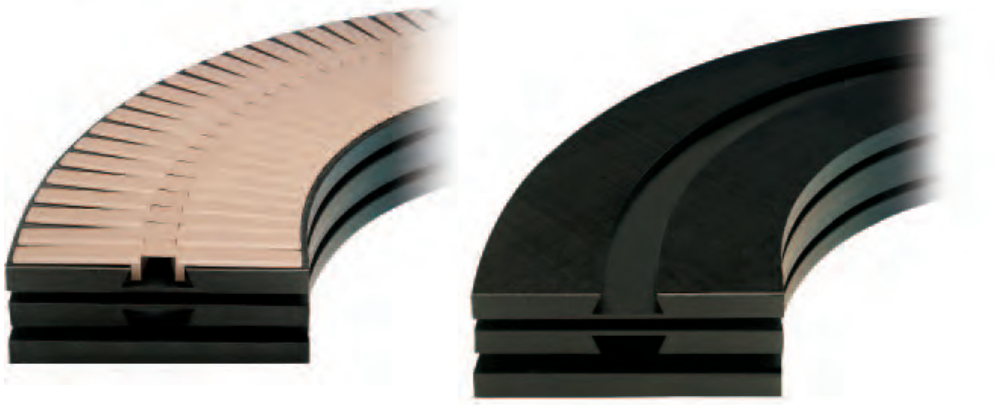




For chains, type see page: 41



For plastic chains, type:
882 BEVEL

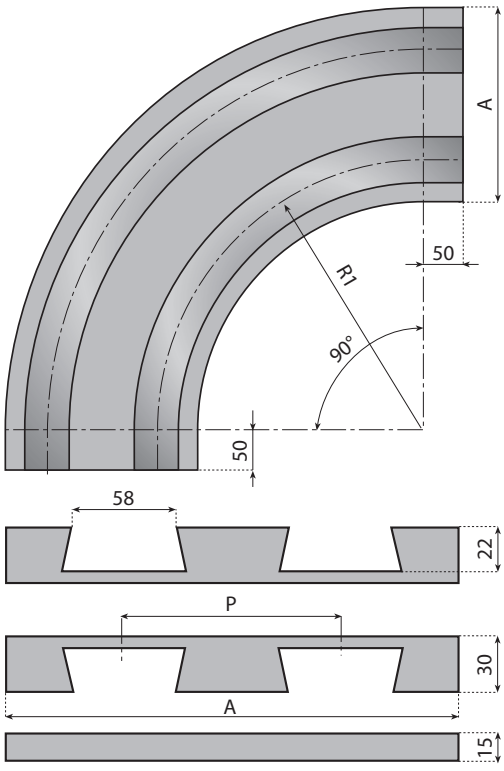

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

- More tracks available on request.

Material: UHMW- PE, colour: black.

Material: Nolu-S, colour: light grey.

Supply: corner tracks are supplied complete with carry and return plates.

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "190001NS"

BEVEL chains **K450** pitch **120 mm**					
Tracks	**Total width A mm**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	130	**190001**	**190007**	**190013**	**190019**
2	250	**190002**	**190008**	**190014**	**190020**
3	370	**190003**	**190009**	**190015**	**190021**
4	490	**190004**	**190010**	**190016**	**190022**
5	610	**190005**	**190011**	**190017**	**190023**
6	730	**190006**	**190012**	**190018**	**190024**

BEVEL chains **K750** pitch **195 mm**					
Tracks	**Total width A mm**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	200	**190025**	**190029**	**190033**	**190037**
2	395	**190026**	**190030**	**190034**	**190038**
3	590	**190027**	**190031**	**190035**	**190039**
4	785	**190028**	**190032**	**190036**	**190040**

BEVEL chains **1000** pitch **260 mm**					
Tracks	**Total width A mm**	**Radius R1 = 610**	**Radius R1 = 650**	**Radius R1 = 800**	**Radius R1 = 1000**
1	270	**190041**	**190045**	**190049**	**190053**
2	530	**190042**	**190046**	**190050**	**190054**
3	790	**190043**	**190047**	**190051**	**190055**
4	1050	**190044**	**190048**	**190052**	**190056**

1863 - 1873 - 1874 CORNER TRACKS FOR TAB CHAINS






For chains, type see page:
24 - 59 - 64
66 - 71 - 72




For steel chains, type:
1874



For plastic chains, type:
1863 • 1873

*FOR CORNER TRACKS IN **NOLU-S** MATERIAL, JUST ADD **"NS"** TO PART NUMBER. EXAMPLE CODE **"190060NS"***

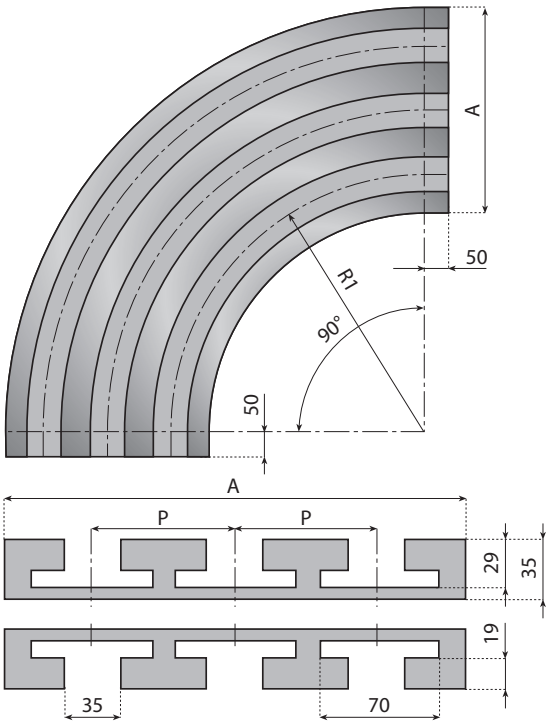

Chains **K225** pitch **70 mm**

Tracks	Total width A mm	Radius R1 = 380	Radius R1 = 500	Radius R1 = 610	Radius R1 = 800	Radius R1 = 1000
1	75	190060	190064	190068	190072	190076
2	145	190061	190065	190069	190073	190077
3	215	190062	190066	190070	190074	190078
4	285	190063	190067	190071	190075	190079

Chains **K325** pitch **85 mm**

Tracks	Total width A mm	Radius R1 = 380	Radius R1 = 500	Radius R1 = 610	Radius R1 = 800	Radius R1 = 1000
1	100	190080	19217	19221	19225	19229
2	185	190081	19218	19222	19226	19230
3	270	190082	19219	19223	19227	19231
4	355	190083	19220	19224	19228	19232

Chains **K325** pitch **90 mm**

Tracks	Total width A mm	Radius R1 = 500	Radius R1 = 610	Radius R1 = 650	Radius R1 = 800	Radius R1 = 1000
1	100	19217	19221	190092	19225	19229
2	190	190085	190089	190093	190097	190101
3	280	190086	190090	190094	190098	190102
4	370	190087	190091	190095	190099	190103

Chains **K450** pitch **120 mm**

Tracks	Total width A mm	Radius R1 = 380	Radius R1 = 500	Radius R1 = 610	Radius R1 = 800	Radius R1 = 1000
1	130	190104	19233	19235	19237	19239
2	250	190105	19234	19236	19238	19240
3	370	190106	190108	190110	190112	190114
4	490	190107	190109	190111	190113	190115

Chains **K600** pitch **160 mm**

Tracks	Total width A mm	Radius R1 = 500	Radius R1 = 610	Radius R1 = 650	Radius R1 = 800	Radius R1 = 1000
1	170	19241	19243	190116	19245	19247
2	330	19242	19244	190117	19246	19248
3	490	190118	190120	190122	190124	190126
4	650	190119	190121	190123	190125	190127

Chains **K750** pitch **195 mm**

Tracks	Total width A mm	Radius R1 = 500	Radius R1 = 610	Radius R1 = 650	Radius R1 = 800	Radius R1 = 1000
1	200	19249	19251	190128	19253	19255
2	395	19250	19252	190129	19254	19256
3	590	190130	190132	190134	190136	190138
4	785	190131	190133	190135	190137	190139

Chains **K1000** pitch **260 mm**

Tracks	Total width A mm	Radius R1 = 500	Radius R1 = 610	Radius R1 = 650	Radius R1 = 800	Radius R1 = 1000
1	270	19257	19259	190140	19261	19263
2	530	19258	19260	190141	19262	19264

Chains **K1200** pitch **310 mm**

Tracks	Total width A mm	Radius R1 = 610	Radius R1 = 650	Radius R1 = 750	Radius R1 = 800	Radius R1 = 1000
1	320	19267	19265	190142	19269	19271
2	630	19268	19266	190143	19270	19272

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

• More tracks available on request.

Material: UHMW- PE, colour: black.


Material: Nolu-S, colour: light grey.

Supply: corner tracks are supplied complete with carry and return plates.

 © System Plast S.r.l. , 2012 - All Rights Reserved


COMPACT CORNER TRACKS FOR TAB CHAINS
878 TAB - 879 TAB - 880 TAB - 881 TAB - 881O TAB - 2250 TAB - 2251 TAB FT



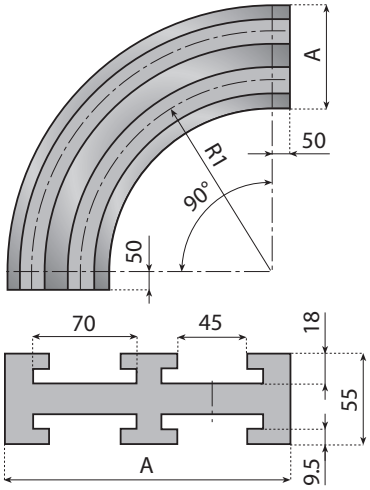




For chains, type see page:
21 - 29 - 38 - 40
49 - 56 - 62
181 - 182



For steel chains, type:
881 TAB
881O TAB



For plastic chains, type:
878 TAB • 879 TAB
880 TAB
2250 TAB • 2251 TAB

For further information see page 198

NOW AVAILABLE IN
"NOLU-S"
MATERIAL !


FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19106NS"

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece.

Chain ref.	Tracks	Code	A	Radius R1	Pitch
K325	1	19106	100	500	90
	2	19107	190		
K450	1	19108	130	610	120
	2	19109	250		


COMPACT CORNER TRACKS FOR BEVEL CHAINS 879 - 880 - 881 - 881O - 881VG



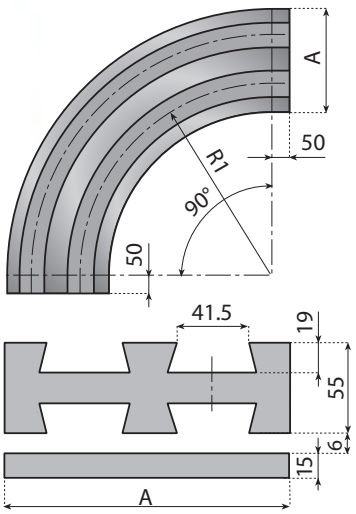




For chains, type see page:
20 - 29 - 36 - 37



For steel chains, type:
881 • 881O



For plastic chains, type:
879 • 880

For further information see page 198


NOW AVAILABLE IN
"NOLU-S"
MATERIAL !


FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19106BNS"

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 2 piece.

Chain ref.	Tracks	Code	A	Radius R1	Pitch
K325	1	19106B	100	500	90
	2	19107B	190		
K450	1	19108B	130	610	120
	2	19109B	250		

LBP 882 K375 — CORNER TRACKS FOR CHAINS

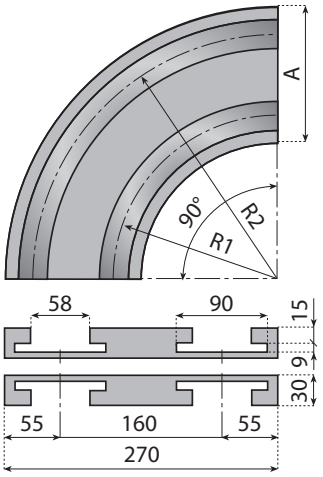

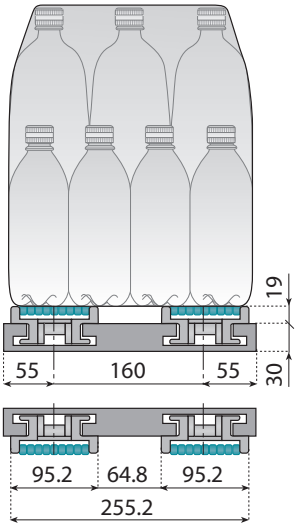


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: corner tracks are supplied complete with carry and return plates.

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For chains, type see page: 50





For plastic chains, type: LBP 882 K375

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19101NS"

For Chains width	Code	A	Tracks	R1	R2
K375	**19101**	270	2	700	860

1843 — CORNER TRACKS FOR CHAINS

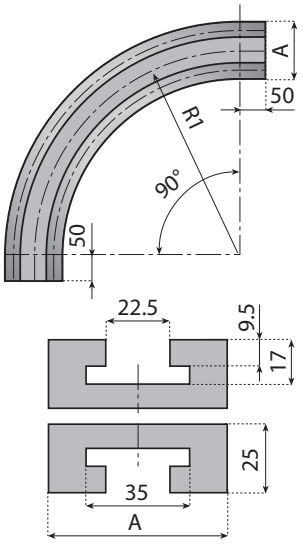



Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: corner tracks are supplied complete with carry and return plates.

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For chains, type see page: 71





For plastic chains, type: 1843

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19396NS"

For Chains width	Code	A	Radius R1
K125	**19396**	50	300
	19397		500
K200	**19396L**	70	300
	19397L		500

1883 — CORNER TRACKS FOR CHAINS

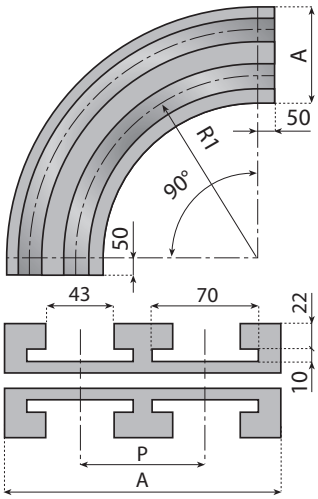




Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: corner tracks are supplied complete with carry and return plates.

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For chains, type see page: 73



For plastic chains, type: 1883


FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19110NS"

Chains ref.	Code	A	Radius R1	Pitch
K325	**19110**	100	750	90
	19111	190		

 © System Plast S.r.l. , 2012 - All Rights Reserved

FOR MULTIFLEX CHAINS 1701 TAB - 1701 TAB OP - 7000 TAB - 7001 TAB - 7005 TAB



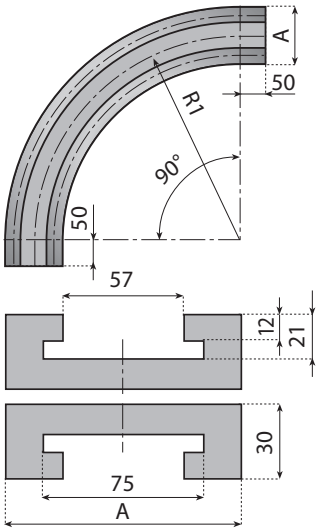


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: corner tracks are supplied complete with carry and return plates.

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For chains, type see page: 77 - 78 81 - 82





For plastic chains, type:
1701 TAB - 1701 TAB OP
7000 TAB - 7001 TAB
7005 TAB

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19390NS"

Chains ref.	Code	A	Radius R1
K55	19390	100	250
	19391		500

FOR MULTIFLEX CHAINS 1700 - 1702 (M) - HMGK (FN-MS-P-M) 7000 - 7001 - 7005

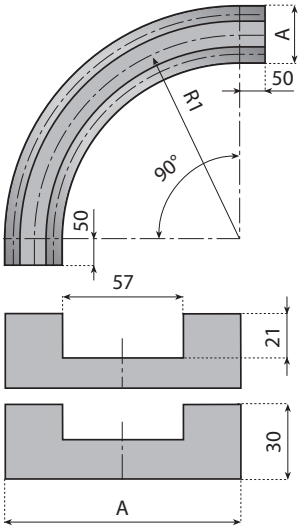




Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: corner tracks are supplied complete with carry and return plates.

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For chains, type see page: 76 - 77 - 78 81 - 82





For plastic chains, type:
1700 - 1702(M)
HMGK (FN-MS-P-M)
7000 - 7001 - 7005

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19113NS"

Chains ref.	Code	A	Radius R1
K55	19113	100	250
	19114		500


CORNER TRACKS FOR CRESCENT MULTIFLEX CHAINS HMGK 50 TAB H1 - HMGK 50 TAB H2

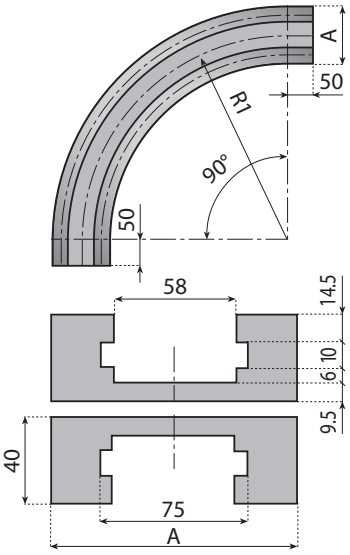





For chains, type see page: 80



For plastic chains, type:
HMGK 50 TAB H1
HMGK 50 TAB H2

For further information see page 198


NOW AVAILABLE IN "NOLU-S" MATERIAL !


FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19115NS"

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: corner tracks are supplied complete with carry and return plates.

For Chains width	Code	A	Radius R1
HMGK 50 TAB H1	**19115**	110	250
HMGK 50 TAB H2	**19116**	200	500


FOR OVERLAPPING TOP PLATE MULTIFLEX CHAIN HMGK 50 TAB P1 - HMGK 50 TAB P2

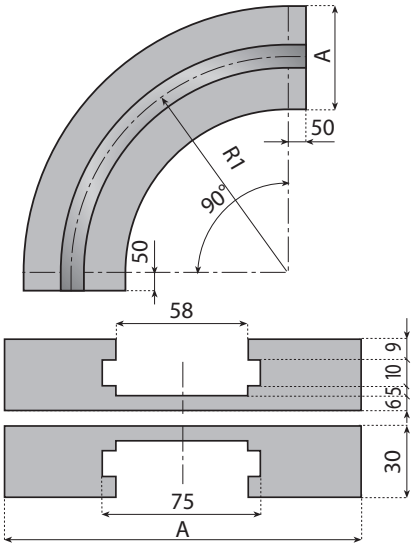

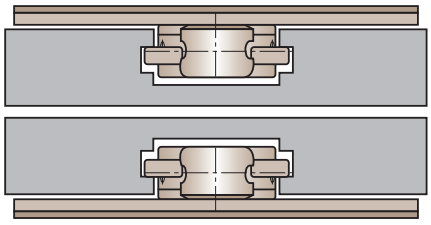



For chains, type see page: 79



For plastic chains, type:
HMGK 50 TAB P1
HMGK 50 TAB P2

For further information see page 198

NOW AVAILABLE IN "NOLU-S" MATERIAL !

FOR CORNER TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19117NS"


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: corner tracks are supplied complete with carry and return plates.

For Chains width	Code	A	Radius R1
HMGK 50 TAB P1	**19117**	200	550
HMGK 50 TAB P2	**19118**	270	

 © System Plast S.r.l. , 2012 - All Rights Reserved


STRAIGHT TRACK SECTION FOR TAB CHAINS
815 TAB VG - 878 TAB - 879 TAB - 880 TAB - 881 TAB - 881O TAB - 2250 TAB - 2251 TAB



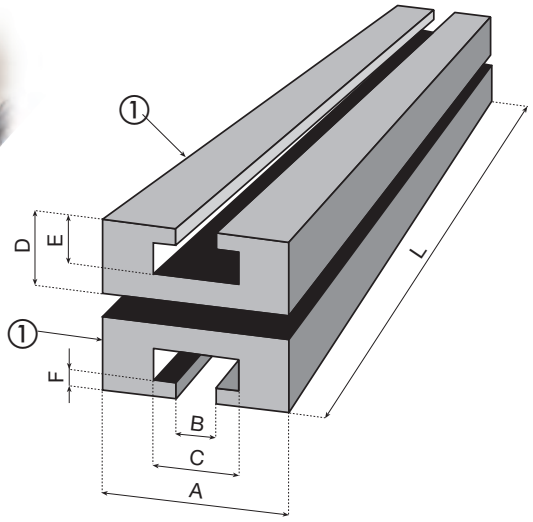



For chains, type see page: 21 - 27 - 29 - 38 40 - 49 - 56 - 62 181 - 182



For steel chains, type:
815 TAB
881 TAB • 881O TAB

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For plastic chains, type:
878 TAB • 879 TAB
880 TAB
2250 TAB • 2251 TAB

• More tracks available on request.


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.

FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19350NS"

① STRAIGHT TRACK SECTION - 1 PIECE								
Chains ref.	**Code**	**A**	**B**	**C**	**D**	**E**	**F**	**L**
K325	**19350**	100	45	67	25	18	9.5	2000
K450	**19351**	130						
K750	**19352**	200						


STRAIGHT TRACK SECTION FOR BEVEL CHAINS
879 - 880 - 881 - 881O



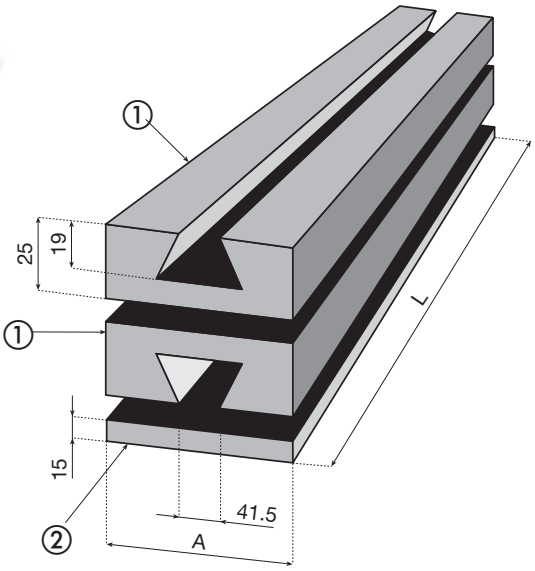



For chains, type see page: 20 - 29 - 36 - 37



For steel chains, type:
881 • 881O

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198



For plastic chains, type:
879 • 880

• More tracks available on request.

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.
Support plate to be ordered separately.


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19370NS"

① CARRY/RETURN TRACK SECTION - 1 PIECE			
Chains ref.	**Code**	**A**	**L**
K325	**19370**	100	2000
K450	**19372**	130	
K750	**19374**	200	

② RETURN PLATE - 1 PIECE			
Chains ref.	**Code**	**A**	**L**
K325	**19371**	100	2000
K450	**19373**	130	
K750	**19375**	200	


STRAIGHT TRACK SECTION FOR TAB CHAINS SERIES 882 TAB - LBP 882 TAB - 882 TAB VG



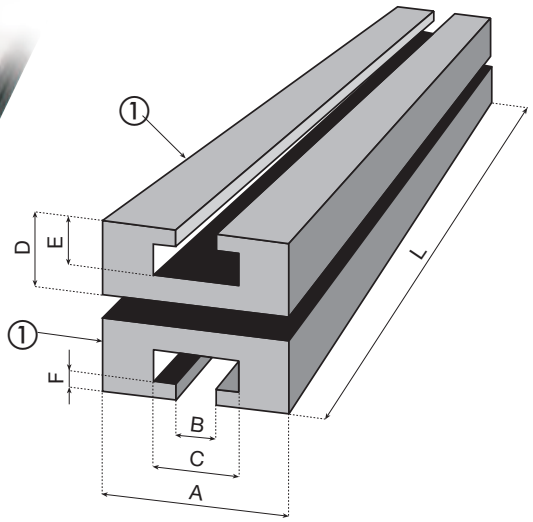



For chains, type see page: 42 - 50 - 51 - 57



For steel chains, type: 882 TAB

For further information see page 198

NOW AVAILABLE IN "NOLU-S" MATERIAL !

FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19359NS"


① STRAIGHT TRACK SECTION - 1 PIECE								
Chains ref.	**Code**	**A**	**B**	**C**	**D**	**E**	**F**	**L**
K375	**19359**	110	60	84	30	24	15	2000
K450	**19360**	130						
K750	**19361**	200						
K1000	**19362**	270						
K1200	**19363**	320						

• More tracks available on request.

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.


STRAIGHT TRACK SECTION FOR BEVEL CHAINS 882 BEVEL



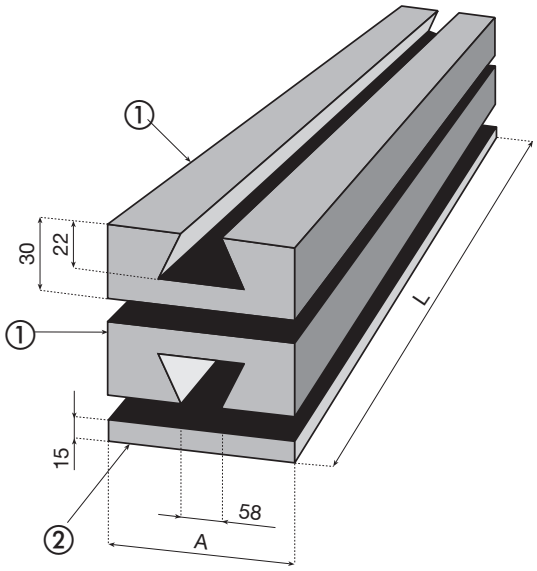



For chains, type see page: 41



For steel chains, type: 882 BEVEL

For further information see page 198

NOW AVAILABLE IN "NOLU-S" MATERIAL !

FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19353NS"

① CARRY/RETURN TRACK SECTION - 1 PIECE			
Chains ref.	**Code**	**A**	**L**
K450	**19353**	130	2000
K750	**19354**	200	
K1000	**19355**	270	

② RETURN PLATE - 1 PIECE			
Chains ref.	**Code**	**A**	**L**
K450	**19373**	130	2000
K750	**19375**	200	
K1000	**19358**	270	


• More tracks available on request.

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.
Support plate to be ordered separately.

 © System Plast S.r.l., 2012 - All Rights Reserved


STRAIGHT TRACK SECTION FOR CHAINS SERIES 1863 - 1873 - 1874



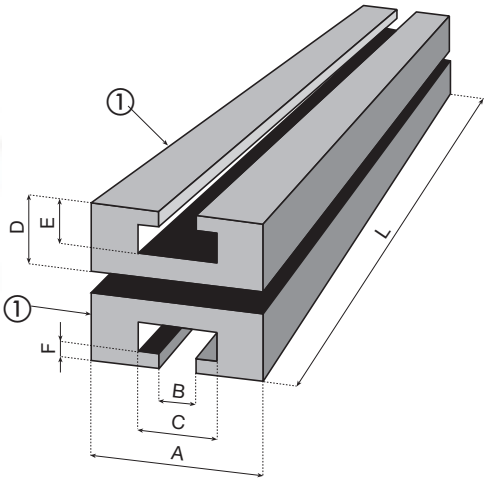



For chains, type see page: 24 - 59 - 66 71 - 72



For steel chains, type: 1874

NOW AVAILABLE IN **"NOLU-S"** MATERIAL !

For further information see page 198



For plastic chains, type: 1863 • 1873


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19406NS"

① Straight Track section - 1 piece								
Chains ref.	**Code**	**A**	**B**	**C**	**D**	**E**	**F**	**L**
K225	**19406**	75	35	67	35	29	19	2000
K325	**19400**	100		70				
K450	**19401**	130						
K600	**19402**	170						
K750	**19403**	200						
K1000	**19404**	270						
K1200	**19405**	320						

• More tracks available on request.


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.

COMPACT STRAIGHT TRACK SECTION FOR TAB CHAINS SERIES 815 TAB - 878 TAB - 879 TAB - 880 TAB - 881 TAB - 881O TAB - 2250 TAB - 2251 TAB

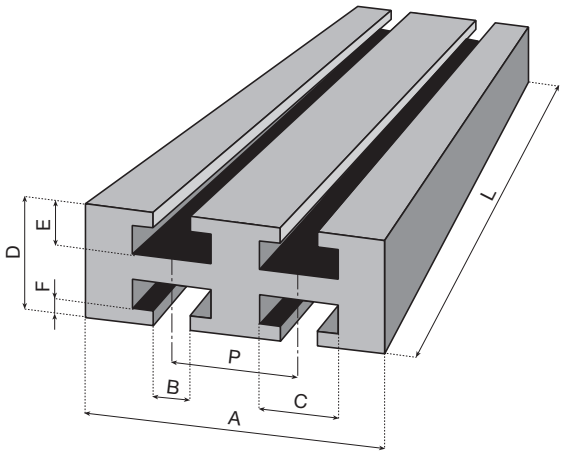



For chains, type see page: 21 - 29 - 38 - 40 49 - 56 - 62 181 - 182



For steel chains, type: 881 TAB 881O TAB

NOW AVAILABLE IN **"NOLU-S"** MATERIAL !

For further information see page 198




For plastic chains, type: 878 TAB • 879 TAB 880 TAB 2250 TAB • 2251 TAB

FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19424NS"

Chains ref.	**Code**	**TRACK**	**A**	**B**	**C**	**D**	**E**	**F**	**P**	**L**
K325	**19424**	1	100	45	67	55	18	9.5	90	2000
	19425		190							
K450	**19426**	2	130						120	
	19427		250							


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece.

COMPACT STRAIGHT TRACK SECTION FOR CHAINS SERIES 879 - 880 - 881 - 881O

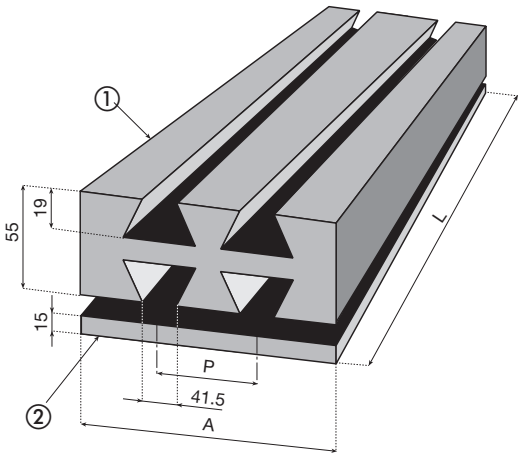



For chains, type see page: 20 - 29 - 36 - 37 - 57



For steel chains, type: 881 • 881O

NOW AVAILABLE IN **"NOLU-S"** MATERIAL !

For further information see page 198




For plastic chains, type: 879 • 880

FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19428NS"

① CARRY/RETURN - 1 PIECE					② RETURN PLATE - 1 PIECE				
Chains ref.	**Code**	**A**	**P**	**L**	**Chains ref.**	**Code**	**A**	**P**	**L**
K325	**19428**	100	90	2000	K325	**19371**	100	90	2000
	19429	190				**19433**	190		
K450	**19430**	130	120		K450	**19373**	130	120	
	19431	250				**19435**	250		


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; carry return sections and return plates are supplied separately.

STRAIGHT TRACK SECTION FOR MAGNETIC CHAINS SERIES 879 M - 879 M VG - 880 M - 881 M - 881MO

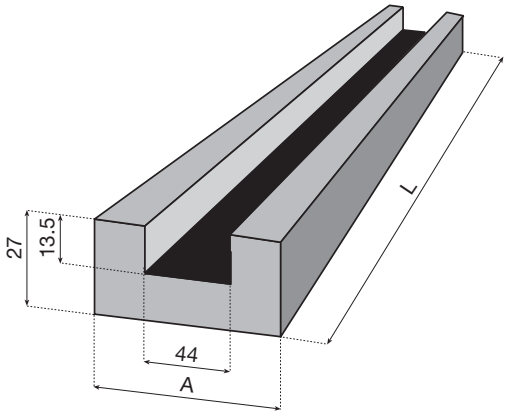




For chains, type see page: 22 - 23 - 30 39 - 49 - 57



For steel chains, type: 881M

NOW AVAILABLE IN **"NOLU-S"** MATERIAL !

For further information see page 198



For plastic chains, type: 879 M • 880 M


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19436NS"

For Chains width	Code	A	L
K325	**19436**	100	2000
	19437	111	
K450	**19438**	129	
K750	**19439**	214	

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece.


 © System Plast S.r.l. , 2012 - All Rights Reserved

STRAIGHT TRACK SECTION FOR MAGNETIC CHAINS SERIES 8857 M - 8857 M VG - 882 M - LBP 882 M - 882 M VG

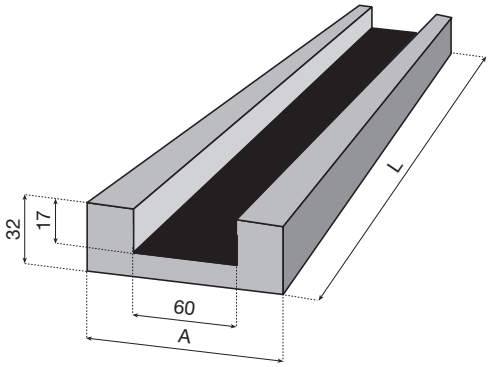




For chains, type see page: 23 - 30 - 43 - 52 - 58



For steel chains, type: 8857 M

NOW AVAILABLE IN **"NOLU-S"** MATERIAL !

For further information see page 198




For plastic chains, type: 882 M


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19440NS"

Chains ref.	Code	A	L
K750	**19440**	200	2000
K1000	**19441**	270	
K1200	**19442**	320	

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece.

STRAIGHT TRACK SECTION FOR TAB CHAINS SERIES 1843

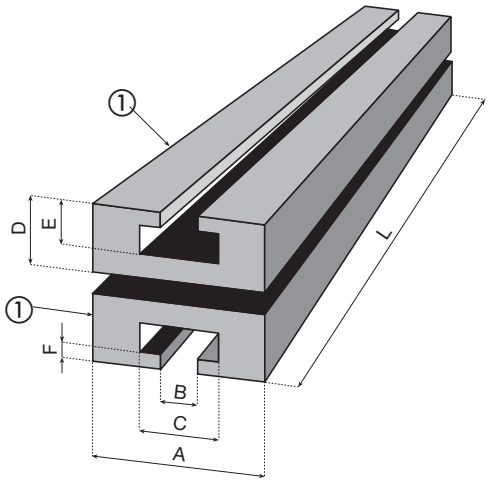





For chains, type see page: 71



For plastic chains, type: 1843

NOW AVAILABLE IN **"NOLU-S"** MATERIAL !


For further information see page 198


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19410NS"

① STRAIGHT TRACK SECTION - 1 PIECE								
Chains ref.	Code	A	B	C	D	E	F	L
K125	**19410**	50	22.5	35	25	17	9.5	2000
K200	**19411**	70	22.3					

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.


STRAIGHT TRACK SECTION FOR CHAINS SERIES 1883

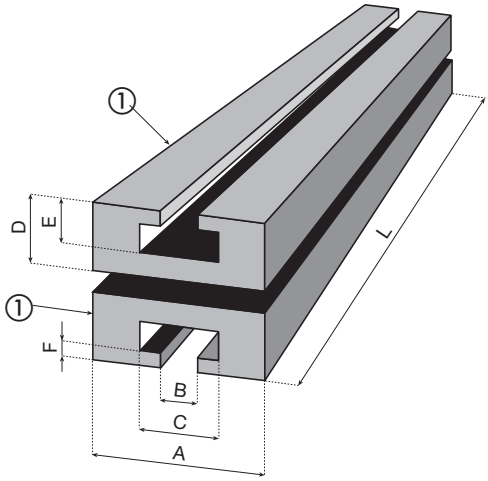





For chains, type see page: 73



For plastic chains, type: 1883

NOW AVAILABLE IN "NOLU-S" MATERIAL !


For further information see page 198


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.

FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19412NS"

① Straight Track section - 1 piece								
Chains ref.	Code	A	B	C	D	E	F	L
K325	**19412**	100	44	70	40	32	22	2000


STRAIGHT TRACK SECTION FOR CHAINS SERIES 1701 TAB - 1701 TAB OP - 7000 TAB - 7001 TAB - 7005 TAB

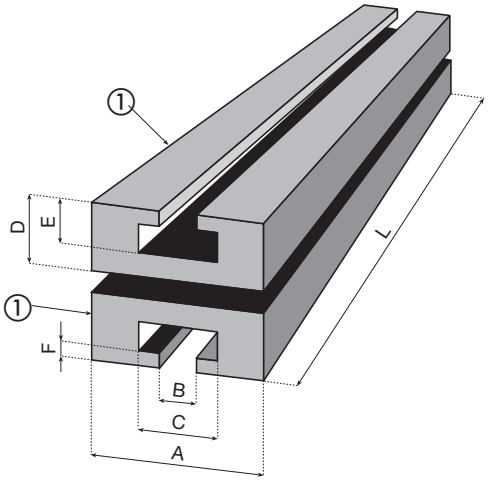





For chains, type see page: 77 - 78 - 81 - 82



For steel chains, type:
1701 TAB
1701 TAB OP
7000 TAB • 7001 TAB
7005 TAB

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198


Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19386NS"

① Straight Track section - 1 piece								
Chains ref.	Code	A	B	C	D	E	F	L
K55	**19386**	100	58	75	30	21	12	2000

 © System Plast S.r.l. , 2012 - All Rights Reserved


STRAIGHT TRACK SECTION FOR CHAINS SERIES 1700 - 1702 (M) - HMGK 50 (FN-MS-P-M) - 7000 - 7001 - 7005

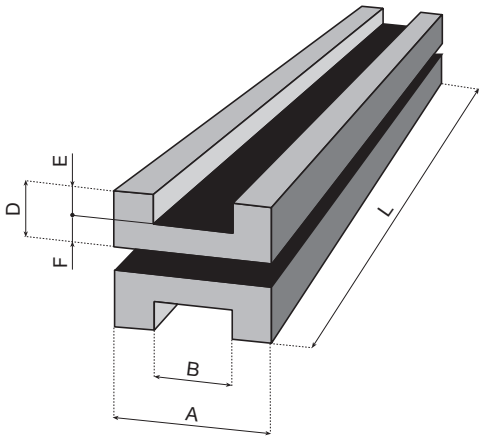





For chains, type see page: 76 - 77 - 81 - 82



For steel chains, type:
1700 • 1702 (M)
HMGK 50 (FN-MS-P-M)
7000 • 7001 • 7005

NOW AVAILABLE IN "NOLU-S" MATERIAL !


For further information see page 198


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19412NS"

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.

① STRAIGHT TRACK SECTION - 1 PIECE							
Chains ref.	**Code**	**A**	**B**	**D**	**E**	**F**	**L**
K55	**19381**	100	58	30	21	9	2000

STRAIGHT TRACK SECTION FOR CHAINS SERIES HMGK 50 TAB H1 - HMGK 50 TAB H2

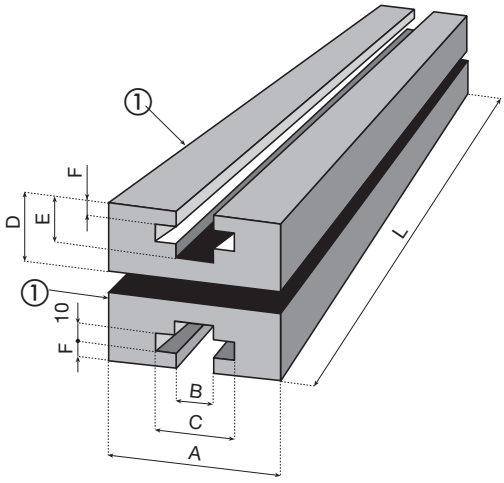





For chains, type see page: 80



For steel chains, type:
HMGK 50 TAB H1
HMGK 50 TAB H2

NOW AVAILABLE IN "NOLU-S" MATERIAL !


For further information see page 198


FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19420NS"

Material: UHMW- PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.

① STRAIGHT TRACK SECTION - 1 PIECE								
Chains ref.	**Code**	**A**	**B**	**C**	**D**	**E**	**F**	**L**
HMGK 50 TAB H1	**19420**	110	58	75	40	30.5	14.5	2000
HMGK 50 TAB H2	**19421**	200						


STRAIGHT TRACK SECTION FOR OVERLAPPING TOP PLATE MULTIFLEX CHAINS SERIES HMGK 50 TAB P1 - HMGK 50 TAB P2

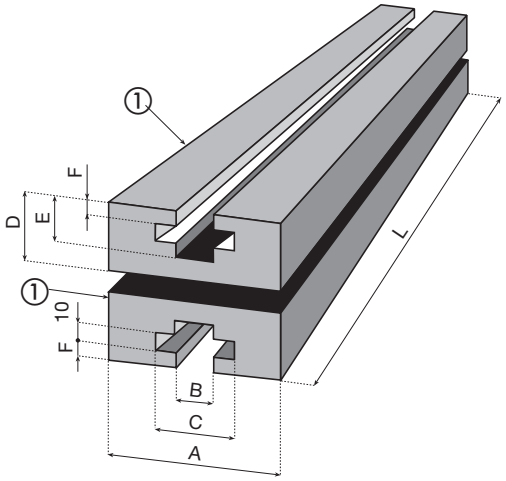

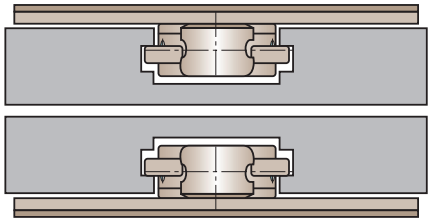



For chains, type see page: 79



For steel chains, type:
HMGK 50 TAB P1
HMGK 50 TAB P2

NOW AVAILABLE IN "NOLU-S" MATERIAL !

For further information see page 198

FOR STRAIGHT TRACKS IN NOLU-S MATERIAL, JUST ADD "NS" TO PART NUMBER. EXAMPLE CODE "19422NS"

Material: UHMW-PE, colour: black.
Material: Nolu-S, colour: light grey.
Supply: 1 piece; straight tracks can be used as carry or return track.

① STRAIGHT TRACK SECTION - 1 PIECE								
Chains ref.	**Code**	**A**	**B**	**C**	**D**	**E**	**F**	**L**
HMGK 50 TAB P1	**19422**	200	58	75	30	24	9	2000
HMGK 50 TAB P2	**19423**	270						

 © System Plast S.r.l. , 2012 - All Rights Reserved

SPROCKETS AND IDLER WHEELS

STEEL CHAINS:

Series	*Pages*
812/815 - 815VG - 881M	274 → 278
815 MINI - SK38	278 → 280
800 - 802 - 805	281 → 284
8157 - 8857M 8157 TAB VG - 8857 TAB	285 → 287
515	288
881 - 881O - 881 TAB 881O TAB - 815 TAB VG	289 → 292

PLASTIC CHAINS:

Series	*Pages*
820 - 831 - LBP 831	293 → 296
821 - 821 VG - LBP 821	297 → 299
828 - 878 - 878TAB - 879 - 879 TAB 879 M - 880 - 880 M - 880 TAB - 880M	300 → 302
882 BEVEL - 882 TAB 882M - 8257	303 → 305

MULTIFLEX CHAINS

CC600 - CC631 - CC1400 V - CC1400 V TAB CC1400 - CC1400 TAB - CC1431 TAB	306 → 307
843 - 1843 - 845 - 863 - 1863 1873 - 1874 - 1883	308

ALL OUR SPROCKETS AND IDLERS OFFERS:

- ***EXCELLENT WEAR AND CHEMICAL RESISTANCE***
- ***STRONG DESIGN: SPROCKETS WITH HIGH KEYWAY STRENGTH***
- ***OPTIMUM SHAPE OF TEETH***



SPROCKETS and IDLER WHEELS
812/815 - 815 VG - 881 M - 881 MO - 8157 TAB VG - 8857 TAB


Features:
- Completely closed structure, easier to clean and to disinfect.
- Split versions: quick and easy replacement.


• Sprockets and idler wheels made of Steel on request.

Pages 16 - 17 - 22 23 - 24 - 26 - 28

Page 340



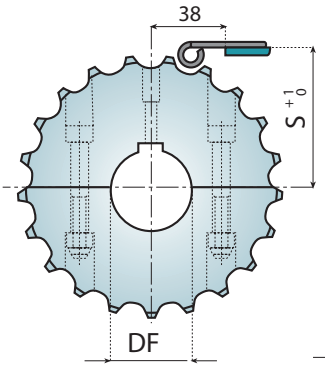

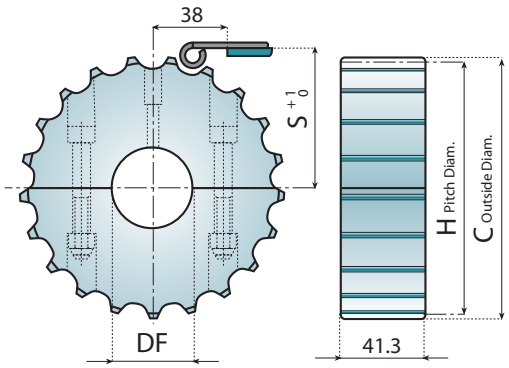

Z	C mm	H mm	S mm
17	103.90	105.47	55.90
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
12525	12526	12527	12528	-
12529	12530	12538	12539	-
12540	12541	12542	12543	126000
12544	12545	12546	12547	126001
12548	12549	12550	12551	126002
121200	121201	121202	121203	-
121205	121206	121207	121208	-


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12904	121235	121236	121237	121238
12905	121239	121240	121241	121242
12906	121243	121244	121245	121246
12907	121247	121248	121249	121250
12908	121251	121252	121253	121254
121199	121255	121256	121257	121258
121204	121259	121260	121261	121262

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



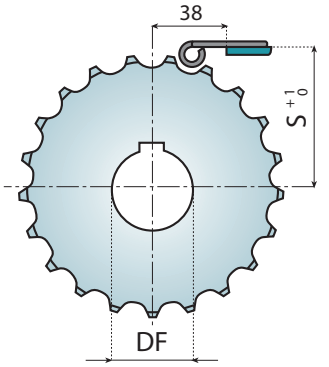

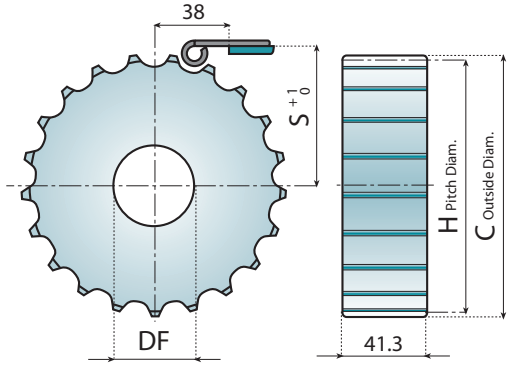

Z	C mm	H mm	S mm
17	103.90	105.47	55.90
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12552	12553	12554	12555
12556	12557	12558	12559
12560	12561	12562	12563
12564	12565	12566	12567
12568	12569	12570	12571
121209	121210	121211	121212
121213	121214	121215	121216

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12572G	12572	12573	12574	12575
12576G	12576	12577	12578	12579
12580G	12580	12581	12582	12583
12584G	12584	12585	12586	12587
12588G	12588	12589	12590	12591
121263G	121263	121264	121265	121266
121267G	121267	121268	121269	121270

Material: polyamide.
***Plain Bore**

 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Split versions: quick and easy replacement.


- Sprockets and idler wheels made of Steel on request.

Pages 16 - 17 - 23 22 - 26

Page 340



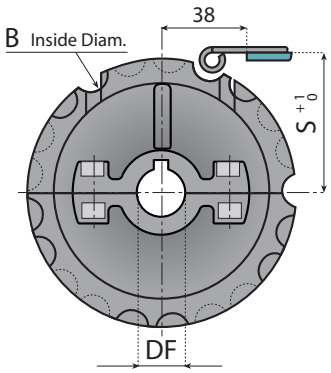

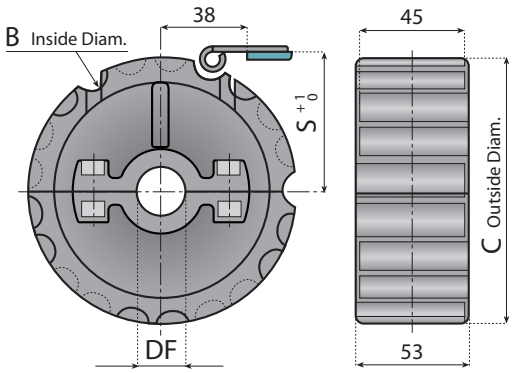

Z	B mm	C mm	S mm
21	116.1	129	67.8
23	128.1	142	73.8
25	140.1	154	79.8

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
12053N	12054N	12055N	12056N	12093N
12099N	12100N	12101N	12102N	-
12065N	12066N	12067N	12068N	12094N


Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
121080N	121081N	121082N	121083N	121084N
121085N	121086N	121087N	121088N	-
121090N	121091N	121092N	121093N	121094N

Material: polyamide, screws in stainless steel, nuts in nickel plated brass.



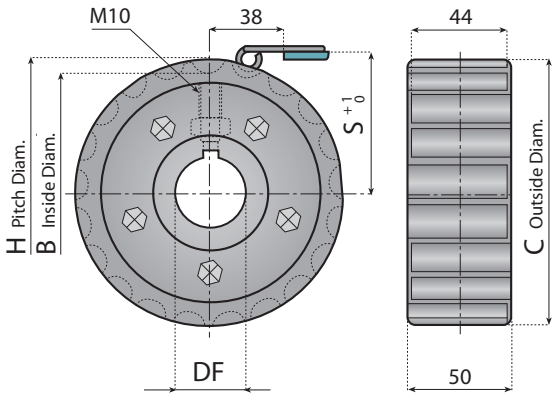

Z	B mm	C mm	H mm	S mm
19	104.20	117.00	117.34	61.90
21	116.10	129.00	129.26	67.80
23	128.10	142.00	141.21	73.80
25	140.10	154.00	153.20	79.80

DRIVE SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12001	12002	12003	12004
12005	12006	12007	12008
12009	12010	12011	12012
12013	12014	12015	12016


Material: reinforced polyamide, screws in stainless steel, DIN 6885 key seat.


Pages 16 - 17 22 - 26 - 28

Page 340

Features:
- Completely closed structure, easier to clean and to disinfect.
- Recyclable.
- Quickly replaceable.



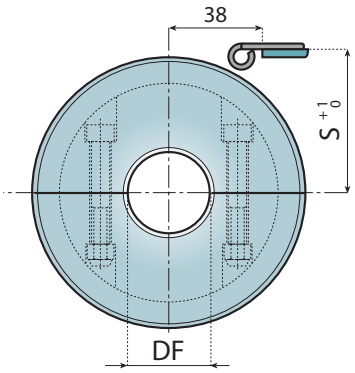

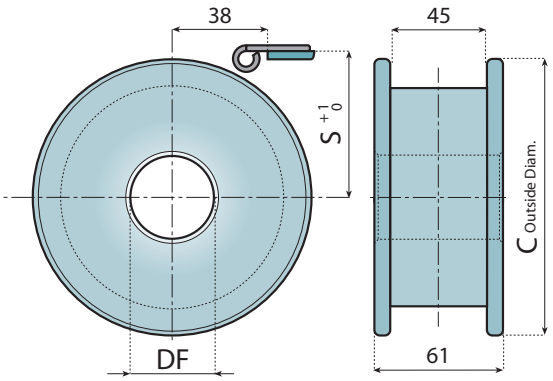

Z equiv.	C mm	S mm
17	104.00	56.20
19	117.00	62.60
21	129.80	68.60
23	142.20	74.60
25	154.70	80.50
27	167.20	88.50
29	179.30	92.80

SPLIT IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12608	12609	12610	12611	12612
12613	12614	12615	12616	12618
12617	12619	12620	12621	12622
12623	12624	12625	12626	12627
12628	12629	12630	12631	12632
121357	121358	121359	121360	121361
121362	121363	121364	121365	121366


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12633	12634	12635	12636	12637
12638	12639	12640	12641	12642
12643	12644	12645	12646	12647
12648	12649	12650	12651	12652
12653	12654	12655	12656	12657
121367	121368	121369	121370	121371
121372	121373	121374	121375	121376

Material: polyamide.



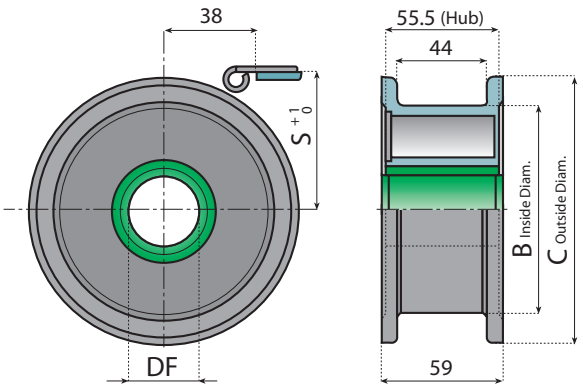

Material: ultrasonic welded cover in reinforced polyamide.
Bushing in Low Friction and low corrosion resin.
Idler body in self-lubricating polyamide.
Colour: black and green.

Z equiv.	B mm	C mm	S mm
21	103.5	129.5	68.6
23	103.5	143.0	74.6
25	122.0	154.5	80.5


IDLER WHEELS - Floating


Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12866	12867	12868	12869
12874	12875	12876	12877
12870	12871	12872	12873

 © System Plast S.r.l. , 2012 - All Rights Reserved

Pages 16 - 17 22 - 23 - 26
Page 340



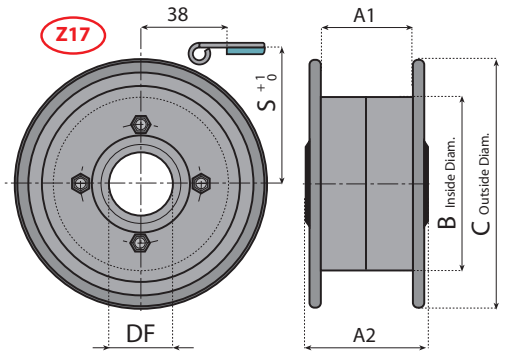

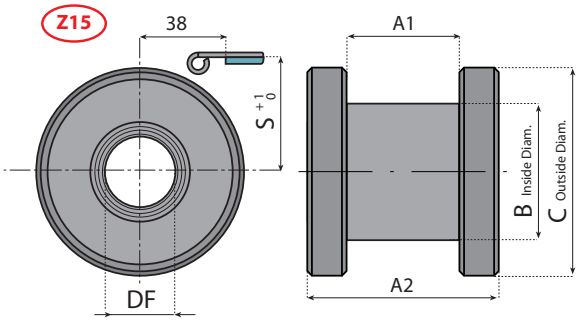


Material: self-lubricating polyamide, screw in zinc plated steel (Z17).
Colour: black
Notes: reinforced version, high wear and chemical resistance, recyclable.


Z equiv.	A1 mm	A2 mm	B mm	C mm	S mm
15	48	83	58	90	48.20
17	44	52	71	106	56.20

IDLER WHEELS - - Floating

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
-	12676	12677	12678	12679
12278	12279	-	-	-



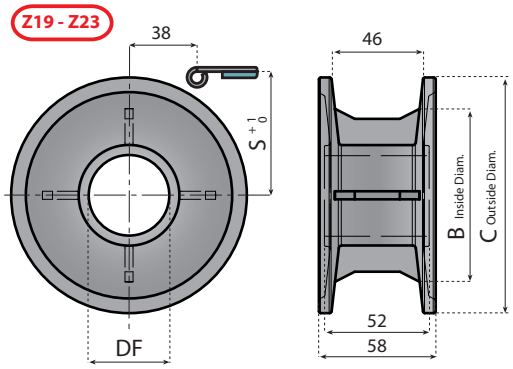

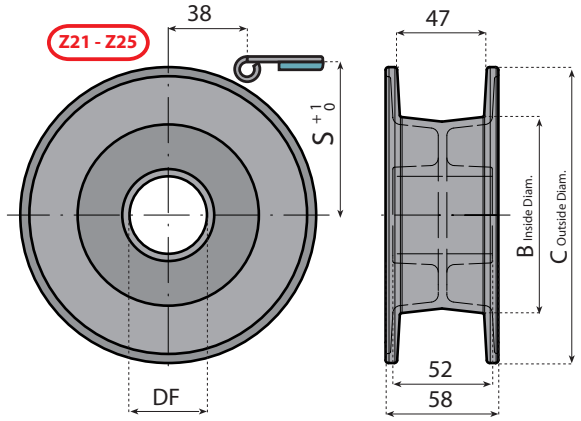


Material: self-lubricating polyamide.
Colour: black.
Notes: reinforced version, high wear and chemical resistance, recyclable.

Z equiv.	B mm	C mm	S mm
19	86	117.0	62.6
21	95	129.8	68.6
23	86	142.2	74.6
25	103	154.7	80.5

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12208B	12209B	12210B	12211B
12200B	12201B	12202B	12203B
12212B	12213B	12214B	12215B
12204B	12205B	12206B	12207B



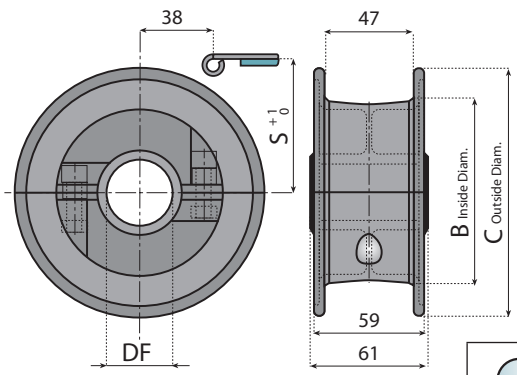

Material: self-lubricating polyamide, screws in stainless steel.
Colour: black.
Notes: quickly replaceable, reinforced version, high wear and chemical resistance, recyclable.

Z equiv.	B mm	C mm	S mm
21	97.0	129.8	68.6
23	99.5	142.2	74.6
25	102.0	154.7	80.5

SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12077B	12078B	12079B	12080B
121928B	121929B	121930B	121931B
12081B	12082B	12083B	12084B


812/815 - 815 VG - 881 M - 881 MO SPROCKETS

Features:
- Completely closed structure, easier to clean and to disinfect.
- Quickly and easy replaceable.

Pages 16 - 17 22 - 23 - 26

Page 340



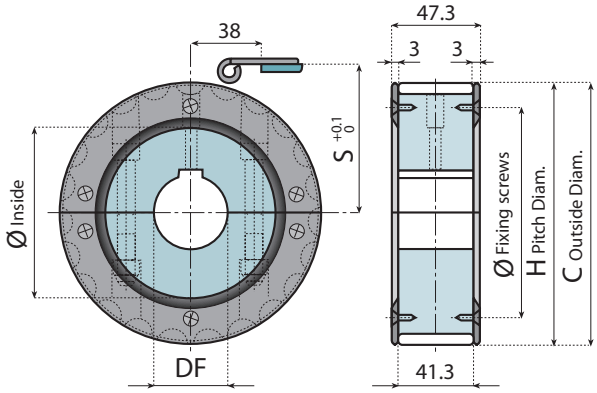



Z	C mm	H mm	S mm
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80

SPLIT SPROCKETS - Fixed

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12906A	12540A	12541A	12542A	12543A
12907A	12544A	12545A	12546A	12547A
12908A	12548A	12549A	12550A	12551A

Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.
*** Plain Bore (without keyway)**

GUIDE RINGS

Black	Ø inside	Ø Fixing screw
12790N	79	104
12791N	92	116
12792N	104	128


Material: reinforced polyamide, screws in stainless steel
Supply: 4 segments and 12 screws
N = Black B = White

815 VG MINI - SK 38 IDLER WHEELS

Features:
- Completely closed structure, easier to clean and to disinfect
- Quick and easy replacement.
- Recyclable.

Pages 26 - 34

Page 340

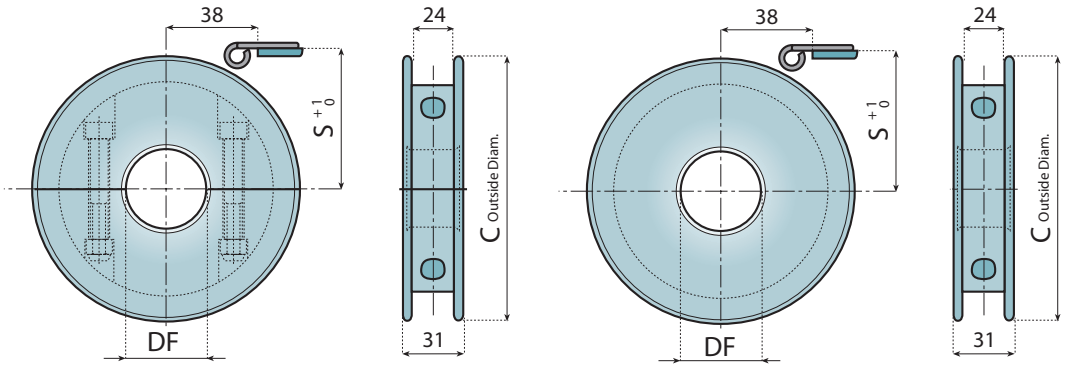

Z equiv.	C mm	S mm
19	117.0	62.6
21	129.8	68.6
23	142.2	74.6
25	154.7	80.5

SPLIT IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
122068	122069	122070	122071	122072
122073	122074	122075	122076	122077
122078	122079	122080	122081	122082
122083	122084	122085	122086	122087

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
122088	122089	122090	122091	122092
122093	122094	122095	122096	122097
122098	122099	122100	122101	122102
122103	122104	122105	122106	122107


Material: polyamide.


 © System Plast S.r.l. , 2012 - All Rights Reserved

Features:
- Completely closed structure, easier to clean and to disinfect
- Split versions quick and easy replacement.

Page 26
Page 340



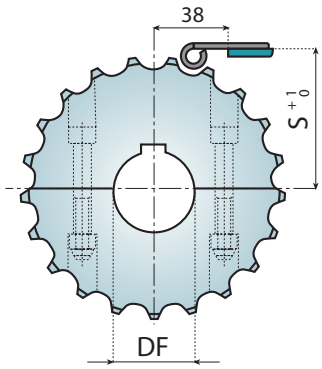

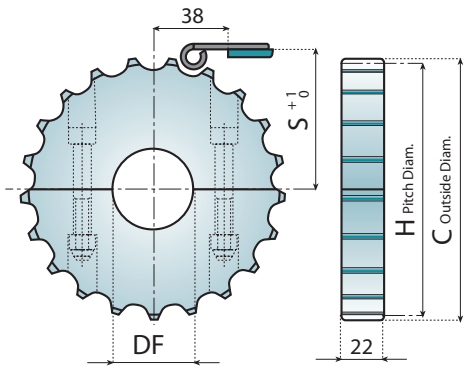

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part Number			
122001	122002	122003	122004
122006	122007	122008	122009
122011	122012	122013	122014
122016	122017	122018	122019


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part Number				
122000	122036	122037	122038	122039
122005	122040	122041	122042	122043
122010	122044	122045	122046	122047
122015	122048	122049	122050	122051

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.



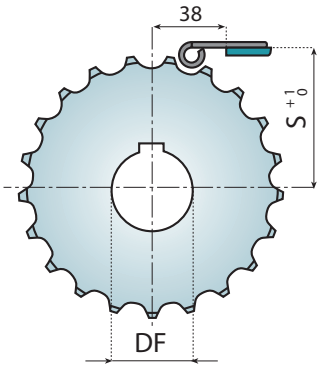

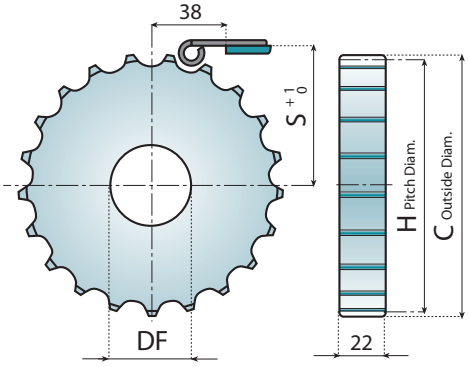

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part Number			
122020	122021	122022	122023
122024	122025	122026	122027
122028	122029	122030	122031
122032	122033	122034	122035

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating


Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part Number				
122052G	122052	122053	122054	122055
122056G	122056	122057	122058	122059
122060G	122060	122061	122062	122063
122064G	122064	122065	122066	122067


Material: polyamide.

Features:
- Completely closed structure, easier to clean and to disinfect
- Split versions quick and easy replacement.

Page 34
Page 340



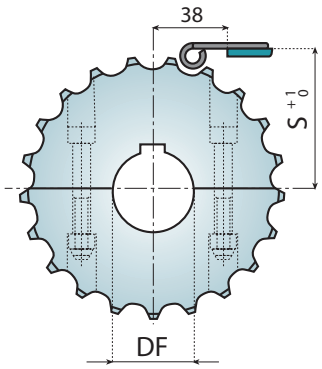

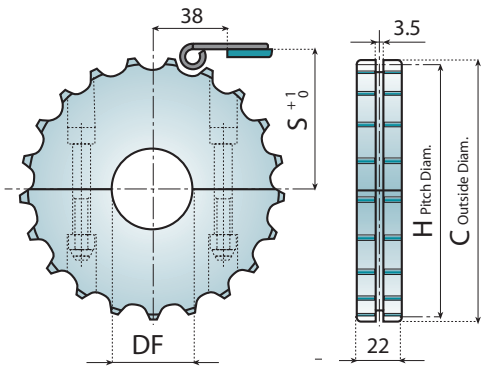

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
122001SK	122002SK	122003SK	122004SK
122006SK	122007SK	122008SK	122009SK
122011SK	122012SK	122013SK	122014SK
122016SK	122017SK	122018SK	122019SK


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
122000SK	122036SK	122037SK	122038SK	122039SK
122005SK	122040SK	122041SK	122042SK	122043SK
122010SK	122044SK	122045SK	122046SK	122047SK
122015SK	122048SK	122049SK	122050SK	122051SK

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.



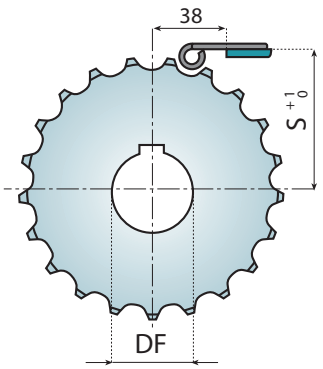

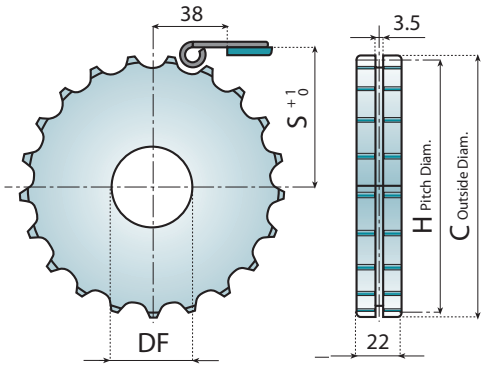

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
122020SK	122021SK	122022SK	122023SK
122024SK	122025SK	122026SK	122027SK
122028SK	122029SK	122030SK	122031SK
122032SK	122033SK	122034SK	122035SK

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
122052G-SK	122052SK	122053SK	122054SK	122055SK
122056G-SK	122056SK	122057SK	122058SK	122059SK
122060G-SK	122060SK	122061SK	122062SK	122063SK
122064G-SK	122064SK	122065SK	122066SK	122067SK

Material: polyamide, DIN 6885 key seat. ***Plain Bore**

 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect.
- Quick and easy replacement.


• Sprockets and idler wheels made of Steel on request.

Pages 18 - 27

Page 340



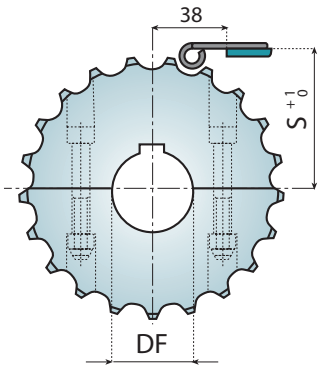

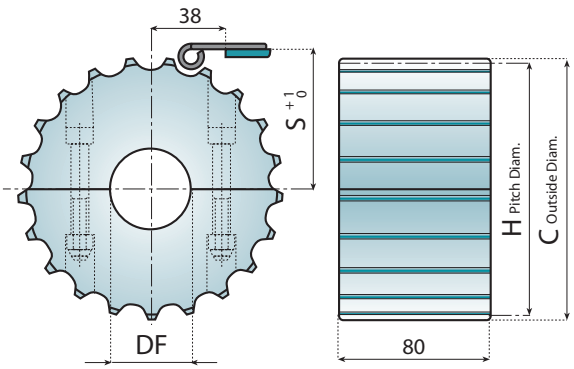

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12280	12281	12282	12283
12284	12285	12286	12287
12288	12289	12290	12291
12292	12293	12294	12295
121308	121309	121310	121311
121313	121314	121315	121316


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12900	121325	121326	121327	121328
12901	121329	121330	121331	121332
12902	121333	121334	121335	121336
12903	121337	121338	121339	121340
121307	121341	121342	121343	121344
121312	121345	121346	121347	121348

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



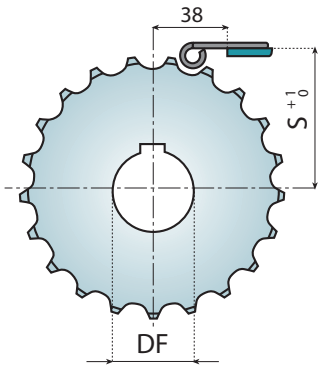

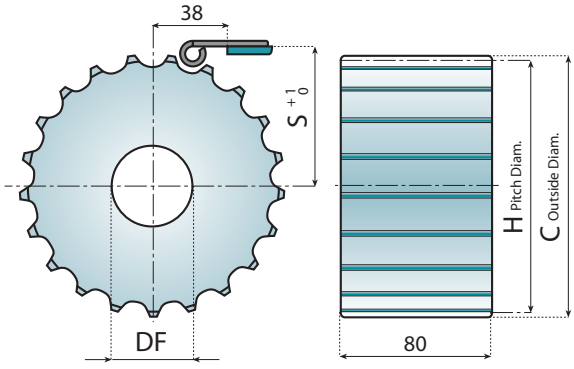

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12296	12297	12298	12299
12437	12438	12439	12440
12441	12442	12443	12444
12445	12446	12447	12448
121317	121318	121319	121320
121321	121322	121323	121324

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12449G	12449	12450	12451	12452
12453G	12453	12454	12455	12456
12457G	12457	12458	12459	12460
12461G	12461	12462	12463	12464
121349G	121349	121350	121351	121352
121353G	121353	121354	121355	121356

Material: polyamide.


***Plain Bore**

Features:
- Completely closed structure, easier to clean and to disinfect
- Quick and easy replacement.
- Split guide rings.

Pages 18 - 27

Page 340



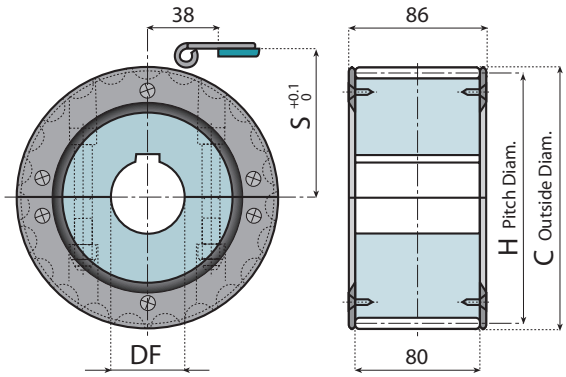



Z	C mm	H mm	S mm
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80

SPLIT SPROCKETS - Fixed

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12901A	12284A	12285A	12286A	12287A
12902A	12288A	12289A	12290A	12291A
12903A	12292A	12293A	12294A	12295A


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.
***Plain Bore (without keyway)**

GUIDE RINGS

Black	Ø inside	Ø Fixing screw
12790N	79	104
12791N	92	116
12792N	104	128

Material: reinforced polyamide, screws in stainless steel.
Supply: 4 segments and 12 screws
N = Black B = White



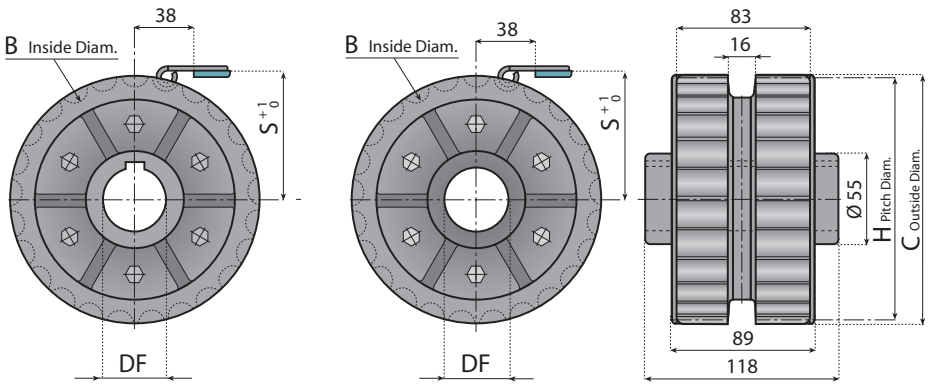

Z	B mm	C mm	H mm	S mm
25	140.1	154.0	153.2	79.8

DRIVE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12033	12034	12035	12036

Material: reinforced polyamide, screws in stainless steel, DIN 6885 key seat.

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12037	12038	12039	12040

Material: polyamide, screws in stainless steel.

 © System Plast S.r.l. , 2012 - All Rights Reserved


Pages 18 - 27

Page 340

Features:
- Molded sprocket.
- Molded covers for easy cleaning.
- Possibility of integrated guide rings.
- Quick and easy replacement.

VERSION WITH INTEGRATED GUIDE RINGS



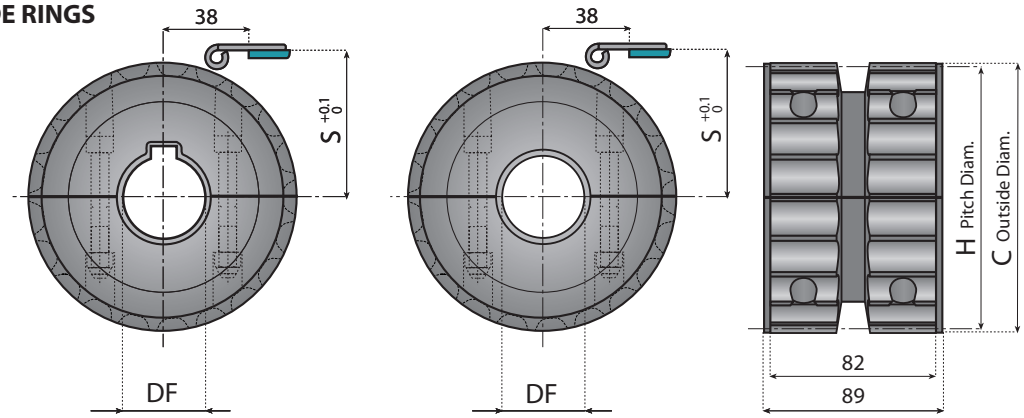

Z	C mm	H mm	S mm
21	129.0	129.26	67.8

SPLIT SPROCKETS - Fixed

Ø 30	Ø 35	Ø 40
Part number		
121932	121933	121934


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 30	Ø 35	Ø 40
Part number		
121935	121936	121937

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.



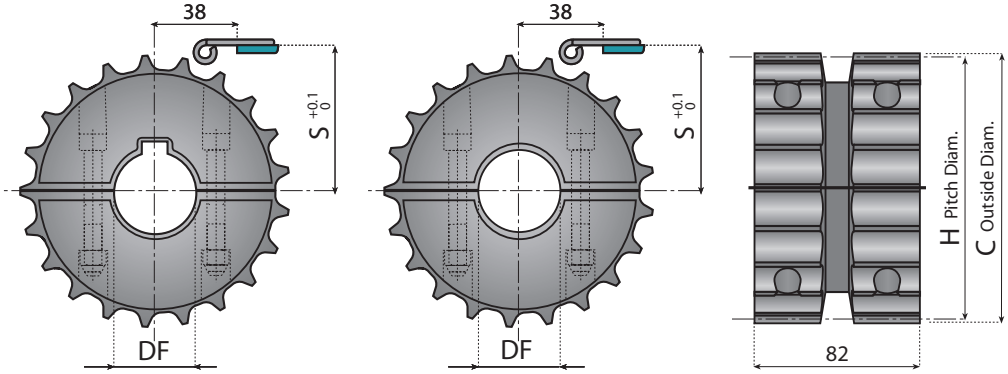

Z	C mm	H mm	S mm
21	129.0	129.26	67.8

SPLIT SPROCKETS - Fixed

Ø 30	Ø 35	Ø 40
Part number		
121938	121939	121940

Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 30	Ø 35	Ø 40
Part number		
121941	121942	121943


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.


Features:
- Completely closed structure, easier to clean and to disinfect
- Quick and easy replacement.


Pages 18 - 27

Page 340



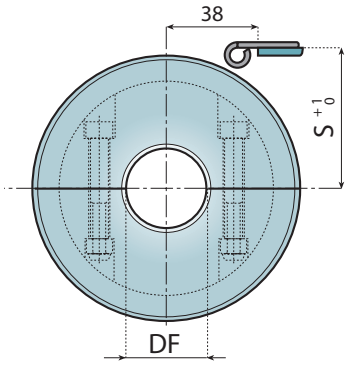

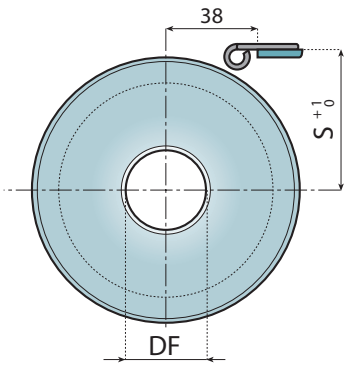

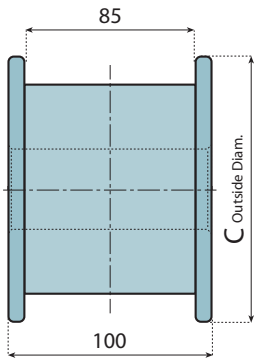

Z equiv.	C mm	S mm
19	117.0	62.6
21	129.8	68.6
23	142.2	74.6
25	154.7	80.5
27	167.2	86.5
29	179.3	92.8

SPLIT IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12980	12981	12982	12983	12984
12985	12986	12987	12988	12989
12990	12991	12992	12993	12994
12995	12996	12997	12998	12999
121527	121528	121529	121530	121531
121532	121533	121534	121535	121536


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.


ONE PIECE IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12130	12131	12132	12133	12134
12135	12136	12137	12138	12139
12140	12141	12142	12143	12144
12145	12146	12147	12148	12149
121537	121538	121539	121540	121541
121542	121543	121544	121545	121546

Material: polyamide.



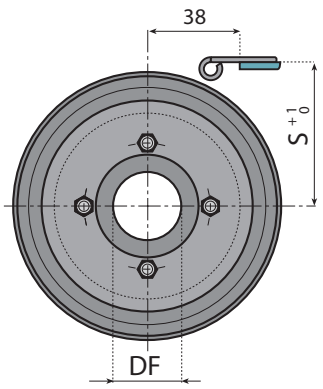

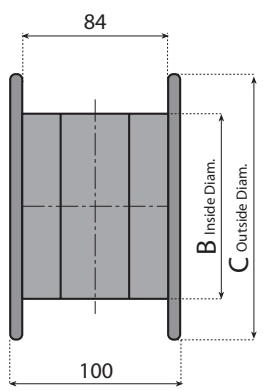

Z equiv.	B mm	C mm	S mm
19	80.0	118.0	62.6
21	80.0	129.8	68.6
23	108.0	142.5	74.6
25	108.0	155.0	80.5

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121616	121617	121618	121619
121620	121621	121622	121623
121624	121625	121626	121627
121628	121629	121630	121631

Material: self-lubricating polyamide, screws in zinc plated steel.


 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect
- Quick and easy replacement.

Pages 18 - 23 28 - 30

Page 340



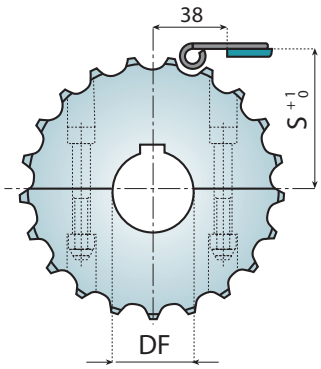

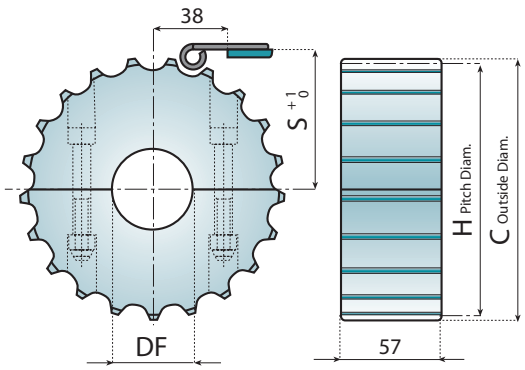

Z	C mm	H mm	S mm
17	103.90	105.47	55.90
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121801	121802	121803	121804
121806	121807	121808	121809
121811	121812	121813	121814
121816	121817	121818	121819
121821	121822	121823	121824
121826	121827	121828	121829
121831	121832	121833	121834


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121800	121863	121864	121865	121866
121805	121867	121868	121869	121870
121810	121871	121872	121873	121874
121815	121875	121876	121877	121878
121820	121879	121880	121881	121882
121825	121883	121884	121885	121886
121830	121887	121888	121889	121890

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



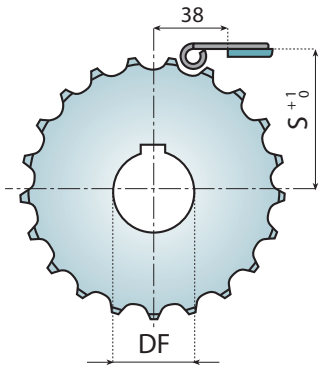

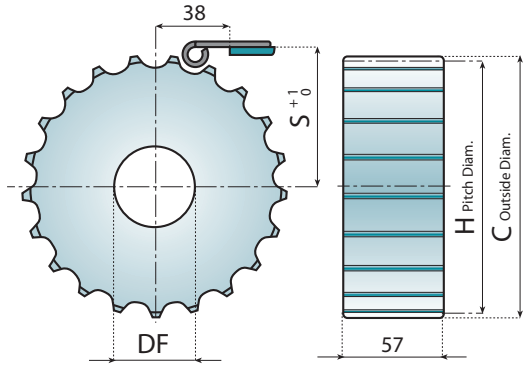

Z	C mm	H mm	S mm
17	103.90	105.47	55.90
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121835	121836	121837	121838
121839	121840	121841	121842
121843	121844	121845	121846
121847	121848	121849	121850
121851	121852	121853	121854
121855	121856	121857	121858
121859	121860	121861	121862

Material: polyamide, screws in stainless steel, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121891G	121891	121892	121893	121894
121895G	121895	121896	121897	121898
121899G	121899	121900	121901	121902
121903G	121903	121904	121905	121906
121907G	121907	121908	121909	121910
121911G	121911	121912	121913	121914
121915G	121915	121916	121617	121918


Material: polyamide, DIN 6885 key seat.
***Plain Bore**

Features:
- Completely closed structure, easier to clean and to disinfect
- Complete with guide rings

Pages 18 - 23 28 - 30

Page 340



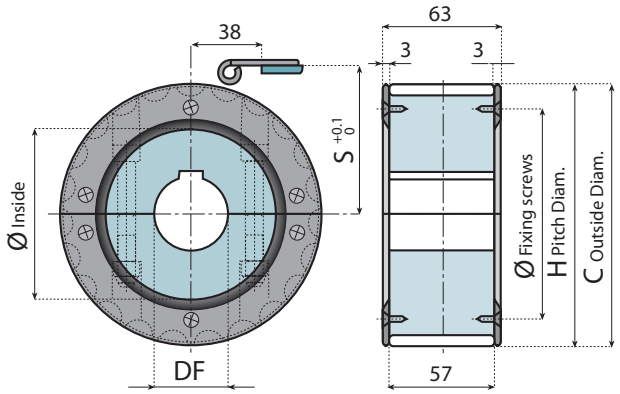



Z	C mm	H mm	S mm
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80

SPLIT SPROCKETS - Fixed

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121810A	121811A	121812A	121813A	121814A
121815A	121816A	121817A	121818A	121819A
121820A	121821A	121822A	121823A	121824A

Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.
***Plain Bore**


GUIDE RINGS

Black	Ø inside	Ø Fixing screw
12790N	79	104
12791N	92	116
12792N	104	128

Material: reinforced polyamide, screws in stainless steel.
Supply: 4 segments and 12 screws
N = Black B = White

SPROCKETS and IDLER WHEELS 8157 - 8857 M



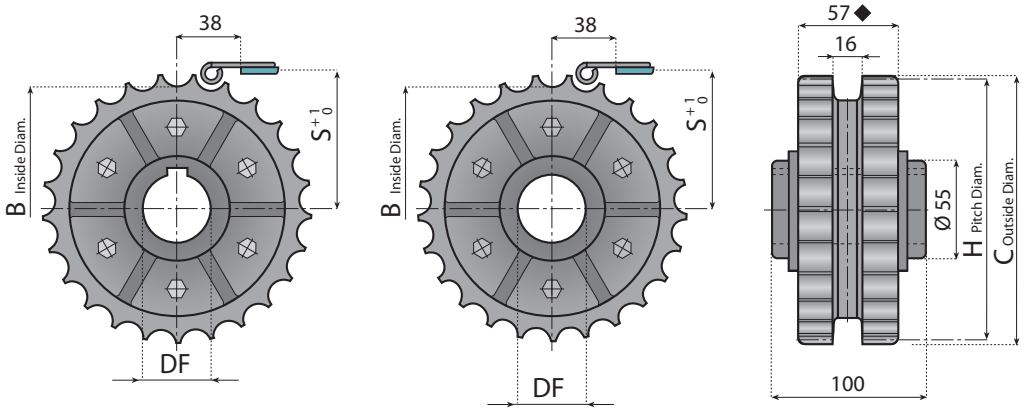

Z	B mm	C mm	H mm	S mm
25	140.1	154.0	153.2	79.8

DRIVE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121920	121921	121922	121923

Material: reinforced polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121924	121925	121926	121927

Material: self lubricating polyamide, screws in stainless steel.


 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect
- Recyclable.
- Quick and easy replacement.

Pages 18 - 23 28 - 30

Page 340



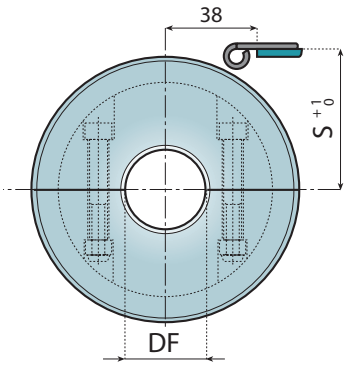

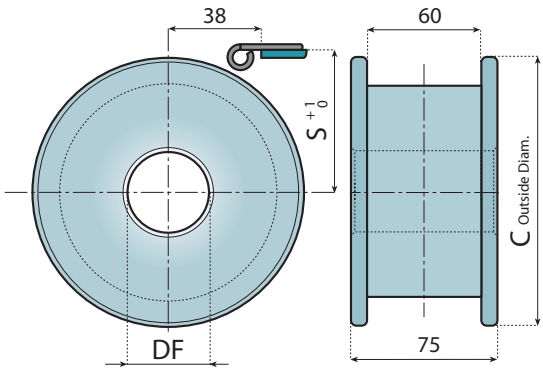

SPLIT IDLER WHEELS - Floating

Z equiv.	C mm	S mm	Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
			Part number				
17	104.0	56.2	121377	121378	121379	121380	121381
19	117.0	62.6	121382	121383	121384	121385	121386
21	129.8	68.6	121387	121388	121389	121390	121391
23	142.2	74.6	121392	121393	121394	121395	121396
25	154.7	80.5	121397	121398	121399	121400	121401
27	167.2	86.5	121402	121403	121404	121405	121406
29	179.3	92.8	121407	121408	121409	121410	121411


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121412	121413	121414	121415	121416
121417	121418	121419	121420	121421
121422	121423	121424	121425	121426
121427	121428	121429	121430	121431
121432	121433	121434	121435	121436
121437	121438	121439	121440	121441
121442	121443	121444	121445	121446

Material: polyamide.



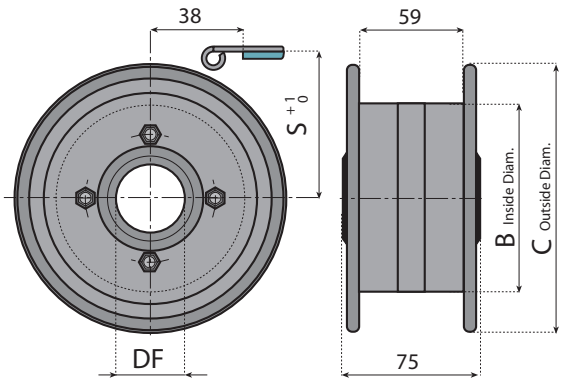

Z equiv.	B mm	C mm	S mm
19	80.0	118.0	62.6
21	80.0	129.8	68.6
23	108.0	142.5	74.6
25	108.0	155.0	80.5

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121600	121601	121602	121603
121604	121605	121606	121607
121608	121609	121610	121611
121612	121613	121614	121615

Material: self-lubricating polyamide, screws in zinc plated steel.


Features:
- Completely closed structure, easier to clean and to disinfect
- Quick and easy replacement.


- Sprockets and idler wheels made of Steel on request.


Page 19

Page 340



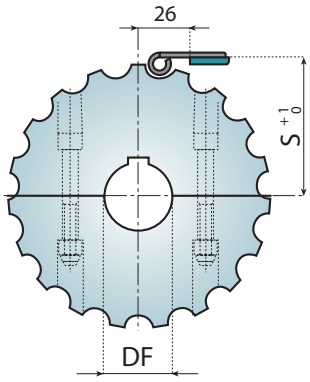

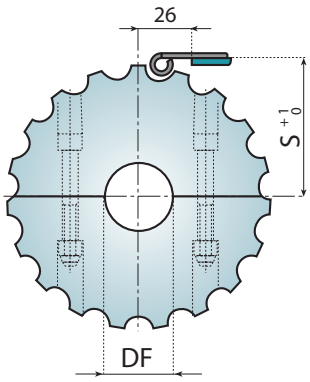



Z	C mm	H mm	S mm
13	106.1	108.0	57.2
15	122.2	124.0	65.2
17	138.2	138.2	72.3
18	146.4	146.3	76.4
19	155.7	154.3	80.4
21	173.0	170.4	88.4
23	190.0	186.5	96.5
25	204.0	202.7	104.6

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121556	121557	121558	121559
121561	121562	121563	121564
121566	121567	121568	121569
121571	121572	121573	121574
121576	121577	121578	121579
121581	121582	121583	121584
121586	121587	121588	121589
121591	121592	121593	121594


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating


Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121555	121688	121689	121690	121691
121560	121692	121693	121694	121695
121565	121696	121697	121698	121699
121570	121700	121701	121702	121703
121575	121704	121705	121706	121707
121580	121708	121709	121710	121711
121585	121712	121713	121714	121715
121590	121716	121717	121718	121719

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



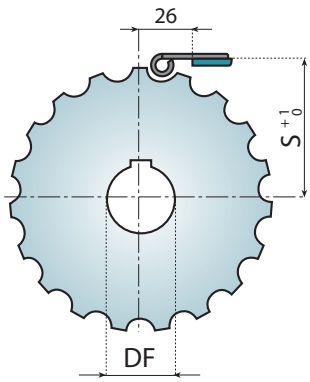

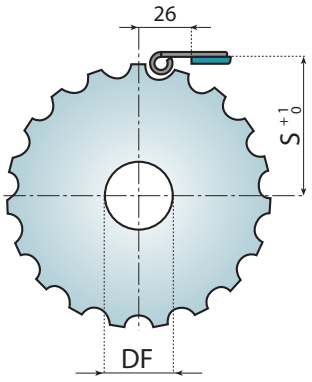



Z	C mm	H mm	S mm
13	106.1	108.0	57.2
15	122.2	124.0	65.2
17	138.2	138.2	72.3
18	146.4	146.3	76.4
19	155.7	154.3	80.4
21	173.0	170.4	88.4
23	190.0	186.5	96.5
25	204.0	202.7	104.6

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121656	121657	121658	121659
121660	121661	121662	121663
121664	121665	121666	121667
121668	121669	121670	121671
121672	121673	121674	121675
121676	121677	121678	121679
121680	121681	121682	121683
121684	121685	121686	121687

Material: polyamide,DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121720G	121720	121721	121722	121723
121724G	121724	121725	121726	121727
121728G	121728	121729	121730	121731
121732G	121732	121733	121734	121735
121736G	121736	121737	121738	121739
121740G	121740	121741	121742	121743
121744G	121744	121745	121746	121747
121748G	121748	121749	121750	121751

Material: polyamide ***Plain Bore**

 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect.
- Quick and easy replacement.


- Sprockets and idler wheels made of Steel on request.

Pages 20 - 21 27 - 29 - 30

Page 340



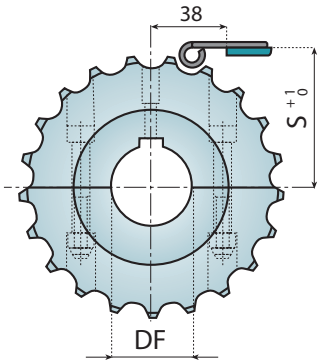

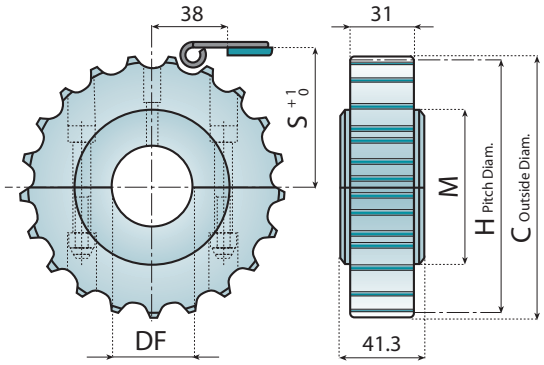

Z	C mm	H mm	M mm	S mm
17	103.90	105.47	70.00	55.90
19	117.00	117.34	70.00	61.90
21	129.00	129.26	85.00	67.80
23	142.00	141.21	90.00	73.80
25	154.00	153.21	90.00	79.80
27	166.80	165.20	100.00	85.80
29	178.50	177.24	110.00	91.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
12465	12466	12467	12468	-
12469	12470	12471	12472	-
12473	12474	12475	12476	126003
12477	12478	12479	12480	126004
12481	12482	12483	12484	126005
121218	121219	121220	121221	-
121223	121224	121225	121226	-


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12965	121271	121272	121273	121274
12966	121275	121276	121277	121278
12967	121279	121280	121281	121282
12968	121283	121284	121285	121286
12969	121287	121288	121289	121290
121217	121291	121292	121293	121294
121222	121295	121296	121297	121298

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



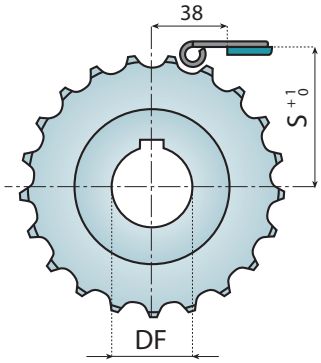

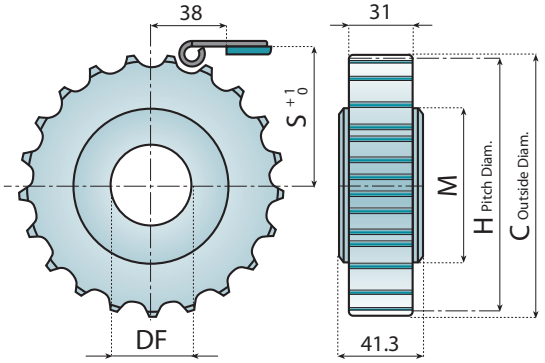

Z	C mm	H mm	M mm	S mm
17	103.90	105.47	70.00	55.90
19	117.00	117.34	70.00	61.90
21	129.00	126.26	85.00	67.80
23	142.00	141.21	90.00	73.80
25	154.00	153.21	90.00	79.80
27	166.80	165.20	100.00	85.80
29	178.50	177.24	110.00	91.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12485	12486	12487	12488
12489	12490	12491	12492
12493	12494	12495	12496
12497	12498	12499	12500
12501	12502	12503	12504
121227	121228	121229	121230
121231	121232	121233	121234

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
-	12505	12506	12507	12508
-	12509	12510	12511	12512
-	12513	12514	12515	12516
-	12517	12518	12519	12520
-	12521	12522	12523	12524
-	121299	121300	121301	121302
-	121303	121304	121305	121306

Material: polyamide. ***Plain Bore**

Features:
- Maximum keyway load.

Pages 20 - 21 27 - 29 - 30

Page 340




Z	B mm	C mm	S mm
21	116.1	129.0	67.8
23	128.1	142.0	73.8
25	140.1	154.0	79.8

SPLIT SPROCKETS - Fixed

Ø25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
12061N	12062N	12063N	12064N	12097N
12109N	12110N	12111N	12112N	-
12073N	12074N	12075N	12076N	19098N

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass, DIN 6885 key seat.

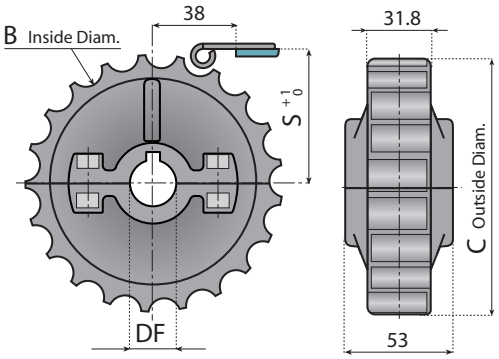




Z	H mm	C mm	S mm
21	129.26	129.00	67.80
25	153.21	154.00	79.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12268	12269	12270	12271
12272	12273	12274	12275

Material: reinforced polyamide, DIN 6885 key seat.

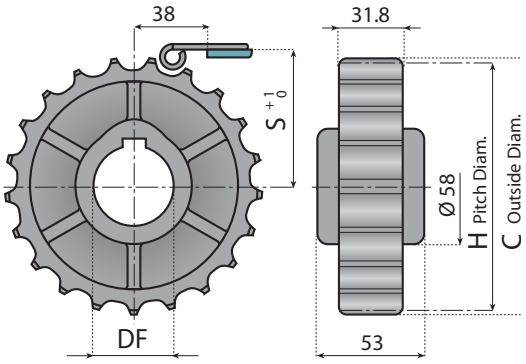


 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect.
- Recyclable.
- Quick and easy replacement.

Pages 20 - 21 27 - 29 - 30

Page 340



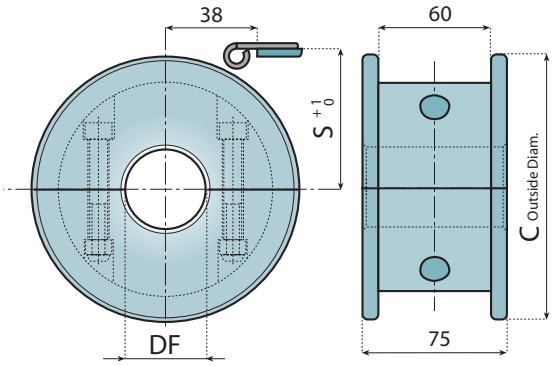

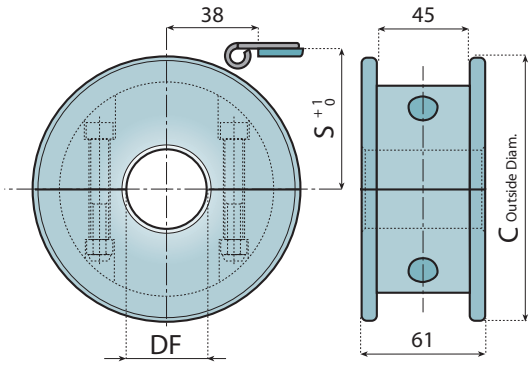

SPLIT IDLER WHEELS, TAB CHAINS - Floating

Z equiv.	C mm	S mm	Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
			Part number				
17	104.0	56.2	121377	121378	121379	121380	121381
19	117.0	62.6	121382	121383	121384	121385	121386
21	129.8	68.6	121387	121388	121389	121390	121391
23	142.2	74.6	121392	121393	121394	121395	121396
25	154.7	80.5	121397	121398	121399	121400	121401
27	167.2	86.5	121402	121403	121404	121405	121406
29	179.3	92.8	121407	121408	121409	121410	121411


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.


SPLIT IDLER WHEELS, BEVEL CHAINS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12608	12609	12610	12611	12612
12613	12614	12615	12616	12618
12617	12619	12620	12621	12622
12623	12624	12625	12626	12627
12628	12629	12630	12631	12632
121357	121358	121359	121360	121361
121362	121363	121364	121365	121366

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.



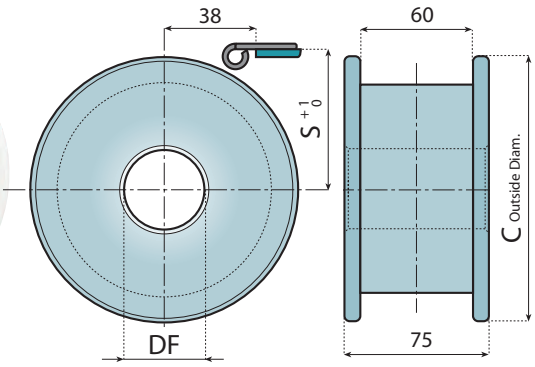

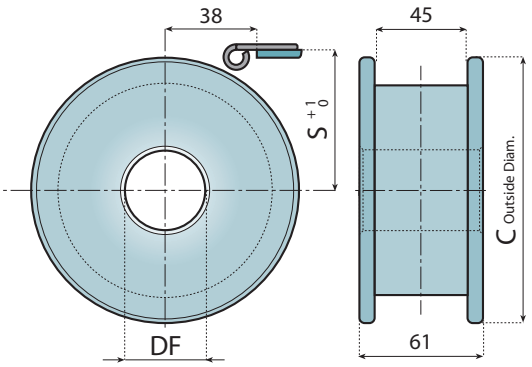

ONE PIECE IDLER WHEELS, TAB CHAINS - Floating

Z equiv.	C mm	S mm	Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
			Part number				
17	104.0	56.2	121412	121413	121414	121415	121416
19	117.0	62.6	121417	121418	121419	121420	121421
21	129.8	68.6	121422	121423	121424	121425	121426
23	142.2	74.6	121427	121428	121429	121430	121431
25	154.7	80.5	121432	121433	121434	121435	121436
27	167.2	86.5	121437	121438	121439	121440	121441
29	179.3	92.8	121442	121443	121444	121445	121446

Material: polyamide.

ONE PIECE IDLER WHEELS, BEVEL CHAINS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12633	12634	12635	12636	12637
12638	12639	12640	12641	12642
12643	12644	12645	12646	12647
12648	12649	12650	12651	12652
12653	12654	12655	12656	12657
121367	121368	121369	121370	121371
121372	121373	121374	121375	121376

Material: polyamide.

Pages 20 - 21 27 - 29 - 30
Page 340




Z	B mm	C mm	S mm
21	116.1	129.0	67.8
23	128.1	142.0	73.8
25	140.1	154.0	79.8

SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
121110N	121111N	121112N	121113N	121084N
121115N	121116N	121117N	121118N	-
121120N	121121N	121122N	121123N	121124N

Material: polyamide, screws in stainless steel, nuts in nickel plated brass.

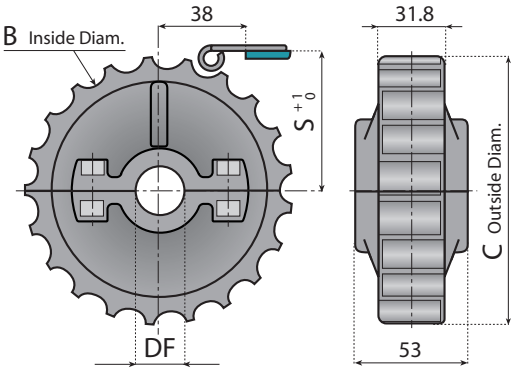




Z	H mm	C mm	S mm
21	129.26	129.00	67.80
25	153.21	154.00	79.80

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12260	12261	12262	12263
12264	12265	12266	12267

Material: polyamide.

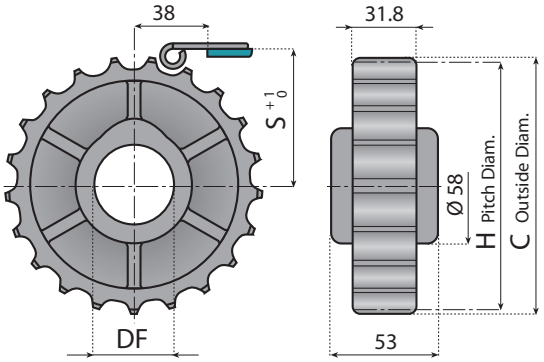




Z equiv.	B mm	C mm	S mm
19	80.0	118.0	62.6
21	80.0	129.8	68.6
23	108.0	142.5	74.6
25	108.0	155.0	80.5

IDLER WHEELS FOR TAB CHAINS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121600	121601	121602	121603
121604	121605	121606	121607
121608	121609	121610	121611
121612	121613	121614	121615

Material: self-lubrificating polyamide, screws in zinc plated steel.

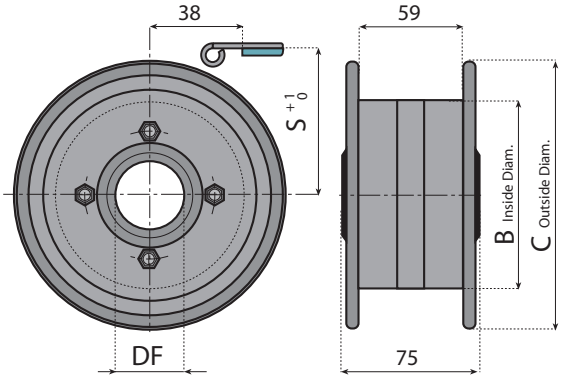




Z equiv.	B mm	C mm	S mm
19	80.0	118.0	62.6
21	80.0	129.8	68.6
23	108.0	142.5	74.6
25	108.0	155.0	80.5

IDLER WHEELS FOR BEVEL CHAINS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12680	12681	12682	12683
12684	12685	12686	12687
12688	12689	12690	12691
12692	12693	12694	12695

Material: self-lubrificating polyamide, screws in zinc plated steel.
Application: chains series 881 - 881O

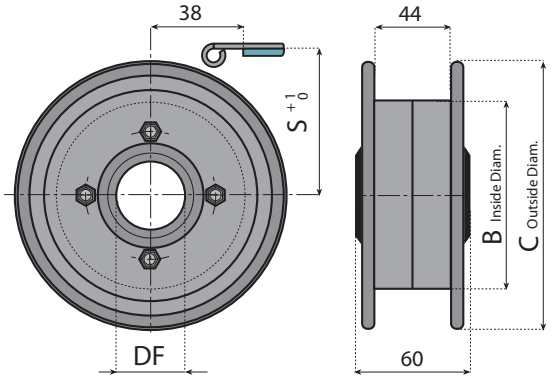

 © System Plast S.r.l., 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect.
- Quick and easy replacement

- Sprockets and idler wheels made of Steel on request.

Pages 32 - 33 48 - 54

Page 340



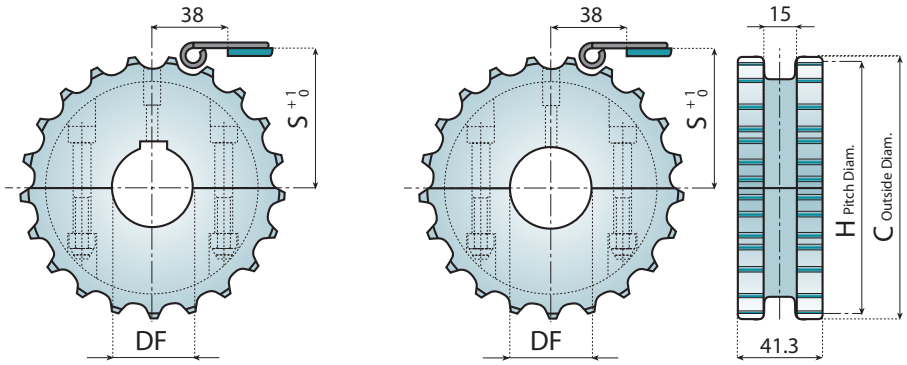

Z	C mm	H mm	S mm
17	103.90	105.47	55.90
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
12920	12921	12922	12923	-
12924	12925	12926	12927	-
12928	12929	12930	12931	126006
12932	12933	12934	12935	126007
12936	12937	12938	12939	126008
121126	121127	121128	121129	-
121131	121132	121133	121134	-


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12960	121143	121144	121145	121146
12961	121147	121148	121149	121150
12962	121151	121152	121153	121154
12963	121155	121156	121157	121158
12964	121159	121160	121161	121162
121125	121163	121164	121165	121166
121130	121167	121168	121169	121170

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



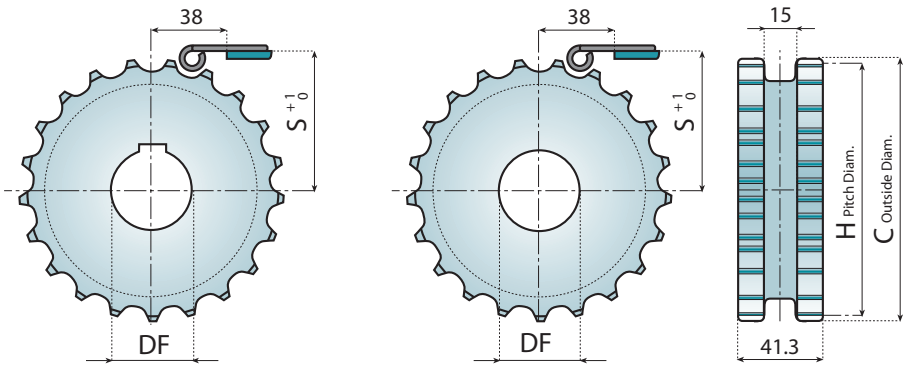

Z	C mm	H mm	S mm
17	103.90	105.47	55.90
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12940	12941	12942	12943
12944	12945	12946	12947
12948	12949	12950	12951
12952	12953	12954	12955
12956	12957	12958	12959
121135	121136	121137	121138
121139	121140	121141	121142

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
-	121171	121172	121173	121174
-	121175	121176	121177	121178
-	121179	121180	121181	121182
-	121183	121184	121185	121186
-	121187	121188	121189	121190
-	121191	121192	121193	121194
-	121195	121196	121197	121198


Material: polyamide.


Features:
- Maximum keyway load.

Pages 32 - 33 48 - 54

Page 340



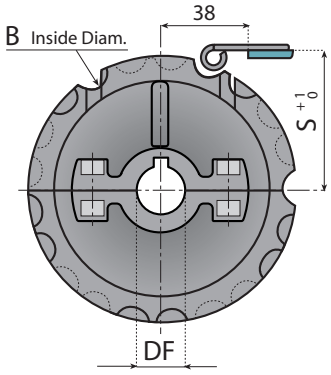

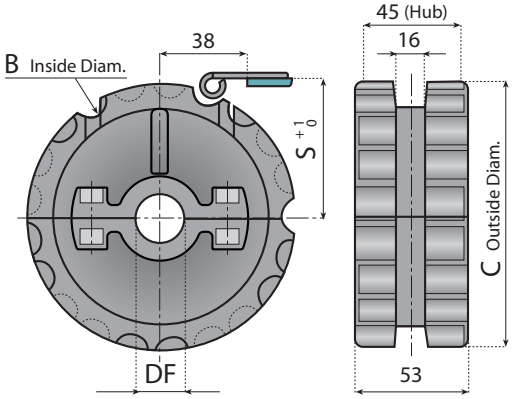

Z	C mm	B mm	S mm
21	129.0	116.1	67.8
23	142.0	128.1	73.8
25	154.0	140.1	79.8

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
12057N	12058N	12059N	12060N	12095N
12104N	12105N	12106N	12107N	-
12069N	12070N	12071N	12072N	12096N


Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
121095N	121096N	121097N	121098N	121099N
121100N	121101N	121102N	121103N	-
121105N	121106N	121107N	121108N	121109N

Material: polyamide, screws in stainless steel, nuts in nickel plated brass.



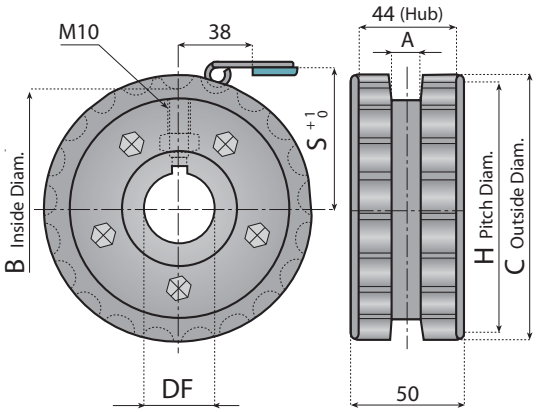

Z	A mm	B mm	C mm	H mm	S mm
17	13.00	92.30	103.90	105.47	55.90
19	16.00	104.20	117.00	117.34	61.90
21	16.00	116.10	129.00	129.26	67.8
23	16.00	128.10	142.00	141.21	73.8
25	16.00	140.10	154.00	153.21	79.8

DRIVE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12276	12277	-	-
12660	12661	12662	12663
12664	12665	12666	12667
12668	12669	12670	12671
12672	12673	12674	12675

Material: reinforced polyamide, screws in stainless steel, DIN 6885 key seat.


 © System Plast S.r.l. , 2012 - All Rights Reserved


Pages 32 - 33 48 - 54

Page 340

Features:
- Completely closed structure, easier to clean and to disinfect
- Recyclable.
- Quickly replaceable.



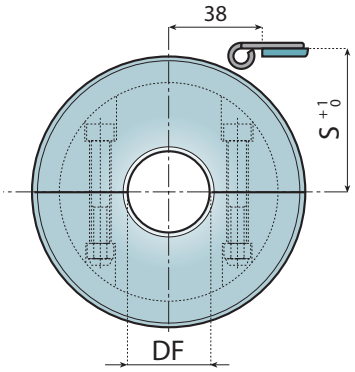

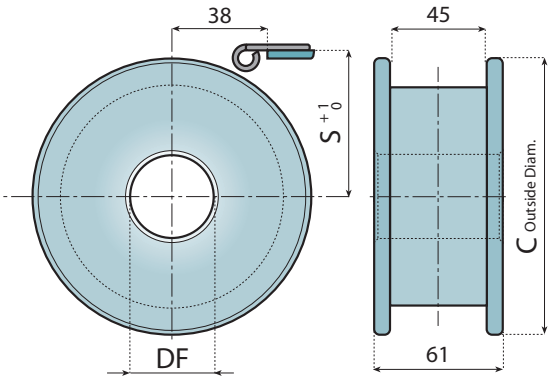


Z equiv.	C mm	S mm	SPLIT IDLER WHEELS - Floating Ø 20	Ø 25	Ø 30	Ø 35	Ø 40	ONE PIECE IDLER WHEELS - Floating Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
			Part number					Part number				
17	104.0	56.2	12608	12609	12610	12611	12612	12633	12634	12635	12636	12637
19	117.0	62.6	12613	12614	12615	12616	12618	12638	12639	12640	12641	12642
21	129.8	68.6	12617	12619	12620	12621	12622	12643	12644	12645	12646	12647
23	142.2	74.6	12623	12624	12625	12626	12627	12648	12649	12650	12651	12652
25	154.7	80.5	12628	12629	12630	12631	12632	12653	12654	12655	12656	12657
27	167.2	86.5	121357	121358	121359	121360	121361	121367	121368	121369	121370	121371
29	179.3	92.8	121362	121363	121364	121365	121366	121372	121373	121374	121375	121376

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

Material: polyamide.



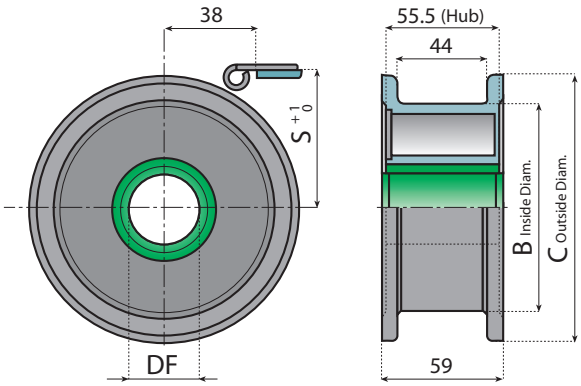


Material: ultrasonic welded cover in reinforced polyamide.
Bushing in Low Friction and low corrosion resin.
Idler body in self-lubricating polyamide.
Colour: black and green.


Z equiv.	B mm	C mm	S mm	IDLER WHEELS - Floating Ø 25	Ø 30	Ø 35	Ø 40
				Part number			
21	103.5	129.5	68.6	12866	12867	12868	12869
23	103.5	143.0	74.6	12874	12875	12876	12877
25	122.0	154.5	80.5	12870	12871	12872	12873

Pages 32 - 33 48 - 54

Page 340



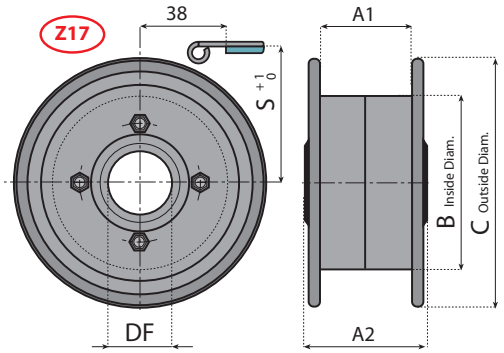

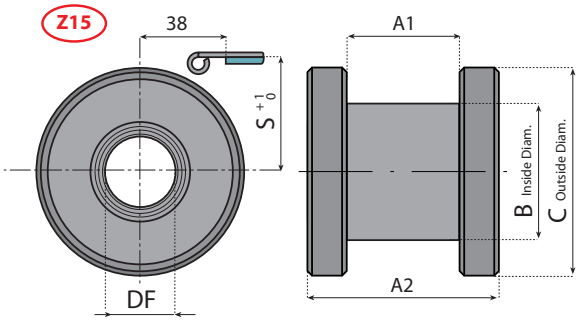


Material: self-lubricating polyamide, screw in zinc plated steel (Z17).
Colour: black
Notes: reinforced version, high wear and chemical resistance, recyclable.


Z equiv.	A1 mm	A2 mm	B mm	C mm	S mm
15	48	83	58	90	48.2
17	44	52	71	106	56.2

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
-	12676	12677	12678	12679
12278	12279	-	-	-



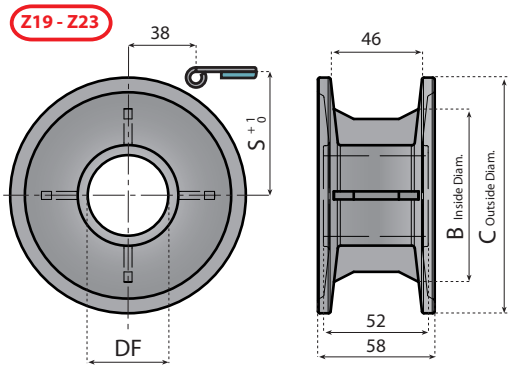

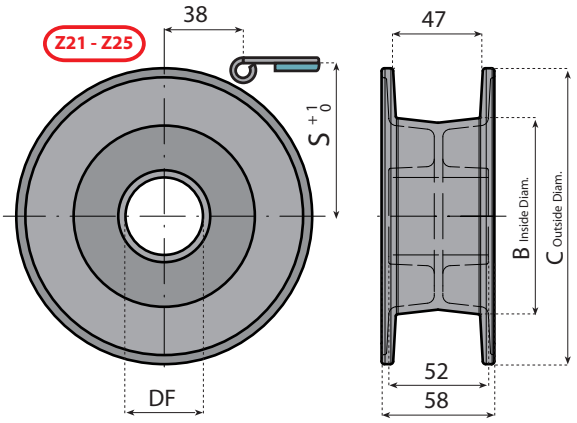


Material: self-lubricating polyamide.
Colour: black.
Notes: reinforced version, high wear and chemical resistance, recyclable.

Z equiv.	C mm	S mm
19	117.0	62.6
21	129.8	68.6
23	142.2	74.6
25	154.7	80.5

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12208B	12209B	12210B	12211B
12200B	12201B	12202B	12203B
12212B	12213B	12214B	12215B
12204B	12205B	12206B	12207B



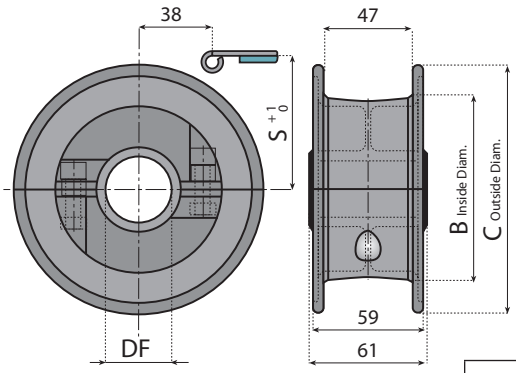

Material: self-lubricating polyamide, screws in stainless steel.
Colour: black.
Notes: quickly replaceable, reinforced version, high wear and chemical resistance, recyclable.

Z equiv.	B mm	C mm	S mm
21	97.0	129.8	68.6
23	99.5	142.2	74.6
25	102.0	154.7	80.5

SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12077B	12078B	12079B	12080B
121928B	121929B	121930B	121931B
12081B	12082B	12083B	12084B

 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect.
- Split versions: quick and easy replacement.


• Sprockets and idler wheels made of Steel on request.

Pages 34 - 46 - 54

Page 340



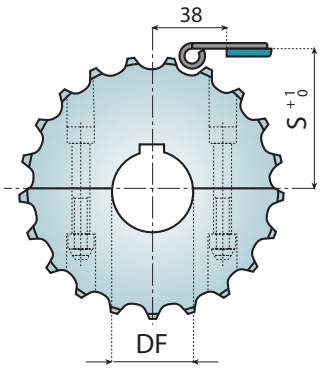

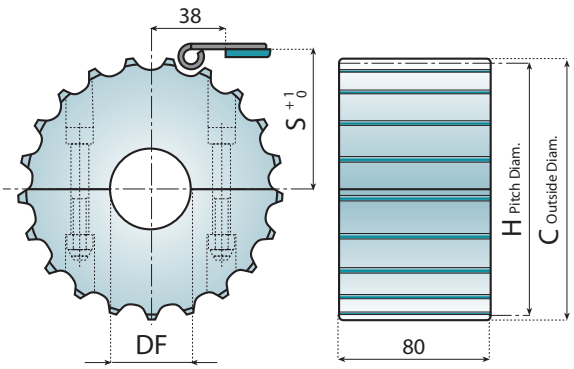

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12280	12281	12282	12283
12284	12285	12286	12287
12288	12289	12290	12291
12292	12293	12294	12295
121308	121309	121310	121311
121313	121314	121315	121316


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12900	121325	121326	121327	121328
12901	121329	121330	121331	121332
12902	121333	121334	121335	121336
12903	121337	121338	121339	121340
121307	121341	121342	121343	131344
121312	121345	121346	121347	131348

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



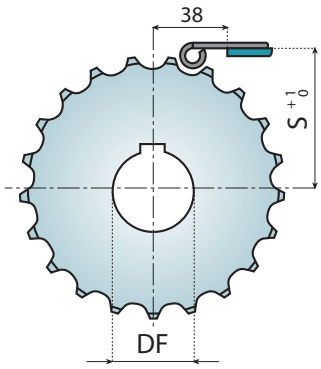

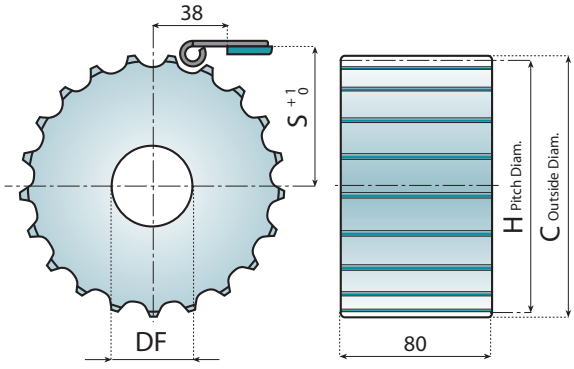

Z	C mm	H mm	S mm
19	117.00	117.34	61.90
21	129.00	129.26	67.80
23	142.00	141.21	73.80
25	154.00	153.21	79.80
27	166.80	165.20	85.80
29	178.50	177.24	91.80

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12296	12297	12298	12299
12437	12438	12439	12440
12441	12442	12443	12444
12445	12446	12447	12448
121317	121318	121319	121320
121321	121322	121323	121324

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12449G	12449	12450	12451	12452
12453G	12453	12454	12455	12456
12457G	12457	12458	12459	12460
12461G	12461	12462	12463	12464
121349G	121349	121350	121351	121352
121353G	121353	121354	121355	121356

Material: polyamide.


***Plain Bore**

Features:
- Molded sprocket.
- Molded covers for easy cleaning.
- Quick and easy replacement.

Pages 34 - 46 - 54

Page 340



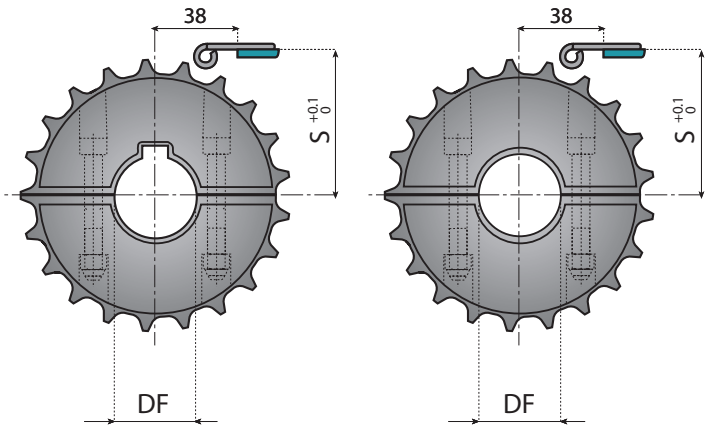

Z	C mm	H mm	S mm
21	129.0	129.26	67.8

SPLIT SPROCKETS - Fixed

Ø 30	Ø 35	Ø 40
Part number		
121938	121939	131940


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 30	Ø 35	Ø 40
Part number		
121941	121942	121943

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.



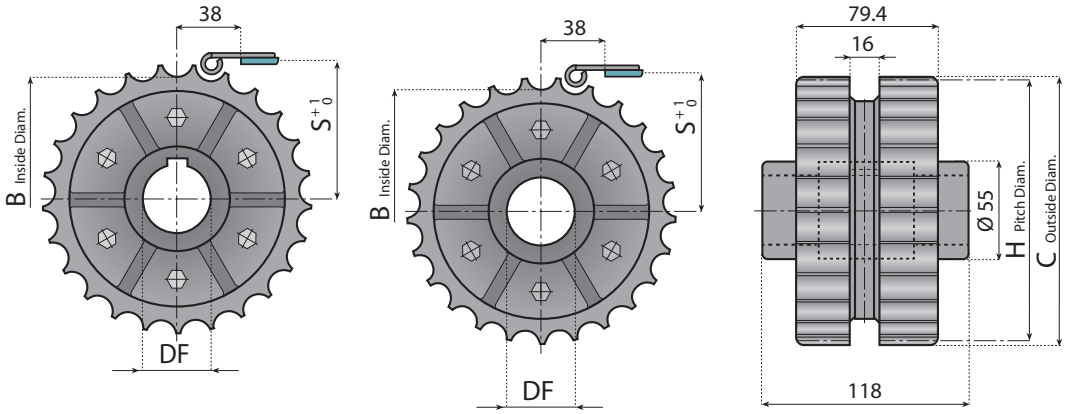

Z	B mm	C mm	H mm	S mm
25	140.1	154.0	153.2	79.8

DRIVE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12085	12086	12087	12088

Material: reinforced polyamide, screws in stainless steel, DIN 6885 key seat.

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12089	12090	12091	12092

Material: self-lubrificating polyamide, screws in stainless steel.


 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Completely closed structure, easier to clean and to disinfect
- Recyclable.
- Quickly replaceable.

Pages 34 - 46 - 54

Page 340



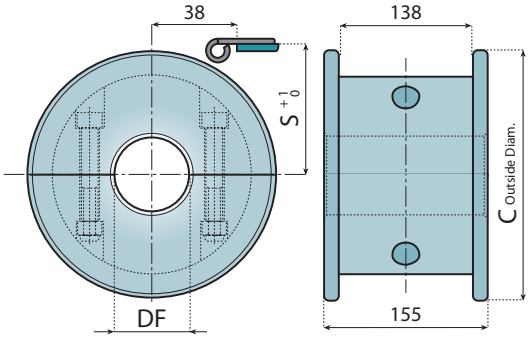

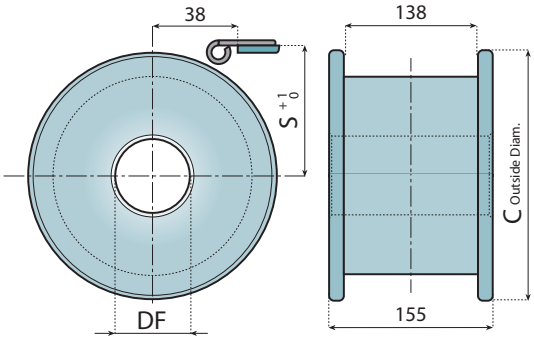

Z equiv.	C mm	S mm
19	117.0	62.6
21	129.8	68.6
23	142.2	74.6
25	154.7	80.5

SPLIT IDLER WHEELS - Floating

Ø 30	Ø 35	Ø 40
Part number		
12220	12221	12222
12223	12224	12225
12226	12227	12228
12229	12230	12231


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating

Ø 30	Ø 35	Ø 40
Part number		
12232	12233	12234
12235	12236	12237
12238	12239	12240
12241	12242	12243

Material: polyamide.



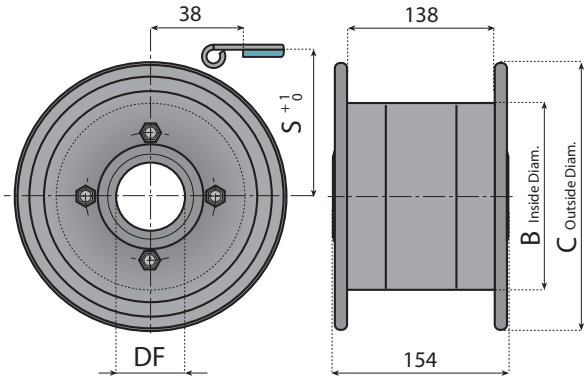

Z equiv.	B mm	C mm	S mm
19	80.0	118.0	62.6
21	80.0	129.8	68.6
23	108.0	142.5	74.6
25	108.0	155.0	80.5

IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121632	121633	121634	121635
121636	121637	121638	121639
121640	121641	121642	121643
121644	121645	121646	121647


Material: polyamide, screws in stainless steel.

Features:
- Completely closed structure, easier to clean and to disinfect.
- Quickly replaceable.

Pages 33 - 36 - 37 - 38 - 39 40 - 49 - 56 - 57 - 62 - 63

Pages 340



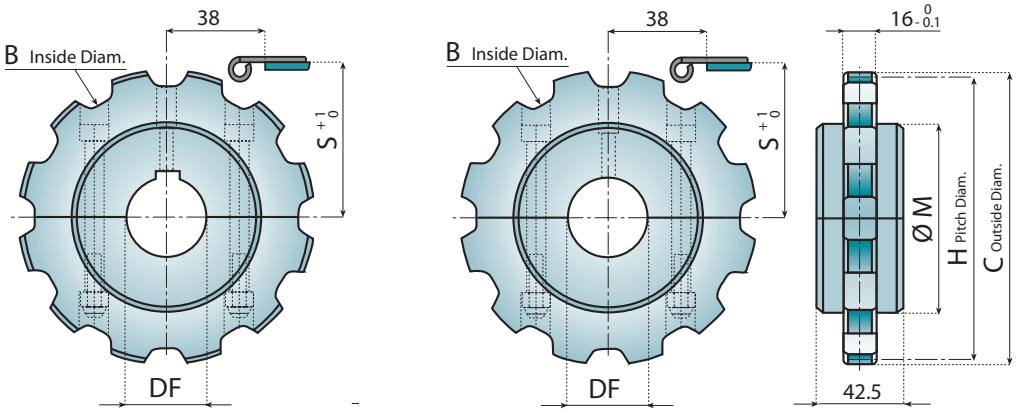

Z	C mm	H mm	B mm	M mm	S mm
9	110.00	111.40	95.00	92.00	59.30
10	122.00	123.30	107.00	88.00	65.25
11	135.00	135.20	119.00	92.00	71.20
12	147.30	147.20	131.00	105.00	77.20

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12382	12383	12384	12385
12386	12387	12388	12389
12390	12391	12392	12393
12394	12395	12396	12397


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12910	121752	121753	121754	121755
12911	121756	121757	121758	121759
12912	121760	121761	121762	121763
12913	121764	121765	121766	121767

Material: polyamide, screws in stainless steel, nuts in zinc plated steel,
***Plain Bore**



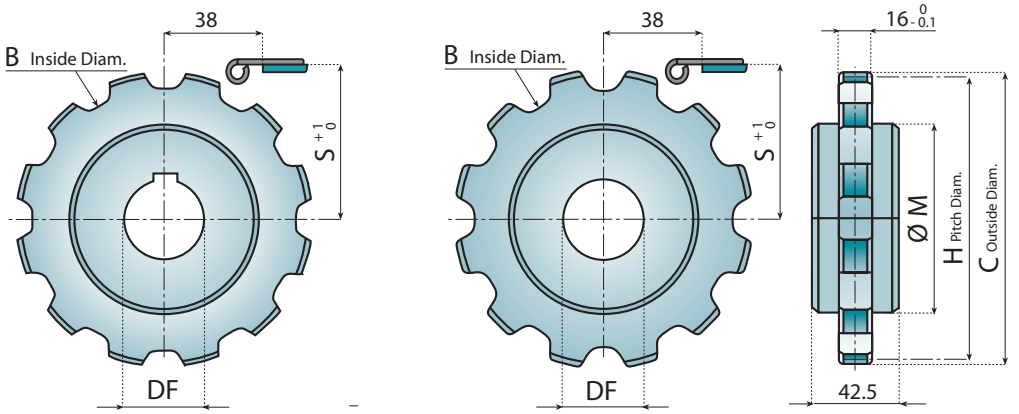

Z	C mm	H mm	B mm	M mm	S mm
9	110.00	111.40	95.00	92.00	59.30
10	122.00	123.30	107.00	88.00	65.25
11	135.00	135.20	119.00	92.00	71.20
12	147.30	147.20	131.00	105.00	77.20

ONE PIECE SPROCKETS - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12398	12399	12407	12408
12409	12410	12411	12412
12413	12414	12415	12416
12417	12418	12419	12420

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12421G	12421	12422	12423	12424
12425G	12425	12426	12427	12428
12429G	12429	12430	12431	12432
12433G	12433	12434	12435	12436

Material: polyamide .***Plain Bore**

 © System Plast S.r.l. , 2012 - All Rights Reserved


SPROCKETS and IDLER WHEELS — 828 - 878 - 879 - 880


Pages
33 - 36 - 37 - 38 - 39
40 - 49 - 56 - 57 - 62 - 63


Page
340

Features:
- Quick and easy replacement.
- High strength.



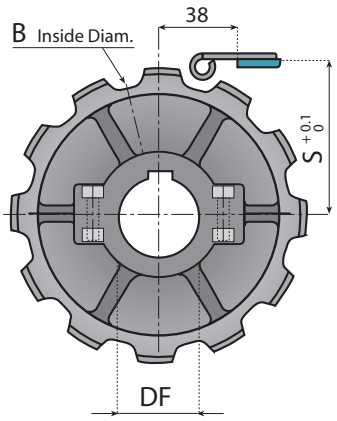

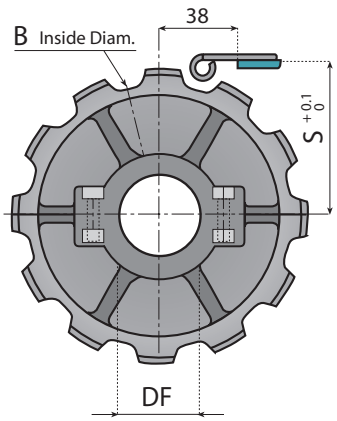

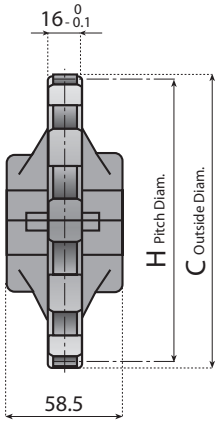

Z	B mm	C mm	H mm	S mm
10	107.00	122.00	123.30	65.25
12	131.00	147.00	146.80	77.20

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121001	121002	121003	121004
12400	12711	12401	12402

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass, DIN 6885 key seat.


SPLIT IDLER WHEELS - Floating


Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121005	121006	121007	121008
12403	12404	12405	12406

Material: polyamide, screws in stainless steel, nuts in nickel plated brass.

IDLER WHEELS — 828 - 879 - 879 M - 880 - 880 M



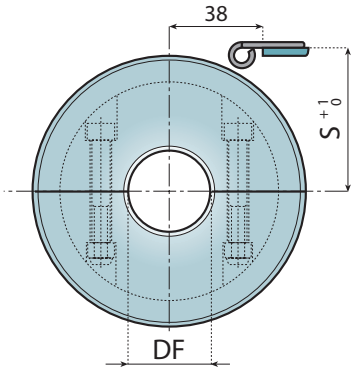

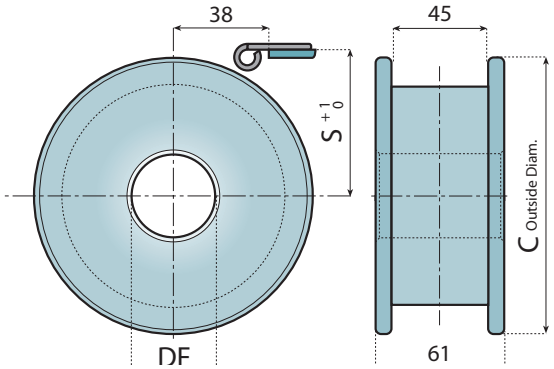

Z equiv.	C mm	S mm
9	117.0	62.6
10	129.8	68.6
11	142.2	74.6
12	154.7	80.5

SPLIT IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12613	12614	12615	12616	12618
12617	12619	12620	12621	12622
12623	12624	12625	12626	12627
12628	12629	12630	12631	12632

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12638	12639	12640	12641	12642
12643	12644	12645	12646	12647
12648	12649	12650	12651	12652
12653	12654	12655	12656	12657


Material: polyamide.


Pages 38 - 40 - 49 - 56 62 - 63

Page 340

Features:
- Completely closed structure, easier to clean and to disinfect.
- Recyclable.
- Quickly replaceable.



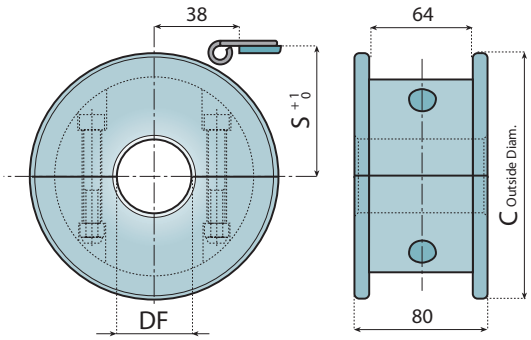

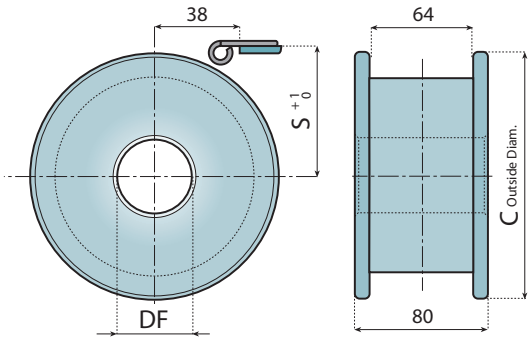

Z equiv.	C mm	S mm
9	117.0	62.6
10	129.8	68.6
11	142.2	74.6
12	154.7	80.5

SPLIT IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121447	121448	121449	121450	121451
121452	121453	121454	121455	121456
121457	121458	121459	121460	121461
121462	121463	121464	121465	121466

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121467	121468	121469	121470	121471
121472	121473	121474	121475	121476
121477	121478	121479	121480	121481
121482	121483	121484	121485	121486

Material: polyamide.




Material: self-lubricating polyamide, screws in zinc plated steel.
Application: chains series 879 - 879 M 880 - 880 M

Z equiv.	A1 mm	A2 mm	B mm	C mm	S mm
8	44.0	52.0	71.0	106.0	56.2
9	44.0	60.0	80.0	118.5	63.5
10	44.0	60.0	80.0	129.8	68.6
11	44.0	60.0	108.0	142.5	74.6
12	44.0	60.0	108.0	155.0	80.5

IDLER WHEELS FOR NON TAB CHAINS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12278	12279	-	-
12680	12681	12682	12683
12684	12685	12686	12687
12688	12689	12690	12691
12692	12693	12694	12695

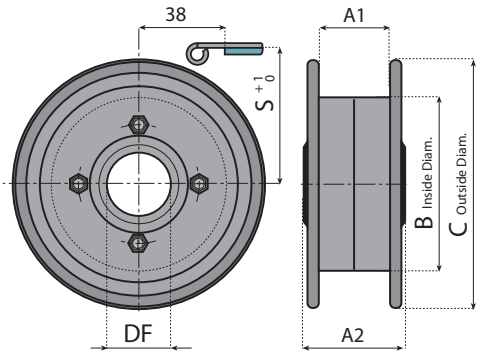




Material: self-lubrificating polyamide, screws in zinc plated steel.
Application: chains series 878 TAB - 879 TAB - 880 TAB

Z equiv.	A1 mm	A2 mm	B mm	C mm	S mm
9	64.0	80.0	80.0	118.5	63.5
10	64.0	80.0	80.0	129.8	68.6
11	64.0	80.0	108.0	142.5	74.6
12	64.0	80.0	108.0	155.0	80.5

IDLER WHEELS FOR TAB CHAINS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
12310	12311	12312	12313
12314	12315	12316	12317
12318	12319	12320	12321
12322	12323	12324	12325

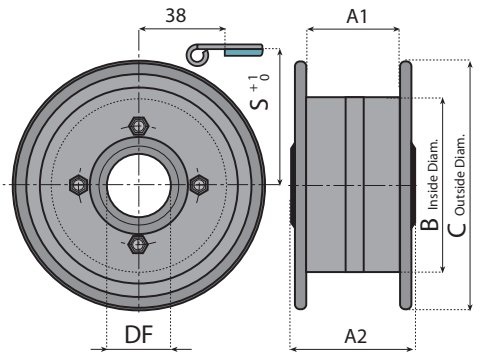


 © System Plast S.r.l. , 2012 - All Rights Reserved

Features:
- Completely closed structure, easier to clean and to disinfect.
- Quickly replaceable.

Pages 35 - 41 - 42 - 43 - 47 - 50 51 - 52 - 55 - 57 - 58

Page 340



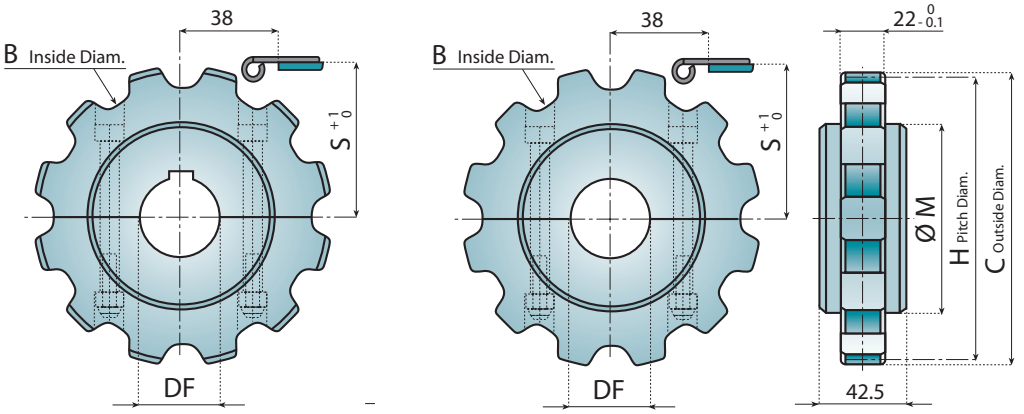

Z	C mm	H mm	B mm	M mm	S mm
9	112.0	111.4	92.1	65.0	60.5
10	125.0	123.2	104.0	75.0	66.4
11	137.0	135.2	116.0	85.0	72.4
12	149.0	147.2	127.9	90.0	78.4

SPLIT SPROCKETS - Fixed

Ø 30	Ø 35	Ø 40
Part number		
12346	12347	12348
12349	12350	12351
12352	12353	12354
12355	12356	12357


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 30	Ø 35	Ø 40
Part number			
12914	121768	121769	121770
12915	121771	121772	121773
12916	121774	121775	121776
12917	121777	121778	121779

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**



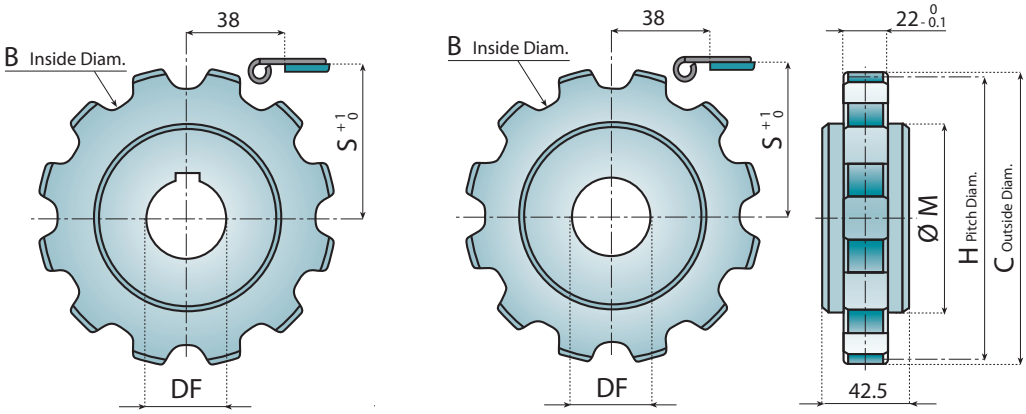

Z	C mm	H mm	B mm	M mm	S mm
9	112.0	111.4	92.1	65.0	60.5
10	125.0	123.2	104.0	75.0	66.4
11	137.0	135.2	116.0	85.0	72.4
12	149.0	147.2	127.9	90.0	78.4

ONE PIECE SPROCKETS - Tight

Ø 30	Ø 35	Ø 40
Part number		
12370	12371	12372
12373	12374	12375
12376	12377	12378
12379	12380	12381

Material: polyamide, DIN 6885 key seat.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 30	Ø 35	Ø 40
Part number			
12358G	12358	12359	12360
12361G	12361	12362	12363
12364G	12364	12365	12366
12367G	12367	12368	12369


Material: polyamide. ***Plain Bore**


882 - 8257 SPROCKETS and IDLER WHEELS



Pages
35 - 41 - 42 - 43 - 47 - 50
51 - 52 - 55 - 57 - 58

Page
340

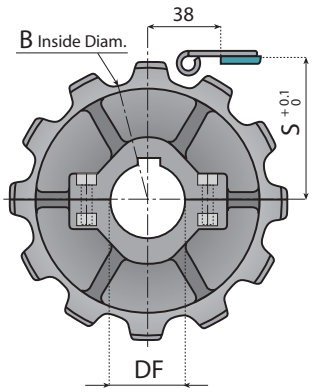

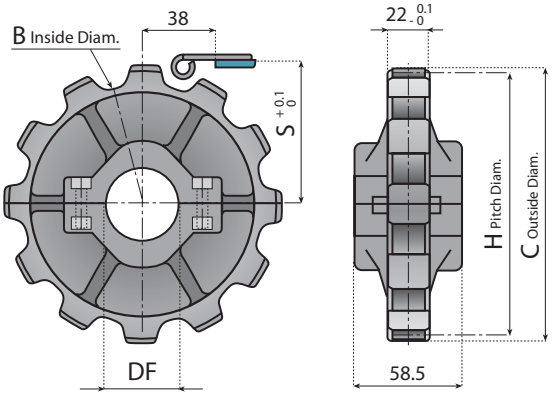

Z	B mm	C mm	H mm	S mm
10	104.0	125.0	123.3	65.4
12	128.0	149.2	147.2	78.5

SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121009	121010	121011	121012
12114	12115	12116	12117

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121013	121014	121015	121016
12119	12120	12121	12122

Material: polyamide, screws in stainless steel, nut in nickel plated brass.


882 M - 8257 - LBP 8257 - LBP 882 M IDLER WHEELS


Features:
- Completely closed structure, easier to clean and to disinfect.
- Recyclable.
- Quickly replaceable.

Pages
35 - 41 - 42 - 43 - 47 - 50
51 - 52 - 55 - 57 - 58

Page
340



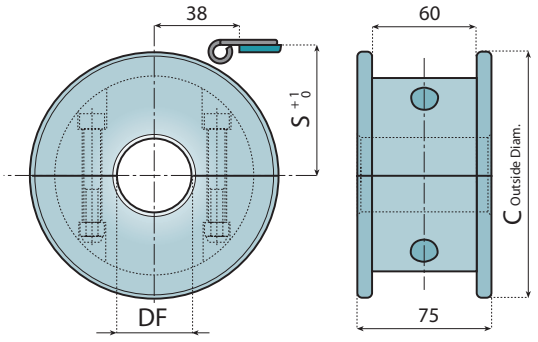

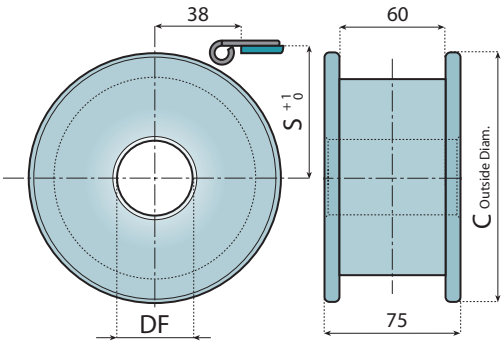

Z equiv.	C mm	S mm
9	117.0	62.6
10	129.8	68.6
11	142.2	74.6
12	154.7	80.5

SPLIT IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121382	121383	121384	121385	121386
121387	121388	121389	121390	121391
121392	121393	121394	121395	121396
121397	121398	121399	121400	121401

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121417	121418	121419	121420	121421
121422	121423	121424	121425	121426
121427	121428	121429	121430	121431
121432	121433	121434	121435	121436

Material: polyamide.




Z equiv.	B mm	C mm	S mm
9	80.0	118.0	62.6
10	80.0	129.8	68.6
11	108.0	142.5	74.6
12	108.0	155.0	80.5

SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121600	121601	121602	121603
121604	121605	121606	121607
121608	121609	121610	121611
121612	121613	121614	121615

Material: self-lubrificating polyamide, screws in zinc plated steel.

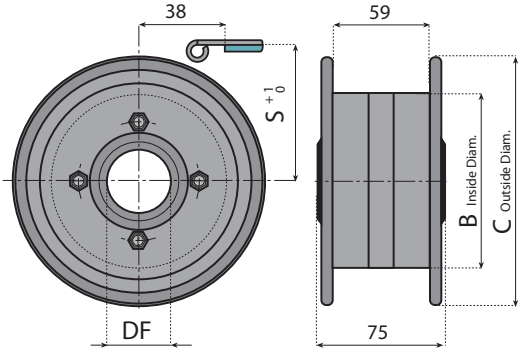


 © System Plast S.r.l. , 2012 - All Rights Reserved


IDLER WHEELS 882 TAB

Features:
- Completely closed structure, easier to clean and to disinfect
- Recyclable.
- Quickly replaceable.

Pages 42 - 50 51 - 57
Page 340



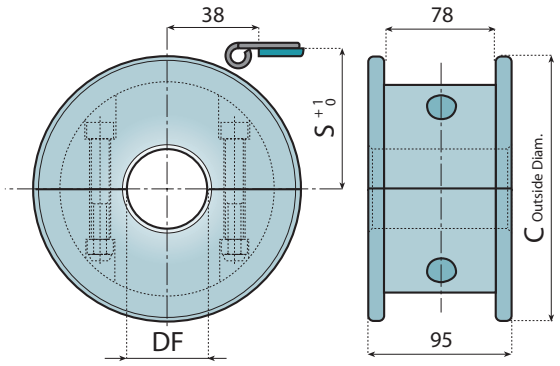

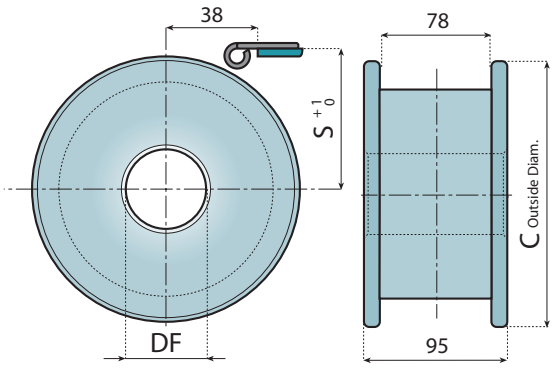

Z equiv.	C mm	S mm
9	117.0	63.8
10	129.8	69.5
11	142.2	75.9
12	154.7	82.1

SPLIT IDLER WHEELS - Floating

Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121487	121488	121489	121490	121491
121492	121493	121494	121495	121496
121497	121498	121499	121500	121501
121502	121503	121504	121505	121506

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE IDLER WHEELS - Floating


Ø 20	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
121507	121508	121509	121510	121511
121512	121513	121514	121515	121516
121517	121518	121519	121520	121521
121522	121523	121524	121525	121526

Material: polyamide.

IDLER WHEELS 882 TAB

Pages 42 - 50 51 - 57
Page 340



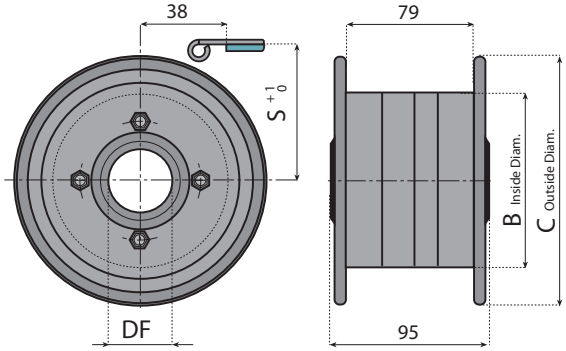

Z equiv.	B mm	C mm	S mm
10	80.0	129.8	68.6
12	108.0	155.0	80.5

SPLIT IDLER WHEELS - Floating


Ø 25	Ø 30	Ø 35	Ø 40
Part number			
121648	121649	121650	121651
121652	121653	121654	121655


Material: self-lubrificating polyamide, screws in zinc plated steel.
Application: chains series 882 TAB - LBP 882 TABin zinc plated steel.

Features:
- Completely closed structure, easier to clean and to disinfect.
- Recyclable.
- Quickly replaceable.

Pages 76⇨82 Page 340



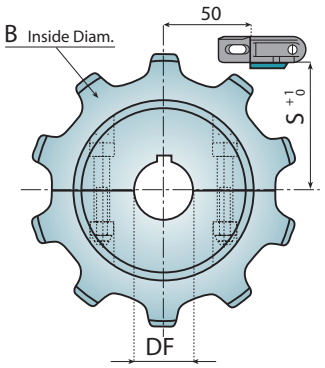

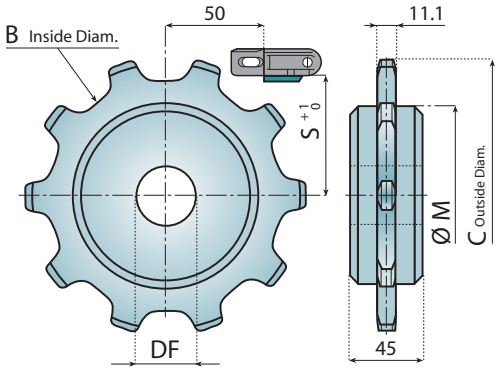

Z	C mm	B mm	M mm	S mm
8	136.3	106.8	80.0	53.0
10	165.1	136.8	110.0	69.0
13	215.0	186.6	150.0	93.5

SPLIT SPROCKETS - Fixed

Ø 20*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12730	12731	12732	12733	12734
12745	12746	12747	12748	12749
12750	12751	12752	12753	12754


Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat. ***Plain Bore**

ONE PIECE IDLER WHEELS - Floating

Ø 20*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
12735	12736	12737	12738	13739
12740	12741	12742	12743	12744
12755	12756	12757	12758	12759

Material: polyamide.



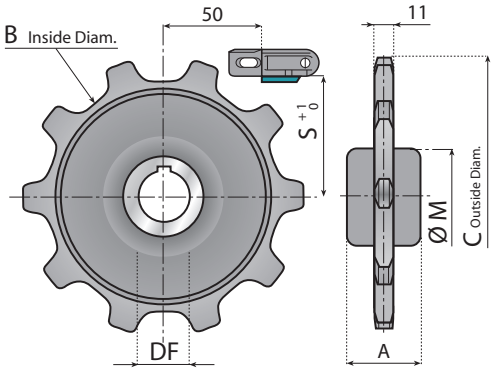


Z	A mm	B mm	C mm	M mm	S mm
8	42	106.8	136.3	55	53
10	43	136.8	165.1	65	69

DRIVE SPROCKETS - Tight

Ø 25	Ø 30
Part number	
12786	12727
12721	12800

Material: reinforced polyamide, hub in brass (Z-10 only). DIN 6885 key seat.



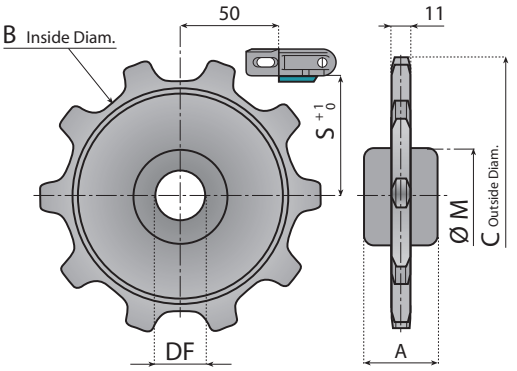

Z	A mm	B mm	C mm	M mm	S mm
8	42	106.8	136.3	55	53
10	42	136.8	165.1	65	69

IDLER WHEELS - Floating

Ø 25	Ø 30
Part number	
12728	12729
12724	12801

Material: self-lubrificating polyamide.

 © System Plast S.r.l. , 2012 - All Rights Reserved


IDLER WHEELS — CC600 - CC631

Pages 83 - 84 Page 340

Features:
- Sprockets are supplied with standard 20 mm bore and can be produced on request with a finished bore according to your drawing.

Application: chains series 600 - 631.



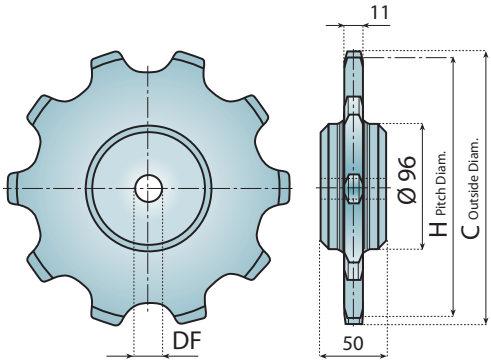

Z	C mm	H mm
8	172	166
10	215	205
12	256	246
14	297	286

SPROCKETS - Pre-bore
Ø 20
Part number
12326
12327
12328
12329

Material: polyamide.


IDLER WHEELS — CC1400 V - CC1400 V TAB

Page 340

Features:
- Sprockets are supplied with standard 20 mm bore and can be produced on request with a finished bore according to your drawing.

Application: ONLY suitable for chains of our CC 1400-V series as shown on page 84 of this catalogue!



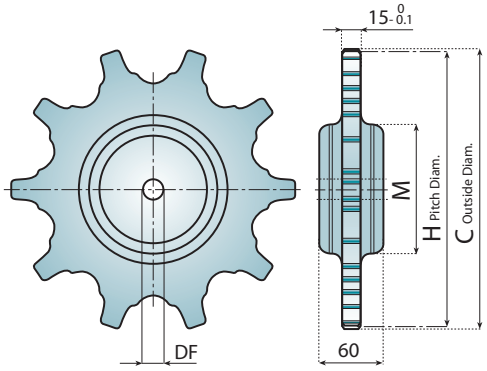

Z	C mm	H mm	M mm
7	202	190	75
8	227.6	218	90
10	279	267	125

SPROCKETS - Pre-bore
Ø 20
Part number
12331
12332
12334

Material: polyamide.


SPROCKETS and IDLER WHEELS — CC1400 - CC1400 TAB - CC1431 TAB

Page 85 Page 340

Features:
- Sprockets are supplied with standard 20 mm bore and can be produced on request with a finished bore according to your drawing.

Application: ONLY suitable for chains of our CC 1400 series as shown on page 85 of this catalogue!



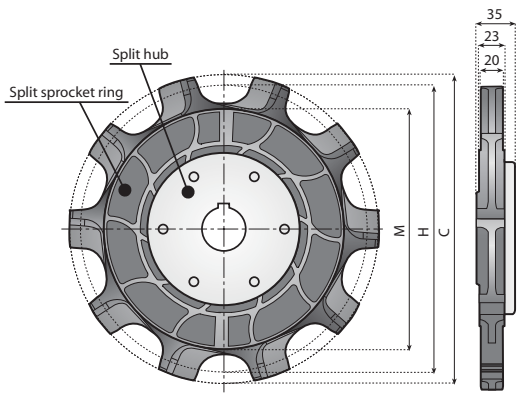

Z	C mm	H mm	M mm
10	276	267	224

SPLIT HUB - Tight		
Ø 20*	Ø 30	Ø 40
Part number		
12970V	12971V	12972V

*Plain Bore

SPLIT SPROCKET RING
Part number
12973

Material: hub: polyamide, ring: acetal


STANDARD SPROCKETS 843 - 1843 - 845

Pages 68 - 69 - 71 Page 340



Z	C mm	H mm	M mm	S mm	ANSI - ONE PIECE SPROCKETS Ø 10	Ø 12	Ø 15	Ø 16
					Part number			
13	57.40	53.00	37.00	28.00	12001A	-		-
15	65.50	61.09	45.00	28.00	12002A	-	-	-
17	73.60	69.11	52.00	28.00	12003A	-	-	-
19	81.70	77.16	60.00	28.00	-	12004A	-	-
21	89.70	85.22	68.00	28.00	-	12005A	-	-
23	98.20	93.27	70.00	28.00	-	12006A	-	-
25	105.80	101.33	70.00	28.00	-	12007A	-	-
27	114.00	109.40	70.00	28.00	-	-	12008A	-
29	122.00	117.46	80.00	30.00	-	-	12009A	-
31	130.20	125.54	90.00	30.00	-	-	-	12010A
33	138.40	133.60	90.00	30.00		-	-	12011A

Material: C 45 steel

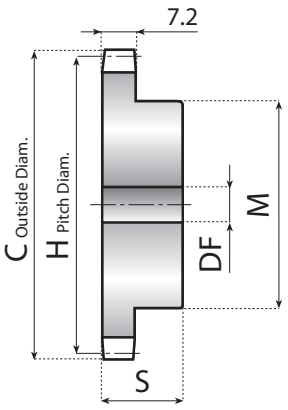

STANDARD SPROCKETS 863 - 1863 - 1873 - 1874


Note:
- Sprockets with Z = 15 and Z = 17 can only be used with 863 chains.
- Sprockets with Z = 19 can only be used with 863, 1863 and 1874 chains.

Pages 24 - 64 - 65 66 - 70 - 71 - 72 Page 340



Z	C mm	H mm	M mm	S mm	ANSI - ONE PIECE SPROCKETS Ø 14	Ø 16	Ø 20
					Part number		
15	99.80	91.63	70.00	35.00	12012A	-	-
17	111.50	103.67	80.00	35.00	-	12013A	-
19	124.20	115.75	80.00	35.00	-	12014A	-
21	136.00	127.82	90.00	40.00	-	-	12015A
23	149.00	139.90	90.00	40.00	-	-	12016A
25	160.00	152.00	90.00	40.00	-	-	12017A
27	172.30	164.09	95.00	40.00	-	-	12018A
29	184.10	176.19	95.00	40.00	-	-	12019A
31	196.30	188.31	100.00	40.00	-	-	12020A

Material: C 45 steel

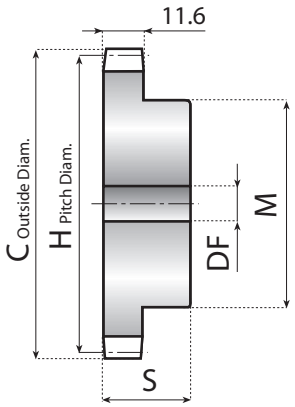


STANDARD SPROCKETS 1883

Page 73 Page 340



Z	C mm	H mm	M mm	S mm	ANSI - ONE PIECE SPROCKETS Ø 20	Ø 25
					Part number	
15	134.62	122.17	92.00	40.00	12021A	-
17	151.13	138.23	100.00	45.00	-	12022A
19	167.39	154.32	100.00	45.00	-	12023A
21	183.90	170.42	110.00	50.00	-	12024A
23	200.15	186.53	110.00	50.00	-	12029A
25	216.41	202.66	110.00	50.00	-	12030A

Material: C 45 steel

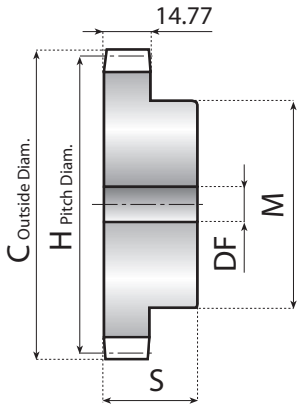

 © System Plast S.r.l. , 2012 - All Rights Reserved

SPROCKETS AND IDLER WHEELS FOR BELTS

Series	*Pages*
2120 - K134	310 → 311
2121 (Version FT - FG - LBP)	312 → 314
2122 FG - 2120 (Version FT - FG - LBP) 2121 - 2120M	315 → 316
2190 (Version FT - FG)	317
2250 (Version FT - FG - LBP)	318 → 320
2253	320
2251 - 2252 (Version FT - FG - LBP)	321 → 323
2250 - 2260 - 2251 (FT - FG) for TAB and magnetic chains/belts	324 → 325
2256	326
2351 - 2451 - 2551 - 2651 2500 RR	327
2508 - 2630	328



FEATURES:

- *EXCELLENT WEAR AND CHEMICAL RESISTANCE.*
- *REINFORCED DESIGN.*
- *COMPLETELY CLOSED STRUCTURE, EASIER TO CLEAN AND TO DISINFECT*
- *THE DESIGN OF THE SPROCKET ENSURES SMOOTH RUNNING AND LONG SERVICE LIFE.*

SPLIT VERSION:


- *QUICK AND EASY REPLACEMENT.*


Part numbers for drive sprockets are manufactured for a tight fit on the shaft.
To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125850FP.**

Pages 88

Pages 340



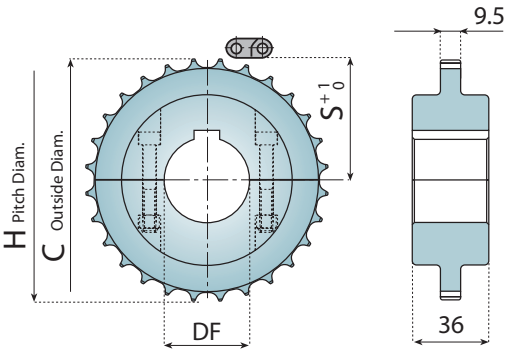

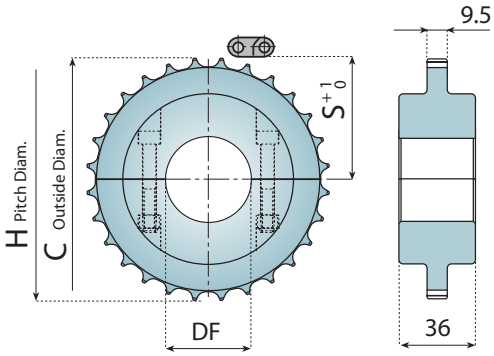

Z	C mm	H mm	S mm
28	115.40	113.40	52.40
36	147.70	145.70	68.50
38	155.80	153.80	72.60
40	163.85	161.85	76.60

SPLIT SPROCKETS SINGLE KEYWAY - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
125850F	125851F	125852F	125853F
125854F	125855F	125856F	125857F
125858F	125859F	125860F	125861F
125862F	125863F	125864F	125865F

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.


SPLIT IDLER WHEELS - Floating


Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125850GF	125850RF	125851RF	125852RF	125853RF
125854GF	125854RF	125855RF	125856RF	125857RF
125858GF	125858RF	125859RF	125860RF	125861RF
125862GF	125862RF	125863RF	125864RF	125865RF

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**

Part numbers for drive sprockets are manufactured for a tight fit on the shaft.
To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125800FP.**



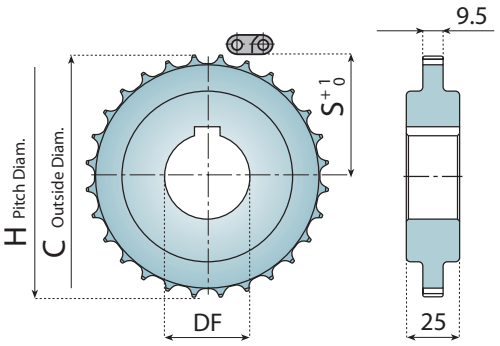

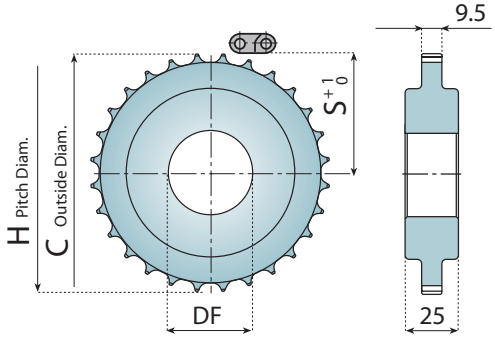

Z	C mm	H mm	S mm
16	65.20	65.10	28.20
20	81.20	81.19	36.30
24	99.30	97.30	44.30
28	115.40	113.40	52.40
36	147.70	145.70	68.50
38	155.80	153.80	72.60
40	163.85	161.85	76.60

ONE PIECE SPROCKETS SINGLE KEYWAY - Tight

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
125800F	125801F	-	-
125802F	125803F	125804F	-
125806F	125807F	125808F	125809F
125810F	125811F	125812F	125813F
125814F	125815F	125816F	125817F
125818F	125819F	125820F	125821F
125822F	125823F	125824F	125825F

Material: polyamide.

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125800GF	125800RIF	125801RIF	-	-
125802GF	125802RIF	125803RIF	125804RIF	125805RIF
125806GF	125806RIF	125807RIF	125808RIF	125809RIF
125810GF	125810RIF	125811RIF	125812RIF	125813RIF
125814GF	125814RIF	125815RIF	125816RIF	125817RIF
125818GF	125818RIF	125819RIF	125820RIF	125821RIF
125822GF	125822RIF	125823RIF	125824RIF	125825RIF


Material: polyamide. ***Plain Bore**


 © System Plast S.r.l. , 2012 - All Rights Reserved

Pages 88

Pages 340



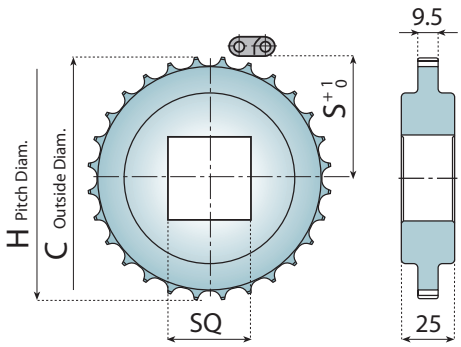

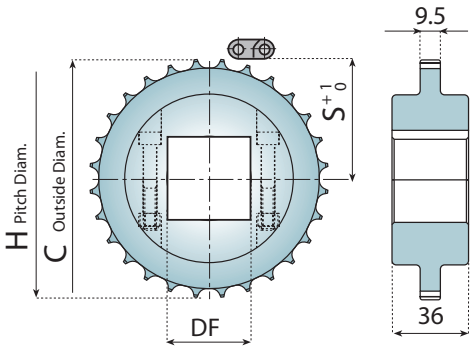

Z	C mm	H mm	S mm
16	65.20	65.10	28.20
20	81.20	81.19	36.30
24	99.30	97.30	44.30
28	115.40	113.40	52.40
36	147.70	145.70	68.50
38	155.80	153.80	72.60
40	163.85	161.85	76.60

ONE PIECE SPROCKETS
SQUARE BORE - Floating

25x25	30x30	35x35	40x40	60x60
Part number				
125877F	-	-	-	-
125870F	125871F	125880F	-	-
125881F	125882F	-	125883F	-
125884F	125885F	-	125886F	-
-	125887F	-	125888F	125889F
-	125890F	-	125891F	125892F
-	125893F	-	125894F	125895F

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

SPLIT SPROCKETS
SQUARE BORE - Floating

30x30	35x35	40x40	60x60
-	-	-	-
-	-	-	-
-	-	-	-
125866F	-	125867F	-
125868F	-	125869F	125872F
125873F	-	125874F	125875F
125876F	-	125896F	125897F

Material: polyamide, screws in stainless steel.


Note:
- Sprockets with single keyway can be used for belt widths up to 680 mm and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores or round bore with double keyway have to be used.


Pages 88⇨96 98⇨111+183

Pages 340

Part numbers for drive sprockets are manufactured for a tight fit on the shaft.
To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125528VP.**



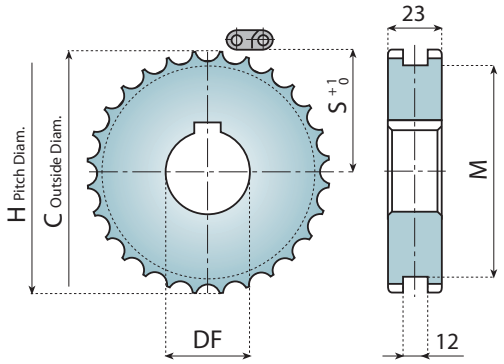

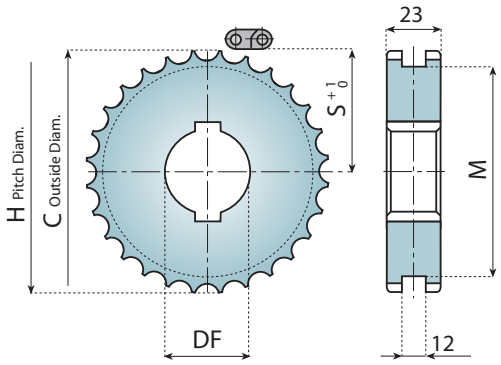

Z	C mm	H mm	M mm	S mm
14	56.90	57.06	46.00	24.30
16	65.20	65.10	55.00	28.20
20	81.20	81.19	71.00	36.30
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50
38	155.80	153.80	143.10	72.60
40	163.85	161.85	150.00	76.60

ONE PIECE SPROCKETS
SINGLE KEYWAY - Tight

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125528GV	125528V	125529V	-	-
125500GV	125500V	125501V	-	-
125502GV	125502V	125503V	125504V	125505V
125506GV	125506V	125507V	125508V	125509V
125510GV	125510V	125511V	125512V	125513V
125516GV	125516V	125517V	125518V	125519V
125520GV	125520V	125521V	125522V	125523V
125524GV	125524V	125525V	125526V	125527V

Material: polyamide. ***Plain Bore**


ONE PIECE SPROCKETS
DOUBLE KEYWAY - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
-	125565V	125566V	-	-
-	125551V	125552V	-	-
-	-	125553V	125554V	-
-	-	125555V	125556V	-
-	-	125557V	125558V	-
-	-	125559V	125560V	-
-	-	125561V	125562V	-
-	-	125563V	125564V	-

Material: polyamide. ***Plain Bore**

Part numbers for drive sprockets are manufactured for a tight fit on the shaft.
To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125600VP.**



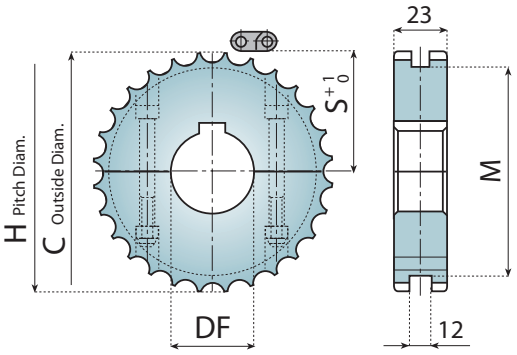

Z	C mm	H mm	M mm	S mm
28	115.40	113.40	103.00	52.40
36	147.70	145.72	136.02	68.50
38	155.80	153.80	143.10	72.60
40	163.85	161.85	150.00	76.60

SPLIT SPROCKETS
SINGLE KEYWAY - Fixed

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125600GV	125600V	125601V	125602V	125603V
125612GV	125612V	125613V	125614V	125615V
125604GV	125604V	125605V	125606V	125607V
125608GV	125608V	125609V	125610V	125611V


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**


 © System Plast S.r.l. , 2012 - All Rights Reserved


SPROCKETS 2120 - 2121 H

Pages 88⇨96 98⇨111+183

Pages 340



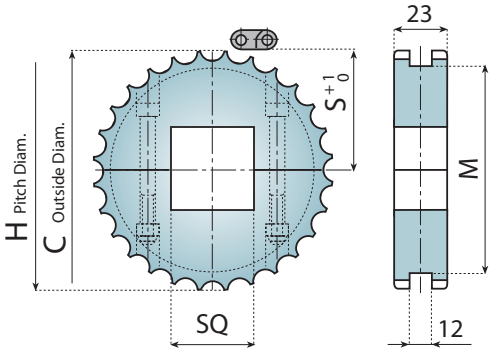

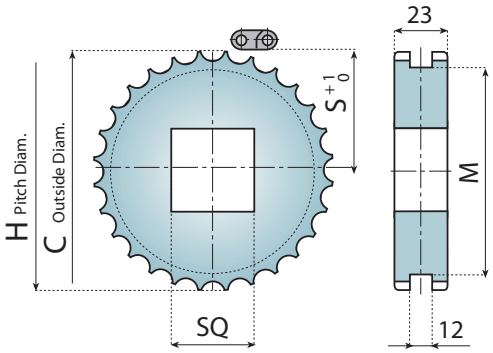

Z	C mm	H mm	M mm	S mm
14	56.90	57.06	46.00	24.30
16	65.20	65.10	55.00	28.20
20	81.20	81.19	71.00	36.30
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50
38	155.80	153.80	143.10	72.60
40	163.85	161.85	150.00	76.60

SPLIT SPROCKETS SQUARE BORE - Floating

30x30	35x35	40x40	60x60
Part number			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
125650V	-	**125651V**	-
125652V	-	**125653V**	**125654V**
125655V	-	**125656V**	**125657V**
125658V	-	**125659V**	**125660V**

Material: polyamide, screws in stainless steel.

ONE PIECE SPROCKETS SQUARE BORE - Floating

20x20	25x25	30x30	35x35	40x40	60x60
Part number					
125720V	**125721V**	-	-	-	-
-	**125700V**	**125701V**	-	-	-
-	**125702V**	**125703V**	**125704V**	-	-
-	**125705V**	**125706V**	-	**125707V**	-
-	**125708V**	**125709V**	-	**125710V**	-
-	-	**125711V**	-	**125712V**	**125713V**
-	-	**125714V**	-	**125715V**	**125716V**
-	-	**125717V**	-	**125718V**	**125719V**


Material: polyamide.


IDLER WHEELS 2120 - 2121 H

Features:

- These idlers float freely on the shaft.



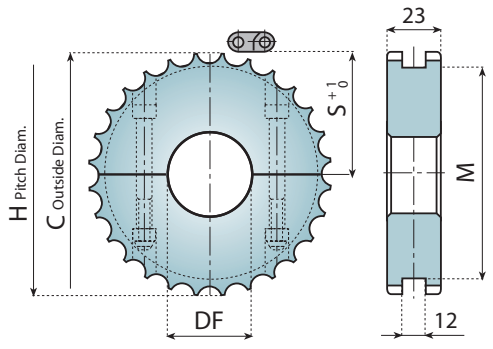

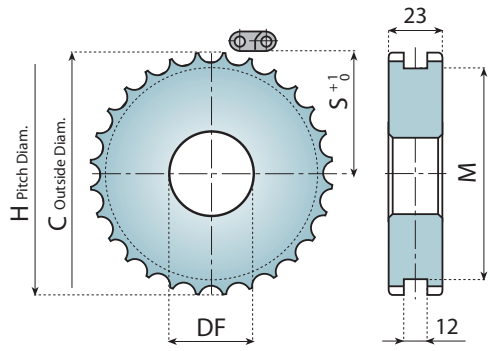

Z	C mm	H mm	M mm	S mm
14	56.90	57.06	46.00	24.30
16	65.20	65.10	55.00	28.20
20	81.20	81.19	71.00	36.30
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50
38	155.80	153.80	143.10	72.60
40	163.85	161.85	150.00	76.60

SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
125600GV	**125600RV**	**125601RV**	**125602RV**	**125603RV**
125612GV	**125612RV**	**125613RV**	**125614RV**	**125615RV**
125604GV	**125604RV**	**125605RV**	**125606RV**	**125607RV**
125608GV	**125608RV**	**125609RV**	**125610RV**	**125611RV**

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125528GV	**125528RIV**	**125529RIV**	-	-
125500GV	**125500RIV**	**125501RIV**	-	-
125502GV	**125502RIV**	**125503RIV**	**125504RIV**	**125505RIV**
125506GV	**125506RIV**	**125507RIV**	**125508RIV**	**125509RIV**
125510GV	**125510RIV**	**125511RIV**	**125512RIV**	**125513RIV**
125516GV	**125612RIV**	**125613RIV**	**125614RIV**	**125615RIV**
125520GV	**125604RIV**	**125605RIV**	**125606RIV**	**125607RIV**
125524GV	**125608RIV**	**125609RIV**	**125610RIV**	**125611RIV**

Material: polyamide.
***Plain Bore**


Note:
- Sprockets with single keyway can be used for belt widths up to 680 mm and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores or round bore with double keyway have to be used.


Pages 88⇨96 98⇨111+179

Pages 340

Part numbers for drive sprockets are manufactured for a tight fit on the shaft. To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **123000VP.**





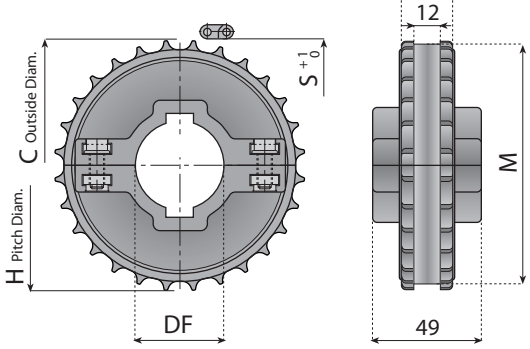

Z	C mm	H mm	M mm	S mm
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50

SPLIT SPROCKETS SINGLE KEYWAY - Fixed


Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123190V	123191V	123192V	-
123000V	123001V	123002V	123003V
123200V	-	123201V	-


SPLIT SPROCKETS DOUBLE KEYWAY - Floating

Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123193V	123194V	123195V	-
123004V	123005V	123006V	123007V
123202V	-	123203V	-

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass.





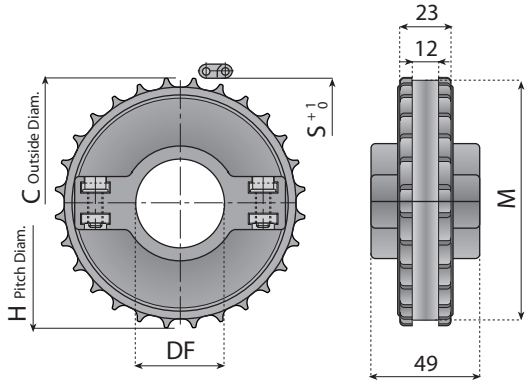

Z	C mm	H mm	M mm	S mm
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50

SPLIT SPROCKETS SQUARE BORE - Floating

30 x 30	40 x 40	-	-
Part number			
123196V	-	-	-
123008V	123009V	-	-
-	-	-	-

SPLIT IDLER WHEELS - Floating

Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123197V	123198V	123199V	-
123010V	123011V	123012V	123013V
123204V	-	123205V	-

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass.


 © System Plast S.r.l. , 2012 - All Rights Reserved


Note:
- Sprockets with single keyway can be used for belt widths up to 700 mm and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores or sprockets with "plus" bores have to be used.

Part numbers for drive sprockets are manufactured for a tight fit on the shaft. To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125028VP**.

Pages 97
Pages 340



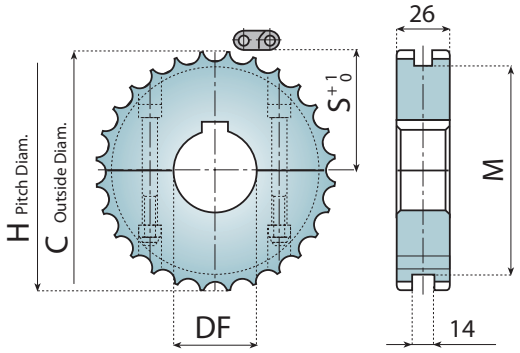

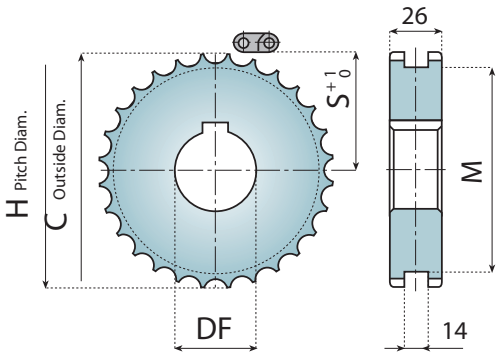

Z	C mm	H mm	M mm	S mm
14	56.90	57.06	46.00	24.30
16	65.20	65.10	55.00	28.20
20	81.20	81.19	71.00	36.30
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50
38	155.80	153.80	143.10	72.60
40	163.85	161.85	150.00	76.60

SPLIT SPROCKETS
SINGLE KEYWAY - Fixed

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
125028GV	125028V	125029V	125030V	125031V
125032GV	125032V	125033V	125034V	125035V
125036GV	125036V	125037V	125038V	125039V
125040GV	125040V	125041V	125042V	125043V


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**


ONE PIECE SPROCKETS
SINGLE KEYWAY - Tight

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125044GV	125044V	125045V	-	-
125046GV	125046V	125047V	-	-
125048GV	125048V	125049V	125050V	125051V
125052GV	125052V	125053V	125054V	125055V
125056GV	125056V	125057V	125058V	125059V
125060GV	125060V	125061V	125062V	125063V
125064GV	125064V	125065V	125066V	125067V
125068GV	125068V	125069V	125070V	125071V

Material: polyamide.



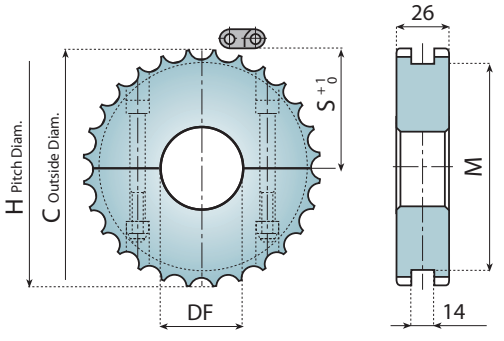

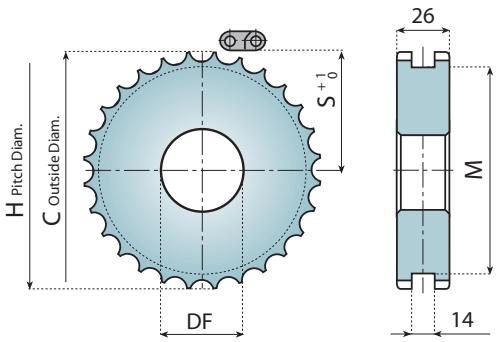

Z	C mm	H mm	M mm	S mm
14	56.90	57.06	46.00	24.30
16	65.20	65.10	55.00	28.20
20	81.20	81.19	71.00	36.30
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50
38	155.80	153.80	143.10	72.60
40	163.85	161.85	150.00	76.60

SPLIT
IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
125028GV	125028RV	125029RV	125030RV	125031RV
125032GV	125032RV	125033RV	125034RV	125035RV
125036GV	125036RV	125037RV	125038RV	125039RV
125040GV	125040RV	125041RV	125042RV	125043RV

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**


ONE PIECE
IDLER WHEELS - Floating


Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125044GV	125044RV	125045RV	-	-
125046GV	125046RV	125047RV	-	-
125048GV	125048RV	125049RV	125050RV	125051RV
125052GV	125052RV	125053RV	125054RV	125055RV
125056GV	125056RV	125057RV	125058RV	125059RV
125060GV	125060RV	125061RV	125062RV	125063RV
125064GV	125064RV	125065RV	125066RV	125067RV
125068GV	125068RV	125069RV	125070RV	125071RV


Material: polyamide.

Pages 97

Pages 340



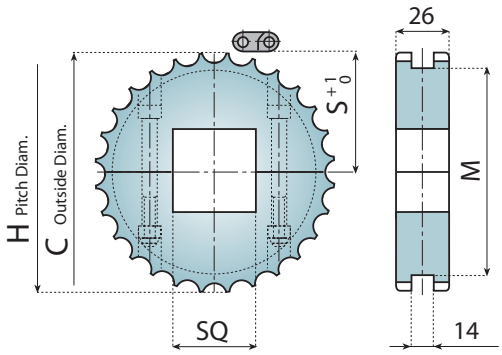

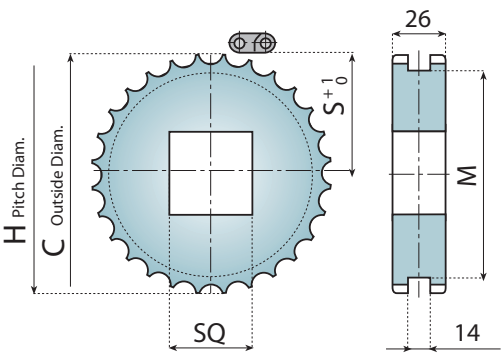

Z	C mm	H mm	M mm	S mm
14	56.90	57.06	46.00	24.30
16	65.20	65.10	55.00	28.20
20	81.20	81.19	71.00	36.30
24	99.30	97.30	87.00	44.30
28	115.40	113.40	103.00	52.40
36	147.70	145.70	136.02	68.50
38	155.80	153.80	143.10	72.60
40	163.85	161.85	150.00	76.60

SPLIT SPROCKETS SQUARE BORE - Floating

⍁30x30	⍁35x35	⍁40x40	⍁60x60
Part number			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
125072V	-	125073V	-
125074V	-	125075V	125076V
125077V	-	125078V	125079V
125080V	-	125081V	125082V

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE SPROCKETS SQUARE BORE - Floating


⍁25x25	⍁30x30	⍁40x40	⍁60x60
Part number			
125083V	-	-	-
125084V	125085V	-	-
125086V	125087V	-	-
125088V	125089V	125090V	-
125091V	125092V	125093V	-
-	125094V	125095V	125096V
-	125097V	125098V	125099V
-	125110V	125111V	125112V

Material: polyamide.

Pages 88⇨109

Pages 340



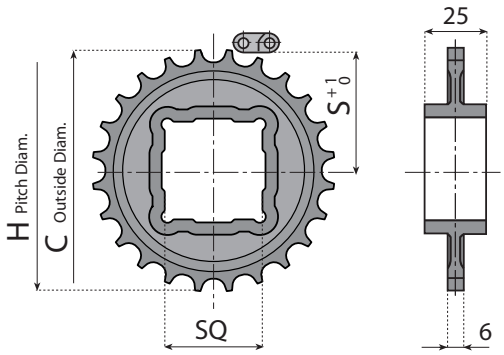

Z	B mm	C mm	H mm	S mm
24	99.30	97.30	87.00	44.30

ONE PIECE SPROCKETS - Floating

⍁30x30	⍁40x40
Part number	
123206	123207

Material: polyamide.

 © System Plast S.r.l. , 2012 - All Rights Reserved




Note:
- Sprockets with single keyway can be used for belt widths up to 27 inch and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores have to be used.

Part numbers for drive sprockets are manufactured for a tight fit on the shaft. To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125300P**.

Pages 114⇨117

Pages 340

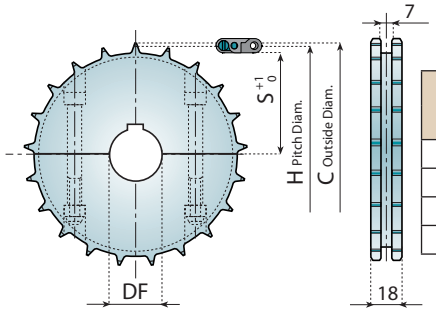

Z	C mm	H mm	S mm
17	103.4	100.7	46.00
21	128.7	126.0	58.65
24	145.6	142.9	67.10
25	151.7	149.0	70.15

METRIC


SPLIT SPROCKETS - Fixed

Ø 25	Ø 30	Ø 35	Ø 40
Part number			
125300	125301	125302	-
125304	125305	125306	125307
125308	125309	125310	125311
125312	125313	125314	125315

IMPERIAL

SPLIT SPROCKETS - Fixed

Ø 1"	Ø 1 ¼"	Ø 1 ½"
Part number		
125300S	125301S	125302S
125304S	125305S	125306S
125308S	125309S	125310S
125312S	125313S	125314S

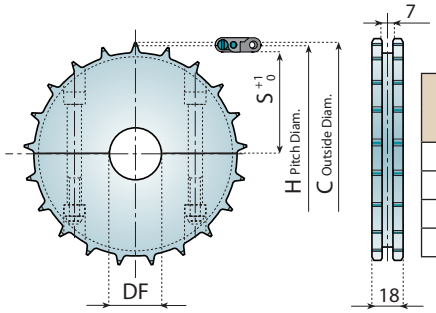

Z	C mm	H mm	S mm
17	103.4	100.7	46.00
21	128.7	126.0	58.65
24	145.6	142.9	67.10
25	151.7	149.0	70.15

METRIC


SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125316GR	125316R	125317R	125318R	-
125320GR	125320R	125321R	125322R	125323R
125324GR	125324R	125325R	125326R	125327R
125328GR	125328R	125329R	125330R	125331R

IMPERIAL

SPLIT IDLER WHEELS Floating

Ø 1"	Ø 1 ¼"	Ø 1 ½"
Part number		
125316RS	125317RS	125318RS
125320RS	125321RS	125322RS
125324RS	125325RS	125326RS
125328RS	125329RS	125330RS

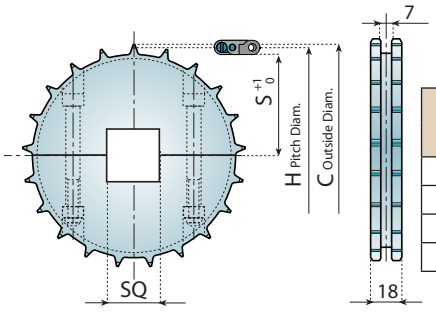

Z	C mm	H mm	S mm
17	103.4	100.7	46.00
21	128.7	126.0	58.65
24	145.6	142.9	67.10
25	151.7	149.0	70.15

METRIC

SPLIT SPROCKETS - Floating

⍁ 25x25	⍁ 30x30	⍁ 40x40
Part number		
125332	125333	-
125335	125336	125337
125338	125339	125340
125341	125342	125343

IMPERIAL

SPLIT SPROCKETS - Floating

⍁1" x 1"	⍁1 ¼" x 1 ¼"	⍁1 ½" x 1 ½"
Part number		
125332S	125333S	125334S
125335S	125336S	125337S
125338S	125339S	125340S
125341S	125342S	125343S


Note:
- Sprockets with single keyway can be used for belt widths up to 680 mm and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores or round bore with double keyway have to be used.


Pages 120⇨143

Pages 340

Part numbers for drive sprockets are manufactured for a tight fit on the shaft.
To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125000FP**.



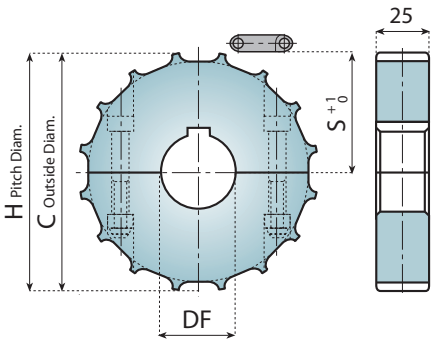

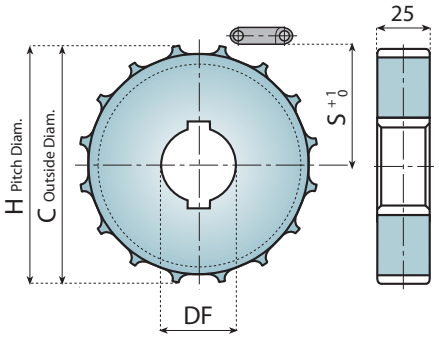

Z	C mm	H mm	S mm
12	98.00	98.14	44.70
14	114.00	114.18	52.70
16	130.00	130.20	60.70
18	146.00	146.27	68.80
20	162.00	162.37	76.80

SPLIT SPROCKETS
SINGLE KEYWAY - Fixed

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125000GF	125000F	125001F	125002F	125003F
125020GF	125020F	125021F	125022F	125023F
125004GF	125004F	125005F	125006F	125007F
125008GF	125008F	125009F	125010F	125011F
125012GF	125012F	125013F	125014F	125015F


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**


ONE PIECE SPROCKETS
DOUBLE KEYWAY - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125100GF	-	125100F	-	125101F
125108GF	-	125108F	-	125109F
125102GF	-	125102F	-	125103F
125104GF	-	125104F	-	125105F
125106GF	-	125106F	-	125107F

Material: polyamide.
***Plain Bore**



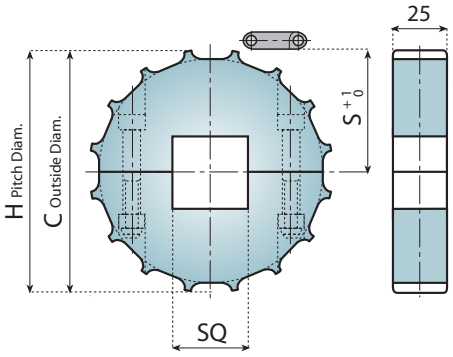

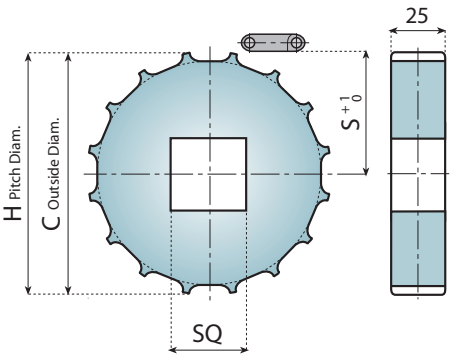

Z	C mm	H mm	S mm
12	98.00	98.14	44.70
14	114.00	114.18	52.70
16	130.00	130.20	60.70
18	146.00	146.27	68.80
20	162.00	162.37	76.80

SPLIT SPROCKETS
SQUARE BORE - Floating

-	30 x 30	40 x 40	60 x 60	-
Part number				
-	125150F	125151F	-	-
-	125161F	125162F	-	-
-	125152F	125153F	125154F	-
-	125155F	125156F	125157F	-
-	125158F	125159F	125160F	-

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE SPROCKETS
SQUARE BORE - Floating

-	30 x 30	40 x 40	60 x 60	-
Part number				
-	125200F	125201F	-	-
-	125211F	125212F	-	-
-	125202F	125203F	125204F	-
-	125205F	125206F	125207F	-
-	125208F	125209F	125210F	-

Material: polyamide.

 © System Plast S.r.l. , 2012 - All Rights Reserved


IDLER WHEELS 2250


Pages 120⇨143

Pages 340

Features: these idlers float freely on the shaft.



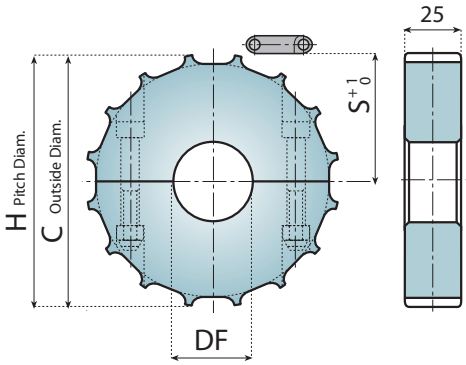

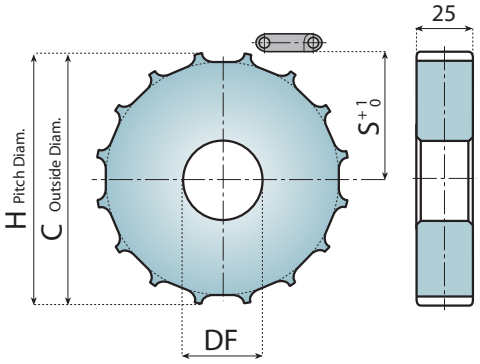

Z	C mm	H mm	S mm
12	98.00	98.14	44.70
14	114.00	114.18	52.70
16	130.00	130.20	60.70
18	146.00	146.27	68.80
20	162.00	162.37	76.80

SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125000GF	125000RF	125001RF	125002RF	125003RF
125020GF	125020RF	125021RF	125022RF	125023RF
125004GF	125004RF	125005RF	125006RF	125007RF
125008GF	125008RF	125009RF	125010RF	125011RF
125012GF	125012RF	125013RF	125014RF	125015RF

Material: polyamide, screws in stainless steel, nuts in zinc plated steel. ***Plain Bore**

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125100GF	125000RIF	125001RIF	125002RIF	125003RIF
125108GF	125020RIF	125021RIF	125022RIF	125023RIF
125102GF	125004RIF	125005RIF	125006RIF	125007RIF
125104GF	125008RIF	125009RIF	125010RIF	125011RIF
125106GF	125012RIF	125013RIF	125014RIF	125015RIF

Material: polyamide. ***Plain Bore**

SPROCKETS and IDLER WHEELS 2250


Note:
- Sprockets with single keyway can be used for belt widths up to 680 mm and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores or round bore with double keyway have to be used.


Pages 120⇨143

Pages 340

Part numbers for drive sprockets are manufactured for a tight fit on the shaft. To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **123015P**.



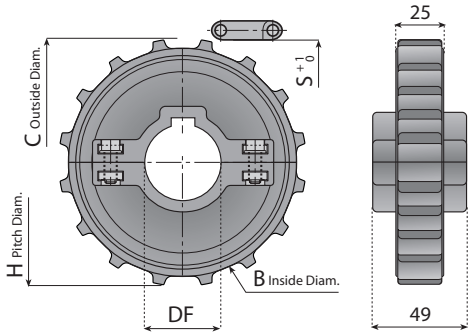

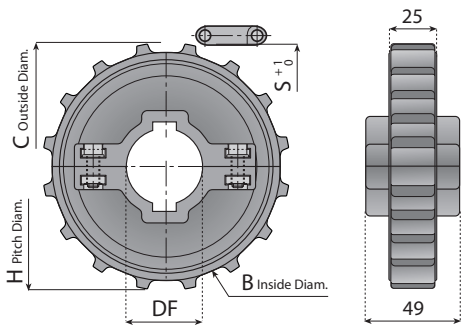

Z	B mm	C mm	H mm	S mm
14	104.18	114.00	114.18	52.70
16	120.00	130.00	130.20	60.70
18	136.20	146.00	146.30	68.80
20	152.20	162.00	162.40	76.80

SPLIT SPROCKETS SINGLE KEYWAY - Fixed

Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123170	123171	123172	-
123015	123016	123017	123018
123029	123030	123031	123032
123043	123044	123045	123046


SPLIT SPROCKETS DOUBLE KEYWAY - Floating


Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123174	123175	123176	-
123019	123020	123021	123022
123033	123034	123035	123036
123047	123048	123049	123050

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass

Pages 120⇨143 Pages 340



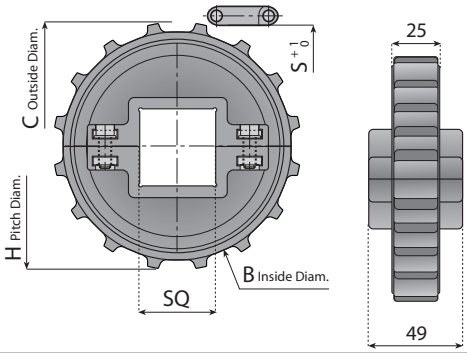

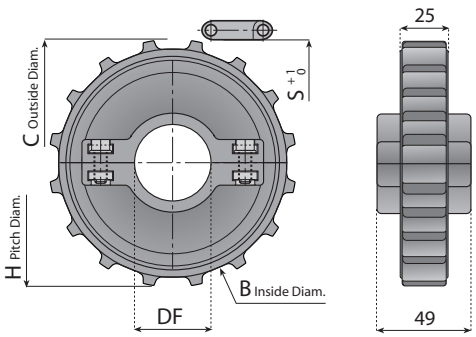

Z	B mm	C mm	H mm	S mm
14	104.18	114.00	114.18	52.70
16	120.00	130.00	130.20	60.70
18	136.20	146.00	146.30	68.80
20	152.20	162.00	162.40	76.80

SPLIT SPROCKETS SQUARE BORE - Floating

25 x 25	30 x 30	40 x 40	-
Part number			
123180	123181	-	-
-	123023	123024	-
-	123037	123038	-
-	123051	123052	-


SPLIT IDLER WHEELS - Floating

Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123182	123183	123184	-
123025	123026	123027	123028
123039	123040	123041	123042
123053	123054	123055	123056

Material: reinforced polyamide screws in stainless steel, nuts in nickel plated brass.

Pages 148 Pages 340



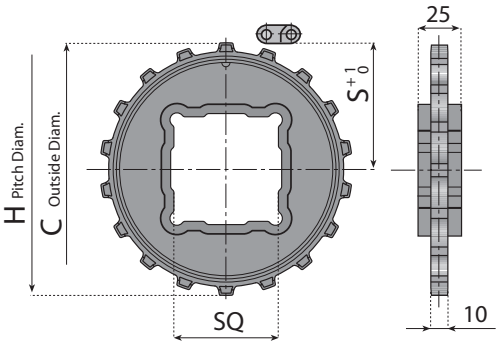


Z	C mm	H mm	S mm
12	97.8	98.1	44.7
15	121.9	122.2	56.7
18	146	146.30	68.80

ONE PIECE SPROCKETS Floating

⍁ 40x40	⍁ 60x60
Part number	Part number
123225	-
123226	123227
123212	123208

Material: polyamide.

Pages 146-147 Pages 340

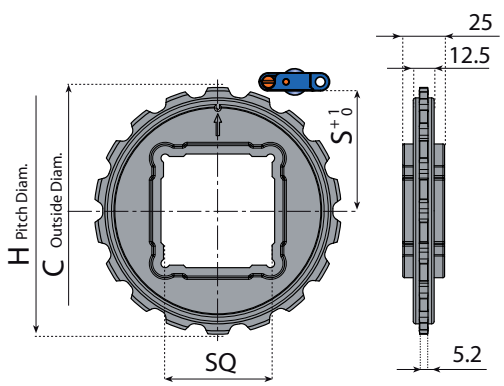

Z	C mm	H mm	S mm
18	147.65	146.3	68

ONE PIECE SPROCKETS Floating

⍁ 40x40	⍁ 65x65
Part number	Part number
123213	123214

Material: polyamide.


 © System Plast S.r.l. , 2012 - All Rights Reserved


Note:
- Sprockets with single keyway can be used for belt widths up to 680 mm and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores or round bore with double keyway have to be used.


Pages 150⇨171

Pages 340

Part numbers for drive sprockets are manufactured for a tight fit on the shaft.
To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **125270FP**.



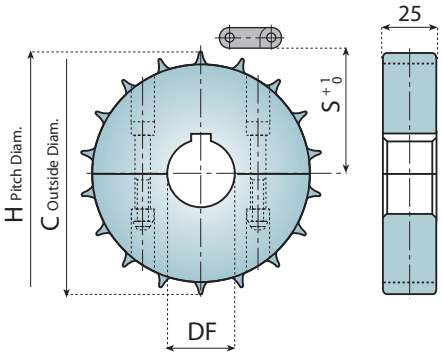

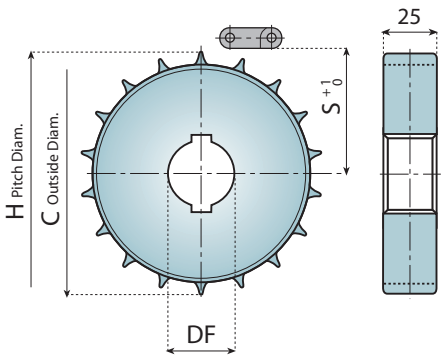

Z	C mm	H mm	S mm
12	97.90	98.14	42.70
13	105.54	106.14	46.70
14	114.00	114.18	50.70
15	122.60	122.20	54.60
16	130.00	130.20	58.70
18	146.00	146.28	66.70
20	162.00	162.37	74.80
21	171.00	170.42	78.90

SPLIT SPROCKETS
SINGLE KEYWAY - Fixed


Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125270GF	125270F	125271F	125272F	125273F
125266GF	125266F	125267F	125268F	125269F
125274GF	125274F	125275F	125276F	125277F
125278GF	125278F	125279F	125280F	125281F
125250GF	125250F	125251F	125252F	125253F
125254GF	125254F	125255F	125256F	125257F
125258GF	125258F	125259F	125260F	125261F
125262GF	125262F	125263F	125264F	125265F


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**


ONE PIECE SPROCKETS
DOUBLE KEYWAY - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125360GF	-	125360F	-	125361F
125358GF	-	125358F	-	125359F
125362GF	-	125362F	-	125363F
-	-	-	-	-
125350GF	-	125350F	-	125351F
125352GF	-	125352F	-	125353F
125354GF	-	125354F	-	125355F
125356GF	-	125356F	-	125357F

Material: polyamide.
***Plain Bore**



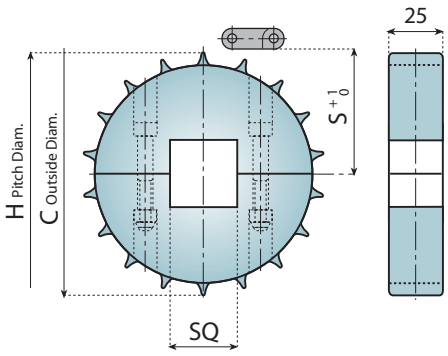

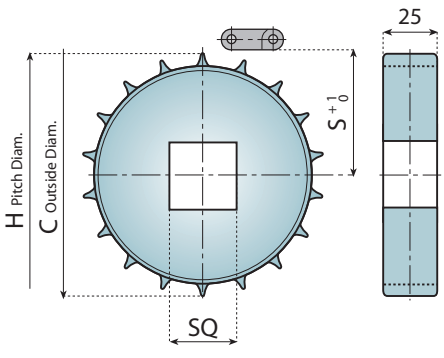

Z	C mm	H mm	S mm
12	97.90	98.14	42.70
13	105.54	106.14	46.70
14	114.00	114.18	50.70
16	130.00	130.20	58.70
18	146.00	146.27	66.70
20	162.00	162.37	74.80
21	171.00	170.42	78.90

SPLIT SPROCKETS
SQUARE BORE - Floating

25 x 25	30 x 30	40 x 40	60 x 60	-
Part number				
125414F	125415F	-	-	-
-	125412F	125413F	-	-
-	125416F	125417F	-	-
-	125400F	125401F	125402F	-
-	125403F	125404F	125405F	-
-	125406F	125407F	125408F	-
-	125409F	125410F	125411F	-

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE SPROCKETS
SQUARE BORE - Floating

-	30 x 30	40 x 40	60 x 60	-
Part number				
-	125464F	125465F	-	-
-	125462F	125463F	-	-
-	125466F	125467F	-	-
-	125450F	125451F	125452F	-
-	125453F	125454F	125455F	-
-	125456F	125457F	125458F	-
-	125459F	125460F	125461F	-


Material: polyamide.


Features: these idlers float freely on the shaft.

Pages 150⇨171

Pages 340



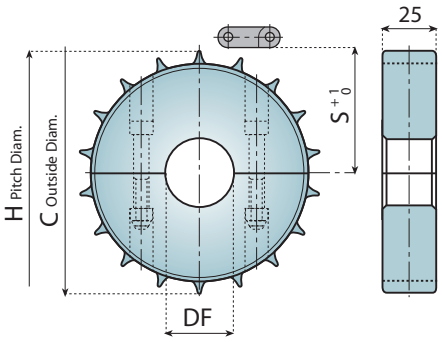

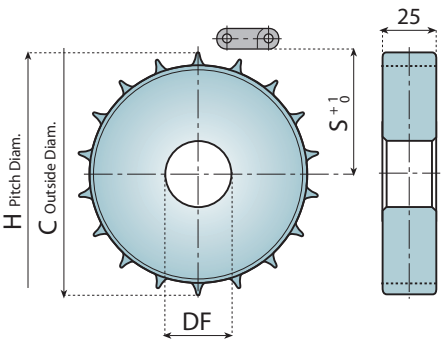

Z	C mm	H mm	S mm
12	97.90	98.14	42.70
13	105.54	106.14	46.70
14	114.00	114.18	50.70
15	122.60	122.20	55.70
16	130.00	130.20	58.70
18	146.00	146.28	66.70
20	162.00	162.37	74.80
21	171.00	170.42	78.90

SPLIT IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125270GF	125270RF	125271RF	125272RF	125273RF
125266GF	125266RF	125267RF	125268RF	125269RF
125274GF	125274RF	125275RF	125276RF	125277RF
125278GF	125278RF	125279RF	125280RF	125281RF
125250GF	125250RF	125251RF	125252RF	125253RF
125254GF	125254RF	125255RF	125256RF	125257RF
125258GF	125258RF	125259RF	125260RF	125261RF
125262GF	125262RF	125263RF	125264RF	125265RF

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**

ONE PIECE IDLER WHEELS - Floating

Ø 18*	Ø 25	Ø 30	Ø 35	Ø 40
Part number				
125360GF	125270RIF	125271RIF	125272RIF	125273RIF
125358GF	125266RIF	125267RIF	125268RIF	125269RIF
125362GF	125274RIF	125275RIF	125276RIF	125277RIF
-	-	-	-	-
125350GF	125250RIF	125251RIF	125252RIF	125253RIF
125352GF	125254RIF	125255RIF	125256RIF	125257RIF
125354GF	125258RIF	125259RIF	125260RIF	125261RIF
125356GF	125262RIF	125263RIF	125264RIF	125265RIF

Material: polyamide.
***Plain Bore**

 © System Plast S.r.l. , 2012 - All Rights Reserved


Note:
- Sprockets with single keyway can be used for belt widths up to 680 mm and temperature differences of maximum 30°C.
- For wider belts or bigger temperature differences, sprockets with square bores or round bore with double keyway have to be used.


Pages 150⇨171

Pages 340

Part numbers for drive sprockets are manufactured for a tight fit on the shaft.
To order single keyway sprockets capable of floating freely on the shaft, just add the letter "P" (=plus) to the existing part number. For example, code **123150FP**.



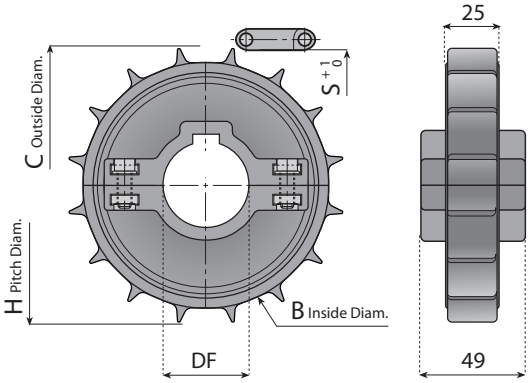

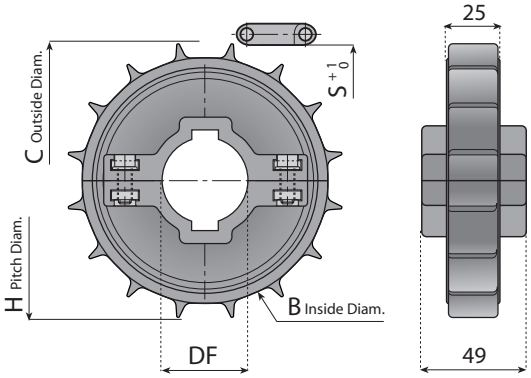

Z	B mm	C mm	H mm	S mm
14	99.10	113.68	114.18	50.70
16	115.10	130.00	130.20	58.70
18	131.20	144.00	146.30	66.70
20	147.30	162.00	162.40	74.80

SPLIT SPROCKETS SINGLE KEYWAY - Fixed


Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123150	123151	123152	-
123057	123058	123059	123060
123071	123072	123073	123074
123085	123086	123087	123088


SPLIT SPROCKETS DOUBLE KEYWAY - Floating

Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123154	123155	123156	-
123061	123062	123063	123064
123075	123076	123077	123078
123089	123090	123091	123092

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass.



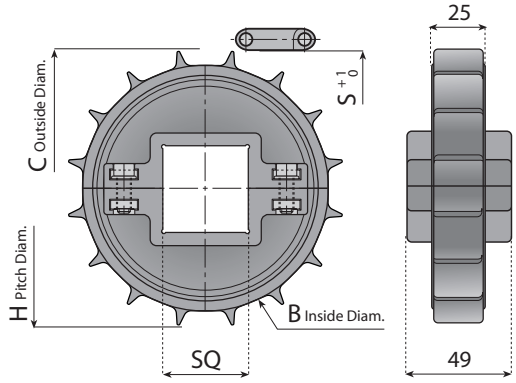

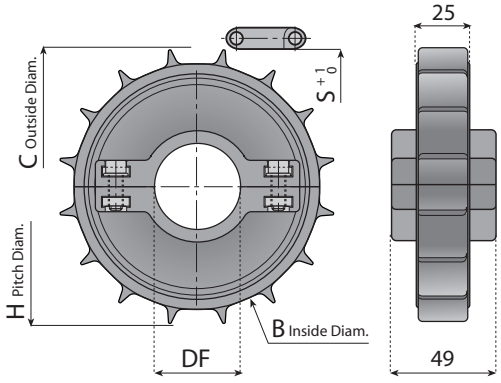

Z	B mm	C mm	H mm	S mm
14	99.10	113.68	114.18	50.70
16	115.10	130.00	130.20	58.70
18	131.20	144.00	146.30	66.70
20	147.30	162.00	162.40	74.80

SPLIT SPROCKETS SQUARE BORE - Floating

-	30 x 30	40 x 40	-
Part number			
-	123161	-	-
-	123065	123066	-
-	123079	123080	-
-	123093	123094	-

SPLIT IDLER WHEELS - Floating


Ø 30	Ø 35	Ø 40	Ø 45
Part number			
123162	123163	123164	-
123067	123068	123069	123070
123081	123082	123083	123084
123095	123096	123097	123098


Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass.

Pages 180⇨182

Pages 340



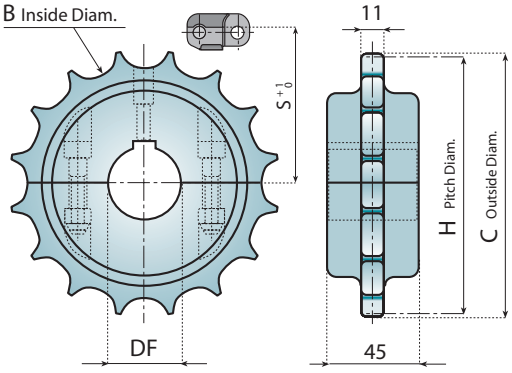

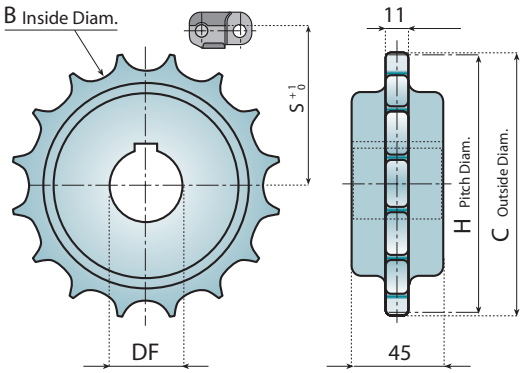

Z	B mm	C mm	H mm	S mm
16	113.00	130.90	128.90	67.80
18	128.80	146.80	144.80	75.70
19	138.30	156.30	154.30	80.50

SPLIT SPROCKETS
SINGLE KEYWAY - Fixed

Ø 18*	Ø25	Ø 30	Ø 35	Ø 40	Ø 45
Part number					
121017	121018	121019	121020	121021	121022
121023	121024	121025	121026	121027	121028
121029	121030	121031	121032	121033	121034


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**


ONE PIECE SPROCKETS
SINGLE KEYWAY - Tight

Ø25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
121035	121036	121037	121038	121039
121040	121041	121042	121043	121044
121045	121046	121047	121048	121049

Material: polyamide.
***Plain Bore**



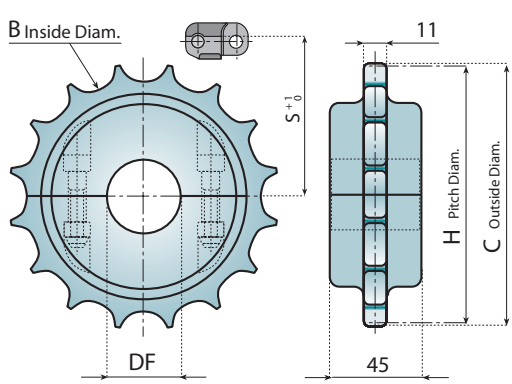

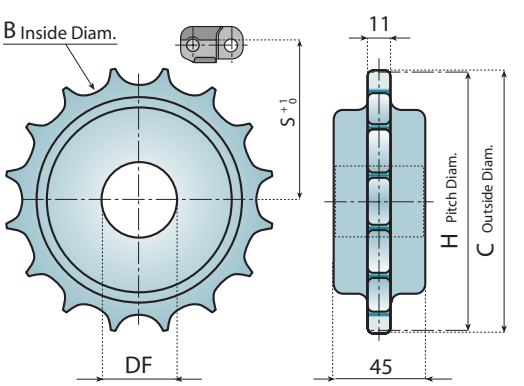

Z	B mm	C mm	H mm	S mm
16	113.00	130.90	128.90	67.80
18	128.80	146.80	144.80	75.70
19	138.30	156.30	154.30	80.50

SPLIT IDLER WHEELS - Floating

Ø 18*	Ø25	Ø 30	Ø 35	Ø 40	Ø 45
Part number					
121017	121065	121066	121067	121068	121069
121023	121070	121071	121072	121073	121074
121029	121075	121076	121077	121078	121079

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.
***Plain Bore**

ONE PIECE IDLER WHEELS - Floating

Ø25	Ø 30	Ø 35	Ø 40	Ø 45
Part number				
121050	121051	121052	121053	121054
121055	121056	121057	121058	121059
121060	121061	121062	121063	121064

Material: polyamide.


 © System Plast S.r.l. , 2012 - All Rights Reserved


Features:
- Excellent wear and chemical resistance.
- Reinforced design.
- Completely closed structure, easier to clean and to disinfect
- The design of the sprocket ensures smooth running and long service life.
- Increased keyway strength.

Pages 180⇨182

Pages 340



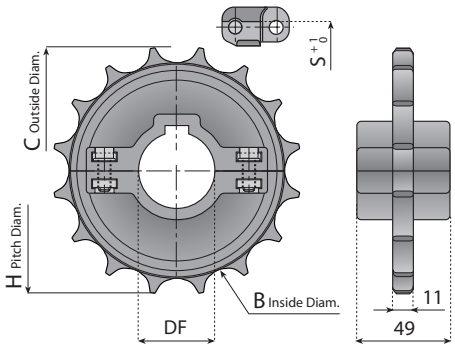


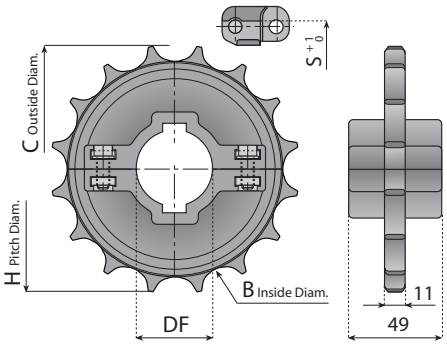


Z	B mm	C mm	H mm	S mm	SPLIT SPROCKETS SINGLE KEYWAY - Fixed				SPLIT SPROCKETS DOUBLE KEYWAY - Floating			
					Ø 30	Ø 35	Ø 40	Ø 45	Ø 30	Ø 35	Ø 40	Ø 45
					Part number				Part number			
16	113.00	130.90	128.90	67.80	123099	123100	123101	123102	123103	123104	123105	123106
18	128.80	146.80	144.80	75.70	123113	123114	123115	123116	123117	123118	123119	123120
19	138.30	156.30	154.30	80.50	123127	123128	123129	123130	123131	123132	123133	123134

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass.



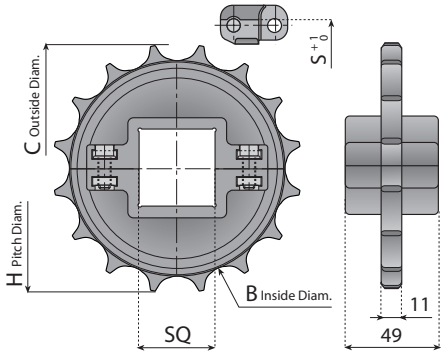

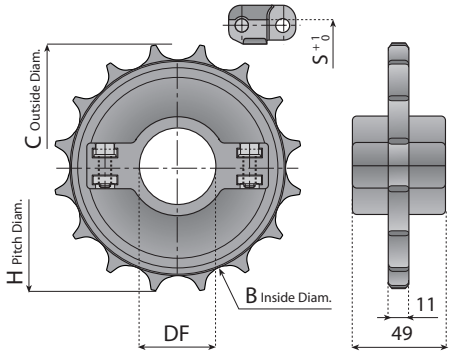

Z	B mm	C mm	H mm	S mm	SPLIT SPROCKETS SQUARE BORE - Floating				SPLIT IDLER WHEELS - Floating			
					-	30 x 30	40 x 40	-	Ø 30	Ø 35	Ø 40	Ø 45
					Part number				Part number			
16	113.00	130.90	128.90	67.80	-	123107	123108	-	123109	123110	123111	123112
18	128.80	146.80	144.80	75.70	-	123121	123122	-	123123	123124	123125	123126
19	138.30	156.30	154.30	80.50	-	123135	123136	-	123137	123138	123139	123140

Material: reinforced polyamide, screws in stainless steel, nuts in nickel plated brass.


2256 - 2256VG SPROCKETS and IDLER WHEELS


All sprockets can move freely on the shaft. We recommend fixing 1 sprocket by means of side mounting collars. You can find these in our catalogue 'Conveyor Components'.

Pages 186⇨189

Pages 340





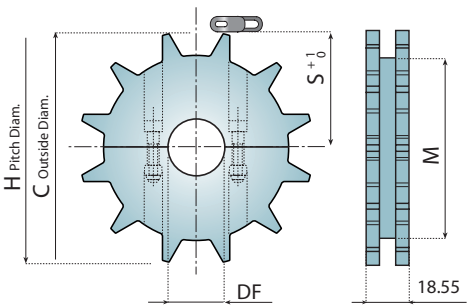

Z	H mm	C mm	M mm	S mm
10	82.2	83.3	65.3	33.0
12	98.1	100	82	41.0
15	122.2	124.3	106.3	53.0
18	146.3	147.8	129	65.0

SPLIT SPROCKETS SINGLE KEYWAY - Fixed

Ø 25	Ø 30	Ø 40
Part number		
125915P	125916P	-
125918P	125919P	125920P
125921P	125922P	125923P
125924P	125925P	125926P


Material: polyamide, screws in stainless steel, nuts in zinc plated steel.


SPLIT IDLER WHEELS - Floating

Ø 25	Ø 30	Ø 40
Part number		
125927P	125928P	-
125930P	125931P	125932P
125933P	125934P	125935P
125936P	125937P	125938P

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

RANGE EXTENSION



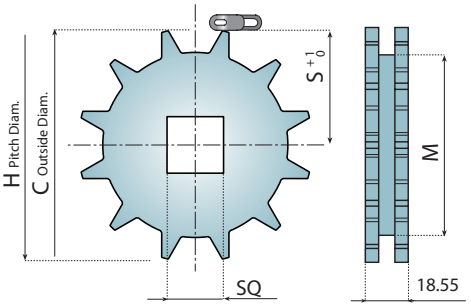

Z	H mm	C mm	M mm	S mm
10	82.2	83.3	65.3	33.0
12	98.1	100	82	41.0
15	122.2	124.3	106.3	53.0
18	146.3	147.8	129	65.0

SPLIT SPROCKETS SQUARE BORE Floating

☐ 25x25	☐ 30x30	☐ 40x40
Part number		
125939	125940	-
125943	125944	-
125947	125948	125949
125951	125952	125953

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE SPROCKETS SQUARE BORE Floating


☐ 25x25	☐ 30x30	☐ 40x40	☐ 60x60
Part number			
125972	125973	125974	-
125969	125970	125971	-
125975	125976	125977	125950
125978	125979	125980	125954


Material: polyamide

SPROCKETS and IDLER WHEELS 2351 - 2451 - 2551 - 2651

Pages 190⇨193

Pages 340



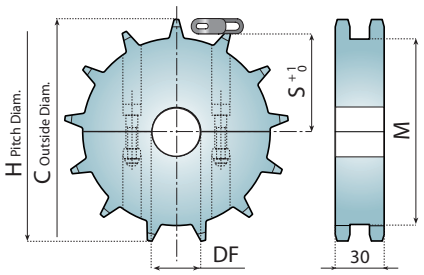

Z	H mm	C mm	M mm	S mm	Diameter of the supporting wheel mm
10	102.8	107.7	84	45	85.0
13	132.7	138.8	114	60	116.1
15	152.7	159.4	135	70	136.7
16	162.8	169.6	145	75	146.9

SPLIT SPROCKETS - Fixed

Ø 30	Ø 40
Part number	
125910	125911
125898	125901
125899	125902
125900	125903

Material: polyamide, screws in stainless steel, nuts in zinc plated steel, DIN 6885 key seat.

SPLIT IDLER WHEELS - Floating

Ø 30	Ø 40
Part number	
125912	125913
125904	125907
125905	125908
125906	125909

Material: polyamide, screws in stainless steel, nuts in zinc plated steel.

 © System Plast S.r.l. , 2012 - All Rights Reserved





Z	H	C	S
16	260.4	263.7	122.3


ONE PIECE SPROCKETS - Floating

⍁ 65x65	⍁ 90x90	⍁ 120x120
123209	**123210**	**123211**

Material: acetal.

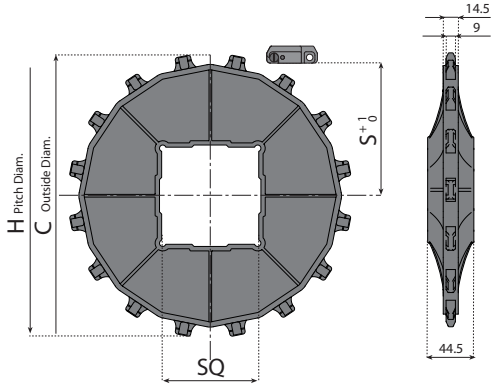

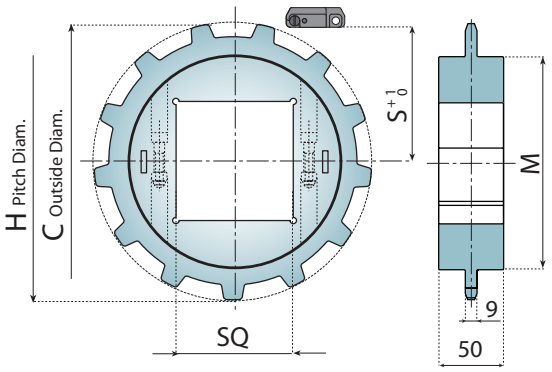

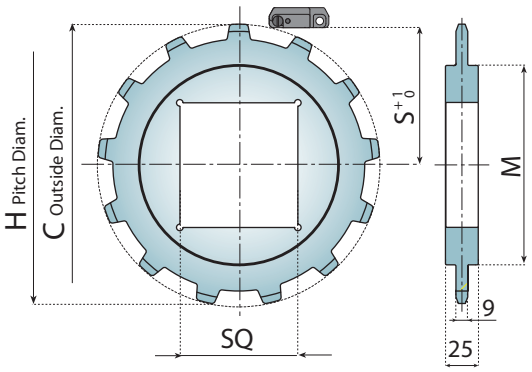

Z	H mm	C mm	M mm	S mm
10	164.4	165.8	140	74.2
10	164.4	165.8	114.8	74.2
12	196.3	198.6	147.7	90.1
13	212.3	214.9	164	98.1
14	228.3	231.2	168.2	106.1
15	244.3	247.6	184.5	114.1
16	260.4	263.7	184.5	122.3

SPLIT SPROCKETS SQUARE BORE Floating


⍁ 40x40	⍁ 60x60	⍁ 65x65	⍁ 90x90
Part number			
-	**126025**	**126026**	**126027**
-	-	-	-
126024	**126028**	**126029**	**126030**
-	**126031**	**126032**	**126033**
-	**126034**	**126035**	**126036**
-	**126037**	**126038**	**126039**
-	-	-	**126040**


Material: acetal, screws in stainless steel, nuts in zinc plated steel.

ONE PIECE SPROCKETS SQUARE BORE Floating

⍁ 40x40	⍁ 60x60	⍁ 65x65	⍁ 90x90
Part number			
-	-	-	-
126010	**126011**	**126012**	-
-	-	-	-
-	**126013**	**126014**	**126015**
-	-	-	-
-	-	-	-
-	-	-	-

Material: acetal.

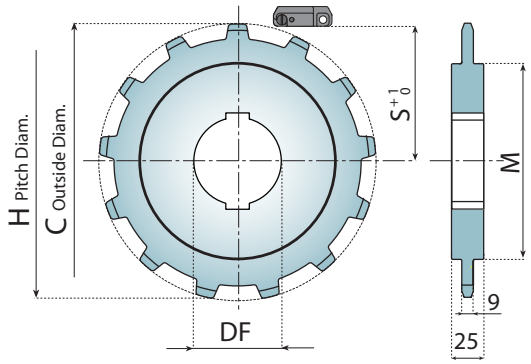

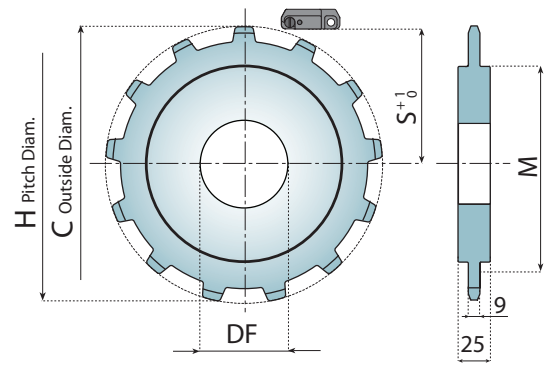

Z	H mm	C mm	M mm	S mm
10	164.4	165.8	102.8	74.2
13	212.3	214.9	152	98.1
16	260.4	263.7	184.5	122.3

ONE PIECE SPROCKETS DOUBLE KEYWAY - Floating

Ø 40	Ø 50	Ø 65	Ø 90
Part number			
126016	**126017**	**126018**	-
-	-	**126019**	**126020**
-	-	**126021**	**126022**

Material: acetal.

ONE PIECE IDLER WHEELS - Floating


Ø 40	Ø 50	Ø 65	Ø 90
Part number			
126023	-	-	-
-	-	-	-
-	-	-	-


Material: acetal.

The sprockets for 2508 and 2630 series have a polygonal shape to provide optimum belt support.
This is important for belts that have a large pitch and work with very high loads.

Pages 176
Pages 340



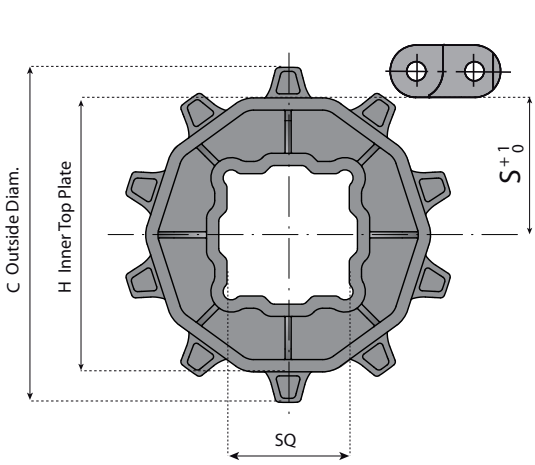



Z	C mm	H mm	S mm
10	160.4	134.4	68.5
12	193.6	167.6	83.8
16	259.4	233.4	116.7

ONE PIECE SPROCKETS
SQUARE BORE - Floating


60x60	90x90
Part number	
123215	-
123216	123217
123218	123219


Material: reinforced polyamide.

On request we can also provide machined sprockets with a different number of teeth or a different bore size. Please contact our Application Engineers to discuss the possibilities.

Pages 177
Pages 340



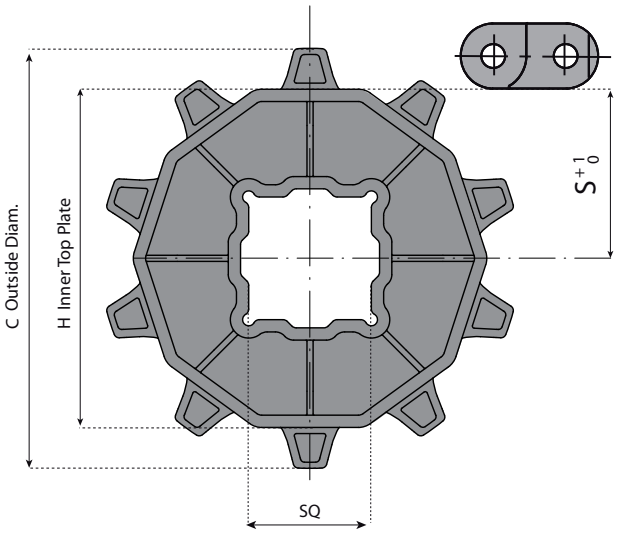



Z	C mm	H mm	S mm
10	203.4	165.5	84.6
13	265.3	"227.7"	113.8
15	305.4	"268.8"	134.4

ONE PIECE SPROCKETS
SQUARE BORE - Floating

60x60	90x90
Part number	
123220	-
123221	123222
123223	123224


Material: reinforced polyamide.

On request we can also provide machined sprockets with a different number of teeth or a different bore size. Please contact our Application Engineers to discuss the possibilities.

 © System Plast S.r.l. , 2012 - All Rights Reserved


TURNING DISK
STEEL CHAINS:


Series	*Pages*
878TAB	**330 ➔333**
MULTIFLEX CHAINS	**334 ➔337**

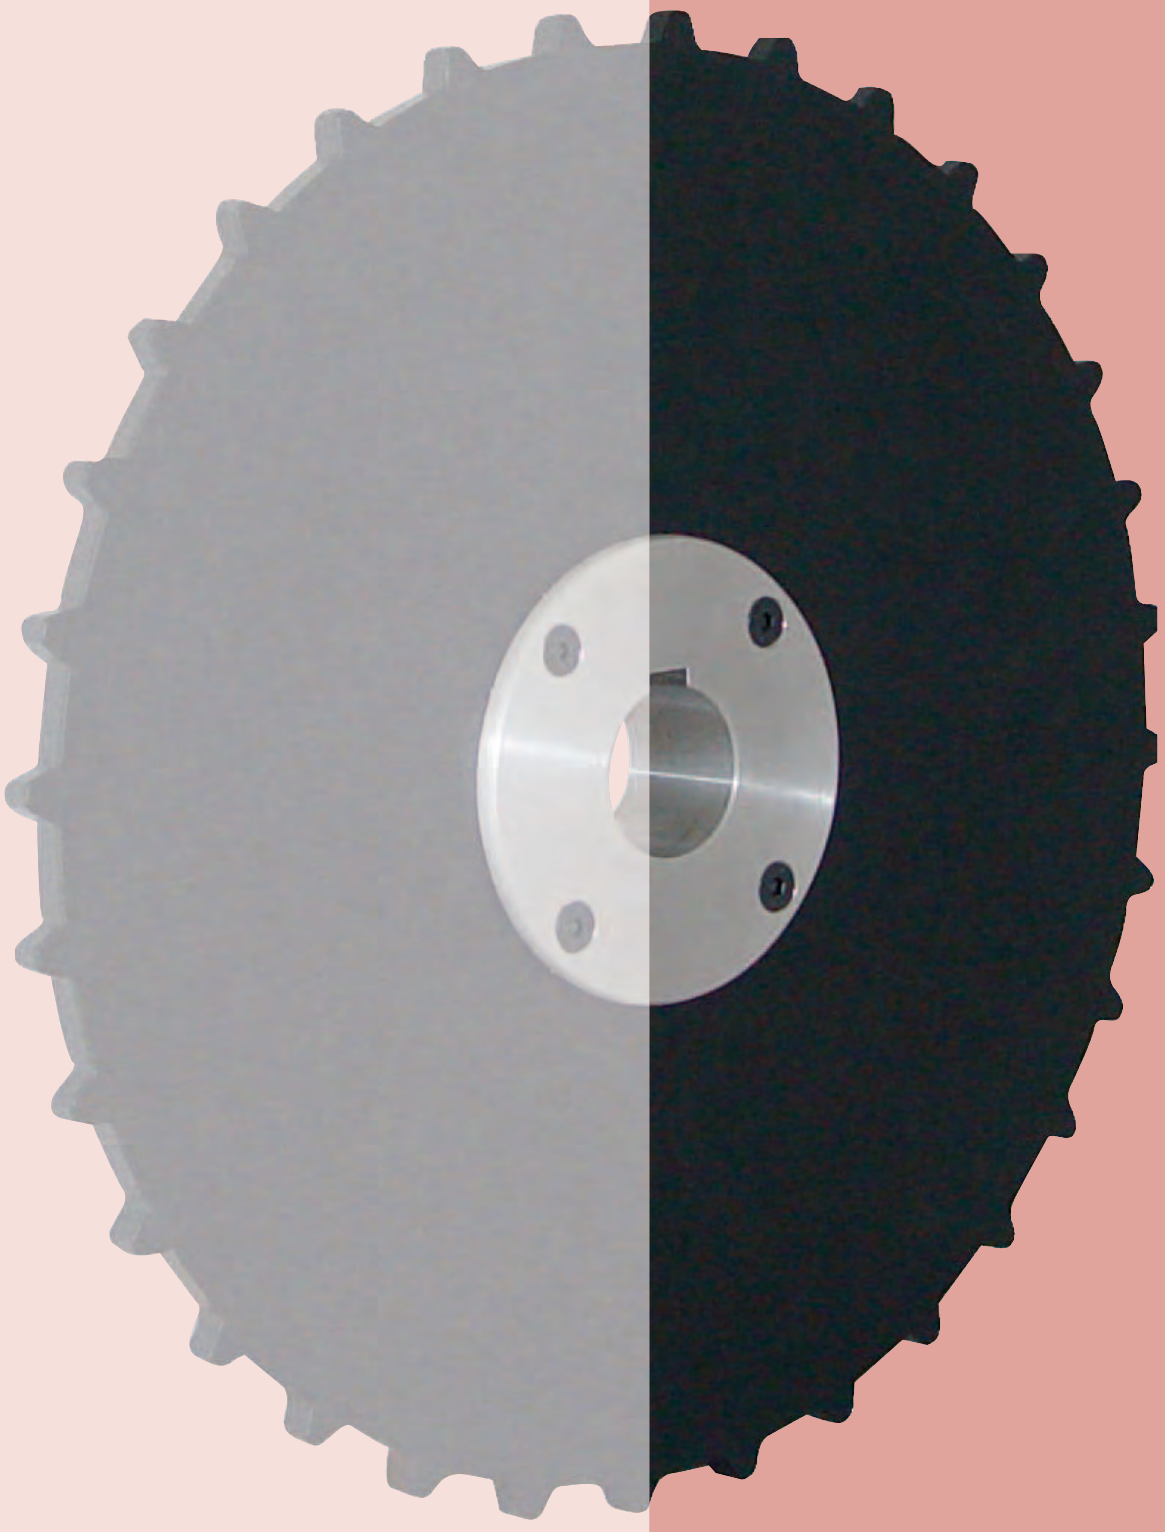

TANGENTIAL SPROCKETS
Plain bore Ø 18
Material: polyamide.
Colour: white.

CODE	Z	B mm	C mm	M mm	R mm
12817	32	336	352	295	190
12789	34	358.5	373.5	320	200

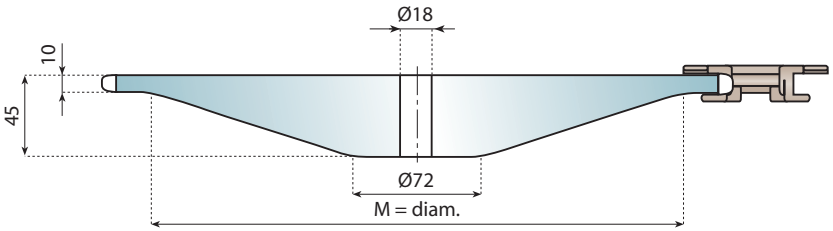

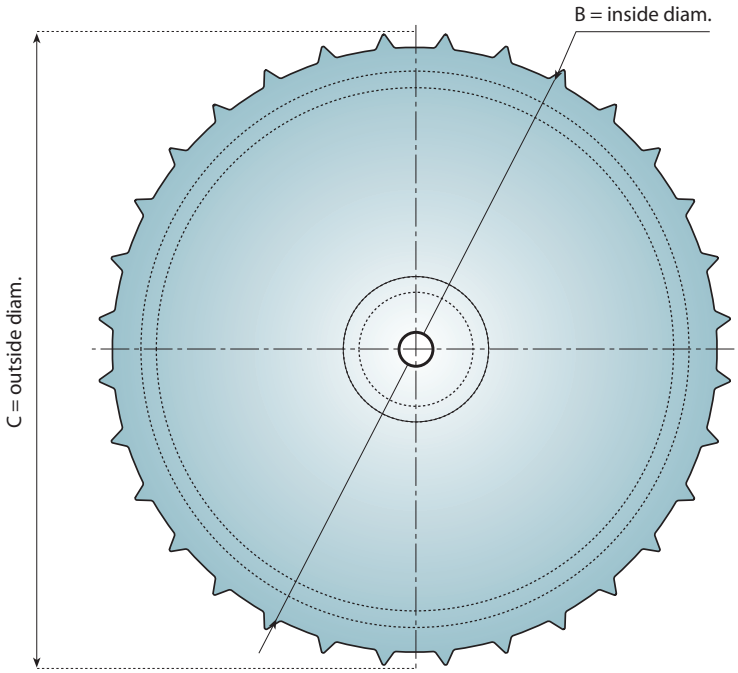


Pages
40 - 49
56 - 62 - 63


MACHINED VERSION

TURNING DISK
Plain bore Ø 18
Material: polyamide.
Colour: white.

CODE	Z	B mm	R mm
12802	32	337	190
12785	34	357	200

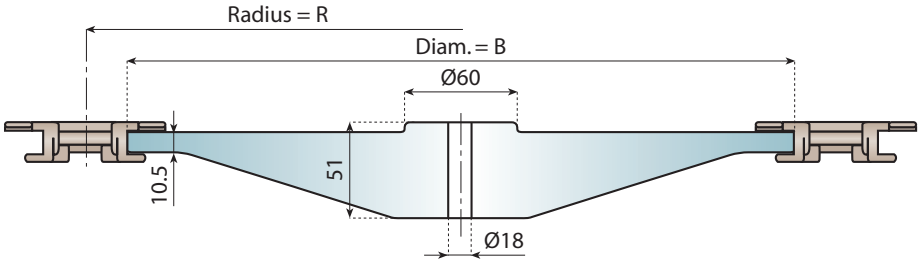


The use of tangential sprockets and turning disks enables the design of compact conveying systems with a great number of curves.
It becomes easy to realise circuits either on the same level or staggered, inclined or downclined.

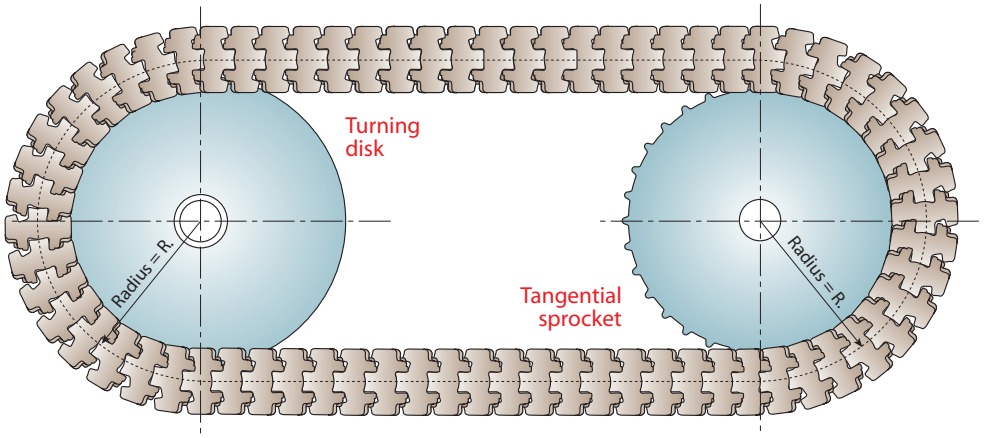


 © System Plast S.r.l. , 2012 - All Rights Reserved

TANGENTIAL SPROCKETS
Material: polyamide.
Colour: black.

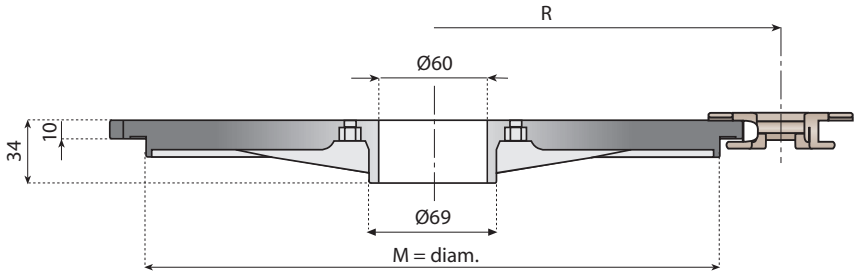

CODE	Z	B mm	C mm	M mm	R mm
12781L	32	336.0	352.0	311.0	190
12782L	34	358.5	373.5	333.5	200

Pages
40 - 49
56 - 62 - 63

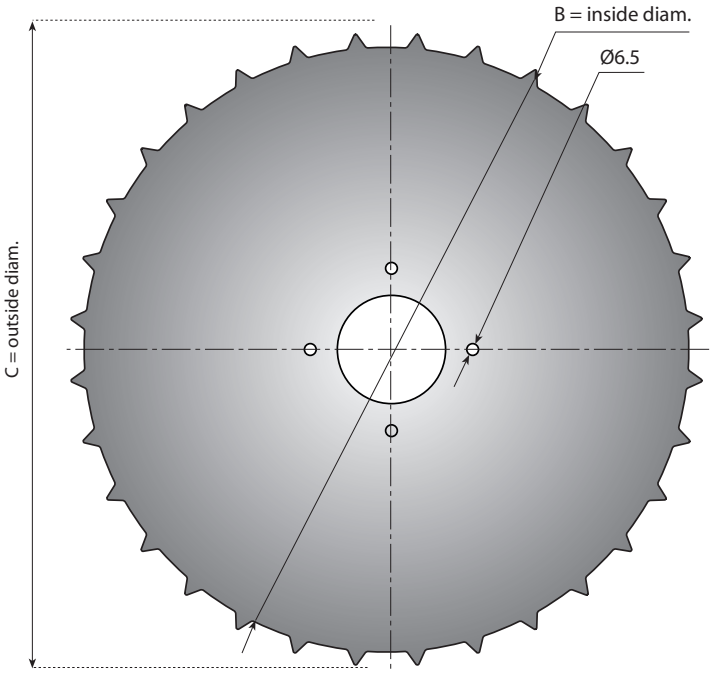


MOLDED VERSION


MACHINED HUB FOR TANGENTIAL SPROCKETS
Material: aluminium.
Packaging:
1 hub for tangential sprockets
4 screws M6 in stainless steel.
4 nuts in stainless steel.

CODE	Ø DF mm
12772G	18*
12772	20
12773	25
12774	30
12775	35
12776	40

***Plain Bore**








Pages 40 - 49 56 - 62 - 63

TURNING DISK CLOSED VERSION CARRY and RETURN

Material: polyamide
Colour: white

CODE	Z equiv.	B mm	C mm
12813	32	337	190
12787	34	357	200

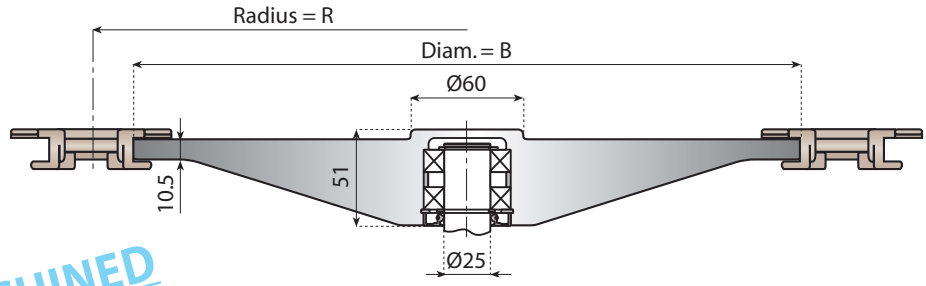


MACHINED VERSION


TURNING DISK OPEN VERSION CARRY and RETURN

Material: polyamide
Colour: white

CODE	Z equiv.	B mm	C mm
12814	32	337	190
12788	34	357	200

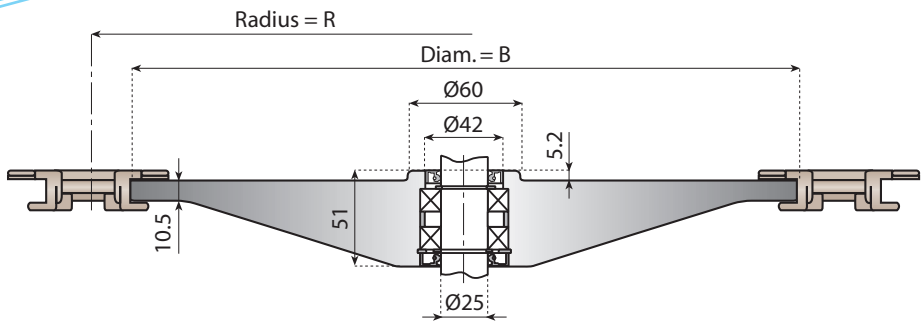



COMPONENTS

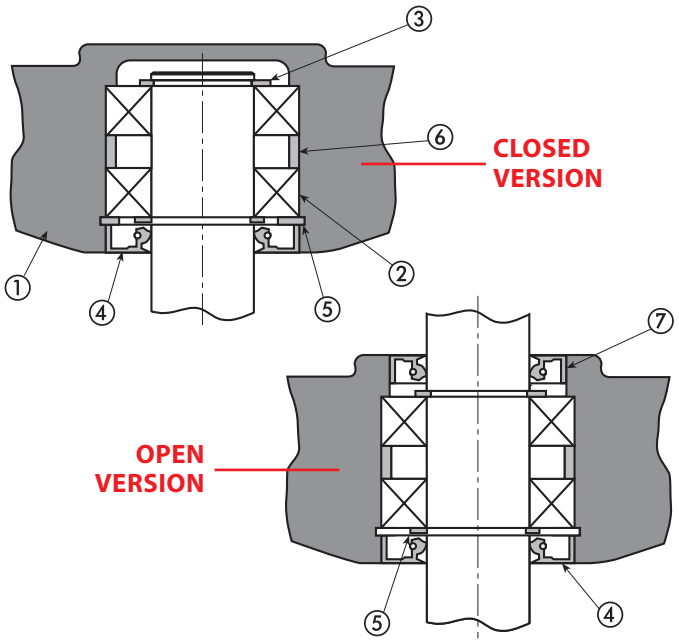

1 - Turning disk.
2 - Single race radial ball bearing with two sliding seals, type 6005-2RS (25x47x12).
3 - External (retaining) ring, Ø 25 DIN 471.
4 - Seal ring with dust cover, 25x47x7 DIN 3760 (NBR rubber).
5 - Internal (retaining) ring, Ø 47 DIN 472.
6 - Bearing spacer.
7 - Seal ring with dust cover, 25x42x7 DIN 3760 (NBR rubber).

SHAFT DIMENSIONS

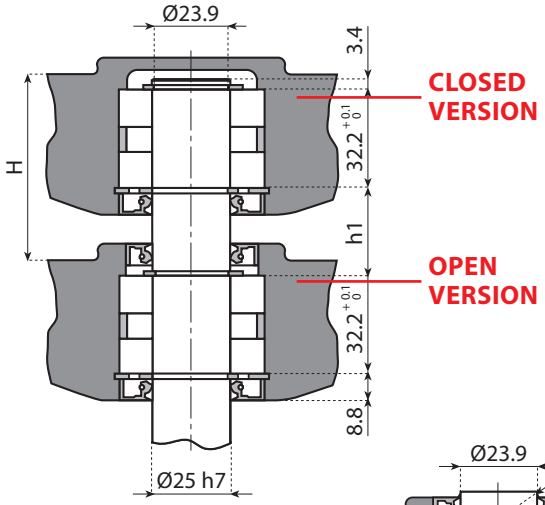

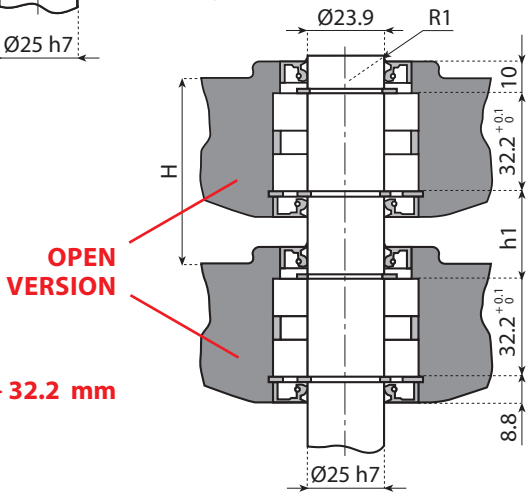

H = h1 + 32.2 mm

All components are supplied separately, except the shaft bearings which are pre-assembled.


 © System Plast S.r.l. , 2012 - All Rights Reserved

Pages
40 - 49
56 - 62 - 63

TURNING DISK CLOSED VERSION CARRY and RETURN

Material: polyamide
Colour: black

CODE	Z equiv.	B mm	R mm
12779	32	337	190
12780	34	357	200

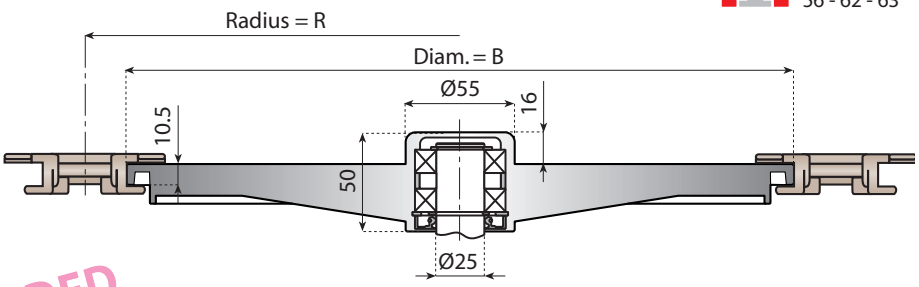


MOLDED VERSION


TURNING DISK OPEN VERSION CARRY and RETURN

Material: polyamide
Colour: black

CODE	Z equiv.	B mm	R mm
12777	32	337	190
12778	34	357	200

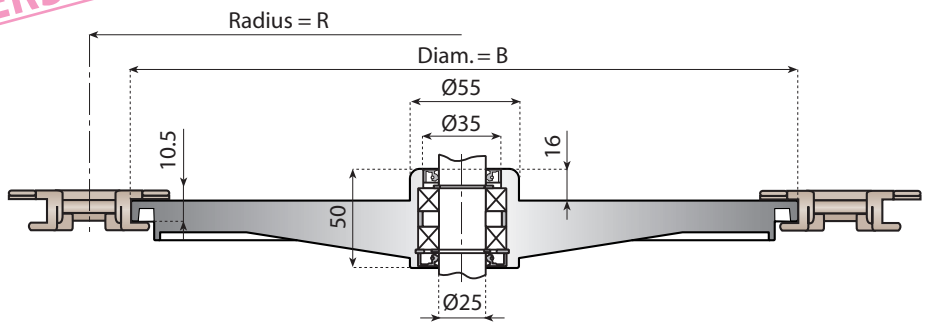



COMPONENTS

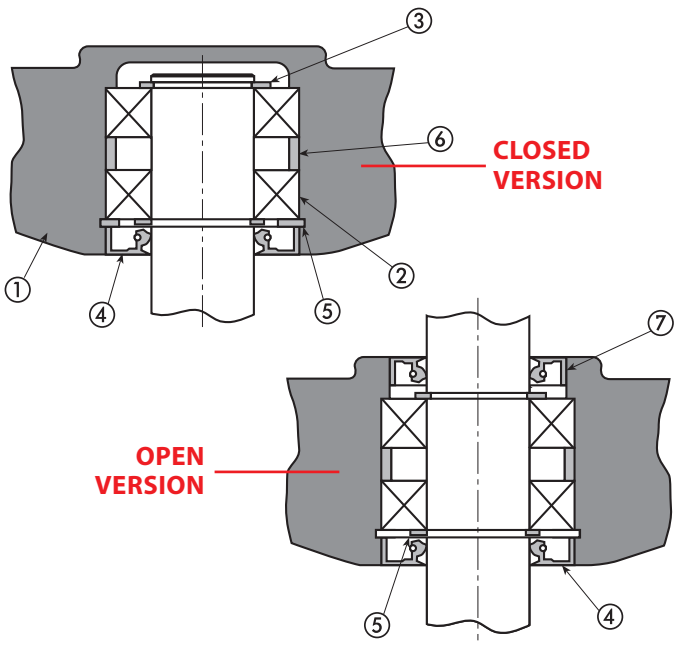

1 - Turning disk.
2 - Single race radial ball bearing with two sliding seals, type 6005-2RS (25x47x12).
3 - External (retaining) ring, Ø 25 DIN 471.
4 - Seal ring with dust cover, 25x47x7 DIN 3760 (NBR rubber).
5 - Internal (retaining) ring, Ø 47 DIN 472.
6 - Bearing spacer.
7 - Seal ring with dust cover, 25x35x7 DIN 3760 (NBR rubber).

SHAFT DIMENSIONS

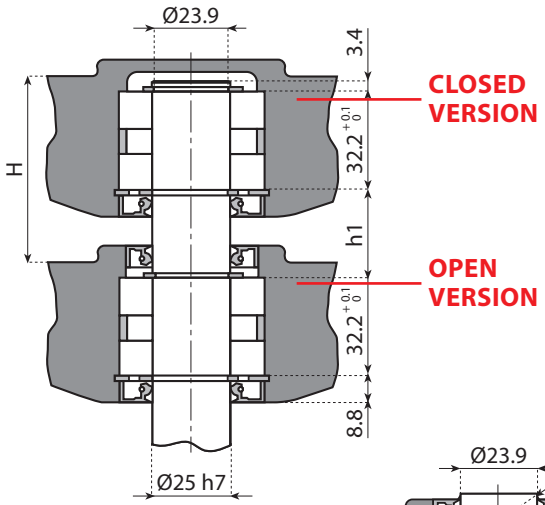

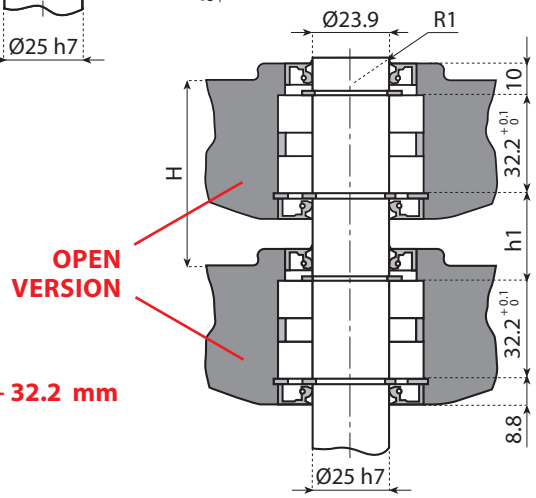


H = H1 + 32.2 mm

All components are supplied separately, except the shaft bearings which are pre-assembled.



Pages
76 - 80
81 - 82

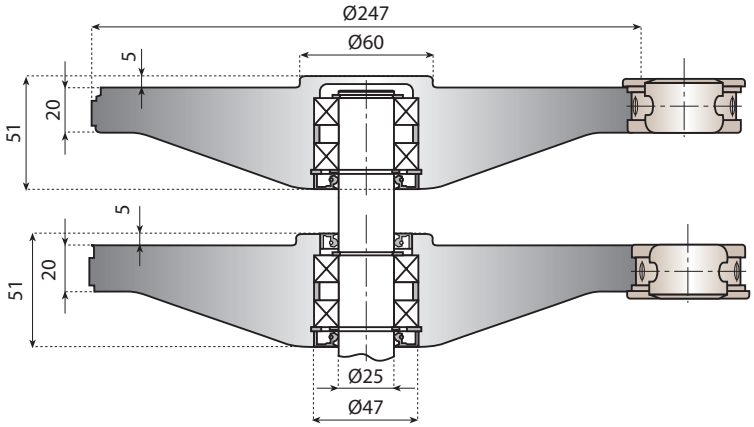


TURNING DISK - Closed version

Material: polyamide
Colour: black

MACHINED VERSION

CODE
12805

CARRY

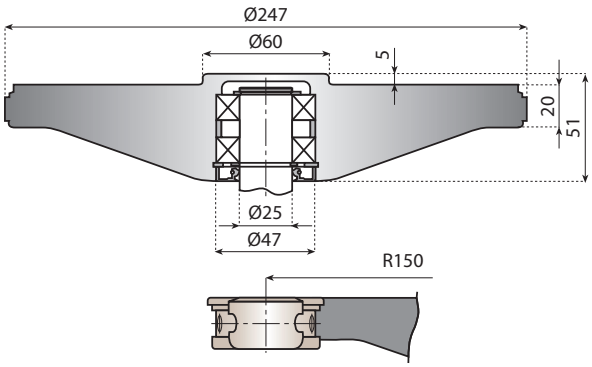


TURNING DISK - Closed version

Material: polyamide
Colour: black

RETURN

CODE
12806

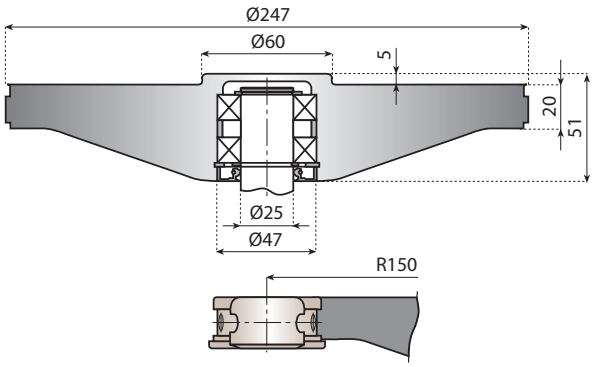


TURNING DISK - Open version

Material: polyamide
Colour: black

CODE
12807

CARRY

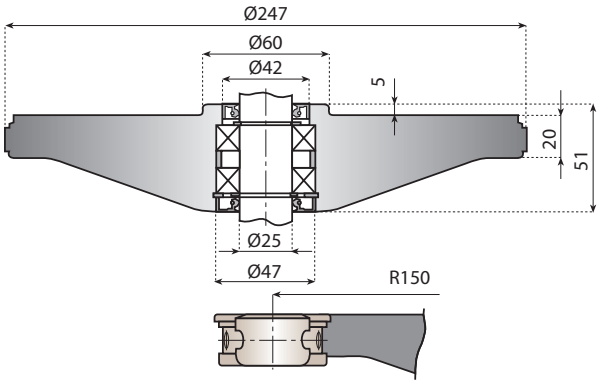


TURNING DISK - Open version

Material: polyamide
Colour: black

RETURN

CODE
12808

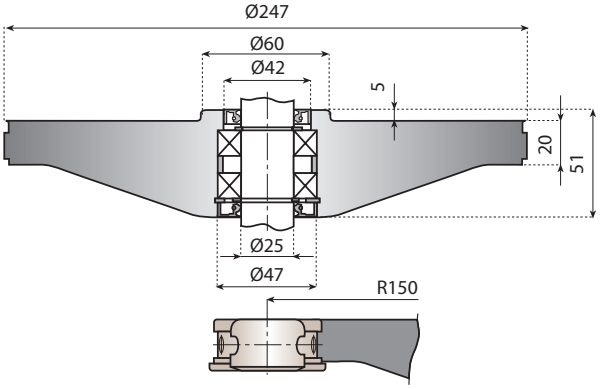


All components are supplied separately, except the shaft bearings which are pre-assembled.


 © System Plast S.r.l. , 2012 - All Rights Reserved

MOLDED VERSION

Pages
76 - 80
81 - 82

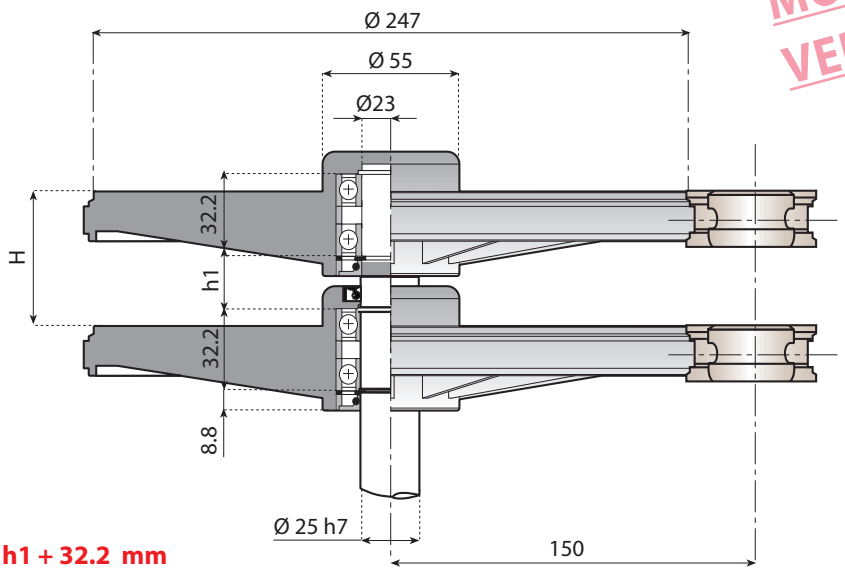

H = h1 + 32.2 mm

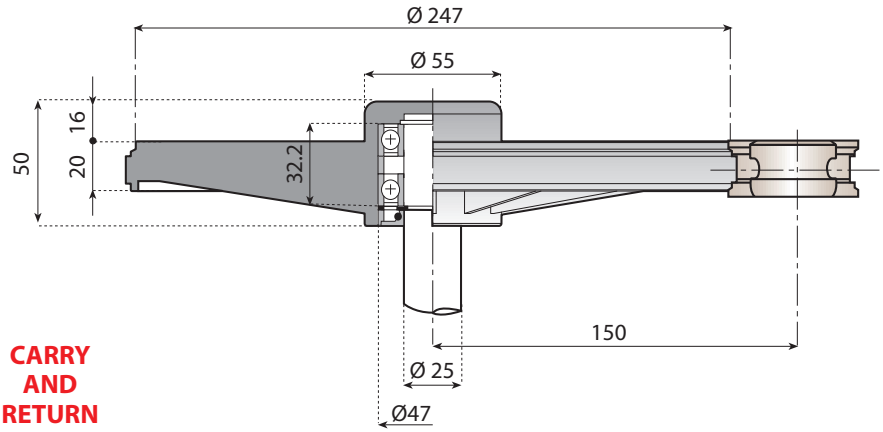


CARRY AND RETURN

TURNING DISK - Closed version

Material: polyamide reinforced with glass fiber.
Colour: black.

CODE
12723

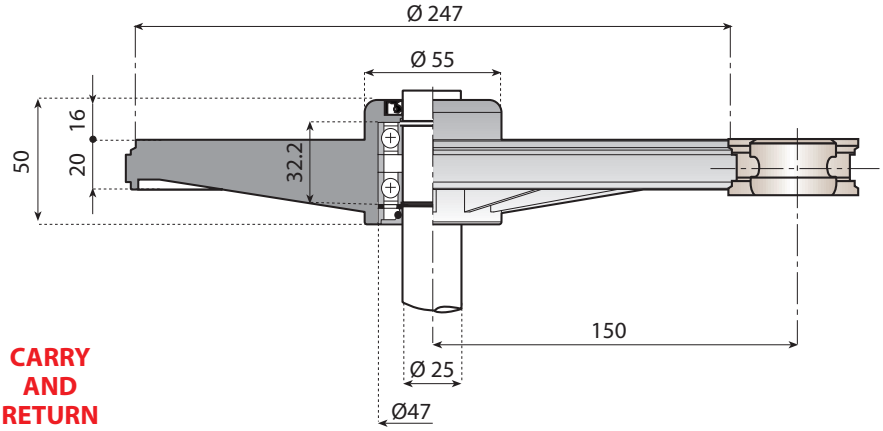

CARRY AND RETURN

TURNING DISK - Open version


Material: polyamide reinforced with glass fiber.
Colour: black.

CODE
12725

All components are supplied separately, except the shaft bearings which are pre-assembled.



Pages
77 - 78
81 - 82

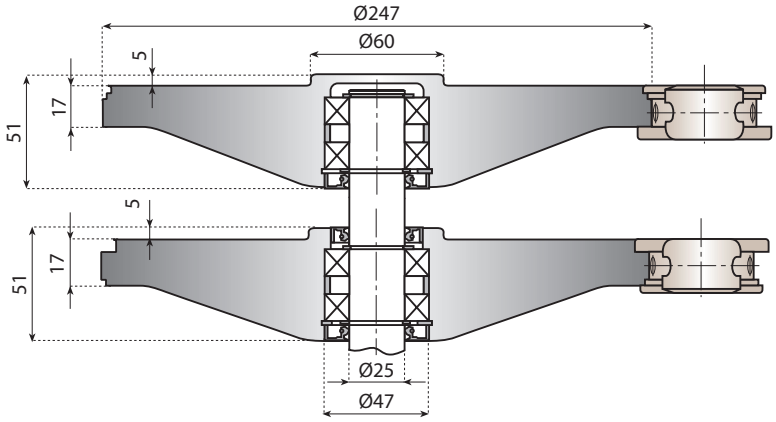


TURNING DISK - Closed version

Material: polyamide
Colour: black

CODE
12809

CARRY

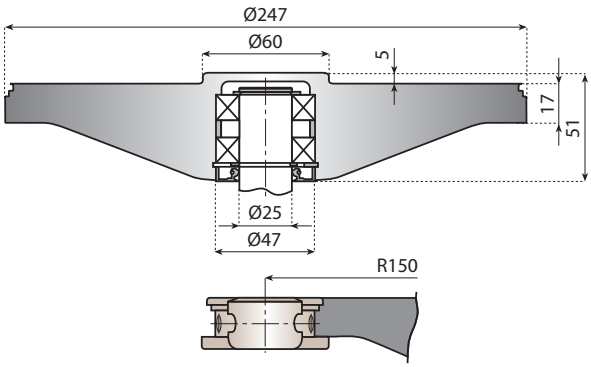


MACHINED VERSION

TURNING DISK - Closed version

Material: polyamide
Colour: black

RETURN

CODE
12810

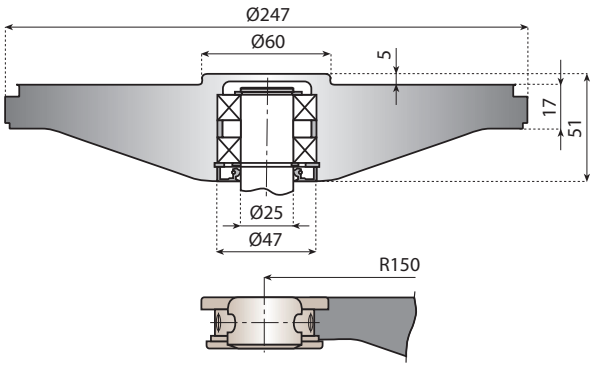


TURNING DISK - Open version

Material: polyamide
Colour: black

CODE
12811

CARRY

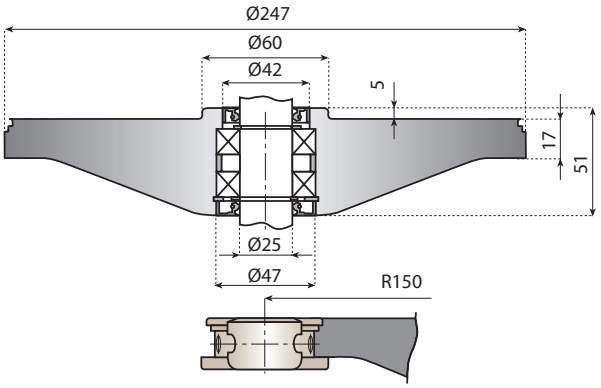


TURNING DISK - Open version

Material: polyamide
Colour: black

RETURN


CODE
12812

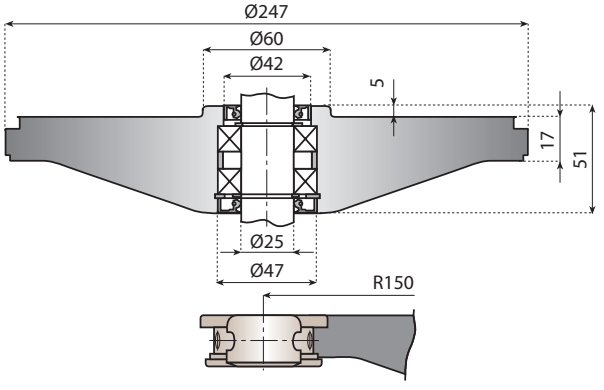

All components are supplied separately, except the shaft bearings which are pre-assembled.


 © System Plast S.r.l. , 2012 - All Rights Reserved

Pages
77 - 78
81 - 82

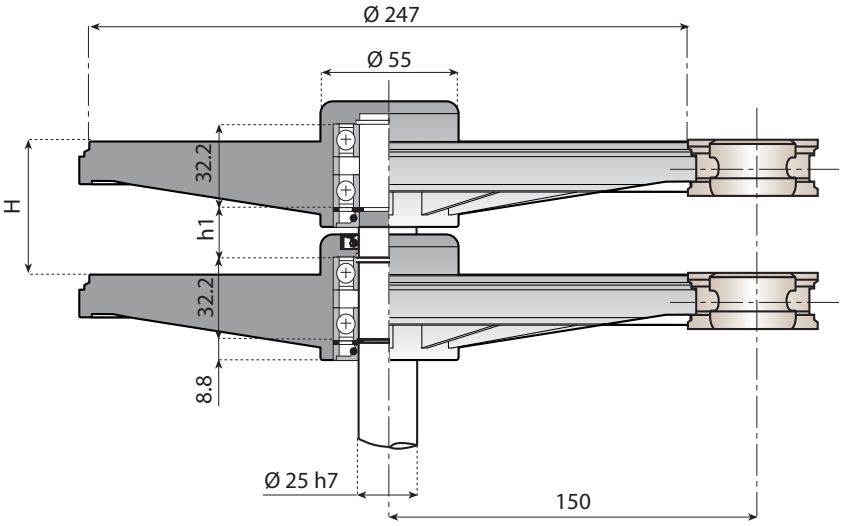

H = h1 + 32.2 mm

MOLDED VERSION

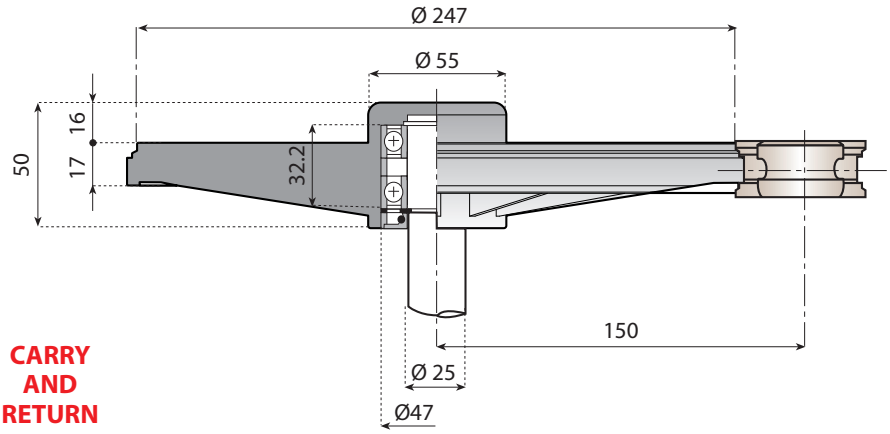


CARRY AND RETURN

TURNING DISK - Closed version

Material: polyamide reinforced with glass fiber.
Colour: black.

CODE
12783

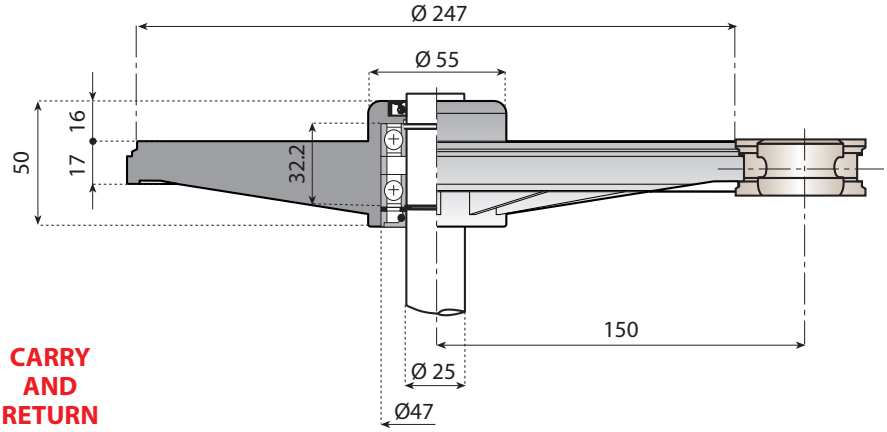

CARRY AND RETURN

TURNING DISK - Open version

Material: polyamide reinforced with glass fiber.
Colour: black.

CODE
12784

All components are supplied separately, except the shaft bearings which are pre-assembled.

 © System Plast S.r.l. , 2012 - All Rights Reserved



System Plast | **TECHNICAL INFORMATION**

TECHNICAL INFORMATION - keyway dimensions


Note: Plain bores require to be machined.

In the tables for our sprockets on pages 274 up to 328 you will see a classification for the fitting on the shaft. There are three classifications: A **Fixed** fitting means that the sprockets are not able to move after installation. This applies to split sprockets. A **Tight** fitting means that the sprockets can be moved on the shaft, but there is virtually no play. This applies to one piece sprockets only. A **Floating** fitting means that the sprockets are able to move along the shaft and follow belt expansion and contraction. This applies to all square bores, all bores with double keyway and all idler bores.

Sprockets that are not floating, can be made floating on request. In that case, please order a **Plus** bore and add a **P** behind the code number.

SINGLE KEYWAY SPROCKETS - METRIC SIZE


STANDARD - FIXED		
DF mm	b mm	t mm
nominal		
20	6	22.8
25	8	28.3
30		33.3
35	10	38.3
40	12	43.3
45	14	48.8
50		53.8
65	18	69.4
90	25	95.4

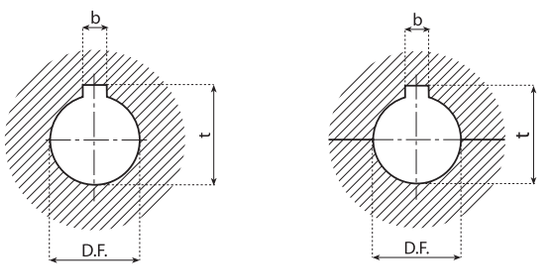

KEY TO BE USED ACCORDING TO UNI 6604 - 69 /ISO 773 - DIN 6885

DOUBLE KEYWAY SPROCKETS - METRIC SIZE


DF mm	b mm	t mm
nominal		
20	6	25.6
25	8	31.6
30		36.6
35	10	41.6
40	12	46.6
45	14	52.6
50		57.6
65	18	73.8
90	25	100.8

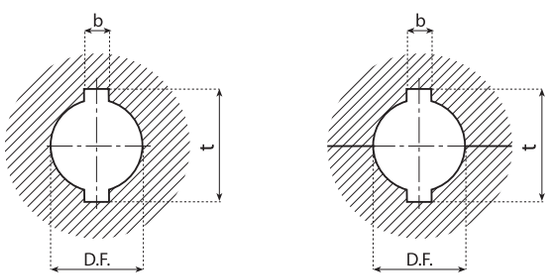

KEY TO BE USED ACCORDING TO UNI 6604 - 69 /ISO 773 - DIN 6885


SINGLE KEYWAY SPROCKETS - IMPERIAL SIZE

STANDARD - FIXED		
DF inch	b inch	t inch
nominal	nominal	nominal
1	¼	1" + ⅛"
1 ¼		1 ¼" + ⅛"
1 7⁄16	⅜	1 7⁄16" + 3⁄16"
1 ½		1 ½ + 3⁄16"
1 ¾		1 ¾ + 3⁄16"

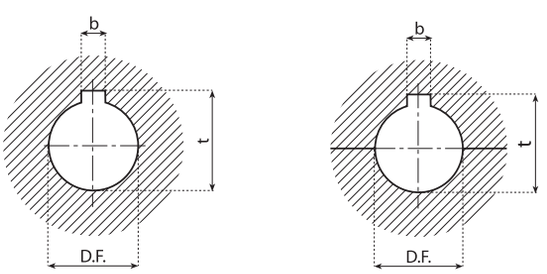

DOUBLE KEYWAY SPROCKETS - IMPERIAL SIZE

STANDARD - FIXED		
DF inch	b inch	t inch
nominal	nominal	nominal
1	¼	1" + ¼"
1 ¼		1 ¼" + ¼"
1 7⁄16	⅜	1 7⁄16" + ⅜"
1 ½		1 ½ + ⅜"
1 ¾		1 ¾ + ⅜"

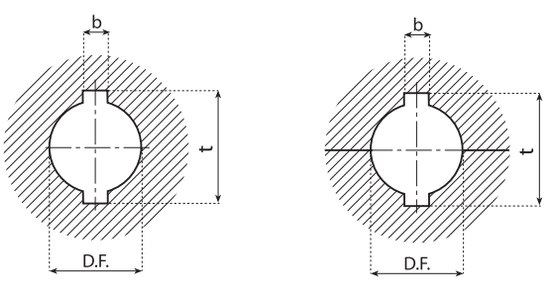

 © System Plast S.r.l., 2012 - All Rights Reserved

INTERNATIONAL SYSTEM (SI) CONVERSION FACTORS

TO CONVERT SI (METRICI)	SYMBOL SI	DIVIDED BY FACTOR	TO OBTAIN
LENGTH			
meter	m	0.3048	foot
centimeter	cm	30.48	foot
millimeter	mm	304.8	foot
meter	m	0.0254	inch
centimeter	cm	2.54	inch
millimeter	mm	25.4	inch
meter	m	1609.34	mile
kilometer	km	1.60934	mile
meter	m	0.9144	yard
MASS			
grams	g	28.3495	ounce
kilogram	kg	0.0283495	ounce
kilogram	kg	0.45359	pound
VELOCITY			
meter/minute		0.00508	foot/hour
meter/hour		0.3048	foot/hour
meter/minute		0.3048	foot/minute
meter/second	m/s	0.00508	foot/minute
meter/minute		18.288	foot/second
meter/second	m/s	0.3048	foot/second
FORCE AND FORCE/LENGTH			
newton	N	9.80665	kilogram-force
newton	N	4448.22	kilopound
newton	N	0.27801	ounce-force
newton	N	4.44822	pound-force
newton/meter	N/m	175.1268	pound/inch
newton/meter	N/m	14.5939	pound/foot

APPLICATION TEMPERATURES

Material	Symbol	User for	Min temp. °C	Max. temp. °C	
				Dry	Wet
Carbon steel	C45	Steel chains, roller chains	-70	180	not recommended
Ferritic stainless steel	Standard	Steel chains	-30	400	130
Extra stainless steel	Extra	Steel chains	-30	400	130
Extra plus stainless steel	Extra plus	Steel chains	-30	400	130
Austenitic stainless steel	Austic	Steel chains, roller chains	-30	400	130
Acetal resin	D,W	Plastic chains	-40	80	65
Low friction acetal resin	LF (all colors)	Plastic chains and belts	-40	80	65
Extra performance acetal resin	XPG	Plastic chains and belts	-40	80	65
Anti static acetal resin	AS	Plastic chains and belts	-40	80	not applicable
Delrin kevlar	DK	Plastic chains and belts	-40	80	65
New generation	NG (all colors)	Plastic chains and belts	-40	120	60
Polypropylene	PP (all colors)	Plastic chains and belts	0	104	104
Chemical resistant	CR	Plastic chains	0	104	104
High temperature resistance	HT	Plastic chains and belts	0	140	140
Abrasion resistant	AR	Plastic chains	0	90	90
Thermoplastic rubber SEBS	TPR	VG chains and belts, gripper chains	-40	100	100
NBR rubber	NBR	Gripper chains	-25	100	100
EPDM rubber	EPDM	Gripper chains	-40	120	120
EPDM-PP rubber	EPDM-PP	Gripper chains	-40	120	120
Polyamide	PA	Sprockets, components	0	90	90
Polyamide reinforced	PA FV	Sprockets, bearing, components	0	90	90
Polypropylene	PP	Components	0	104	104
Polypropylene reinforced	PP FV	Bearing, components	0	104	104
Polyethylene	PE	Curves, components	-40	80	80
Nolu-S	Nolu-S	Curves, components	-40	80	80

© System Plast S.r.l. , 2012 - All Rights Reserved

CHEMICAL RESISTANCE

Data shown in the table was taken from laboratory tests performed on unstrained samples and are merely indicative.

Chemical resistance under normal working conditions can depend on various factors, such as stress and temperature, concentration of the chemical agent and duration of its effects.

Valid for ambient temperature (21°C)

Chemical agent	METALS								PLASTICS										RUBBERS							
	EXTRA		AISI 304		AISI 316		OT.NI		POM		PBT		PP		PA		PE		EPDM		NBR		SEBS		VITON	
	C %		C %		C %		C %		C %		C %		C %		C %		C %		C %		C %		C %		C %	
Acetic Acid	5	☆	20	☆	100	☆		O	5	●	10	☆	40	☆	10	●	10	☆	25	☆		●	25	O	20	●
Acetone		☆	25	☆		☆		☆		O		O		☆	100	☆		☆		☆		●		O		●
Acrylonitrile						☆								☆	100	☆				☆		●		O		●
Aluminium chloride				O	10	O								O	10	☆				☆		☆		☆	SA	☆
Aluminium sulphate					SA	☆								☆	10	☆		☆		☆		☆		☆	SA	☆
Amyl alcohol				☆		☆						☆		☆	10	☆		☆		☆				☆		☆
Ammonia		☆	100	☆		☆		●		☆		O	30	☆	10	☆		☆		☆		O		O		O
Ammonium chloride				O		☆							10	☆	10	☆				☆		☆		☆	SA	☆
Aniline		☆		☆		☆								☆	100	O	3	☆		●		●		●		☆
Barium chloride				O	SA	☆								☆	10	☆				☆		☆		☆		☆
Beer		☆		☆		☆		☆		☆				☆		☆		☆		☆		☆		☆		☆
Benzene		☆	70	O		☆				☆		●		☆				O		●				●		
Benzoic acid			100	☆	SA	☆						☆	SA	☆	SA	O				●		☆		●		☆
Benzol				☆		☆		☆		☆		☆		O	100	☆		O		●		●		●		O
Boric acid		O	SA	☆		☆					10	☆	SA	☆	10	☆	SA	☆		☆		☆		☆	SA	☆
Brine	10	●		O		☆						☆		O		O		☆		☆				O		
Butter				☆		☆		☆		☆		☆		☆		☆		☆		☆		☆		O		☆
Butyl acetate						☆						O		O	100	☆				O				O		●
Butyl alcohol				☆										☆	100	☆				☆		O		☆		☆
Butyl glycole						☆								☆	100	☆				☆				☆		
Calcium chloride		●		O		☆		☆				☆	50	☆	10	☆	SA	☆		☆		☆		☆	SA	☆
Carbon sulphide				☆		☆				☆				☆	100	☆				●		●		●		☆
Carbon tetrachloride			10	☆				☆		☆				●		☆						●				☆
Chlorine water		●		●		O				●		●		●				●	3	O			3	O		
Chloroform		O	10	☆		☆		☆		●		●		O	100	●		●		●		●		●		☆
Chromic acid			25	☆	50	O						O			1	O			50	O		●	50	●	50	☆
Citric acid	10	☆		☆	SA	☆		●		O	10	☆	10	☆	10	O		☆		☆		☆		☆	SA	☆
Cyclohexane						☆						☆		☆	100	☆				●		☆		●		☆
Cycloexanol						☆						☆		☆	100	☆				●		☆		O		☆
Decalin						☆						O		O		☆				●		O		●		●
Dioxane						☆						☆		O		☆				O		●		●		
Distilled water		☆	10	☆		☆		☆		☆		☆		☆		☆		☆		☆				☆		●
Ethyl acetate				O		☆						O		☆	100	☆						●				O
Ethyl alcohol				☆						☆			96	☆	96	☆						O				☆
Ethyl chloride				☆				O						●	100	☆		O				O				●
Ethyl ether						☆						☆		☆	100	☆										☆
Ferric chloride				O		☆					10	☆		☆	10	☆				☆		☆		☆	SA	☆
Food fats		☆	100	☆		☆				☆		☆				☆		☆		O		☆		O		☆
Food oils		☆		☆		☆				☆				☆		☆		☆				☆				☆
Formaldehyde		☆		☆		☆		☆		☆		☆	40	☆	30	☆		O		O		O		O	40	●
Formic acid	2	O		●	100	☆		☆	10	●		O			10	●	10	●		☆		●		☆		O
Freon 12				☆								☆				☆						☆				☆
Fresh water		☆		☆		☆				☆		☆		☆		☆		☆		☆		☆		☆		☆
Fruit juice		☆		O		☆				☆		☆		☆		☆		☆		☆		☆		☆		☆
Gasoline		☆		☆		☆		O				O		O		☆		O		●		O		●		☆
Glycerine		☆		☆		☆		☆		☆		☆		☆		☆		☆		☆		☆		☆		☆
Hydrocloric acid		●		●		●		O	35	●	20	O	30	☆		●	35	☆	15	☆		O	15	☆	37	☆
Hydrofluoric acid				●		●							40	☆		●	70	☆				●			48	☆
Hydrogen peroxide	3	☆		☆	100	☆										●			30	O		●	30	●	90	☆
Isopropyl alcohol						☆						☆		☆		☆				☆				☆		☆
Lactic acid		O				☆		●		☆	10	☆	20	☆		☆		☆		O		☆		O		☆
Linseed oil				☆		☆				☆		☆		☆		☆		☆		O		☆		●		

 © System Plast S.r.l., 2012 - All Rights Reserved

Chemical agent	METALS								PLASTICS										RUBBERS							
	EXTRA		AISI 304		AISI 316		OT.NI		POM		PBT		PP		PA		PE		EPDM		NBR		SEBS		VITON	
	C %		C %		C %		C %		C %		C %		C %		C %		C %		C %		C %		C %		C %	
Magnesium chloride				O		☆						☆		☆		☆				☆		☆		☆	SA	☆
Methyl acetate				O		☆						O		☆		☆				O		●		●		●
Methyl alcohol			80	☆		☆		☆		☆		☆				☆				☆		O		☆		O
Methylene chloride		O		O		☆				●		●		O		☆		O		●		●		●		O
Milk		☆		☆		☆		☆		☆		☆		☆		☆		☆		O		☆		☆		☆
Mineral oil				☆		☆				☆		☆		☆		☆		☆		●		☆		●		☆
Nitric acid	25	O	65	☆						●	10	●	25	●		●		O			10	●			70	☆
Nitrobenzene						☆						☆		☆		O				●		●		O		O
Oleic acid		O		☆		☆		☆				☆		☆		☆		O		●		O		●		O
Oxalic acid			65	☆		☆					10	☆		☆		O				O		O		O		☆
Paraffin						☆				☆		☆						☆		O				●		
Petroleum				☆		☆		☆		☆		☆		☆		☆		●		●		☆		●		☆
Petroleum ether				☆		☆		☆		☆		O		☆		☆				●		●		●		☆
Phenol				☆		☆						●		☆		●				O		●		O		☆
Phosphoric acid	25	O		●		☆		●		●		●		☆		●		☆		☆	20	O		☆	85	☆
Potassium bichromate					SA	☆						O		☆		O				☆		O		O	SA	☆
Potassium bromite						☆						☆		☆		☆				☆		☆		☆		☆
Potassium hydroxide		☆	50	☆		☆				●		●		☆		☆		☆		☆		O		☆		☆
Potassium permanganate				☆		☆						☆		☆		●			10	☆		●	10	O		☆
Sea water		●		☆		☆		☆		O		☆		☆		☆		☆		☆		☆		O		☆
Silicone oil						☆						☆		☆		☆				☆		☆		☆		☆
Silver nitrate				O		☆								☆		☆						O				☆
Sodium carbonate		☆	100	☆	SA	☆				☆	10	☆		☆		☆		☆		☆		☆		☆		☆
Sodium chloride		O		O		☆		☆		☆				☆		☆		☆		☆		☆		☆	SA	☆
Sodium hydroxide	40	☆		☆	60	☆					10	●				☆				☆		O		☆		
Sodium hypochlorite				●	SA	O				●	10	O		☆		☆		☆	10	☆		●	10	O	5	☆
Sodium silicate			100	☆		☆										☆				☆		☆		☆		☆
Sodium sulphate			100	☆		☆										☆				O		☆		☆		☆
Soft drinks				☆		☆				☆		☆		☆		☆		☆		☆		☆		☆		☆
Suds				☆		☆				☆	10	☆		☆		☆		☆		☆		☆		☆		☆
Sulphuric acid		●		●		O		☆		●	2	☆		☆		●		O	50	☆		●	50	O	95	☆
Tartaric acid		☆	50	☆		☆		●		O	50	☆		☆		☆		☆		O		☆		☆		☆
Tetrahydrofuran						☆						☆		O		☆				●		●		●		●
Tetralin				●		☆						☆		●		☆				●		●		●		☆
Tincture of iodine				O		☆		●						☆		●		☆		O		●		O		☆
Toluol		☆				☆						☆		☆		☆				●		●		●		O
Transformer oil		☆				☆						☆		O		☆				●		☆		●		☆
Tricholoethylene				●	100	☆						●		O		O				●		●		●		☆
Triethanolamin						☆						☆		☆		☆				O		●		O		●
Turpentine		☆		☆		☆				●		☆						●		●				●		
Vaseline						☆						☆				☆		O		●		☆		●		☆
Vegetable juice		☆		☆		☆				☆		☆		☆		☆		☆		☆		☆		☆		☆
Vegetable oils		☆		☆		☆				☆		●		☆		☆		☆		O		☆		O		☆
Vinegar		☆		☆	100	☆		☆		☆	10	☆		☆		☆		☆	25	☆		O	25	O		●
Water and soap		☆		☆		☆				☆		☆		☆		☆		☆		☆		☆		☆		☆
Whisky		☆		☆		☆		☆		☆		☆		☆		☆				☆		☆		☆		☆
Wine		☆		☆		☆		☆		☆		☆		☆		☆		O		☆		☆		☆		☆
Xilol		☆		☆		☆		O		●		☆		●		☆		☆		●		●		●		☆

ABBREVIATION

C = concentration
SA = saturated
☆ = good resistance
● = insufficient resistance (not recommended)
O = fairly good resistance depending on use conditions
blank spaces = no tests performed

All values are only applicable to temperatures below 20°C.

 © System Plast S.r.l. , 2012 - All Rights Reserved

System Plast **INDEX**

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
13S00255	194	10201	22	11054	48	11187ULS	37	11362	32	11506UL	37
13S00256	194	10203	22	11055	46	11189	36	11362UL	32	11506ULS	37
13S00258	194	10204	23	11056	46	11190	38	11365	32	11507	36
19S00035-3M	194	10206	22	11057	46	11193	36	11368	32	11507UL	37
19S00077-3M	194	10206L	23	11067	49	11193UL	37	11368UL	32	11507ULS	37
10001	16	10207	22	11068	51	11193ULS	37	11371	32	11543	71
10001L	17	10208	22	11069	51	11194	36	11374	32	11545	71
10002	16	10208L	23	11070	50	11194UL	37	11374UL	32	11547	71
10003	16	10209	22	11071	50	11194ULS	37	11377	38	11557	71
10004	16	10211	22	11072	51	11195	38	11377M	39	11572	59
10005	16	10212	22	11073	52	11195M	39	11377ST	38	11578	59
10006	16	10213	22	11074	52	11196	38	11380	38	11590	59
10007	16	10213L	23	11075	52	11197	38	11380M	39	11591	59
11008	84	10214	22	11076	47	11197M	39	11380ST	38	11593	68
11008R	84	10218	23	11077	47	11198	38	11383	36	11597	68
11010	84	10219	24	11078	47	11198M	39	11383UL	37	11602	32
11010R	84	10220	24	11083	55	11199	38	11383ULS	37	11603	32
10009	16	10225	30	11084	55	11202	66	11386	36	11607	33
10009L	17	10255L	23	11085	55	11203	66	11386UL	37	11608	33
10010	16	10256L	23	11086	55	11204	66	11386ULS	37	11609	33
10011	16	10265L	23	11087	85	11221	54	11387	62	11614	68
10012	16	10266L	23	11087R	85	11222M	39	11387CR	62	11615	68
10013	16	10301	16	11088	85	11224M	39	11388	49	11616	68
10014	16	10302	16	11088R	85	11225	57	11389	40	11617	68
10016	16	10303	16	11093	57	11242	56	11390	40	11622	70
10017	16	10304	16	11094	57	11243	56	11391	56	11623	70
10018	16	10305	16	11095	57	11244	56	11393M	39	11624	70
10019	16	10306	16	11096	85	11245	56	11395M	39	11625	70
10020	16	10307	16	11096R	85	11246	56	11396M	39	11633	72
10021	16	10400	20	11097	85	11247	56	11404	63	11634	72
10032	16	10401	20	11097R	85	11250	82	11404CR	63	11635	72
10033	16	10402	20	11098	85	11251	82	11407	63	11636	72
10034	16	10403	21	11098R	85	11252	82	11407CR	63	11637	72
10035	16	10404	21	11099	85	11253	81	11408	63	11638	72
10036	16	10405	21	11099R	85	11254	81	11408CR	63	11639	72
10036L	17	10406	20	11130	33	11255	81	11409	63	11644	68
10037	16	10407	20	11131	33	11256	81	11409CR	63	11645	68
10040	19	10408	20	11134	33	11257	81	11410	34	11646	68
10041	19	10420	21	11135	33	11258	81	11411	34	11647	68
10042	19	10500	26	11150	32	11259	38	11414	34	11652	70
10043	19	10502	27	11151	32	11261	38	11415	34	11653	70
10044	19	10503	29	11151UL	32	11320	180	11420M	39	11654	70
10045	19	10504	29	11152	32	11320NGG	180	11421M	39	11655	70
10046	19	10510	27	11153	32	11321	180	11425	71	11663	72
10050	18	10511	30	11154	32	11321NGG	180	11426	71	11664	72
10051	18	10512	28	11154UL	32	11322	182	11429	71	11665	72
10052	18	10513	28	11155	32	11322NGG	182	11431	71	11666	72
10053	18	10514	28	11156	32	11323	181	11433	71	11667	72
10054	18	10515	28	11156UL	32	11323NGG	181	11435	71	11668	72
10055	18	10516	30	11157	32	11324	181	11445/298	69	11669	72
10059	18	11002	34	11160	33	11324NGG	181	11445/300	69	11670	68
10060	18	11004	34	11161	33	11325	182	11459	41	11671	68
10061	18	11006	34	11162	33	11325NGG	182	11460	41	11672	68
10062	18	11007	83	11167	35	11326	182	11461	41	11673	68
10072	26	11009	83	11168	35	11326NGG	182	11480	41	11674	68
10085L	17	11025	83	11169	35	11328	182	11481	41	11675	68
10086L	17	11026	83	11170	34	11328NGG	182	11482	41	11676	68
10095L	17	11027	83	11171	34	11329	181	11483	42	11677	68
10096L	17	11028	83	11172	34	11329NGG	181	11484	42	11678	68
10101	20	11033	54	11175	35	11340	183	11485	42	11679	68
10102	20	11034	54	11176	35	11340NGG	183	11486	42	11680	70
10103	20	11035	54	11177	35	11344	81	11487	43	11681	70
10104	21	11036	84	11180	35	11346	81	11488	43	11682	70
10105	21	11037	84	11181	35	11347	81	11489	43	11683	70
10106	21	11040	42	11182	35	11348	81	11490	43	11684	70
10107	20	11041	42	11185	36	11350	81	11491	43	11685	70
10108	20	11042	42	11185UL	37	11351	81	11492	43	11686	70
10109	20	11043	42	11185ULS	37	11352	82	11493	43	11687	70
10110	21	11045	83	11186	36	11353	82	11494	43	11688	72
10111	21	11046	83	11187	36	11355	82	11495	43	11689	72
10112	21	11053	48	11187UL	37	11359	32	11506	36	11690	72

 © System Plast S.r.l., 2012 - All Rights Reserved

Code	Page
11691	72
11692	72
11693	72
11694	72
11695	72
11696	72
11697	72
11698	72
11699	72
11703	58
11704	58
11705	58
11707	72
11709	72
11710	71
11711	71
11720	68
11722	68
11723	68
11725	68
11728	65
11728CR	65
11729	65
11729CR	65
11730	65
11730CR	65
11731	65
11731CR	65
11732	65
11732CR	65
11733	65
11733CR	65
11734	65
11734CR	65
11735	65
11735CR	65
11736	63
11736CR	63
11737	63
11737CR	63
11738	63
11738CR	63
11739	63
11739CR	63
11740	63-65
11740CR	63-65
11741	65
11741CR	65
11742	63-65
11742CR	63-65
11743	65
11743CR	65
11744	63-65
11744CR	63-65
11745	65
11745CR	65
11746	63-65
11746CR	63-65
11747	65
11747CR	65
11762	65
11763	65
11763CR	65
11766	65
11767	65
11767CR	65
11775	65
11776	65
11776CR	65
11779	65
11780	65
11780CR	65
11781	65
11782	65
11782CR	65
11783	65
11784	65
11784CR	65
11785	65
11786	65
11786CR	65
11787	65
11788	65
11788CR	65
11790	64
11791	64
11791CR	64
11795	64
11796	64
11796CR	64
11830	24
11831	24
11832	24
11850	73
11852	73
11880	80
11890	80
11900	80
11910	80
11948	76
11949	76
11950	76
11951	76
11952	76
11953	76
11954	76
11955	76
11956	77
11957	77
11958	77
11959	77
11960	77
11961	76
11962	76
11963	76
11964	78
11965	78
11966	78
11967	78
11968	78
11969	78
11976	79
11977	79
11978	80
11979	80
11980	80
11981	80
11982	77
11983	77
11984	76
11988	79
11989	79
12001	275
12001A	308
12002	275
12002A	308
12003	275
12003A	308
12004	275
12004A	308
12005	275
12005A	308
12006	275
12006A	308
12007	275
12007A	308
12008	275
12008A	308
12009	275
12009A	308
12010	275
12010A	308
12011	275
12011A	308
12012	275
12012A	308
12013	275
12013A	308
12014	275
12014A	308
12015	275
12015A	308
12016	275
12016A	308
12017A	308
12018A	308
12019A	308
12020A	308
12021A	308
12022A	308
12023A	308
12024A	308
12029A	308
12030A	308
12033	282
12034	282
12035	282
12036	282
12037	282
12038	282
12039	282
12040	282
12053N	275
12054N	275
12055N	275
12056N	275
12057N	294
12058N	294
12059N	294
12060N	294
12061N	290
12062N	290
12063N	290
12064N	290
12065N	275
12066N	275
12067N	275
12068N	275
12069N	294
12070N	294
12071N	294
12072N	294
12073N	290
12074N	290
12075N	290
12076N	290
12077B	277-296
12078B	277-296
12079B	277-296
12080B	277-296
12081B	277-296
12082B	277-296
12083B	277-296
12084B	277-296
12085	298
12086	298
12087	298
12088	298
12089	298
12090	298
12091	298
12092	298
12095	294
12096	294
12099N	275
12100N	275
12101N	275
12102N	275
12104N	294
12105N	294
12106N	294
12107N	294
12109N	290
12110N	290
12111N	290
12112N	290
12114	304
12115	304
12116	304
12117	304
12119	304
12120	304
12121	304
12122	304
12130	284
12131	284
12132	284
12133	284
12134	284
12135	284
12136	284
12137	284
12138	284
12139	284
12140	284
12141	284
12142	284
12143	284
12144	284
12145	284
12146	284
12147	284
12148	284
12149	284
12200B	277-296
12201B	277-296
12202B	277-296
12203B	277-296
12204B	277-296
12205B	277-296
12206B	277-296
12207B	277-296
12208B	277-296
12209B	277-296
12210B	277-296
12211B	277-296
12212B	277-296
12213B	277-296
12214B	277-296
12215B	277-296
12220	299
12221	299
12222	299
12223	299
12224	299
12225	299
12226	299
12227	299
12228	299
12229	299
12230	299
12231	299
12232	299
12233	299
12234	299
12235	299
12236	299
12237	299
12238	299
12239	299
12240	299
12241	299
12242	299
12243	299
12260	292
12261	292
12262	292
12263	292
12264	292
12265	292
12266	292
12267	292
12268	290
12269	290
12270	290
12271	290
12272	290
12273	290
12274	290
12275	290
12276	294
12277	294
12278	277-296-302
12279	277-296-302
12280	281-297
12281	281-297
12282	281-297
12283	281-297
12284	281-297
12284A	282
12285	281-297
12285A	282
12286	281-297
12286A	282
12287	281-297
12287A	282
12288	281-297
12288A	282
12289	281-297
12289A	282
12290	281-297
12290A	282
12291	281-297
12291A	282
12292	281-297
12292A	282
12293	281-297
12293A	282
12294	281-297
12294A	282
12295	281-297
12295A	282
12296	281-297
12297	281-297
12298	281-297
12299	281-297
12310	302
12311	302
12312	302
12313	302
12314	302
12315	302
12316	302
12317	302
12318	302
12319	302
12320	302
12321	302
12322	302
12323	302
12324	302
12325	302
12326	307
12327	307
12328	307
12329	307
12331	307
12332	307
12333	303
12334	303
12346	303
12347	303
12348	303
12349	303
12350	303
12351	303
12352	303
12353	303
12354	303
12355	303
12356	303
12357	303
12358	303
12358G	303
12359	303
12360	303
12361	303
12361G	303
12362	303
12363	303
12364	303
12364G	303
12365	303
12366	303
12367	303
12367G	303
12368	303
12369	303
12370	303
12371	303
12372	303
12373	303
12374	303
12375	303
12376	303
12377	303
12378	303
12379	303
12380	303
12381	303
12382	300
12383	300
12384	300
12385	300
12386	300
12387	300

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
12388	300	12453G	281-297	12522	289	12584G	274	12672	294	12780	333
12389	300	12454	281-297	12523	289	12585	274	12673	294	12781L	331
12390	300	12455	281-297	12524	289	12586	274	12674	294	12782L	331
12391	300	12456	281-297	12525	274	12587	274	12675	294	12783	337
12392	300	12457	281-297	12526	274	12588	274	12676	277-296	12784	337
12393	300	12457G	281-297	12527	274	12588G	274	12677	277-296	12785	330
12394	300	12458	281-297	12528	274	12589	274	12678	277-296	12786	305
12395	300	12459	281-297	12529	274	12590	274	12679	277-296	12787	332
12396	300	12460	281-297	12530	274	12591	274	12680	292-302	12788	332
12397	300	12461	281-297	12538	274	12608	276-291-295	12681	292-302	12789	330
12398	300	12461G	281-297	12539	274	12609	276-291-295	12682	292-302	12790N	278-282-286
12399	300	12462	281-297	12540	274	12610	276-291-295	12683	292-302	12791N	278-282-286
12400	301	12463	281-297	12540A	278	12611	276-291-295	12684	292-302	12792N	278-282-286
12401	301	12464	281-297	12541	274	12612	276-291-295	12685	292-302	12800	305
12402	301	12465	289	12541A	278	12613	276-291-295-301	12686	292-302	12801	305
12403	301	12466	289	12542	274	12614	276-291-295-301	12687	292-302	12802	330
12404	301	12467	289	12542A	278	12615	276-291-295-301	12688	292-302	12805	334
12405	301	12468	289	12543	274	12616	276-291-295-301	12689	292-302	12806	334
12406	301	12469	289	12543A	278	12617	276-291-295-301	12690	292-302	12807	334
12407	300	12470	289	12544	274	12618	276-291-295-301	12691	292-302	12808	334
12408	300	12471	289	12544A	278	12619	276-291-295-301	12692	292-302	12809	336
12409	300	12472	289	12545	274	12620	276-291-295-301	12693	292-302	12810	336
12410	300	12473	289	12545A	278	12621	276-291-295-301	12694	292-302	12811	336
12411	300	12474	289	12546	274	12622	276-291-295-301	12695	292-302	12812	336
12412	300	12475	289	12546A	278	12623	276-291-295-301	12711	301	12813	332
12413	300	12476	289	12547	274	12624	276-291-295-301	12721	305	12814	332
12414	300	12477	289	12547A	278	12625	276-291-295-301	12723	335	12817	330
12415	300	12478	289	12548	274	12626	276-291-295-301	12724	305	12866	276-295
12416	300	12479	289	12548A	278	12627	276-291-295-301	12725	335	12867	276-295
12417	300	12480	289	12549	274	12628	276-291-295-301	12727	305	12868	276-295
12418	300	12481	289	12549A	278	12629	276-291-295-301	12728	305	12869	276-295
12419	300	12482	289	12550	274	12630	276-291-295-301	12729	305	12870	276-295
12420	300	12483	289	12550A	278	12631	276-291-295-301	12730	305	12871	276-295
12421	300	12484	289	12551	274	12632	276-291-295-301	12731	305	12872	276-295
12421G	300	12485	289	12551A	278	12633	276-291-295	12732	305	12873	276-295
12422	300	12486	289	12552	274	12634	276-291-295	12733	305	12874	276-295
12423	300	12487	289	12553	274	12635	276-291-295	12734	305	12875	276-295
12424	300	12488	289	12554	274	12636	276-291-295	12735	305	12876	276-295
12425	300	12489	289	12555	274	12637	276-291-295	12736	305	12877	276-295
12425G	300	12490	289	12556	274	12638	276-291-295-301	12737	305	12900	281-297
12426	300	12491	289	12557	274	12639	276-291-295-301	12738	305	12901	281-297
12427	300	12492	289	12558	274	12640	276-291-295-301	12739	305	12901A	282
12428	300	12493	289	12559	274	12641	276-291-295-301	12740	305	12902	281-297
12429	300	12494	289	12560	274	12642	276-291-295-301	12741	305	12902A	282
12429G	300	12495	289	12561	274	12643	276-291-295-301	12742	305	12903	281-297
12430	300	12496	289	12562	274	12644	276-291-295-301	12743	305	12903A	282
12431	300	12497	289	12563	274	12645	276-291-295-301	12744	305	12904	274
12432	300	12498	289	12564	274	12646	276-291-295-301	12745	305	12905	274
12433	300	12499	289	12565	274	12647	276-291-295-301	12746	305	12906	274
12433G	300	12500	289	12566	274	12648	276-291-295-301	12747	305	12906A	278
12434	300	12501	289	12567	274	12649	276-291-295-301	12748	305	12907	274
12435	300	12502	289	12568	274	12650	276-291-295-301	12749	305	12907A	278
12436	300	12503	289	12569	274	12651	276-291-295-301	12750	305	12908	274
12437	281-297	12504	289	12570	274	12652	276-291-295-301	12751	305	12908A	278
12438	281-297	12505	289	12571	274	12653	276-291-295-301	12752	305	12910	300
12439	281-297	12506	289	12572	274	12654	276-291-295-301	12753	305	12911	300
12440	281-297	12507	289	12572G	274	12655	276-291-295-301	12754	305	12912	300
12441	281-297	12508	289	12573	274	12656	276-291-295-301	12755	305	12913	300
12442	281-297	12509	289	12574	274	12657	276-291-295-301	12756	305	12914	303
12443	281-297	12510	289	12575	274	12660	294	12757	305	12915	303
12444	281-297	12511	289	12576	274	12661	294	12758	305	12916	303
12445	281-297	12512	289	12576G	274	12662	294	12759	305	12917	303
12446	281-297	12513	289	12577	274	12663	294	12772	331	12920	293
12447	281-297	12514	289	12578	274	12664	294	12772G	331	12921	293
12448	281-297	12515	289	12579	274	12665	294	12773	331	12922	293
12449	281-297	12516	289	12580	274	12666	294	12774	331	12923	293
12449G	281-297	12517	289	12580G	274	12667	294	12775	331	12924	293
12450	281-297	12518	289	12581	274	12668	294	12776	331	12925	293
12451	281-297	12519	289	12582	274	12669	294	12777	333	12926	293
12452	281-297	12520	289	12583	274	12670	294	12778	333	12927	293
12453	281-297	12521	289	12584	274	12671	294	12779	333	12928	293

 © System Plast S.r.l., 2012 - All Rights Reserved

INDEX

Code	Page
12929	293
12930	293
12931	293
12932	293
12933	293
12934	293
12935	293
12936	293
12937	293
12938	293
12939	293
12940	293
12941	293
12942	293
12943	293
12944	293
12945	293
12946	293
12947	293
12948	293
12949	293
12950	293
12951	293
12952	293
12953	293
12954	293
12955	293
12956	293
12957	293
12958	293
12959	293
12960	293
12961	293
12962	293
12963	293
12964	293
12965	289
12966	289
12967	289
12968	289
12969	289
12970V	307
12971V	307
12972V	307
12973	307
12980	284
12981	284
12982	284
12983	284
12984	284
12985	284
12986	284
12987	284
12988	284
12989	284
12990	284
12991	284
12992	284
12993	284
12994	284
12995	284
12996	284
12997	284
12998	284
12999	284
14143	112
14143M	112
14144	112
14144M	112
14145	112
14145M	112
14146	175
14147	175
19015	257
19016	257
19017	256
19018	256
19101	262
19102	258
19103	258
19104	258
19105	258
19106	261
19106B	261
19107	261
19107B	261
19108	261
19108B	261
19109	261
19109B	261
19110	262
19111	262
19113	263
19114	263
19115	264
19116	264
19117	264
19118	264
19120	256
19121	256
19122	256
19123	256
19124	256
19125	256
19126	256
19127	256
19128	256
19129	256
19130	256
19131	256
19132	256
19133	256
19134	256
19135	256
19136	256
19137	256
19138	256
19139	256
19140	256
19141	256
19142	256
19143	256
19144	256
19145	256
19146	256
19147	256
19148	256
19149	256
19150	256
19151	256
19152	256
19153	256
19154	256
19155	256
19156	256
19157	256
19158	256
19159	256
19160	256
19161	256
19162	256
19163	256
19164	256
19165	256
19166	256
19167	256
19168	256
19169	256
19170	256
19171	256
19172	256
19173	256
19174	256
19175	256
19176	256
19177	256
19178	256
19179	256
19180	256
19181	256
19182	256
19183	256
19184	256
19185	256
19186	256
19187	256
19188	256
19189	258
19190	258
19191	258
19192	258
19193	258
19194	258
19195	258
19196	258
19197	258
19198	258
19199	258
19200	258
19201	258
19202	258
19203	258
19204	258
19205	258
19206	258
19207	258
19208	258
19209	258
19210	258
19211	258
19212	258
19213	258
19214	258
19215	258
19216	258
19217	260
19218	260
19219	260
19220	260
19221	260
19222	260
19223	260
19224	260
19225	260
19226	260
19227	260
19228	260
19229	260
19230	260
19231	260
19232	260
19233	260
19234	260
19235	260
19236	260
19237	260
19238	260
19239	260
19240	260
19241	260
19242	260
19243	260
19244	260
19245	260
19246	260
19247	260
19248	260
19249	260
19250	260
19251	260
19252	260
19253	260
19254	260
19255	260
19256	260
19257	260
19258	260
19259	260
19260	260
19261	260
19262	260
19263	260
19264	260
19265	260
19266	260
19267	260
19268	260
19269	260
19270	260
19271	260
19272	260
19274	257
19275	257
19276	257
19277	257
19278	257
19279	257
19280	257
19281	257
19282	257
19283	257
19284	257
19285	257
19286	257
19287	257
19288	257
19289	257
19290	257
19291	257
19292	257
19293	257
19294	257
19295	257
19296	257
19297	257
19298	257
19299	257
19300	257
19301	257
19302	257
19303	257
19304	257
19305	257
19306	257
19307	257
19308	257
19309	257
19310	257
19311	257
19312	257
19313	257
19314	257
19315	257
19316	257
19317	257
19318	257
19319	257
19320	257
19321	257
19322	257
19323	257
19324	257
19325	257
19326	257
19327	257
19329	257
19330	257
19331	257
19332	257
19333	257
19334	257
19335	257
19336	257
19337	257
19338	257
19339	257
19340	257
19341	257
19342	257
19343	257
19350	265
19351	265
19352	265
19353	266
19354	266
19355	266
19358	266
19359	266
19360	266
19361	266
19362	266
19363	266
19370	265
19371	265-268
19372	265
19373	265-266-268
19374	265
19375	265-266
19381	271
19386	270
19390	263
19391	263
19396	262
19396L	262
19397	262
19397L	262
19400	267
19401	267
19402	267
19403	267
19404	267
19405	267
19406	267
19410	269
19411	269
19412	270
19420	271
19421	271
19422	272
19423	272
19424	267
19425	267
19426	267
19427	267
19428	268
19429	268
19430	268
19431	268
19433	268
19435	268
19436	268
19437	268
19438	268
19439	268
19440	269
19441	269
19442	269
19445	256
19446	256
19447	256
19448	256
19449	256
19450T	256
19451T	256
19452T	256
19453	256
19454	256
19455	256
19456	256
19457	256
19458	256
19459	256
19460T	256
19465	256
19466	256
19467	256
19468	256
19469	256
19470	256
19471	256
19472	256
19473	256
19474	256
19475	256
19476	256
19477	256
19478	256
19479	256
19480	256
19481	256
19482	256
19483	256
19484	256
19485	256
19486	256
19487	256
19488	256
19489	256
19490	256
19491	256
19492	256
19493	256
19494	256
19495	256
19496	256
19497	256

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
19896	257	19972	258	25119	122	25310	124	25421	127	25533J	131
19897	257	19973	258	25120	122	25311	124	25421SX	128	25534J	131
19898	257	19974	258	25121	122	25312	124	25422	127	25535J	131
19899	257	19975	258	25122	122	25313	124	25422SX	128	25536J	131
19901	257	19976	258	25123	122	25314	124	25423	127	25537J	131
19902	257	19977	258	25124	122	25315	124	25423SX	128	25538J	131
19903	257	19978	258	25125	122	25316	124	25424	127	25539J	131
19904	257	19979	258	25126	122	25317	124	25424SX	128	25600J	132
19905	257	19980	258	25127	122	25318	124	25425	127	25601J	132
19906	257	19981	258	25128	122	25319	124	25425SX	128	25602J	132
19907	257	19982	258	25129	122	25320	124	25426	127	25603J	132
19908	257	19983	258	25130	122	25321	124	25426SX	128	25604J	132
19909	257	19984	258	25131	122	25322	124	25427	127	25605J	132
19910	257	19985	258	25132	122	25323	124	25427SX	128	25606J	132
19911	257	19986	258	25133	122	25324	124	25428	127	25607J	132
19912	257	19987	258	25134	122	25325	124	25428SX	128	25608J	132
19914	257	19988	258	25135	122	25326	124	25429	127	25609J	132
19915	257	19989	258	25136	122	25327	124	25429SX	128	25610J	132
19916	257	25000	120	25137	122	25328	124	25430	127	25611J	132
19917	257	25000NGG	120	25138	122	25329	124	25430SX	128	25612J	132
19918	257	25001	120	25139	122	25330	124	25431	127	25613J	132
19919	257	25001NGG	120	25200	123	25331	124	25431SX	128	25614J	132
19920	257	25002	121	25201	123	25332	124	25432	127	25615J	132
19921	257	25002NGG	121	25202	123	25333	124	25432SX	128	25616J	132
19922	257	25010J	129	25203	123	25334	124	25433	127	25617J	132
19923	257	25010J-NGG	129	25204	123	25335	124	25433SX	128	25618J	132
19924	257	25011J	129	25205	123	25336	124	25434	127	25619J	132
19925	257	25011J-NGG	129	25206	123	25337	124	25434SX	128	25620J	132
19926	257	25012J	130	25207	123	25338	124	25435	127	25621J	132
19927	257	25012J-NGG	130	25208	123	25339	124	25435SX	128	25622J	132
19928	257	25020	150	25209	123	25400	127-128	25436	127	25623J	132
19929	257	25020NGG	150	25210	123	25401	127	25436SX	128	25624J	132
19930	257	25021	150	25211	123	25401SX	128	25437	127	25625J	132
19931	257	25021NGG	150	25212	123	25402	127	25437SX	128	25626J	132
19932	257	25022	151	25213	123	25402SX	128	25438	127	25627J	132
19933	257	25022NGG	151	25214	123	25403	127	25438SX	128	25628J	132
19934	257	25040H	90	25215	123	25403SX	128	25439	127	25629J	132
19935	257	25040H-NGG	90	25216	123	25404	127	25439SX	128	25630J	132
19936	257	25041H	90	25217	123	25404SX	128	25500J	131	25631J	132
19937	257	25041H-NGG	90	25218	123	25405	127	25501J	131	25632J	132
19938	257	25042H	91	25219	123	25405SX	128	25502J	131	25633J	132
19939	257	25042HNGG	91	25220	123	25406	127	25503J	131	25634J	132
19940	257	25052H	88	25221	123	25406SX	128	25504J	131	25635J	132
19941	257	25052H-VG	89	25222	123	25407	127	25505J	131	25636J	132
19942	257	25052H-NGG	88	25223	123	25407SX	128	25506J	131	25637J	132
19943	257	25053H	88	25224	123	25408	127	25507J	131	25638J	132
19944	257	25053H-NGG	88	25225	123	25408SX	128	25508J	131	25639J	132
19945	257	25054H	88	25226	123	25409	127	25509J	131	25700J	133
19946	257	25054H-VG	89	25227	123	25409SX	128	25510J	131	25701J	133
19950	258	25054H-NGG	88	25228	123	25410	127	25511J	131	25702J	133
19951	258	25055H	88	25229	123	25410SX	128	25512J	131	25703J	133
19952	258	25055H-NGG	88	25230	123	25411	127	25513J	131	25704J	133
19953	258	25100	122	25231	123	25411SX	128	25514J	131	25705J	133
19954	258	25101	122	25232	123	25412	127	25515J	131	25706J	133
19955	258	25102	122	25233	123	25412SX	128	25516J	131	25707J	133
19956	258	25103	122	25234	123	25413	127	25517J	131	25708J	133
19957	258	25104	122	25235	123	25413SX	128	25518J	131	25709J	133
19958	258	25105	122	25236	123	25414	127	25519J	131	25710J	133
19959	258	25106	122	25237	123	25414SX	128	25520J	131	25711J	133
19960	258	25107	122	25238	123	25415	127	25521J	131	25712J	133
19961	258	25108	122	25239	123	25415SX	128	25522J	131	25713J	133
19962	258	25109	122	25300	124	25416	127	25523J	131	25714J	133
19963	258	25110	122	25301	124	25416SX	128	25524J	131	25715J	133
19964	258	25111	122	25302	124	25417	127	25525J	131	25716J	133
19965	258	25112	122	25303	124	25417SX	128	25526J	131	25717J	133
19966	258	25113	122	25304	124	25418	127	25527J	131	25718J	133
19967	258	25114	122	25305	124	25418SX	128	25528J	131	25719J	133
19968	258	25115	122	25306	124	25419	127	25529J	131	25720J	133
19969	258	25116	122	25307	124	25419SX	128	25530J	131	25721J	133
19970	258	25117	122	25308	124	25420	127	25531J	131	25722J	133
19971	258	25118	122	25309	124	25420SX	128	25532J	131	25723J	133

 © System Plast S.r.l., 2012 - All Rights Reserved

INDEX

Code	Page
25724J	133
25725J	133
25726J	133
25727J	133
25728J	133
25729J	133
25730J	133
25731J	133
25732J	133
25733J	133
25734J	133
25735J	133
25736J	133
25737J	133
25738J	133
25739J	133
25800J	136-137
25801J	136
25801J-SX	137
25802J	136
25802J-SX	137
25803J	136
25803J-SX	137
25804J	136
25804J-SX	137
25805J	136
25805J-SX	137
25806J	136
25806J-SX	137
25807J	136
25807J-SX	137
25808J	136
25808J-SX	137
25809J	136
25809J-SX	137
25810J	136
25810J-SX	137
25811J	136
25811J-SX	137
25812J	136
25812J-SX	137
25813J	136
25813J-SX	137
25814J	136
25814J-SX	137
25815J	136
25815J-SX	137
25816J	136
25816J-SX	137
25817J	136
25817J-SX	137
25818J	136
25818J-SX	137
25819J	136
25819J-SX	137
25820J	136
25820J-SX	137
25821J	136
25821J-SX	137
25822J	136
25822J-SX	137
25823J	136
25823J-SX	137
25824J	136
25824J-SX	137
25825J	136
25825J-SX	137
25826J	136
25826J-SX	137
25827J	136
25827J-SX	137
25828J	136
25828J-SX	137
25829J	136
25829J-SX	137
25830J	136
25830J-SX	137
25831J	136
25831J-SX	137
25832J	136
25832J-SX	137
25833J	136
25833J-SX	137
25834J	136
25834J-SX	137
25835J	136
25835J-SX	137
25836J	136
25836J-SX	137
25837J	136
25837J-SX	137
25838J	136
25838J-SX	137
25839J	136
25839J-SX	137
26000	160-161
26001	160
26002	160
26003	160-161
26004	160
26010	160
26011	160
26012	160
26013	160
26014	160
26050	110-111
26051	110
26052	110
26053	110-111
26054	110
26055	110
26056	110
26057	110
26058	110
26059	110
26200	162
26201	162
26202	162
26203	162
26204	162
26205	162
26206	162
26207	162
26208	162
26209	162
26210	162
26211	162
26212	162
26213	162
26214	162
26215	162
26216	162
26217	162
26218	162
26219	162
26220	162
26221	162
26222	162
26223	162
26224	162
26225	162
26226	162
26227	162
26228	162
26229	162
26230	162
26231	162
26232	162
26233	162
26234	162
26235	162
26236	162
26237	162
26238	162
26239	162
26501	97
26502	97
26503	97
26504	97
26505	97
26506	97
26507	97
26508	97
26509	97
26510	97
26511	97
26512	97
26513	97
26514	97
26515	97
26516	97
26517	97
26518	97
26519	97
26520	97
26521	97
26522	97
26523	97
26524	97
26525	97
26526	97
26527	97
26528	97
26529	97
26530	97
26550LFB	148
26551LFB	148
26552LFB	148
26553LFB	148
26554LFB	148
26555LFB	148
26556LFB	148
26557LFB	148
26558LFB	148
26559LFB	148
26560LFB	148
26561LFB	148
26562LFB	148
26563LFB	148
26564LFB	148
26565LFB	148
26566LFB	148
26567LFB	148
26568LFB	148
26569LFB	148
26570LFB	148
26571LFB	148
26572LFB	148
26573LFB	148
26574LFB	148
26575LFB	148
26576LFB	148
26577LFB	148
26578LFB	148
26579LFB	148
26580LFB	148
26581LFB	148
26582LFB	148
26583LFB	148
26584LFB	148
26585LFB	148
26586LFB	148
26587LFB	148
26588LFB	148
26589LFB	148
26601	186
26602	186
26603	186
26604	186
26605	186
26606	186
26607	186
26608	186
26609	187
26610	187
26611	187
26612	187
26613	187
26614	187
26615	187
26616	187
26617	187
26618	187
26619	187
26620	187
26621	187
26622	187
26623	187
26624	187
26625	186
26626	186
26627	186
26628	186
26629	186
26630	186
26631	186
26632	186
26652	176
26653	176
26654	176
26655	176
26656	176
26657	176
26658	176
26659	176
26660	176
26661	176
26662	176
26663	176
26664	176
26665	176
26666	176
26667	176
26668	176
26669	176
26670	176
26671	176
26672	176
26673	176
26674	176
26675	176
26676	176
26677	176
26678	176
26679	176
26680	176
26681	176
26682	176
26683	176
26684	176
26685	176
26686	176
26687	176
26688	176
26689	176
26690	176
26691	176
26692	176
26693	176
26694	176
26695	176
26696	176
26697	176
26698	176
26699	176
26700	177
26702	177
26703	177
26704	177
26705	177
26706	177
26707	177
26708	177
26709	177
26710	177
26711	177
26712	177
26713	177
26714	177
26715	177
26716	177
26717	177
26718	177
26719	177
26720	177
26721	177
26722	177
26723	177
26724	177
26725	177
26726	177
26727	177
26728	177
26729	177
26730	177
26731	177
26732	177
26733	177
26734	177
26735	177
26736	177
26737	177
26738	177
26739	177
26740	177
26741	177
26742	177
26743	177
26744	177
26745	177
26746	177
26747	177
26748	177
26749	177
26751	188
26752	188
26753	188
26754	188
26755	188
26756	188
26757	188
26758	188
26763	189
26764	189
26765	189
26766	189
26767	189
26768	189
26769	189
26770	189
26775	189
26776	189
26777	189
26778	189
26779	189
26780	189
26781	189
26782	189
26787	188
26788	188
26789	188
26790	188
26791	188
26792	188
26793	188
26794	188
27312	190
27313	190
27314	190
27315	190
27316	190
27317	190
27318	190
27319	190
27322	190
27323	190
27324	190
27325	190
27326	190
27327	190
27328	190
27329	190
27433	191
27434	191
27435	191
27436	191
27437	191
27438	191
27439	191
27543	192
27544	192
27545	192
27546	192
27547	192
27548	192
27549	192
27563	192
27564	192
27565	192
27566	192
27567	192
27568	192
27569	192
27634	193
27635	193
27636	193

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
27637	193	121069	324	121149	293	121220	289	121289	289	121358	276-291-295
27638	193	121070	324	121150	293	121221	289	121290	289	121359	276-291-295
27639	193	121071	324	121151	293	121222	289	121291	289	121360	276-291-295
121001	301	121072	324	121152	293	121223	289	121292	289	121361	276-291-295
121002	301	121073	324	121153	293	121224	289	121293	289	121362	276-291-295
121003	301	121074	324	121154	293	121225	289	121294	289	121363	276-291-295
121004	301	121075	324	121155	293	121226	289	121295	289	121364	276-291-295
121005	301	121076	324	121156	293	121227	289	121296	289	121365	276-291-295
121006	301	121077	324	121157	293	121228	289	121297	289	121366	276-291-295
121007	301	121078	324	121158	293	121229	289	121298	289	121367	276-291-295
121008	301	121079	324	121159	293	121230	289	121299	289	121368	276-291-295
121009	304	121080N	275	121160	293	121231	289	121300	289	121369	276-291-295
121010	304	121081N	275	121161	293	121232	289	121301	289	121370	276-291-295
121011	304	121082N	275	121162	293	121233	289	121302	289	121371	276-291-295
121012	304	121083N	275	121163	293	121234	289	121303	289	121372	276-291-295
121013	304	121085N	275	121164	293	121235	274	121304	289	121373	276-291-295
121014	304	121086N	275	121165	293	121236	274	121305	289	121374	276-291-295
121015	304	121087N	275	121166	293	121237	274	121306	289	121375	276-291-295
121016	304	121088N	275	121167	293	121238	274	121307	281-297	121376	276-291-295
121017	324	121090N	275	121168	293	121239	274	121308	281-297	121377	287-291
121018	324	121091N	275	121169	293	121240	274	121309	281-297	121378	287-291
121019	324	121092N	275	121170	293	121241	274	121310	281-297	121379	287-291
121020	324	121093N	275	121171	293	121242	274	121311	281-297	121380	287-291
121021	324	121095	294	121172	293	121243	274	121312	281-297	121381	287-291
121022	324	121096	294	121173	293	121244	274	121313	281-297	121382	287-291-304
121023	324	121097	294	121174	293	121245	274	121314	281-297	121383	287-291-304
121024	324	121098	294	121175	293	121246	274	121315	281-297	121384	287-291-304
121025	324	121100	294	121176	293	121247	274	121316	281-297	121385	287-291-304
121026	324	121101	294	121177	293	121248	274	121317	281-297	121386	287-291-304
121027	324	121102	294	121178	293	121249	274	121318	281-297	121387	287-291-304
121028	324	121103	294	121179	293	121250	274	121319	281-297	121388	287-291-304
121029	324	121105	294	121180	293	121251	274	121320	281-297	121389	287-291-304
121030	324	121106	294	121181	293	121252	274	121321	281-297	121390	287-291-304
121031	324	121107	294	121182	293	121253	274	121322	281-297	121391	287-291-304
121032	324	121108	294	121183	293	121254	274	121323	281-297	121392	287-291-304
121033	324	121110N	292	121184	293	121255	274	121324	281-297	121393	287-291-304
121034	324	121111N	292	121185	293	121256	274	121325	281-297	121394	287-291-304
121035	324	121112N	292	121186	293	121257	274	121326	281-297	121395	287-291-304
121036	324	121113N	292	121187	293	121258	274	121327	281-297	121396	287-291-304
121037	324	121115N	292	121188	293	121259	274	121328	281-297	121397	287-291-304
121038	324	121116N	292	121189	293	121260	274	121329	281-297	121398	287-291-304
121039	324	121117N	292	121190	293	121261	274	121330	281-297	121399	287-291-304
121040	324	121118N	292	121191	293	121262	274	121331	281-297	121400	287-291-304
121041	324	121120N	292	121192	293	121263	274	121332	281-297	121401	287-291-304
121042	324	121121N	292	121193	293	121263G	274	121333	281-297	121402	287-291
121043	324	121122N	292	121194	293	121264	274	121334	281-297	121403	287-291
121044	324	121123N	292	121195	293	121265	274	121335	281-297	121404	287-291
121045	324	121125	293	121196	293	121266	274	121336	281-297	121405	287-291
121046	324	121126	293	121197	293	121267	274	121337	281-297	121406	287-291
121047	324	121127	293	121198	293	121267G	274	121338	281-297	121407	287-291
121048	324	121128	293	121199	274	121268	274	121339	281-297	121408	287-291
121049	324	121129	293	121200	274	121269	274	121340	281-297	121409	287-291
121050	324	121130	293	121201	274	121270	274	121341	281-297	121410	287-291
121051	324	121131	293	121202	274	121271	289	121342	281-297	121411	287-291
121052	324	121132	293	121203	274	121272	289	121343	281-297	121412	287-291
121053	324	121133	293	121204	274	121273	289	121344	281-297	121413	287-291
121054	324	121134	293	121205	274	121274	289	121345	281-297	121414	287-291
121055	324	121135	293	121206	274	121275	289	121346	281-297	121415	287-291
121056	324	121136	293	121207	274	121276	289	121347	281-297	121416	287-291
121057	324	121137	293	121208	274	121277	289	121348	281-297	121417	287-291-304
121058	324	121138	293	121209	274	121278	289	121349	281-297	121418	287-291-304
121059	324	121139	293	121210	274	121279	289	121349G	281-297	121419	287-291-304
121060	324	121140	293	121211	274	121280	289	121350	281-297	121420	287-291-304
121061	324	121141	293	121212	274	121281	289	121351	281-297	121421	287-291-304
121062	324	121142	293	121213	274	121282	289	121352	281-297	121422	287-291-304
121063	324	121143	293	121214	274	121283	289	121353	281-297	121423	287-291-304
121064	324	121144	293	121215	274	121284	289	121353G	281-297	121424	287-291-304
121065	324	121145	293	121216	274	121285	289	121354	281-297	121425	287-291-304
121066	324	121146	293	121217	289	121286	289	121355	281-297	121426	287-291-304
121067	324	121147	293	121218	289	121287	289	121356	281-297	121427	287-291-304
121068	324	121148	293	121219	289	121288	289	121357	276-291-295	121428	287-291-304

 © System Plast S.r.l., 2012 - All Rights Reserved

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
121429	287-291-304	121500	304	121579	288	121655	305	121724G	288	121809	285
121430	287-291-304	121501	304	121580	288	121656	288	121725	288	121810	285
121431	287-291-304	121502	304	121581	288	121657	288	121726	288	121810A	286
121432	287-291-304	121503	304	121582	288	121658	288	121727	288	121811	285
121433	287-291-304	121504	304	121583	288	121659	288	121728	288	121811A	286
121434	287-291-304	121505	304	121584	288	121660	288	121728G	288	121812	285
121435	287-291-304	121506	304	121585	288	121661	288	121729	288	121812A	286
121436	287-291-304	121507	304	121586	288	121662	288	121730	288	121813	285
121437	287-291	121508	304	121587	288	121663	288	121731	288	121813A	286
121438	287-291	121509	304	121588	288	121664	288	121732	288	121814	285
121439	287-291	121510	304	121589	288	121665	288	121732G	288	121814A	286
121440	287-291	121511	304	121590	288	121666	288	121733	288	121815	285
121441	287-291	121512	304	121591	288	121667	288	121734	288	121815A	286
121442	287-291	121513	304	121592	288	121668	288	121735	288	121816	285
121443	287-291	121514	304	121593	288	121669	288	121736	288	121816A	286
121444	287-291	121515	304	121594	288	121670	288	121736G	288	121817	285
121445	287-291	121516	304	121600	287-292-304	121671	288	121737	288	121817A	286
121446	287-291	121517	304	121601	287-292-304	121672	288	121738	288	121818	285
121447	302	121518	304	121602	287-292-304	121673	288	121739	288	121818A	286
121448	302	121519	304	121603	287-292-304	121674	288	121740	288	121819	285
121449	302	121520	304	121604	287-292-304	121675	288	121740G	288	121819A	286
121450	302	121521	304	121605	287-292-304	121676	288	121741	288	121820	285
121451	302	121522	304	121606	287-292-304	121677	288	121742	288	121820A	286
121452	302	121523	304	121607	287-292-304	121678	288	121743	288	121821	285
121453	302	121524	304	121608	287-292-304	121679	288	121744	288	121821A	286
121454	302	121525	304	121609	287-292-304	121680	288	121744G	288	121822	285
121455	302	121526	304	121610	287-292-304	121681	288	121745	288	121822A	286
121456	302	121527	284	121611	287-292-304	121682	288	121746	288	121823	285
121457	302	121528	284	121612	287-292-304	121683	288	121747	288	121823A	286
121458	302	121529	284	121613	287-292-304	121684	288	121748	288	121824	285
121459	302	121530	284	121614	287-292-304	121685	288	121748G	288	121824A	286
121460	302	121531	284	121615	287-292-304	121686	288	121749	288	121825	285
121461	302	121532	284	121616	284	121687	288	121750	288	121826	285
121462	302	121533	284	121617	284	121688	288	121751	288	121827	285
121463	302	121534	284	121618	284	121689	288	121752	300	121828	285
121464	302	121535	284	121619	284	121690	288	121753	300	121829	285
121465	302	121536	284	121620	284	121691	288	121754	300	121830	285
121466	302	121537	284	121621	284	121692	288	121755	300	121831	285
121467	302	121538	284	121622	284	121693	288	121756	300	121832	285
121468	302	121539	284	121623	284	121694	288	121757	300	121833	285
121469	302	121540	284	121624	284	121695	288	121758	300	121834	285
121470	302	121541	284	121625	284	121696	288	121759	300	121835	285
121471	302	121542	284	121626	284	121697	288	121760	300	121836	285
121472	302	121543	284	121627	284	121698	288	121761	300	121837	285
121473	302	121544	284	121628	284	121699	288	121762	300	121838	285
121474	302	121545	284	121629	284	121700	288	121763	300	121839	285
121475	302	121546	284	121630	284	121701	288	121764	300	121840	285
121476	302	121555	288	121631	284	121702	288	121765	300	121841	285
121477	302	121556	288	121632	299	121703	288	121766	300	121842	285
121478	302	121557	288	121633	299	121704	288	121767	300	121843	285
121479	302	121558	288	121634	299	121705	288	121768	303	121844	285
121480	302	121559	288	121635	299	121706	288	121769	303	121845	285
121481	302	121560	288	121636	299	121707	288	121770	303	121846	285
121482	302	121561	288	121637	299	121708	288	121771	303	121847	285
121483	302	121562	288	121638	299	121709	288	121772	303	121848	285
121484	302	121563	288	121639	299	121710	288	121773	303	121849	285
121485	302	121564	288	121640	299	121711	288	121774	303	121850	285
121486	302	121565	288	121641	299	121712	288	121775	303	121851	285
121487	304	121566	288	121642	299	121713	288	121776	303	121852	285
121488	304	121567	288	121643	299	121714	288	121777	303	121853	285
121489	304	121568	288	121644	299	121715	288	121778	303	121854	285
121490	304	121569	288	121645	299	121716	288	121779	303	121855	285
121491	304	121570	288	121646	299	121717	288	121800	285	121856	285
121492	304	121571	288	121647	299	121718	288	121801	285	121857	285
121493	304	121572	288	121648	305	121719	288	121802	285	121858	285
121494	304	121573	288	121649	305	121720	288	121803	285	121859	285
121495	304	121574	288	121650	305	121720G	288	121804	285	121860	285
121496	304	121575	288	121651	305	121721	288	121805	285	121861	285
121497	304	121576	288	121652	305	121722	288	121806	285	121862	285
121498	304	121577	288	121653	305	121723	288	121807	285	121863	285
121499	304	121578	288	121654	305	121724	288	121808	285	121864	285

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
121865	285	121930B	277-296	122028SK	280	122061	279	123016	319	123087	323
121866	285	121931B	277-296	122029	279	122061SK	280	123017	319	123088	323
121867	285	121932	283	122029SK	280	122062	279	123018	319	123089	323
121868	285	121933	283	122030	279	122062SK	280	123019	319	123090	323
121869	285	121934	283	122030SK	280	122063	279	123020	319	123091	323
121870	285	121935	283	122031	279	122063SK	280	123021	319	123092	323
121871	285	121936	283	122031SK	280	122064	279	123022	319	123093	323
121872	285	121937	283	122032	279	122064G	279	123023	320	123094	323
121873	285	121938	283-298	122032SK	280	122064G-SK	280	123024	320	123095	323
121874	285	121939	283-298	122033	279	122064SK	280	123025	320	123096	323
121875	285	121940	283-298	122033SK	280	122065	279	123026	320	123097	323
121876	285	121941	283-298	122034	279	122065SK	280	123027	320	123098	323
121877	285	121942	283-298	122034SK	280	122066	279	123028	320	123099	325
121878	285	121943	283-298	122035	279	122066SK	280	123029	319	123100	325
121879	285	122000	279	122035SK	280	122067	279	123030	319	123101	325
121880	285	122000SK	280	122036	279	122067SK	280	123031	319	123102	325
121881	285	122001	279	122036SK	280	122068	278	123032	319	123103	325
121882	285	122001SK	280	122037	279	122069	278	123033	319	123104	325
121883	285	122002	279	122037SK	280	122070	278	123034	319	123105	325
121884	285	122002SK	280	122038	279	122071	278	123035	319	123106	325
121885	285	122003	279	122038SK	280	122072	278	123036	319	123107	325
121886	285	122003SK	280	122039	279	122073	278	123037	320	123108	325
121887	285	122004	279	122039SK	280	122074	278	123038	320	123109	325
121888	285	122004SK	280	122040	279	122075	278	123039	320	123110	325
121889	285	122005	279	122040SK	280	122076	278	123040	320	123111	325
121890	285	122005SK	280	122041	279	122077	278	123041	320	123112	325
121891	285	122006	279	122041SK	280	122078	278	123042	320	123113	325
121891G	285	122006SK	280	122042	279	122079	278	123043	319	123114	325
121892	285	122007	279	122042SK	280	122080	278	123044	319	123115	325
121893	285	122007SK	280	122043	279	122081	278	123045	319	123116	325
121894	285	122008	279	122043SK	280	122082	278	123046	319	123117	325
121895	285	122008SK	280	122044	279	122083	278	123047	319	123118	325
121895G	285	122009	279	122044SK	280	122084	278	123048	319	123119	325
121896	285	122009SK	280	122045	279	122085	278	123049	319	123120	325
121897	285	122010	279	122045SK	280	122086	278	123050	319	123121	325
121898	285	122010SK	280	122046	279	122087	278	123051	320	123122	325
121899	285	122011	279	122046SK	280	122088	278	123052	320	123123	325
121899G	285	122011SK	280	122047	279	122089	278	123053	320	123124	325
121900	285	122012	279	122047SK	280	122090	278	123054	320	123125	325
121901	285	122012SK	280	122048	279	122091	278	123055	320	123126	325
121902	285	122013	279	122048SK	280	122092	278	123056	320	123127	325
121903	285	122013SK	280	122049	279	122093	278	123057	323	123128	325
121903G	285	122014	279	122049SK	280	122094	278	123058	323	123129	325
121904	285	122014SK	280	122050	279	122095	278	123059	323	123130	325
121905	285	122015	280	122050SK	280	122096	278	123060	323	123131	325
121906	285	122015SK	279	122051	279	122097	278	123061	323	123132	325
121907	285	122016	279	122051SK	280	122098	278	123062	323	123133	325
121907G	285	122016SK	280	122052	279	122099	278	123063	323	123134	325
121908	285	122017	279	122052G	279	122100	278	123064	323	123135	325
121909	285	122017SK	280	122052G-SK	280	122101	278	123065	323	123136	325
121910	285	122018	280	122052SK	280	122102	278	123066	323	123137	325
121911	285	122018SK	279	122053	279	122103	278	123067	323	123138	325
121911G	285	122019	279	122053SK	280	122104	278	123068	323	123139	325
121912	285	122019SK	280	122054	279	122105	278	123069	323	123140	325
121913	285	122020	279	122054SK	280	122106	278	123070	323	123150	323
121914	285	122020SK	280	122055	279	122107	278	123071	323	123151	323
121915	285	122021	279	122055SK	280	123000V	314	123072	323	123152	323
121915G	285	122021SK	280	122056	279	123001V	314	123073	323	123154	323
121916	285	122022	279	122056G	279	123002V	314	123074	323	123155	323
121917	285	122022SK	280	122056G-SK	280	123003V	314	123075	323	123156	323
121918	285	122023	279	122056SK	280	123004V	314	123076	323	123161	323
121920	286	122023SK	280	122057	279	123005V	314	123077	323	123162	323
121921	286	122024	279	122057SK	280	123006V	314	123078	323	123163	323
121922	286	122024SK	280	122058	279	123007V	314	123079	323	123164	323
121923	286	122025	279	122058SK	280	123008V	314	123080	323	123170	319
121924	286	122025SK	280	122059	279	123009V	314	123081	323	123171	319
121925	286	122026	279	122059SK	280	123010V	314	123082	323	123172	319
121926	286	122026SK	280	122060	279	123011V	314	123083	323	123174	319
121927	286	122027	279	122060G	279	123012V	314	123084	323	123175	319
121928B	277-296	122027SK	280	122060G-SK	280	123013V	314	123085	323	123176	319
121929B	277-296	122028	279	122060SK	280	123015	319	123086	323	123180	320

 © System Plast S.r.l. , 2012 - All Rights Reserved

INDEX

Code	Page
123181	320
123182	320
123183	320
123184	320
123190V	314
123191V	314
123192V	314
123193V	314
123194V	314
123195V	314
123196V	314
123197V	314
123198V	314
123199V	314
123200V	314
123201V	314
123202V	314
123203V	314
123204V	314
123205V	314
123206	316
123207	316
123208	320
123209	327
123210	327
123211	327
123212	320
123213	320
123214	320
123215	328
123216	328
123217	328
123218	328
123219	328
123220	328
123221	328
123222	328
123223	328
123224	328
125000F	318
125000GF	318-319
125000RF	319
125000RIF	319
125001F	318
125001RF	319
125001RIF	319
125002F	318
125002RF	319
125002RIF	319
125003F	318
125003RF	319
125003RIF	319
125004F	318
125004GF	318-319
125004RF	319
125004RIF	319
125005F	318
125005RF	319
125005RIF	319
125006F	318
125006RF	319
125006RIF	319
125007F	318
125007RF	319
125007RIF	319
125008F	318
125008GF	318-319
125008RF	319
125008RIF	319
125009F	318
125009RF	319
125009RIF	319
125010F	318
125010RF	319
125010RIF	319
125011F	318
125011RF	319
125011RIF	319
125012F	318
125012GF	318-319
125012RF	319
125012RIF	318
125013F	318
125013RF	319
125013RIF	319
125014F	318
125014RF	319
125014RIF	319
125015F	318
125015RF	319
125015RIF	319
125020F	318
125020GF	318-319
125020RF	319
125020RIF	319
125021F	318
125021RF	319
125021RIF	319
125022F	318
125022RF	319
125022RIF	319
125023F	318
125023RF	319
125023RIF	319
125028GV	315
125028RV	315
125028V	315
125029RV	315
125029V	315
125030RV	315
125030V	315
125031RV	315
125031V	315
125032GV	315
125032RV	315
125032V	315
125033RV	315
125033V	315
125034RV	315
125034V	315
125035RV	315
125035V	315
125036GV	315
125036RV	315
125036V	315
125037RV	315
125037V	315
125038RV	315
125038V	315
125039RV	315
125039V	315
125040GV	315
125040RV	315
125040V	315
125041RV	315
125041V	315
125042RV	315
125042V	315
125043RV	315
125043V	315
125044GV	315
125044RV	315
125044V	315
125045RV	315
125045V	315
125046GV	315
125046RV	315
125046V	315
125047RV	315
125047V	315
125048GV	315
125048RV	315
125048V	315
125049RV	315
125049V	315
125050RV	315
125050V	315
125051RV	315
125051V	315
125052GV	315
125052RV	315
125052V	315
125053RV	315
125053V	315
125054RV	315
125054V	315
125055RV	315
125055V	315
125056GV	315
125056RV	315
125056V	315
125057RV	315
125057V	315
125058RV	315
125058V	315
125059RV	315
125059V	315
125060GV	315
125060RV	315
125060V	315
125061RV	315
125061V	315
125062RV	315
125062V	315
125063RV	315
125063V	315
125064GV	315
125064RV	315
125064V	315
125065RV	315
125065V	315
125066RV	315
125066V	315
125067RV	315
125067V	315
125068GV	315
125068RV	315
125068V	315
125069RV	315
125069V	315
125070RV	315
125070V	315
125071RV	315
125071V	315
125072V	316
125073V	316
125074V	316
125075V	316
125076V	316
125077V	316
125078V	316
125079V	316
125080V	316
125081V	316
125082V	316
125083V	316
125084V	316
125085V	316
125086V	316
125087V	316
125088V	316
125089V	316
125090V	316
125091V	316
125092V	316
125093V	316
125094V	316
125095V	316
125096V	316
125097V	316
125098V	316
125099V	316
125100F	318
125100GF	318-319
125101F	318
125102F	319
125102GF	318-319
125103F	318
125104F	318
125104GF	318-319
125105F	318
125106F	318
125106GF	318-319
125107F	318
125108F	318
125108GF	318-319
125109F	318
125110V	316
125111V	316
125112V	316
125150F	318
125151F	318
125152F	318
125153F	318
125154F	318
125155F	318
125156F	318
125157F	318
125158F	318
125159F	318
125160F	318
125200F	318
125201F	318
125202F	318
125203F	318
125204F	318
125205F	318
125206F	318
125207F	318
125208F	318
125209F	318
125210F	318
125211F	318
125212F	318
125250F	321
125250GF	321-322
125250RF	322
125250RIF	322
125251F	321
125251RF	322
125251RIF	322
125252F	321
125252RF	322
125252RIF	322
125253F	321
125253RF	322
125253RIF	322
125254F	321
125254GF	321-322
125254RF	322
125254RIF	322
125255F	321
125255RF	322
125255RIF	322
125256F	321
125256RF	322
125256RIF	322
125257F	321
125257RF	322
125257RIF	322
125258F	321
125258GF	321-322
125258RF	322
125258RIF	322
125259F	321
125259RF	322
125259RIF	322
125260F	321
125260RF	322
125260RIF	322
125261F	321
125261RF	322
125261RIF	322
125262F	321
125262GF	321-322
125262RF	322
125262RIF	322
125263F	321
125263RF	322
125263RIF	322
125264F	321
125264RF	322
125264RIF	322
125265F	321
125265RF	322
125265RIF	322
125266F	321
125266GF	321-322
125266RF	322
125266RIF	322
125267F	321
125267RF	322
125267RIF	322
125268F	321
125268RF	322
125268RIF	322
125269F	321
125269RF	322
125269RIF	322
125270F	321
125270GF	321-322
125270RF	322
125270RIF	322
125271F	321
125271RF	322
125271RIF	322
125272F	321
125272RF	322
125272RIF	322
125273F	321
125273RF	322
125273RIF	322
125274F	321
125274GF	321-322
125274RF	322
125274RIF	322
125275F	321
125275RF	322
125275RIF	322
125276F	321
125276RF	322
125276RIF	322
125277F	321
125277RF	322
125277RIF	322
125278GF	321-322
125278F	321
125278RF	322
125279F	321
125279RF	322
125280F	321
125280RF	322
125281F	321
125281RF	322
125300	317
125300S	317
125301	317
125301S	317
125302	317
125302S	317
125304	317
125304S	317
125305	317
125305S	317
125306	317
125306S	317
125307	317
125308	317
125308S	317
125309	317
125309S	317
125310	317
125310S	317
125311	317
125312	317
125312S	317
125313	317
125313S	317
125314	317
125314S	317
125315	317
125316GR	317
125316R	317
125316RS	317
125317R	317
125317RS	317
125318R	317
125318RS	317
125320GR	317
125320R	317
125320RS	317
125321R	317
125321RS	317
125322R	317
125322RS	317
125323R	317
125324GR	317
125324R	317
125324RS	317
125325R	317
125325RS	317
125326R	317
125326RS	317
125327R	317
125328GR	317
125328R	317

INDEX

Code	Page
125328RS	317
125329R	317
125329RS	317
125330R	317
125330RS	317
125331R	317
125332	317
125332S	317
125333	317
125333S	317
125334S	317
125335	317
125335S	317
125336	317
125336S	317
125337	317
125337S	317
125338	317
125338S	317
125339	317
125339S	317
125340	317
125340S	317
125341	317
125341S	317
125342	317
125342S	317
125343	317
125343S	317
125350F	321
125350GF	321-322
125351F	321
125352F	321
125352GF	321-322
125353F	321
125354F	321
125354GF	321-322
125355F	321
125356F	321
125356GF	321-322
125357F	321
125358F	321
125358GF	321-322
125359F	321
125360F	321
125360GF	321-322
125361F	321
125362F	321
125362GF	321-322
125363F	321
125400F	321
125401F	321
125402F	321
125403F	321
125404F	321
125405F	321
125406F	321
125407F	321
125408F	321
125409F	321
125410F	321
125411F	321
125412F	321
125413F	321
125414F	321
125415F	321
125416F	321
125417F	321
125450F	321
125451F	321
125452F	321
125453F	321
125454F	321
125455F	321
125456F	321
125457F	321
125458F	321
125459F	321
125460F	321
125461F	321
125462F	321
125463F	321
125464F	321
125465F	321
125466F	321
125467F	321
125500GV	312-313
125500RIV	313
125500V	312
125501RIV	313
125501V	312
125502GV	312-313
125502RIV	313
125502V	312
125503RIV	313
125503V	312
125504RIV	313
125504V	312
125505RIV	313
125505V	312
125506GV	312-313
125506RIV	313
125506V	312
125507RIV	313
125507V	312
125508RIV	313
125508V	312
125509RIV	313
125509V	312
125510GV	312-313
125510RIV	313
125510V	312
125511RIV	313
125511V	312
125512RIV	313
125512V	312
125513RIV	313
125513V	312
125516GV	312-313
125516V	312
125517V	312
125518V	312
125519V	312
125520GV	312-313
125520V	312
125521V	312
125522V	312
125523V	312
125524GV	312-313
125524V	312
125525V	312
125526V	312
125527F	312
125528GV	312-313
125528RIV	313
125528V	312
125529RIV	313
125529V	312
125551V	312
125552V	312
125553V	312
125554V	312
125555V	312
125556V	312
125557V	312
125558V	312
125559V	312
125560V	312
125561V	312
125562V	312
125563V	312
125564V	312
125565V	312
125566V	312
125600GV	312-313
125600RV	313
125600V	312
125601RV	313
125601V	312
125602RV	313
125602V	312
125603RV	313
125603V	312
125604GV	312-313
125604RIV	313
125604RV	313
125604V	312
125605RIV	313
125605RV	313
125605V	312
125606RIV	313
125606RV	313
125606V	312
125607RIV	313
125607RV	313
125607V	312
125608GV	312-313
125608RIV	313
125608RV	313
125608V	312
125609RIV	313
125609RV	313
125609V	312
125610RIV	313
125610RV	313
125610V	312
125611RIV	313
125611RV	313
125611V	312
125612GV	312-313
125612RIV	313
125612RV	313
125612V	312
125613RIV	313
125613RV	313
125613V	312
125614RIV	313
125614RV	313
125614V	312
125615RIV	313
125615RV	313
125615V	312
125650V	313
125651V	313
125652V	313
125653V	313
125654V	313
125655V	313
125656V	313
125657V	313
125658V	313
125659V	313
125660V	313
125700V	313
125701V	313
125702V	313
125703V	313
125704V	313
125705V	313
125706V	313
125707V	313
125708V	313
125709V	313
125710V	313
125711V	313
125712V	313
125713V	313
125714V	313
125715V	313
125716V	313
125717V	313
125718V	313
125719V	313
125720V	313
125721V	313
125800F	310
125800GF	310
125800RIF	310
125801F	310
125801RIF	310
125802F	310
125802GF	310
125802RIF	310
125803F	310
125803RIF	310
125804F	310
125804RIF	310
125805RIF	310
125806F	310
125806GF	310
125806RIF	310
125807F	310
125807RIF	310
125808F	310
125808RIF	310
125809F	310
125809RIF	310
125810F	310
125810GF	310
125810RIF	310
125811F	310
125811RIF	310
125812F	310
125812RIF	310
125813F	310
125813RIF	310
125814F	310
125814GF	310
125814RIF	310
125815F	310
125815RIF	310
125816F	310
125816RIF	310
125817F	310
125817RIF	310
125818F	310
125818GF	310
125818RIF	310
125819F	310
125819RIF	310
125820F	310
125820RIF	310
125821F	310
125821RIF	310
125822F	310
125822GF	310
125822RIF	310
125823F	310
125823RIF	310
125824F	310
125824RIF	310
125825F	310
125825RIF	310
125850F	310
125850GF	310
125850RF	310
125851F	310
125851RF	310
125852F	310
125852RF	310
125853F	310
125853RF	310
125854F	310
125854GF	310
125854RF	310
125855F	310
125855RF	310
125856F	310
125856RF	310
125857F	310
125857RF	310
125858F	310
125858GF	310
125858RF	310
125859F	310
125859RF	310
125860F	310
125860RF	310
125861F	310
125861RF	310
125862F	310
125862GF	310
125862RF	310
125863F	310
125863RF	310
125864F	310
125864RF	310
125865F	310
125865RF	310
125866F	311
125867F	311
125868F	311
125869F	311
125870F	311
125871F	311
125872F	311
125873F	311
125874F	311
125875F	311
125876F	311
125877F	311
125880F	311
125881F	311
125882F	311
125883F	311
125884F	311
125885F	311
125886F	311
125887F	311
125888F	311
125889F	311
125890F	311
125891F	311
125892F	311
125893F	311
125894F	311
125895F	311
125896F	311
125897F	311
125898	327
125899	327
125900	327
125901	327
125902	327
125903	327
125904	327
125905	327
125906	327
125907	327
125908	327
125909	327
125910	327
125911	327
125912	327
125913	327
125915P	326
125916P	326
125918P	326
125919P	326
125920P	326
125921P	326
125922P	326
125923P	326
125924P	326
125925P	326
125926P	326
125927P	326
125928P	326
125930P	326
125931P	326
125932P	326
125933P	326
125934P	326
125935P	326
125936P	326
125937P	326
125938P	326
125939	326
125940	326
125943	326
125944	326
125947	326
125948	326
125949	326
125950	326
125951	326
125952	326
125953	326
125954	326
125969	326
125970	326
125971	326
125972	326
125973	326
125974	326
125975	326
125976	326
125977	326
125978	326
125979	326
125980	326
126000	274
126001	274
126002	274
126003	289
126004	289

 © System Plast S.r.l. , 2012 - All Rights Reserved

INDEX

Code	Page
126005	289
126006	293
126007	293
126008	293
190001	259
190002	259
190003	259
190004	259
190005	259
190006	259
190007	259
190008	259
190009	259
190010	259
190011	259
190012	259
190013	259
190014	259
190015	259
190016	259
190017	259
190018	259
190019	259
190020	259
190021	259
190022	259
190023	259
190024	259
190025	259
190026	259
190027	259
190028	259
190029	259
190030	259
190031	259
190032	259
190033	259
190034	259
190035	259
190036	259
190037	259
190038	259
190039	259
190040	259
190041	259
190042	259
190043	259
190044	259
190045	259
190046	259
190047	259
190048	259
190049	259
190050	259
190051	259
190052	259
190053	259
190054	259
190055	259
190056	259
190060	260
190061	260
190062	260
190063	260
190064	260
190065	260
190066	260
190067	260
190068	260
190069	260
190070	260
190071	260
190072	260
190073	260
190074	260
190075	260
190076	260
190077	260
190078	260
190079	260
190080	260
190081	260
190082	260
190083	260
190085	260
190086	260
190087	260
190089	260
190090	260
190091	260
190092	260
190093	260
190094	260
190095	260
190097	260
190098	260
190099	260
190101	260
190102	260
190103	260
190104	260
190105	260
190106	260
190107	260
190108	260
190109	260
190110	260
190111	260
190112	260
190113	260
190114	260
190115	260
190116	260
190117	260
190118	260
190119	260
190120	260
190121	260
190122	260
190123	260
190124	260
190125	260
190126	260
190127	260
190128	260
190129	260
190130	260
190131	260
190132	260
190133	260
190134	260
190135	260
190136	260
190137	260
190138	260
190139	260
190140	260
190141	260
190142	260
190143	260
190276	194
190276N	194
190277	194
190277N	194
250000	138
250001	138
250002	138
250003	138
250004	138
250005	138
250006	138
250007	138
250008	138
250009	138
250010	138
250011	138
250012	138
250013	138
250014	138
250015	138
250016	138
250017	138
250018	138
250019	138
250020	138
250021	138
250022	138
250023	138
250024	138
250025	138
250026	138
250027	138
250052	141
250053	141
250054	141
250055	141
250056	141
250057	141
250058	141
250059	141
250060	141
250061	141
250062	141
250063	141
250064	141
250065	141
250066	141
250067	141
250068	141
250069	141
250070	141
250071	141
250072	141
250073	141
250074	141
250075	141
250076	141
250077	141
250100	138
250101	138
250102	138
250103	138
250104	138
250105	138
250106	138
250107	138
250108	138
250109	138
250110	138
250111	138
250112	138
250113	138
250114	138
250115	138
250116	138
250117	138
250118	138
250119	138
250120	138
250121	138
250122	138
250123	138
250124	138
250125	138
250126	138
250127	138
250151	141
250152	141
250153	141
250154	141
250155	141
250156	141
250157	141
250158	141
250159	141
250160	141
250161	141
250162	141
250163	141
250164	141
250165	141
250166	141
250167	141
250168	141
250169	141
250170	141
250171	141
250172	141
250173	141
250174	141
250175	141
250176	141
250177	141
250200	138
250201	138
250202	138
250203	138
250204	138
250205	138
250206	138
250207	138
250208	138
250209	138
250210	138
250211	138
250212	138
250213	138
250214	138
250215	138
250216	138
250217	138
250218	138
250219	138
250220	138
250221	138
250222	138
250223	138
250224	138
250225	138
250226	138
250227	138
250251	141
250252	141
250253	141
250254	141
250255	141
250256	141
250257	141
250258	141
250259	141
250260	141
250261	141
250262	141
250263	141
250264	141
250265	141
250266	141
250267	141
250268	141
250269	141
250270	141
250271	141
250272	141
250273	141
250274	141
250275	141
250276	141
250277	141
250300	139
250301	139
250302	139
250303	139
250304	139
250305	139
250306	139
250307	139
250308	139
250309	139
250310	139
250311	139
250312	139
250313	139
250314	139
250315	139
250316	139
250317	139
250318	139
250319	139
250320	139
250321	139
250322	139
250323	139
250324	139
250325	139
250326	139
250327	139
250352	142
250353	142
250354	142
250355	142
250356	142
250357	142
250358	142
250359	142
250360	142
250361	142
250362	142
250363	142
250364	142
250365	142
250366	142
250367	142
250368	142
250369	142
250370	142
250371	142
250372	142
250373	142
250374	142
250375	142
250376	142
250377	142
250400	139
250401	139
250402	139
250403	139
250404	139
250405	139
250406	139
250407	139
250408	139
250409	139
250410	139
250411	139
250412	139
250413	139
250414	139
250415	139
250416	139
250417	139
250418	139
250419	139
250420	139
250421	139
250422	139
250423	139
250424	139
250425	139
250426	139
250427	139
250451	142
250452	142
250453	142
250454	142
250455	142
250456	142
250457	142
250458	142
250459	142
250460	142
250461	142
250462	142
250463	142
250464	142
250465	142
250466	142
250467	142
250468	142
250469	142
250470	142
250471	142
250472	142
250473	142
250474	142
250475	142
250476	142
250477	142
250500	139
250501	139
250502	139
250503	139
250504	139
250505	139
250506	139
250507	139
250508	139

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
250509	139	250626	140	250766	143	251005	152	251136	153	251312SX	158
250510	139	250627	140	250767	143	251006	152	251137	153	251313	157
250511	139	250652	143	250768	143	251007	152	251138	153	251313SX	158
250512	139	250653	143	250769	143	251008	152	251139	153	251314	157
250513	139	250654	143	250770	143	251009	152	251200	155	251314SX	158
250514	139	250655	143	250771	143	251010	152	251201	155	251315	157
250515	139	250656	143	250772	143	251011	152	251202	155	251315SX	158
250516	139	250657	143	250773	143	251012	152	251203	155	251316	157
250517	139	250658	143	250774	143	251013	152	251204	155	251316SX	158
250518	139	250659	143	250775	143	251014	152	251205	155	251317	157
250519	139	250660	143	250776	143	251015	152	251206	155	251317SX	158
250520	139	250661	143	250777	143	251016	152	251207	155	251318	157
250521	139	250662	143	250800	140	251017	152	251208	155	251318SX	158
250522	139	250663	143	250801	140	251018	152	251209	155	251319	157
250523	139	250664	143	250802	140	251019	152	251210	155	251319SX	158
250524	139	250665	143	250803	140	251020	152	251211	155	251320	157
250525	139	250666	143	250804	140	251021	152	251212	155	251320SX	158
250526	139	250667	143	250805	140	251022	152	251213	155	251321	157
250527	139	250668	143	250806	140	251023	152	251214	155	251321SX	158
250552	142	250669	143	250807	140	251024	152	251215	155	251322	157
250553	142	250670	143	250808	140	251025	152	251216	155	251322SX	158
250554	142	250671	143	250809	140	251026	152	251217	155	251323	157
250555	142	250672	143	250810	140	251027	152	251218	155	251323SX	158
250556	142	250673	143	250811	140	251028	152	251219	155	251324	157
250557	142	250674	143	250812	140	251029	152	251220	155	251324SX	158
250558	142	250675	143	250813	140	251030	152	251221	155	251325	157
250559	142	250676	143	250814	140	251031	152	251222	155	251325SX	158
250560	142	250677	143	250815	140	251032	152	251223	155	251326	157
250561	142	250700	140	250816	140	251033	152	251224	155	251326SX	158
250562	142	250701	140	250817	140	251034	152	251225	155	251327	157
250563	142	250702	140	250818	140	251035	152	251226	155	251327SX	158
250564	142	250703	140	250819	140	251036	152	251227	155	251328	157
250565	142	250704	140	250820	140	251037	152	251228	155	251328SX	158
250566	142	250705	140	250821	140	251038	152	251229	155	251329	157
250567	142	250706	140	250822	140	251039	152	251230	155	251329SX	158
250568	142	250707	140	250823	140	251100	153	251231	155	251330	157
250569	142	250708	140	250824	140	251101	153	251232	155	251330SX	158
250570	142	250709	140	250825	140	251102	153	251233	155	251331	157
250571	142	250710	140	250826	140	251103	153	251234	155	251331SX	158
250572	142	250711	140	250827	140	251104	153	251235	155	251332	157
250573	142	250712	140	250852	143	251105	153	251236	155	251332SX	158
250574	142	250713	140	250853	143	251106	153	251237	155	251333	157
250575	142	250714	140	250854	143	251107	153	251238	155	251333SX	158
250576	142	250715	140	250855	143	251108	153	251239	155	251334	157
250577	142	250716	140	250856	143	251109	153	251300	157-158	251334SX	158
250600	140	250717	140	250857	143	251110	153	251300L	159	251335	157
250601	140	250718	140	250858	143	251111	153	251301	157	251335SX	158
250602	140	250719	140	250859	143	251112	153	251301L	159	251336	157
250603	140	250720	140	250860	143	251113	153	251301SX	158	251336SX	158
250604	140	250721	140	250861	143	251114	153	251301SXL	159	251337	157
250605	140	250722	140	250862	143	251115	153	251302	157	251337SX	158
250606	140	250723	140	250863	143	251116	153	251302SX	158	251338	157
250607	140	250724	140	250864	143	251117	153	251303	157	251338SX	158
250608	140	250725	140	250865	143	251118	153	251303SX	158	251339	157
250609	140	250726	140	250866	143	251119	153	251304	157	251339SX	158
250610	140	250727	140	250867	143	251120	153	251304SX	158	251400H	92
250611	140	250751	143	250868	143	251121	153	251305	157	251401H	92
250612	140	250752	143	250869	143	251122	153	251305SX	158	251402H	92
250613	140	250753	143	250870	143	251123	153	251306	157	251403H	92
250614	140	250754	143	250871	143	251124	153	251306SX	158	251404H	92
250615	140	250755	143	250872	143	251125	153	251307	157	251405H	92
250616	140	250756	143	250873	143	251126	153	251307SX	158	251406H	92
250617	140	250757	143	250874	143	251127	153	251308	157	251407H	92
250618	140	250758	143	250875	143	251128	153	251308SX	158	251408H	92
250619	140	250759	143	250876	143	251129	153	251309	157	251409H	92
250620	140	250760	143	250877	143	251130	153	251309SX	158	251410H	92
250621	140	250761	143	251000	152	251131	153	251310	157	251411H	92
250622	140	250762	143	251001	152	251132	153	251310SX	158	251412H	92
250623	140	250763	143	251002	152	251133	153	251311	157	251413H	92
250624	140	250764	143	251003	152	251134	153	251311SX	158	251414H	92
250625	140	250765	143	251004	152	251135	153	251312	157	251415H	92

 © System Plast S.r.l. , 2012 - All Rights Reserved

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
251416H	92	251507H	93	251588	93	251679	95	251730H-SX	99	251912	171
251417H	92	251508H	93	251589	93	251680	95	251731H	98	251913	171
251418H	92	251509H	93	251600H	95	251681	95	251731H-SX	99	251914	171
251419H	92	251510H	93	251601H	95	251682	95	251732H	98	251915	171
251420H	92	251511H	93	251602H	95	251683	95	251732H-SX	99	251916	171
251421H	92	251512H	93	251603H	95	251684	95	251733H	98	251917	171
251422H	92	251513H	93	251604H	95	251685	95	251733H-SX	99	251918	171
251423H	92	251514H	93	251605H	95	251686	95	251734H	98	251919	171
251424H	92	251515H	93	251606H	95	251687	95	251734H-SX	99	251920	171
251425H	92	251516H	93	251607H	95	251688	95	251735H	98	251921	171
251426H	92	251517H	93	251608H	95	251689	95	251735H-SX	99	251922	171
251427H	92	251518H	93	251609H	95	251700H	98-99	251736H	98	251923	171
251428H	92	251519H	93	251610H	95	251701H	98	251736H-SX	99	251924	171
251429H	92	251520H	93	251611H	95	251701H-SX	99	251737H	98	251925	171
251430H	92	251521H	93	251612H	95	251702H	98	251737H-SX	99	251926	171
251431H	92	251522H	93	251613H	95	251702H-SX	99	251738H	98	251927	171
251432H	92	251523H	93	251614H	95	251703H	98	251738H-SX	99	251928	171
251433H	92	251524H	93	251615H	95	251703H-SX	99	251739H	98	251929	171
251434H	92	251525H	93	251616H	95	251704H	98	251739H-SX	99	251930	171
251435H	92	251526H	93	251617H	95	251704H-SX	99	251800	169	251931	171
251436H	92	251527H	93	251618H	95	251705H	98	251801	169	251932	171
251437H	92	251528H	93	251619H	95	251705H-SX	99	251802	169	251933	171
251438H	92	251529H	93	251620H	95	251706H	98	251803	169	251934	171
251439H	92	251530H	93	251621H	95	251706H-SX	99	251804	169	251935	171
251450	92	251531H	93	251622H	95	251707H	98	251805	169	251936	171
251451	92	251532H	93	251623H	95	251707H-SX	99	251806	169	251937	171
251452	92	251533H	93	251624H	95	251708H	98	251807	169	251938	171
251453	92	251534H	93	251625H	95	251708H-SX	99	251808	169	251939	171
251454	92	251535H	93	251626H	95	251709H	98	251809	169	252000	163
251455	92	251536H	93	251627H	95	251709H-SX	99	251810	169	252001	163
251456	92	251537H	93	251628H	95	251710H	98	251811	169	252002	163
251457	92	251538H	93	251629H	95	251710H-SX	99	251812	169	252003	163
251458	92	251539H	93	251630H	95	251711H	98	251813	169	252004	163
251459	92	251550	93	251631H	95	251711H-SX	99	251814	169	252005	163
251460	92	251551	93	251632H	95	251712H	98	251815	169	252006	163
251461	92	251552	93	251633H	95	251712H-SX	99	251816	169	252007	163
251462	92	251553	93	251634H	95	251713H	98	251817	169	252008	163
251463	92	251554	93	251635H	95	251713H-SX	99	251818	169	252009	163
251464	92	251555	93	251636H	95	251714H	98	251819	169	252010	163
251465	92	251556	93	251637H	95	251714H-SX	99	251820	169	252011	163
251466	92	251557	93	251638H	95	251715H	98	251821	169	252012	163
251467	92	251558	93	251639H	95	251715H-SX	99	251822	169	252013	163
251468	92	251559	93	251650	95	251716H	98	251823	169	252014	163
251469	92	251560	93	251651	95	251716H-SX	99	251824	169	252015	163
251470	92	251561	93	251652	95	251717H	98	251825	169	252016	163
251471	92	251562	93	251653	95	251717H-SX	99	251826	169	252017	163
251472	92	251563	93	251654	95	251718H	98	251827	169	252018	163
251473	92	251564	93	251655	95	251718H-SX	99	251828	169	252019	163
251474	92	251565	93	251656	95	251719H	98	251829	169	252020	163
251475	92	251566	93	251657	95	251719H-SX	99	251830	169	252021	163
251476	92	251567	93	251658	95	251720H	98	251831	169	252022	163
251477	92	251568	93	251659	95	251720H-SX	99	251832	169	252023	163
251478	92	251569	93	251660	95	251721H	98	251833	169	252024	163
251479	92	251570	93	251661	95	251721H-SX	99	251834	169	252025	163
251480	92	251571	93	251662	95	251722H	98	251835	169	252026	163
251481	92	251572	93	251663	95	251722H-SX	99	251836	169	252027	163
251482	92	251573	93	251664	95	251723H	98	251837	169	252100	163
251483	92	251574	93	251665	95	251723H-SX	99	251838	169	252101	163
251484	92	251575	93	251666	95	251724H	98	251839	169	252102	163
251485	92	251576	93	251667	95	251724H-SX	99	251900	171	252103	163
251486	92	251577	93	251668	95	251725H	98	251901	171	252104	163
251487	92	251578	93	251669	95	251725H-SX	99	251902	171	252105	163
251488	92	251579	93	251670	95	251726H	98	251903	171	252106	163
251489	92	251580	93	251671	95	251726H-SX	99	251904	171	252107	163
251500H	93	251581	93	251672	95	251727H	98	251905	171	252108	163
251501H	93	251582	93	251673	95	251727H-SX	99	251906	171	252109	163
251502H	93	251583	93	251674	95	251728H	98	251907	171	252110	163
251503H	93	251584	93	251675	95	251728H-SX	99	251908	171	252111	163
251504H	93	251585	93	251676	95	251729H	98	251909	171	252112	163
251505H	93	251586	93	251677	95	251729H-SX	99	251910	171	252113	163
251506H	93	251587	93	251678	95	251730H	98	251911	171	252114	163

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
252115	163	252402	165	252619	166	252910	168	253201	154	253333	156
252116	163	252403	165	252620	166	252911	168	253202	154	253334	156
252117	163	252404	165	252621	166	252912	168	253203	154	253335	156
252118	163	252405	165	252622	166	252913	168	253204	154	253336	156
252119	163	252406	165	252623	166	252914	168	253205	154	253337	156
252120	163	252407	165	252624	166	252915	168	253206	154	253338	156
252121	163	252408	165	252625	166	252916	168	253207	154	253339	156
252122	163	252409	165	252626	166	252917	168	253208	154	253400	164
252123	163	252410	165	252627	166	252918	168	253209	154	253401	164
252124	163	252411	165	252701	166	252919	168	253210	154	253402	164
252125	163	252412	165	252702	166	252920	168	253211	154	253403	164
252126	163	252413	165	252703	166	252921	168	253212	154	253404	164
252127	163	252414	165	252704	166	252922	168	253213	154	253405	164
252200	163	252415	165	252705	166	252923	168	253214	154	253406	164
252201	163	252416	165	252706	166	252924	168	253215	154	253407	164
252202	163	252417	165	252707	166	252925	168	253216	154	253408	164
252203	163	252418	165	252708	166	252926	168	253217	154	253409	164
252204	163	252419	165	252709	166	252927	168	253218	154	253410	164
252205	163	252420	165	252710	166	253001	168	253219	154	253411	164
252206	163	252421	165	252711	166	253002	168	253220	154	253412	164
252207	163	252422	165	252712	166	253003	168	253221	154	253413	164
252208	163	252423	165	252713	166	253004	168	253222	154	253414	164
252209	163	252424	165	252714	166	253005	168	253223	154	253415	164
252210	163	252425	165	252715	166	253006	168	253224	154	253416	164
252211	163	252426	165	252716	166	253007	168	253225	154	253417	164
252212	163	252427	165	252717	166	253008	168	253226	154	253418	164
252213	163	252500	165	252718	166	253009	168	253227	154	253419	164
252214	163	252501	165	252719	166	253010	168	253228	154	253420	164
252215	163	252502	165	252720	166	253011	168	253229	154	253421	164
252216	163	252503	165	252721	166	253012	168	253230	154	253422	164
252217	163	252504	165	252722	166	253013	168	253231	154	253423	164
252218	163	252505	165	252723	166	253014	168	253232	154	253424	164
252219	163	252506	165	252724	166	253015	168	253233	154	253425	164
252220	163	252507	165	252725	166	253016	168	253234	154	253426	164
252221	163	252508	165	252726	166	253017	168	253235	154	253427	164
252222	163	252509	165	252727	166	253018	168	253236	154	253500	164
252223	163	252510	165	252801	166	253019	168	253237	154	253501	164
252224	163	252511	165	252802	166	253020	168	253238	154	253502	164
252225	163	252512	165	252803	166	253021	168	253239	154	253503	164
252226	163	252513	165	252804	166	253022	168	253301	156	253504	164
252227	163	252514	165	252805	166	253023	168	253302	156	253505	164
252300	165	252515	165	252806	166	253024	168	253303	156	253506	164
252301	165	252516	165	252807	166	253025	168	253304	156	253507	164
252302	165	252517	165	252808	166	253026	168	253305	156	253508	164
252303	165	252518	165	252809	166	253027	168	253306	156	253509	164
252304	165	252519	165	252810	166	253102	168	253307	156	253510	164
252305	165	252520	165	252811	166	253103	168	253308	156	253511	164
252306	165	252521	165	252812	166	253104	168	253309	156	253512	164
252307	165	252522	165	252813	166	253105	168	253310	156	253513	164
252308	165	252523	165	252814	166	253106	168	253311	156	253514	164
252309	165	252524	165	252815	166	253107	168	253312	156	253515	164
252310	165	252525	165	252816	166	253108	168	253313	156	253516	164
252311	165	252526	165	252817	166	253109	168	253314	156	253517	164
252312	165	252527	165	252818	166	253110	168	253315	156	253518	164
252313	165	252602	166	252819	166	253111	168	253316	156	253519	164
252314	165	252603	166	252820	166	253112	168	253317	156	253520	164
252315	165	252604	166	252821	166	253113	168	253318	156	253521	164
252316	165	252605	166	252822	166	253114	168	253319	156	253522	164
252317	165	252606	166	252823	166	253115	168	253320	156	253523	164
252318	165	252607	166	252824	166	253116	168	253321	156	253524	164
252319	165	252608	166	252825	166	253117	168	253322	156	253525	164
252320	165	252609	166	252826	166	253118	168	253323	156	253526	164
252321	165	252610	166	252827	166	253119	168	253324	156	253527	164
252322	165	252611	166	252902	168	253120	168	253325	156	253600	164
252323	165	252612	166	252903	168	253121	168	253326	156	253601	164
252324	165	252613	166	252904	168	253122	168	253327	156	253602	164
252325	165	252614	166	252905	168	253123	168	253328	156	253603	164
252326	165	252615	166	252906	168	253124	168	253329	156	253604	164
252327	165	252616	166	252907	168	253125	168	253330	156	253605	164
252400	165	252617	166	252908	168	253126	168	253331	156	253606	164
252401	165	252618	166	252909	168	253127	168	253332	156	253607	164

 © System Plast S.r.l., 2012 - All Rights Reserved

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
253608	164	253826	167	254104	125	254236	126	254429J	135	254572	94
253609	164	253827	167	254105	125	254237	126	254430J	135	254573	94
253610	164	253902	167	254106	125	254238	126	254431J	135	254574	94
253611	164	253903	167	254107	125	254239	126	254432J	135	254575	94
253612	164	253904	167	254108	125	254301J	134	254433J	135	254576	94
253613	164	253905	167	254109	125	254302J	134	254434J	135	254577	94
253614	164	253906	167	254110	125	254303J	134	254435J	135	254578	94
253615	164	253907	167	254111	125	254304J	134	254436J	135	254579	94
253616	164	253908	167	254112	125	254305J	134	254437J	135	254580	94
253617	164	253909	167	254113	125	254306J	134	254438J	135	254581	94
253618	164	253910	167	254114	125	254307J	134	254439J	135	254582	94
253619	164	253911	167	254115	125	254308J	134	254501H	94	254583	94
253620	164	253912	167	254116	125	254309J	134	254502H	94	254584	94
253621	164	253913	167	254117	125	254310J	134	254503H	94	254585	94
253622	164	253914	167	254118	125	254311J	134	254504H	94	254586	94
253623	164	253915	167	254119	125	254312J	134	254505H	94	254587	94
253624	164	253916	167	254120	125	254313J	134	254506H	94	254588	94
253625	164	253917	167	254121	125	254314J	134	254507H	94	254589	94
253626	164	253918	167	254122	125	254315J	134	254508H	94	254601H	96
253627	164	253919	167	254123	125	254316J	134	254509H	94	254602H	96
253702	167	253920	167	254124	125	254317J	134	254510H	94	254603H	96
253703	167	253921	167	254125	125	254318J	134	254511H	94	254604H	96
253704	167	253922	167	254126	125	254319J	134	254512H	94	254605H	96
253705	167	253923	167	254127	125	254320J	134	254513H	94	254606H	96
253706	167	253924	167	254128	125	254321J	134	254514H	94	254607H	96
253707	167	253925	167	254129	125	254322J	134	254515H	94	254608H	96
253708	167	253926	167	254130	125	254323J	134	254516H	94	254609H	96
253709	167	253927	167	254131	125	254324J	134	254517H	94	254610H	96
253710	167	254000	170	254132	125	254325J	134	254518H	94	254611H	96
253711	167	254001	170	254133	125	254326J	134	254519H	94	254612H	96
253712	167	254002	170	254134	125	254327J	134	254520H	94	254613H	96
253713	167	254003	170	254135	125	254328J	134	254521H	94	254614H	96
253714	167	254004	170	254136	125	254329J	134	254522H	94	254615H	96
253715	167	254005	170	254137	125	254330J	134	254523H	94	254616H	96
253716	167	254006	170	254138	125	254331J	134	254524H	94	254617H	96
253717	167	254007	170	254139	125	254332J	134	254525H	94	254618H	96
253718	167	254008	170	254201	126	254333J	134	254526H	94	254619H	96
253719	167	254009	170	254202	126	254334J	134	254527H	94	254620H	96
253720	167	254010	170	254203	126	254335J	134	254528H	94	254621H	96
253721	167	254011	170	254204	126	254336J	134	254529H	94	254622H	96
253722	167	254012	170	254205	126	254337J	134	254530H	94	254623H	96
253723	167	254013	170	254206	126	254338J	134	254531H	94	254624H	96
253724	167	254014	170	254207	126	254339J	134	254532H	94	254625H	96
253725	167	254015	170	254208	126	254401J	135	254533H	94	254626H	96
253726	167	254016	170	254209	126	254402J	135	254534H	94	254627H	96
253727	167	254017	170	254210	126	254403J	135	254535H	94	254628H	96
253801	167	254018	170	254211	126	254404J	135	254536H	94	254629H	96
253802	167	254019	170	254212	126	254405J	135	254537H	94	254630H	96
253803	167	254020	170	254213	126	254406J	135	254538H	94	254631H	96
253804	167	254021	170	254214	126	254407J	135	254539H	94	254632H	96
253805	167	254022	170	254215	126	254408J	135	254551	94	254633H	96
253806	167	254023	170	254216	126	254409J	135	254552	94	254634H	96
253807	167	254024	170	254217	126	254410J	135	254553	94	254635H	96
253808	167	254025	170	254218	126	254411J	135	254554	94	254636H	96
253809	167	254026	170	254219	126	254412J	135	254555	94	254637H	96
253810	167	254027	170	254220	126	254413J	135	254556	94	254638H	96
253811	167	254028	170	254221	126	254414J	135	254557	94	254639H	96
253812	167	254029	170	254222	126	254415J	135	254558	94	254651	96
253813	167	254030	170	254223	126	254416J	135	254559	94	254652	96
253814	167	254031	170	254224	126	254417J	135	254560	94	254653	96
253815	167	254032	170	254225	126	254418J	135	254561	94	254654	96
253816	167	254033	170	254226	126	254419J	135	254562	94	254655	96
253817	167	254034	170	254227	126	254420J	135	254563	94	254656	96
253818	167	254035	170	254228	126	254421J	135	254564	94	254657	96
253819	167	254036	170	254229	126	254422J	135	254565	94	254658	96
253820	167	254037	170	254230	126	254423J	135	254566	94	254659	96
253821	167	254038	170	254231	126	254424J	135	254567	94	254660	96
253822	167	254039	170	254232	126	254425J	135	254568	94	254661	96
253823	167	254101	125	254233	126	254426J	135	254569	94	254662	96
253824	167	254102	125	254234	126	254427J	135	254570	94	254663	96
253825	167	254103	125	254235	126	254428J	135	254571	94	254664	96

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
254665	96	254818	100	255105	101	255320	102	255609	103	255826	103
254666	96	254819	100	255106	101	255321	102	255610	103	255827	103
254667	96	254820	100	255107	101	255322	102	255611	103	255902	104
254668	96	254821	100	255108	101	255323	102	255612	103	255903	104
254669	96	254822	100	255109	101	255324	102	255613	103	255904	104
254670	96	254823	100	255110	101	255325	102	255614	103	255905	104
254671	96	254824	100	255111	101	255326	102	255615	103	255906	104
254672	96	254825	100	255112	101	255327	102	255616	103	255907	104
254673	96	254826	100	255113	101	255400	102	255617	103	255908	104
254674	96	254827	100	255114	101	255401	102	255618	103	255909	104
254675	96	254900	100	255115	101	255402	102	255619	103	255910	104
254676	96	254901	100	255116	101	255403	102	255620	103	255911	104
254677	96	254902	100	255117	101	255404	102	255621	103	255912	104
254678	96	254903	100	255118	101	255405	102	255622	103	255913	104
254679	96	254904	100	255119	101	255406	102	255623	103	255914	104
254680	96	254905	100	255120	101	255407	102	255624	103	255915	104
254681	96	254906	100	255121	101	255408	102	255625	103	255916	104
254682	96	254907	100	255122	101	255409	102	255626	103	255917	104
254683	96	254908	100	255123	101	255410	102	255627	103	255918	104
254684	96	254909	100	255124	101	255411	102	255701	103	255919	104
254685	96	254910	100	255125	101	255412	102	255702	103	255920	104
254686	96	254911	100	255126	101	255413	102	255703	103	255921	104
254687	96	254912	100	255127	101	255414	102	255704	103	255922	104
254688	96	254913	100	255200	101	255415	102	255705	103	255923	104
254689	96	254914	100	255201	101	255416	102	255706	103	255924	104
254700	100	254915	100	255202	101	255417	102	255707	103	255925	104
254701	100	254916	100	255203	101	255418	102	255708	103	255926	104
254702	100	254917	100	255204	101	255419	102	255709	103	255927	104
254703	100	254918	100	255205	101	255420	102	255710	103	256001	104
254704	100	254919	100	255206	101	255421	102	255711	103	256002	104
254705	100	254920	100	255207	101	255422	102	255712	103	256003	104
254706	100	254921	100	255208	101	255423	102	255713	103	256004	104
254707	100	254922	100	255209	101	255424	102	255714	103	256005	104
254708	100	254923	100	255210	101	255425	102	255715	103	256006	104
254709	100	254924	100	255211	101	255426	102	255716	103	256007	104
254710	100	254925	100	255212	101	255427	102	255717	103	256008	104
254711	100	254926	100	255213	101	255500	102	255718	103	256009	104
254712	100	254927	100	255214	101	255501	102	255719	103	256010	104
254713	100	255000	101	255215	101	255502	102	255720	103	256011	104
254714	100	255001	101	255216	101	255503	102	255721	103	256012	104
254715	100	255002	101	255217	101	255504	102	255722	103	256013	104
254716	100	255003	101	255218	101	255505	102	255723	103	256014	104
254717	100	255004	101	255219	101	255506	102	255724	103	256015	104
254718	100	255005	101	255220	101	255507	102	255725	103	256016	104
254719	100	255006	101	255221	101	255508	102	255726	103	256017	104
254720	100	255007	101	255222	101	255509	102	255727	103	256018	104
254721	100	255008	101	255223	101	255510	102	255801	103	256019	104
254722	100	255009	101	255224	101	255511	102	255802	103	256020	104
254723	100	255010	101	255225	101	255512	102	255803	103	256021	104
254724	100	255011	101	255226	101	255513	102	255804	103	256022	104
254725	100	255012	101	255227	101	255514	102	255805	103	256023	104
254726	100	255013	101	255300	102	255515	102	255806	103	256024	104
254727	100	255014	101	255301	102	255516	102	255807	103	256025	104
254800	100	255015	101	255302	102	255517	102	255808	103	256026	104
254801	100	255016	101	255303	102	255518	102	255809	103	256027	104
254802	100	255017	101	255304	102	255519	102	255810	103	256102	104
254803	100	255018	101	255305	102	255520	102	255811	103	256103	104
254804	100	255019	101	255306	102	255521	102	255812	103	256104	104
254805	100	255020	101	255307	102	255522	102	255813	103	256105	104
254806	100	255021	101	255308	102	255523	102	255814	103	256106	104
254807	100	255022	101	255309	102	255524	102	255815	103	256107	104
254808	100	255023	101	255310	102	255525	102	255816	103	256108	104
254809	100	255024	101	255311	102	255526	102	255817	103	256109	104
254810	100	255025	101	255312	102	255527	102	255818	103	256110	104
254811	100	255026	101	255313	102	255602	103	255819	103	256111	104
254812	100	255027	101	255314	102	255603	103	255820	103	256112	104
254813	100	255100	101	255315	102	255604	103	255821	103	256113	104
254814	100	255101	101	255316	102	255605	103	255822	103	256114	104
254815	100	255102	101	255317	102	255606	103	255823	103	256115	104
254816	100	255103	101	255318	102	255607	103	255824	103	256116	104
254817	100	255104	101	255319	102	255608	103	255825	103	256117	104

 © System Plast S.r.l. , 2012 - All Rights Reserved

INDEX

Code	Page
256118	104
256119	104
256120	104
256121	104
256122	104
256123	104
256124	104
256125	104
256126	104
256127	104
256202	105
256203	105
256204	105
256205	105
256206	105
256207	105
256208	105
256209	105
256210	105
256211	105
256212	105
256213	105
256214	105
256215	105
256216	105
256217	105
256218	105
256219	105
256220	105
256221	105
256222	105
256223	105
256224	105
256225	105
256226	105
256227	105
256301	105
256302	105
256303	105
256304	105
256305	105
256306	105
256307	105
256308	105
256309	105
256310	105
256311	105
256312	105
256313	105
256314	105
256315	105
256316	105
256317	105
256318	105
256319	105
256320	105
256321	105
256322	105
256323	105
256324	105
256325	105
256326	105
256327	105
256402	105
256403	105
256404	105
256405	105
256406	105
256407	105
256408	105
256409	105
256410	105
256411	105
256412	105
256413	105
256414	105
256415	105
256416	105
256417	105
256418	105
256419	105
256420	105
256421	105
256422	105
256423	105
256424	105
256425	105
256426	105
256427	105
256500	106
256501	106
256502	106
256503	106
256504	106
256505	106
256506	106
256507	106
256508	106
256509	106
256510	106
256511	106
256512	106
256513	106
256514	106
256515	106
256516	106
256517	106
256518	106
256519	106
256520	106
256521	106
256522	106
256523	106
256524	106
256525	106
256526	106
256527	106
256528	106
256529	106
256530	106
256531	106
256532	106
256533	106
256534	106
256535	106
256536	106
256537	106
256538	106
256539	106
256600	107
256601	107
256602	107
256603	107
256604	107
256605	107
256606	107
256607	107
256608	107
256609	107
256610	107
256611	107
256612	107
256613	107
256614	107
256615	107
256616	107
256617	107
256618	107
256619	107
256620	107
256621	107
256622	107
256623	107
256624	107
256625	107
256626	107
256627	107
256628	107
256629	107
256630	107
256631	107
256632	107
256633	107
256634	107
256635	107
256636	107
256637	107
256638	107
256639	107
256700	108
256701	108
256702	108
256703	108
256704	108
256705	108
256706	108
256707	108
256708	108
256709	108
256710	108
256711	108
256712	108
256713	108
256714	108
256715	108
256716	108
256717	108
256718	108
256719	108
256720	108
256721	108
256722	108
256723	108
256724	108
256725	108
256726	108
256727	108
256728	108
256729	108
256730	108
256731	108
256732	108
256733	108
256734	108
256735	108
256736	108
256737	108
256738	108
256739	108
256800	109
256801	109
256802	109
256803	109
256804	109
256805	109
256806	109
256807	109
256808	109
256809	109
256810	109
256811	109
256812	109
256813	109
256814	109
256815	109
256816	109
256817	109
256818	109
256819	109
256820	109
256821	109
256822	109
256823	109
256824	109
256825	109
256826	109
256827	109
256900	109
256901	109
256902	109
256903	109
256904	109
256905	109
256906	109
256907	109
256908	109
256909	109
256910	109
256911	109
256912	109
256913	109
256914	109
256915	109
256916	109
256917	109
256918	109
256919	109
256920	109
256921	109
256922	109
256923	109
256924	109
256925	109
256926	109
256927	109
257000	109
257001	109
257002	109
257003	109
257004	109
257005	109
257006	109
257007	109
257008	109
257009	109
257010	109
257011	109
257012	109
257013	109
257014	109
257015	109
257016	109
257017	109
257018	109
257019	109
257020	109
257021	109
257022	109
257023	109
257024	109
257025	109
257026	109
257027	109
261002	161
261003	161
261004	161
261005	161
261006	161
261007	161
261008	161
261009	161
261010	161
261011	161
261012	161
261013	161
261014	161
261015	161
261016	161
261017	161
261018	161
261019	161
261020	161
261021	161
261022	161
261023	161
261024	161
261025	161
261026	161
261027	161
261028	161
261029	161
261030	161
261031	161
261032	161
261033	161
261034	161
261035	161
261036	161
261037	161
261038	161
261039	161
261102	111
261103	111
261104	111
261105	111
261106	111
261107	111
261108	111
261109	111
261110	111
261111	111
261112	111
261113	111
261114	111
261115	111
261116	111
261117	111
261118	111
261119	111
261120	111
261121	111
261122	111
261123	111
261124	111
261125	111
261126	111
261127	111
261128	111
261129	111
261130	111
261131	111
261132	111
261133	111
261134	111
261135	111
261136	111
261137	111
261138	111
261139	111
261252	174
261253	174
261254	174
261255	174
261256	174
261257	174
261258	174
261259	174
261260	174
261261	174
261262	174
261263	174
261264	174
261265	174
261266	174
261267	174
261268	174
261269	174
261270	174
261271	174
261272	174
261273	174
261274	174
261275	174
261276	174
261277	174
261278	174
261279	174
261280	174
261281	174
261282	174
261283	174
261284	174
261285	174
261286	174
261287	174
261288	174
261289	174
261290	174
261291	174
261292	174
261293	174
261294	174
261295	174
261296	174
261297	174
261298	174
261299	174
261300	114-115
261301	114-115
261302	115
261303	115
261304	115
261305	115
261306	115
261307	115
261308	115

INDEX

Code	Page
261309	115
261310	115
261311	115
261312	115
261313	115
261314	115
261315	115
261316	115
261317	115
261318	115
261319	115
261320	115
261321	115
261322	115
261323	115
261324	115
261325	115
261326	115
261327	115
261328	115
261329	115
261330	115
261331	115
261332	115
261333	115
261334	115
261335	115
261336	115
261337	115
261338	115
261339	115
261340	114
261341	114
261342	114
261343	114
261344	114
261345	114
261346	114
261347	114
261350	116-117
261351	116-117
261352	117
261353	117
261354	117
261355	117
261356	117
261357	117
261358	117
261359	117
261360	117
261361	117
261362	117
261363	117
261364	117
261365	117
261366	117
261367	117
261368	117
261369	117
261370	117
261371	117
261372	117
261373	117
261374	117
261375	117
261376	117
261377	117
261378	117
261379	117
261380	117
261381	117

Code	Page
261382	117
261383	117
261384	117
261385	117
261386	117
261387	117
261388	117
261389	117
261390	116
261391	116
261392	116
261393	116
261394	116
261395	116
261396	116
261397	116
261400LFB	146
261401LFB	146
261402LFB	146
261403LFB	146
261404LFB	146
261405LFB	146
261406LFB	146
261407LFB	146
261408LFB	146
261409LFB	146
261410LFB	146
261411LFB	146
261412LFB	146
261413LFB	146
261414LFB	146
261415LFB	146
261416LFB	146
261417LFB	146
261418LFB	146
261419LFB	146
261420LFB	146
261421LFB	146
261422LFB	146
261423LFB	146
261424LFB	146
261425LFB	146
261426LFB	146
261427LFB	146
261428LFB	146
261429LFB	146
831915	175

Code	Page

Code	Page
KMD.B.03.20.02.B	253
KMD.B.03.20.02.BC	253
KMD.LM.03.20.02.B	253
KMD.LM.03.20.02.BC	253
KMD.RM.03.20.02.B	253
KMD.RM.03.20.02.BC	253
KMD.T.03.20.02.B	253
KMD.T.03.20.02.BC	253
KMD.01.15.01.C	206
KMD.01.15.02.C	206
KMD.01.15.03.C	206
KMD.01.15.04.C	206
KMD.01.15.05.C	206
KMD.01.15.06.C	206
KMD.01.15.07.C	206
KMD.01.15.08.C	206
KMD.01.30.01.C	206
KMD.01.30.02.C	206
KMD.01.30.03.C	206
KMD.01.30.04.C	206
KMD.01.30.05.C	206
KMD.01.30.06.C	206
KMD.01.30.07.C	206
KMD.01.30.08.C	206
KMD.01.45.01.C	206
KMD.01.45.02.C	206
KMD.01.45.03.C	206
KMD.01.45.04.C	206
KMD.01.45.05.C	206
KMD.01.45.06.C	206
KMD.01.45.07.C	206
KMD.01.45.08.C	206
KMD.01.60.01.C	206
KMD.01.60.02.C	206
KMD.01.60.03.C	206
KMD.01.60.04.C	206
KMD.01.60.05.C	206
KMD.01.60.06.C	206
KMD.01.60.07.C	206
KMD.01.60.08.C	206
KMD.01.75.01.C	206
KMD.01.75.02.C	206
KMD.01.75.03.C	206
KMD.01.75.04.C	206
KMD.01.75.05.C	206
KMD.01.75.06.C	206
KMD.01.75.07.C	206
KMD.01.75.08.C	206
KMD.01.90.01.C	206
KMD.01.90.02.C	206
KMD.01.90.03.C	206
KMD.01.90.04.C	206
KMD.01.90.05.C	206
KMD.01.90.06.C	206
KMD.01.90.07.C	206
KMD.01.90.08.C	206
KMD.02.15.01.B	207
KMD.02.15.02.B	207
KMD.02.15.03.B	207
KMD.02.15.04.B	207
KMD.02.15.05.B	207
KMD.02.15.06.B	207
KMD.02.15.07.B	207
KMD.02.15.08.B	207
KMD.02.30.01.B	207
KMD.02.30.02.B	207
KMD.02.30.03.B	207
KMD.02.30.04.B	207
KMD.02.30.05.B	207
KMD.02.30.06.B	207

Code	Page
KMD.02.30.07.B	207
KMD.02.30.08.B	207
KMD.02.45.01.B	207
KMD.02.45.02.B	207
KMD.02.45.03.B	207
KMD.02.45.04.B	207
KMD.02.45.05.B	207
KMD.02.45.06.B	207
KMD.02.45.07.B	207
KMD.02.45.08.B	207
KMD.02.60.01.B	207
KMD.02.60.02.B	207
KMD.02.60.03.B	207
KMD.02.60.04.B	207
KMD.02.60.05.B	207
KMD.02.60.06.B	207
KMD.02.60.07.B	207
KMD.02.60.08.B	207
KMD.02.75.01.B	207
KMD.02.75.02.B	207
KMD.02.75.03.B	207
KMD.02.75.04.B	207
KMD.02.75.05.B	207
KMD.02.75.06.B	207
KMD.02.75.07.B	207
KMD.02.75.08.B	207
KMD.02.90.01.B	207
KMD.02.90.02.B	207
KMD.02.90.03.B	207
KMD.02.90.04.B	207
KMD.02.90.05.B	207
KMD.02.90.06.B	207
KMD.02.90.07.B	207
KMD.02.90.08.B	207
KMD.03.15.01.A	202
KMD.03.15.01.B	203
KMD.03.15.02.A	202
KMD.03.15.02.B	203
KMD.03.15.03.A	202
KMD.03.15.03.B	203
KMD.03.15.04.A	202
KMD.03.15.04.B	203
KMD.03.15.05.A	202
KMD.03.15.05.B	203
KMD.03.15.06.A	202
KMD.03.15.06.B	203
KMD.03.15.07.A	202
KMD.03.15.07.B	203
KMD.03.15.08.A	202
KMD.03.15.08.B	203
KMD.03.30.01.A	202
KMD.03.30.01.B	203
KMD.03.30.02.A	202
KMD.03.30.02.B	203
KMD.03.30.03.A	202
KMD.03.30.03.B	203
KMD.03.30.04.A	202
KMD.03.30.04.B	203
KMD.03.30.05.A	202
KMD.03.30.05.B	203
KMD.03.30.06.A	202
KMD.03.30.06.B	203
KMD.03.30.07.A	202
KMD.03.30.07.B	203
KMD.03.30.08.A	202
KMD.03.30.08.B	203
KMD.03.45.01.A	202
KMD.03.45.01.B	203
KMD.03.45.02.A	202
KMD.03.45.02.B	203

Code	Page
KMD.03.45.03.A	202
KMD.03.45.03.B	203
KMD.03.45.04.A	202
KMD.03.45.04.B	203
KMD.03.45.05.A	202
KMD.03.45.05.B	203
KMD.03.45.06.A	202
KMD.03.45.06.B	203
KMD.03.45.07.A	202
KMD.03.45.07.B	203
KMD.03.45.08.A	202
KMD.03.45.08.B	203
KMD.03.60.01.A	202
KMD.03.60.01.B	203
KMD.03.60.02.A	202
KMD.03.60.02.B	203
KMD.03.60.03.A	202
KMD.03.60.03.B	203
KMD.03.60.04.A	202
KMD.03.60.04.B	203
KMD.03.60.05.A	202
KMD.03.60.05.B	203
KMD.03.60.06.A	202
KMD.03.60.06.B	203
KMD.03.60.07.A	202
KMD.03.60.07.B	203
KMD.03.60.08.A	202
KMD.03.60.08.B	203
KMD.03.75.01.A	202
KMD.03.75.01.B	203
KMD.03.75.02.A	202
KMD.03.75.02.B	203
KMD.03.75.03.A	202
KMD.03.75.03.B	203
KMD.03.75.04.A	202
KMD.03.75.04.B	203
KMD.03.75.05.A	202
KMD.03.75.05.B	203
KMD.03.75.06.A	202
KMD.03.75.06.B	203
KMD.03.75.07.A	202
KMD.03.75.07.B	203
KMD.03.75.08.A	202
KMD.03.75.08.B	203
KMD.03.90.01.A	202
KMD.03.90.01.B	203
KMD.03.90.02.A	202
KMD.03.90.02.B	203
KMD.03.90.03.A	202
KMD.03.90.03.B	203
KMD.03.90.04.A	202
KMD.03.90.04.B	203
KMD.03.90.05.A	202
KMD.03.90.05.B	203
KMD.03.90.06.A	202
KMD.03.90.06.B	203
KMD.03.90.07.A	202
KMD.03.90.07.B	203
KMD.03.90.08.A	202
KMD.03.90.08.B	203
KMD.04.15.01.A	208
KMD.04.15.02.A	208
KMD.04.15.03.A	208
KMD.04.15.04.A	208
KMD.04.15.05.A	208
KMD.04.15.06.A	208
KMD.04.15.07.A	208
KMD.04.15.08.A	208
KMD.04.30.01.A	208
KMD.04.30.02.A	208

 © System Plast S.r.l. , 2012 - All Rights Reserved

INDEX

Code	Page
KMD.04.30.03.A	208
KMD.04.30.04.A	208
KMD.04.30.05.A	208
KMD.04.30.06.A	208
KMD.04.30.07.A	208
KMD.04.30.08.A	208
KMD.04.45.01.A	208
KMD.04.45.02.A	208
KMD.04.45.03.A	208
KMD.04.45.04.A	208
KMD.04.45.05.A	208
KMD.04.45.06.A	208
KMD.04.45.07.A	208
KMD.04.45.08.A	208
KMD.04.60.01.A	208
KMD.04.60.02.A	208
KMD.04.60.03.A	208
KMD.04.60.04.A	208
KMD.04.60.05.A	208
KMD.04.60.06.A	208
KMD.04.60.07.A	208
KMD.04.60.08.A	208
KMD.04.75.01.A	208
KMD.04.75.02.A	208
KMD.04.75.03.A	208
KMD.04.75.04.A	208
KMD.04.75.05.A	208
KMD.04.75.06.A	208
KMD.04.75.07.A	208
KMD.04.75.08.A	208
KMD.04.90.01.A	208
KMD.04.90.02.A	208
KMD.04.90.03.A	208
KMD.04.90.04.A	208
KMD.04.90.05.A	208
KMD.04.90.06.A	208
KMD.04.90.07.A	208
KMD.04.90.08.A	208
KMD.05.15.01.B	205
KMD.05.15.02.B	205
KMD.05.15.03.B	205
KMD.05.15.04.B	205
KMD.05.15.05.B	205
KMD.05.15.06.B	205
KMD.05.15.07.B	205
KMD.05.15.08.B	205
KMD.05.30.01.B	205
KMD.05.30.02.B	205
KMD.05.30.03.B	205
KMD.05.30.04.B	205
KMD.05.30.05.B	205
KMD.05.30.06.B	205
KMD.05.30.07.B	205
KMD.05.30.08.B	205
KMD.05.45.01.B	205
KMD.05.45.02.B	205
KMD.05.45.03.B	205
KMD.05.45.04.B	205
KMD.05.45.05.B	205
KMD.05.45.06.B	205
KMD.05.45.07.B	205
KMD.05.45.08.B	205
KMD.05.60.01.B	205
KMD.05.60.02.B	205
KMD.05.60.03.B	205
KMD.05.60.04.B	205
KMD.05.60.05.B	205
KMD.05.60.06.B	205
KMD.05.60.07.B	205
KMD.05.60.08.B	205
KMD.05.75.01.B	205
KMD.05.75.02.B	205
KMD.05.75.03.B	205
KMD.05.75.04.B	205
KMD.05.75.05.B	205
KMD.05.75.06.B	205
KMD.05.75.07.B	205
KMD.05.75.08.B	205
KMD.05.90.01.B	205
KMD.05.90.02.B	205
KMD.05.90.03.B	205
KMD.05.90.04.B	205
KMD.05.90.05.B	205
KMD.05.90.06.B	205
KMD.05.90.07.B	205
KMD.05.90.08.B	205
KMD.06.15.02.B	209
KMD.06.30.02.B	209
KMD.06.45.02.B	209
KMD.06.60.02.B	209
KMD.06.75.02.B	209
KMD.06.90.02.B	209
KMD.07.15.01.B	210
KMD.07.30.01.B	210
KMD.07.45.01.B	210
KMD.07.60.01.B	210
KMD.07.75.01.B	210
KMD.07.90.01.B	210
KMD.08.15.01.B	211
KMD.08.15.02.B	211
KMD.08.15.03.B	211
KMD.08.15.04.B	211
KMD.08.15.05.B	211
KMD.08.15.06.B	211
KMD.08.15.07.B	211
KMD.08.15.08.B	211
KMD.08.30.01.B	211
KMD.08.30.02.B	211
KMD.08.30.03.B	211
KMD.08.30.04.B	211
KMD.08.30.05.B	211
KMD.08.30.06.B	211
KMD.08.30.07.B	211
KMD.08.30.08.B	211
KMD.08.45.01.B	211
KMD.08.45.02.B	211
KMD.08.45.03.B	211
KMD.08.45.04.B	211
KMD.08.45.05.B	211
KMD.08.45.06.B	211
KMD.08.45.07.B	211
KMD.08.45.08.B	211
KMD.08.60.01.B	211
KMD.08.60.02.B	211
KMD.08.60.03.B	211
KMD.08.60.04.B	211
KMD.08.60.05.B	211
KMD.08.60.06.B	211
KMD.08.60.07.B	211
KMD.08.60.08.B	211
KMD.08.75.01.B	211
KMD.08.75.02.B	211
KMD.08.75.03.B	211
KMD.08.75.04.B	211
KMD.08.75.05.B	211
KMD.08.75.06.B	211
KMD.08.75.07.B	211
KMD.08.75.08.B	211
KMD.08.90.01.B	211
KMD.08.90.02.B	211
KMD.08.90.03.B	211
KMD.08.90.04.B	211
KMD.08.90.05.B	211
KMD.08.90.06.B	211
KMD.08.90.07.B	211
KMD.08.90.08.B	211
KMD.09.15.01.C	210
KMD.09.30.01.C	210
KMD.09.45.01.C	210
KMD.09.60.01.C	210
KMD.09.75.01.C	210
KMD.09.90.01.C	210
KMD.10.15.01.A	210
KMD.10.30.01.A	210
KMD.10.45.01.A	210
KMD.10.60.01.A	210
KMD.10.75.01.A	210
KMD.10.90.01.A	210
KMD.11.15.01.B	212
KMD.11.15.02.B	212
KMD.11.15.03.B	212
KMD.11.15.04.B	212
KMD.11.15.05.B	212
KMD.11.15.06.B	212
KMD.11.15.07.B	212
KMD.11.15.08.B	212
KMD.11.30.01.B	212
KMD.11.30.02.B	212
KMD.11.30.03.B	212
KMD.11.30.04.B	212
KMD.11.30.05.B	212
KMD.11.30.06.B	212
KMD.11.30.07.B	212
KMD.11.30.08.B	212
KMD.11.45.01.B	212
KMD.11.45.02.B	212
KMD.11.45.03.B	212
KMD.11.45.04.B	212
KMD.11.45.05.B	212
KMD.11.45.06.B	212
KMD.11.45.07.B	212
KMD.11.45.08.B	212
KMD.11.60.01.B	212
KMD.11.60.02.B	212
KMD.11.60.03.B	212
KMD.11.60.04.B	212
KMD.11.60.05.B	212
KMD.11.60.06.B	212
KMD.11.60.07.B	212
KMD.11.60.08.B	212
KMD.11.75.01.B	212
KMD.11.75.02.B	212
KMD.11.75.03.B	212
KMD.11.75.04.B	212
KMD.11.75.05.B	212
KMD.11.75.06.B	212
KMD.11.75.07.B	212
KMD.11.75.08.B	212
KMD.11.90.01.B	212
KMD.11.90.02.B	212
KMD.11.90.03.B	212
KMD.11.90.04.B	212
KMD.11.90.05.B	212
KMD.11.90.06.B	212
KMD.11.90.07.B	212
KMD.11.90.08.B	212
KMD.12.15.01.B	214
KMD.12.15.02.B	214
KMD.12.15.03.B	214
KMD.12.15.04.B	214
KMD.12.15.05.B	214
KMD.12.15.06.B	214
KMD.12.15.07.B	214
KMD.12.15.08.B	214
KMD.12.30.01.B	214
KMD.12.30.02.B	214
KMD.12.30.03.B	214
KMD.12.30.04.B	214
KMD.12.30.05.B	214
KMD.12.30.06.B	214
KMD.12.30.07.B	214
KMD.12.30.08.B	214
KMD.12.45.01.B	214
KMD.12.45.02.B	214
KMD.12.45.03.B	214
KMD.12.45.04.B	214
KMD.12.45.05.B	214
KMD.12.45.06.B	214
KMD.12.45.07.B	214
KMD.12.45.08.B	214
KMD.12.60.01.B	214
KMD.12.60.02.B	214
KMD.12.60.03.B	214
KMD.12.60.04.B	214
KMD.12.60.05.B	214
KMD.12.60.06.B	214
KMD.12.60.07.B	214
KMD.12.60.08.B	214
KMD.12.75.01.B	214
KMD.12.75.02.B	214
KMD.12.75.03.B	214
KMD.12.75.04.B	214
KMD.12.75.05.B	214
KMD.12.75.06.B	214
KMD.12.75.07.B	214
KMD.12.75.08.B	214
KMD.12.90.01.B	214
KMD.12.90.02.B	214
KMD.12.90.03.B	214
KMD.12.90.04.B	214
KMD.12.90.05.B	214
KMD.12.90.06.B	214
KMD.12.90.07.B	214
KMD.12.90.08.B	214
KMD.21.15.01.C	215
KMD.21.15.02.C	215
KMD.21.15.03.C	215
KMD.21.15.04.C	215
KMD.21.15.05.C	215
KMD.21.15.06.C	215
KMD.21.15.07.C	215
KMD.21.15.08.C	215
KMD.21.30.01.C	215
KMD.21.30.02.C	215
KMD.21.30.03.C	215
KMD.21.30.04.C	215
KMD.21.30.05.C	215
KMD.21.30.06.C	215
KMD.21.30.07.C	215
KMD.21.30.08.C	215
KMD.21.45.01.C	215
KMD.21.45.02.C	215
KMD.21.45.03.C	215
KMD.21.45.04.C	215
KMD.21.45.05.C	215
KMD.21.45.06.C	215
KMD.21.45.07.C	215
KMD.21.45.08.C	215
KMD.21.60.01.C	215
KMD.21.60.02.C	215
KMD.21.60.03.C	215
KMD.21.60.04.C	215
KMD.21.60.05.C	215
KMD.21.60.06.C	215
KMD.21.60.07.C	215
KMD.21.60.08.C	215
KMD.21.75.01.C	215
KMD.21.75.02.C	215
KMD.21.75.03.C	215
KMD.21.75.04.C	215
KMD.21.75.05.C	215
KMD.21.75.06.C	215
KMD.21.75.07.C	215
KMD.21.75.08.C	215
KMD.21.90.01.C	215
KMD.21.90.02.C	215
KMD.21.90.03.C	215
KMD.21.90.04.C	215
KMD.21.90.05.C	215
KMD.21.90.06.C	215
KMD.21.90.07.C	215
KMD.21.90.08.C	215
KMD.22.15.01.C	216
KMD.22.15.02.C	216
KMD.22.15.03.C	216
KMD.22.15.04.C	216
KMD.22.15.05.C	216
KMD.22.15.06.C	216
KMD.22.15.07.C	216
KMD.22.15.08.C	216
KMD.22.30.01.C	216
KMD.22.30.02.C	216
KMD.22.30.03.C	216
KMD.22.30.04.C	216
KMD.22.30.05.C	216
KMD.22.30.06.C	216
KMD.22.30.07.C	216
KMD.22.30.08.C	216
KMD.22.45.01.C	216
KMD.22.45.02.C	216
KMD.22.45.03.C	216
KMD.22.45.04.C	216
KMD.22.45.05.C	216
KMD.22.45.06.C	216
KMD.22.45.07.C	216
KMD.22.45.08.C	216
KMD.22.60.01.C	216
KMD.22.60.02.C	216
KMD.22.60.03.C	216
KMD.22.60.04.C	216
KMD.22.60.05.C	216
KMD.22.60.06.C	216
KMD.22.60.07.C	216
KMD.22.60.08.C	216
KMD.22.75.01.C	216
KMD.22.75.02.C	216
KMD.22.75.03.C	216
KMD.22.75.04.C	216
KMD.22.75.05.C	216
KMD.22.75.06.C	216
KMD.22.75.07.C	216
KMD.22.75.08.C	216
KMD.22.90.01.C	216
KMD.22.90.02.C	216
KMD.22.90.03.C	216
KMD.22.90.04.C	216
KMD.22.90.05.C	216
KMD.22.90.06.C	216
KMD.22.90.07.C	216
KMD.22.90.08.C	216
KMD.23.15.01.A	217
KMD.23.15.02.A	217
KMD.23.15.03.A	217
KMD.23.15.04.A	217
KMD.23.15.05.A	217
KMD.23.15.06.A	217
KMD.23.15.07.A	217
KMD.23.15.08.A	217
KMD.23.30.01.A	217
KMD.23.30.02.A	217
KMD.23.30.03.A	217
KMD.23.30.04.A	217
KMD.23.30.05.A	217
KMD.23.30.06.A	217
KMD.23.30.07.A	217
KMD.23.30.08.A	217
KMD.23.45.01.A	217
KMD.23.45.02.A	217
KMD.23.45.03.A	217
KMD.23.45.04.A	217
KMD.23.45.05.A	217
KMD.23.45.06.A	217
KMD.23.45.07.A	217
KMD.23.45.08.A	217
KMD.23.60.01.A	217
KMD.23.60.02.A	217
KMD.23.60.03.A	217
KMD.23.60.04.A	217
KMD.23.60.05.A	217
KMD.23.60.06.A	217
KMD.23.60.07.A	217
KMD.23.60.08.A	217
KMD.23.75.01.A	217
KMD.23.75.02.A	217
KMD.23.75.03.A	217
KMD.23.75.04.A	217
KMD.23.75.05.A	217
KMD.23.75.06.A	217
KMD.23.75.07.A	217
KMD.23.75.08.A	217
KMD.23.90.01.A	217
KMD.23.90.02.A	217
KMD.23.90.03.A	217
KMD.23.90.04.A	217
KMD.23.90.05.A	217
KMD.23.90.06.A	217
KMD.23.90.07.A	217
KMD.23.90.08.A	217
KMD.24.15.01.A	231
KMD.24.15.02.A	231
KMD.24.15.03.A	231
KMD.24.15.04.A	231
KMD.24.15.05.A	231
KMD.24.15.06.A	231
KMD.24.15.07.A	231
KMD.24.15.08.A	231
KMD.24.30.01.A	231
KMD.24.30.02.A	231
KMD.24.30.03.A	231
KMD.24.30.04.A	231
KMD.24.30.05.A	231
KMD.24.30.06.A	231
KMD.24.30.07.A	231
KMD.24.30.08.A	231
KMD.24.45.01.A	231
KMD.24.45.02.A	231
KMD.24.45.03.A	231
KMD.24.45.04.A	231
KMD.24.45.05.A	231
KMD.24.45.06.A	231

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
KMD.24.45.07.A	231	KMD.25.90.05.B	232	KMD.27.45.03.B	234	KMD.28.90.01.B	235	KMD.30.30.07.A	237	KMD.32.15.01.A	220
KMD.24.45.08.A	231	KMD.25.90.06.B	232	KMD.27.45.04.B	234	KMD.28.90.02.B	235	KMD.30.30.08.A	237	KMD.32.30.01.A	220
KMD.24.60.01.A	231	KMD.25.90.07.B	232	KMD.27.45.05.B	234	KMD.28.90.03.B	235	KMD.30.45.01.A	237	KMD.32.45.01.A	220
KMD.24.60.02.A	231	KMD.25.90.08.B	232	KMD.27.45.06.B	234	KMD.28.90.04.B	235	KMD.30.45.02.A	237	KMD.32.60.01.A	220
KMD.24.60.03.A	231	KMD.26.15.01.B	233	KMD.27.45.07.B	234	KMD.28.90.05.B	235	KMD.30.45.03.A	237	KMD.32.75.01.A	220
KMD.24.60.04.A	231	KMD.26.15.02.B	233	KMD.27.45.08.B	234	KMD.28.90.06.B	235	KMD.30.45.04.A	237	KMD.32.90.01.A	220
KMD.24.60.05.A	231	KMD.26.15.03.B	233	KMD.27.60.01.B	234	KMD.28.90.07.B	235	KMD.30.45.05.A	237	KMD.33.15.01.A	220
KMD.24.60.06.A	231	KMD.26.15.04.B	233	KMD.27.60.02.B	234	KMD.28.90.08.B	235	KMD.30.45.06.A	237	KMD.33.30.01.A	220
KMD.24.60.07.A	231	KMD.26.15.05.B	233	KMD.27.60.03.B	234	KMD.29.15.01.B	236	KMD.30.45.07.A	237	KMD.33.45.01.A	220
KMD.24.60.08.A	231	KMD.26.15.06.B	233	KMD.27.60.04.B	234	KMD.29.15.02.B	236	KMD.30.45.08.A	237	KMD.33.60.01.A	220
KMD.24.75.01.A	231	KMD.26.15.07.B	233	KMD.27.60.05.B	234	KMD.29.15.03.B	236	KMD.30.60.01.A	237	KMD.33.75.01.A	220
KMD.24.75.02.A	231	KMD.26.15.08.B	233	KMD.27.60.06.B	234	KMD.29.15.04.B	236	KMD.30.60.02.A	237	KMD.33.90.01.A	220
KMD.24.75.03.A	231	KMD.26.30.01.B	233	KMD.27.60.07.B	234	KMD.29.15.05.B	236	KMD.30.60.03.A	237	KMD.37.15.01.A	220
KMD.24.75.04.A	231	KMD.26.30.02.B	233	KMD.27.60.08.B	234	KMD.29.15.06.B	236	KMD.30.60.04.A	237	KMD.37.30.01.A	220
KMD.24.75.05.A	231	KMD.26.30.03.B	233	KMD.27.75.01.B	234	KMD.29.15.07.B	236	KMD.30.60.05.A	237	KMD.37.45.01.A	220
KMD.24.75.06.A	231	KMD.26.30.04.B	233	KMD.27.75.02.B	234	KMD.29.15.08.B	236	KMD.30.60.06.A	237	KMD.37.60.01.A	220
KMD.24.75.07.A	231	KMD.26.30.05.B	233	KMD.27.75.03.B	234	KMD.29.30.01.B	236	KMD.30.60.07.A	237	KMD.37.75.01.A	220
KMD.24.75.08.A	231	KMD.26.30.06.B	233	KMD.27.75.04.B	234	KMD.29.30.02.B	236	KMD.30.60.08.A	237	KMD.37.90.01.A	220
KMD.24.90.01.A	231	KMD.26.30.07.B	233	KMD.27.75.05.B	234	KMD.29.30.03.B	236	KMD.30.75.01.A	237	KMD.38.15.01.A	a218
KMD.24.90.02.A	231	KMD.26.30.08.B	233	KMD.27.75.06.B	234	KMD.29.30.04.B	236	KMD.30.75.02.A	237	KMD.38.15.02.A	218
KMD.24.90.03.A	231	KMD.26.45.01.B	233	KMD.27.75.07.B	234	KMD.29.30.05.B	236	KMD.30.75.03.A	237	KMD.38.15.03.A	218
KMD.24.90.04.A	231	KMD.26.45.02.B	233	KMD.27.75.08.B	234	KMD.29.30.06.B	236	KMD.30.75.04.A	237	KMD.38.30.01.A	218
KMD.24.90.05.A	231	KMD.26.45.03.B	233	KMD.27.90.01.B	234	KMD.29.30.07.B	236	KMD.30.75.05.A	237	KMD.38.30.02.A	218
KMD.24.90.06.A	231	KMD.26.45.04.B	233	KMD.27.90.02.B	234	KMD.29.30.08.B	236	KMD.30.75.06.A	237	KMD.38.30.03.A	218
KMD.24.90.07.A	231	KMD.26.45.05.B	233	KMD.27.90.03.B	234	KMD.29.45.01.B	236	KMD.30.75.07.A	237	KMD.38.45.01.A	218
KMD.24.90.08.A	231	KMD.26.45.06.B	233	KMD.27.90.04.B	234	KMD.29.45.02.B	236	KMD.30.75.08.A	237	KMD.38.45.02.A	218
KMD.25.15.01.B	232	KMD.26.45.07.B	233	KMD.27.90.05.B	234	KMD.29.45.03.B	236	KMD.30.90.01.A	237	KMD.38.45.03.A	218
KMD.25.15.02.B	232	KMD.26.45.08.B	233	KMD.27.90.06.B	234	KMD.29.45.04.B	236	KMD.30.90.02.A	237	KMD.38.60.01.A	218
KMD.25.15.03.B	232	KMD.26.60.01.B	233	KMD.27.90.07.B	234	KMD.29.45.05.B	236	KMD.30.90.03.A	237	KMD.38.60.02.A	218
KMD.25.15.04.B	232	KMD.26.60.02.B	233	KMD.27.90.08.B	234	KMD.29.45.06.B	236	KMD.30.90.04.A	237	KMD.38.60.03.A	218
KMD.25.15.05.B	232	KMD.26.60.03.B	233	KMD.28.15.01.B	235	KMD.29.45.07.B	236	KMD.30.90.05.A	237	KMD.38.75.01.A	218
KMD.25.15.06.B	232	KMD.26.60.04.B	233	KMD.28.15.02.B	235	KMD.29.45.08.B	236	KMD.30.90.06.A	237	KMD.38.75.02.A	218
KMD.25.15.07.B	232	KMD.26.60.05.B	233	KMD.28.15.03.B	235	KMD.29.60.01.B	236	KMD.30.90.07.A	237	KMD.38.75.03.A	218
KMD.25.15.08.B	232	KMD.26.60.06.B	233	KMD.28.15.04.B	235	KMD.29.60.02.B	236	KMD.30.90.08.A	237	KMD.38.90.01.A	218
KMD.25.30.01.B	232	KMD.26.60.07.B	233	KMD.28.15.05.B	235	KMD.29.60.03.B	236	KMD.31.15.01.C	219	KMD.38.90.02.A	218
KMD.25.30.02.B	232	KMD.26.60.08.B	233	KMD.28.15.06.B	235	KMD.29.60.04.B	236	KMD.31.15.02.C	219	KMD.38.90.03.A	218
KMD.25.30.03.B	232	KMD.26.75.01.B	233	KMD.28.15.07.B	235	KMD.29.60.05.B	236	KMD.31.15.03.C	219	KMD.39.15.01.B	224
KMD.25.30.04.B	232	KMD.26.75.02.B	233	KMD.28.15.08.B	235	KMD.29.60.06.B	236	KMD.31.15.04.C	219	KMD.39.15.02.B	224
KMD.25.30.05.B	232	KMD.26.75.03.B	233	KMD.28.30.01.B	235	KMD.29.60.07.B	236	KMD.31.15.05.C	219	KMD.39.15.03.B	224
KMD.25.30.06.B	232	KMD.26.75.04.B	233	KMD.28.30.02.B	235	KMD.29.60.08.B	236	KMD.31.15.06.C	219	KMD.39.30.01.B	224
KMD.25.30.07.B	232	KMD.26.75.05.B	233	KMD.28.30.03.B	235	KMD.29.75.01.B	236	KMD.31.30.01.C	219	KMD.39.30.02.B	224
KMD.25.30.08.B	232	KMD.26.75.06.B	233	KMD.28.30.04.B	235	KMD.29.75.02.B	236	KMD.31.30.02.C	219	KMD.39.30.03.B	224
KMD.25.45.01.B	232	KMD.26.75.07.B	233	KMD.28.30.05.B	235	KMD.29.75.03.B	236	KMD.31.30.03.C	219	KMD.39.45.01.B	224
KMD.25.45.02.B	232	KMD.26.75.08.B	233	KMD.28.30.06.B	235	KMD.29.75.04.B	236	KMD.31.30.04.C	219	KMD.39.45.02.B	224
KMD.25.45.03.B	232	KMD.26.90.01.B	233	KMD.28.30.07.B	235	KMD.29.75.05.B	236	KMD.31.30.05.C	219	KMD.39.45.03.B	224
KMD.25.45.04.B	232	KMD.26.90.02.B	233	KMD.28.30.08.B	235	KMD.29.75.06.B	236	KMD.31.30.06.C	219	KMD.39.60.01.B	224
KMD.25.45.05.B	232	KMD.26.90.03.B	233	KMD.28.45.01.B	235	KMD.29.75.07.B	236	KMD.31.45.01.C	219	KMD.39.60.02.B	224
KMD.25.45.06.B	232	KMD.26.90.04.B	233	KMD.28.45.02.B	235	KMD.29.75.08.B	236	KMD.31.45.02.C	219	KMD.39.60.03.B	224
KMD.25.45.07.B	232	KMD.26.90.05.B	233	KMD.28.45.03.B	235	KMD.29.90.01.B	236	KMD.31.45.03.C	219	KMD.39.75.01.B	224
KMD.25.45.08.B	232	KMD.26.90.06.B	233	KMD.28.45.04.B	235	KMD.29.90.02.B	236	KMD.31.45.04.C	219	KMD.39.75.02.B	224
KMD.25.60.01.B	232	KMD.26.90.07.B	233	KMD.28.45.05.B	235	KMD.29.90.03.B	236	KMD.31.45.05.C	219	KMD.39.75.03.B	224
KMD.25.60.02.B	232	KMD.26.90.08.B	233	KMD.28.45.06.B	235	KMD.29.90.04.B	236	KMD.31.45.06.C	219	KMD.39.90.01.B	224
KMD.25.60.03.B	232	KMD.27.15.01.B	234	KMD.28.45.07.B	235	KMD.29.90.05.B	236	KMD.31.60.01.C	219	KMD.39.90.02.B	224
KMD.25.60.04.B	232	KMD.27.15.02.B	234	KMD.28.45.08.B	235	KMD.29.90.06.B	236	KMD.31.60.02.C	219	KMD.39.90.03.B	224
KMD.25.60.05.B	232	KMD.27.15.03.B	234	KMD.28.60.01.B	235	KMD.29.90.07.B	236	KMD.31.60.03.C	219	KMD.40.15.01.B	221
KMD.25.60.06.B	232	KMD.27.15.04.B	234	KMD.28.60.02.B	235	KMD.29.90.08.B	236	KMD.31.60.04.C	219	KMD.40.15.02.B	221
KMD.25.60.07.B	232	KMD.27.15.05.B	234	KMD.28.60.03.B	235	KMD.30.15.01.A	237	KMD.31.60.05.C	219	KMD.40.15.03.B	221
KMD.25.60.08.B	232	KMD.27.15.06.B	234	KMD.28.60.04.B	235	KMD.30.15.02.A	237	KMD.31.60.06.C	219	KMD.40.30.01.B	221
KMD.25.75.01.B	232	KMD.27.15.07.B	234	KMD.28.60.05.B	235	KMD.30.15.03.A	237	KMD.31.75.01.C	219	KMD.40.30.02.B	221
KMD.25.75.02.B	232	KMD.27.15.08.B	234	KMD.28.60.06.B	235	KMD.30.15.04.A	237	KMD.31.75.02.C	219	KMD.40.30.03.B	221
KMD.25.75.03.B	232	KMD.27.30.01.B	234	KMD.28.60.07.B	235	KMD.30.15.05.A	237	KMD.31.75.03.C	219	KMD.40.45.01.B	221
KMD.25.75.04.B	232	KMD.27.30.02.B	234	KMD.28.60.08.B	235	KMD.30.15.06.A	237	KMD.31.75.04.C	219	KMD.40.45.02.B	221
KMD.25.75.05.B	232	KMD.27.30.03.B	234	KMD.28.75.01.B	235	KMD.30.15.07.A	237	KMD.31.75.05.C	219	KMD.40.45.03.B	221
KMD.25.75.06.B	232	KMD.27.30.04.B	234	KMD.28.75.02.B	235	KMD.30.15.08.A	237	KMD.31.75.06.C	219	KMD.40.60.01.B	221
KMD.25.75.07.B	232	KMD.27.30.05.B	234	KMD.28.75.03.B	235	KMD.30.30.01.A	237	KMD.31.90.01.C	219	KMD.40.60.02.B	221
KMD.25.75.08.B	232	KMD.27.30.06.B	234	KMD.28.75.04.B	235	KMD.30.30.02.A	237	KMD.31.90.02.C	219	KMD.40.60.03.B	221
KMD.25.90.01.B	232	KMD.27.30.07.B	234	KMD.28.75.05.B	235	KMD.30.30.03.A	237	KMD.31.90.03.C	219	KMD.40.75.01.B	221
KMD.25.90.02.B	232	KMD.27.30.08.B	234	KMD.28.75.06.B	235	KMD.30.30.04.A	237	KMD.31.90.04.C	219	KMD.40.75.02.B	221
KMD.25.90.03.B	232	KMD.27.45.01.B	234	KMD.28.75.07.B	235	KMD.30.30.05.A	237	KMD.31.90.05.C	219	KMD.40.75.03.B	221
KMD.25.90.04.B	232	KMD.27.45.02.B	234	KMD.28.75.08.B	235	KMD.30.30.06.A	237	KMD.31.90.06.C	219	KMD.40.90.01.B	221

 © System Plast S.r.l. , 2012 - All Rights Reserved

INDEX

Code	Page
KMD.40.90.02.B	221
KMD.40.90.03.B	221
KMD.41.15.01.A	223
KMD.41.15.02.A	223
KMD.41.15.03.A	223
KMD.41.30.01.A	223
KMD.41.30.02.A	223
KMD.41.30.03.A	223
KMD.41.45.01.A	223
KMD.41.45.02.A	223
KMD.41.45.03.A	223
KMD.41.60.01.A	223
KMD.41.60.02.A	223
KMD.41.60.03.A	223
KMD.41.75.01.A	223
KMD.41.75.02.A	223
KMD.41.75.03.A	223
KMD.41.90.01.A	223
KMD.41.90.02.A	223
KMD.41.90.03.A	223
KMD.42.15.01.B	222
KMD.42.15.02.B	222
KMD.42.15.03.B	222
KMD.42.30.01.B	222
KMD.42.30.02.B	222
KMD.42.30.03.B	222
KMD.42.45.01.B	222
KMD.42.45.02.B	222
KMD.42.45.03.B	222
KMD.42.60.01.B	222
KMD.42.60.02.B	222
KMD.42.60.03.B	222
KMD.42.75.01.B	222
KMD.42.75.02.B	222
KMD.42.75.03.B	222
KMD.42.90.01.B	222
KMD.42.90.02.B	222
KMD.42.90.03.B	222
KMD.48.15.01.A	225
KMD.48.30.01.A	225
KMD.48.45.01.A	225
KMD.48.60.01.A	225
KMD.48.75.01.A	225
KMD.48.90.01.A	225
KMD.49.15.01.A	225
KMD.49.30.01.A	225
KMD.49.45.01.A	225
KMD.49.60.01.A	225
KMD.49.75.01.A	225
KMD.49.90.01.A	225
KMD.52.15.01.A	226
KMD.52.30.01.A	226
KMD.52.45.01.A	226
KMD.52.60.01.A	226
KMD.52.75.01.A	226
KMD.52.90.01.A	226
KMD.53.15.01.A	226
KMD.53.30.01.A	226
KMD.53.45.01.A	226
KMD.53.60.01.A	226
KMD.53.75.01.A	226
KMD.53.90.01.A	226
KMD.54.15.01.B	243
KMD.54.15.02.B	243
KMD.54.15.03.B	243
KMD.54.15.04.B	243
KMD.54.30.01.B	243
KMD.54.30.02.B	243
KMD.54.30.03.B	243
KMD.54.30.04.B	243
KMD.54.45.01.B	243
KMD.54.45.02.B	243
KMD.54.45.03.B	243
KMD.54.45.04.B	243
KMD.54.60.01.B	243
KMD.54.60.02.B	243
KMD.54.60.03.B	243
KMD.54.60.04.B	243
KMD.54.75.01.B	243
KMD.54.75.02.B	243
KMD.54.75.03.B	243
KMD.54.75.04.B	243
KMD.54.90.01.B	243
KMD.54.90.02.B	243
KMD.54.90.03.B	243
KMD.54.90.04.B	243
KMD.56.15.01.B	244
KMD.56.15.02.B	244
KMD.56.15.03.B	244
KMD.56.15.04.B	244
KMD.56.30.01.B	244
KMD.56.30.02.B	244
KMD.56.30.03.B	244
KMD.56.30.04.B	244
KMD.56.45.01.B	244
KMD.56.45.02.B	244
KMD.56.45.03.B	244
KMD.56.45.04.B	244
KMD.56.60.01.B	244
KMD.56.60.02.B	244
KMD.56.60.03.B	244
KMD.56.60.04.B	244
KMD.56.75.01.B	244
KMD.56.75.02.B	244
KMD.56.75.03.B	244
KMD.56.75.04.B	244
KMD.56.90.01.B	244
KMD.56.90.02.B	244
KMD.56.90.03.B	244
KMD.56.90.04.B	244
KMD.61.15.01.B	204
KMD.61.15.02.B	204
KMD.61.15.03.B	204
KMD.61.15.04.B	204
KMD.61.15.05.B	204
KMD.61.15.06.B	204
KMD.61.15.07.B	204
KMD.61.15.08.B	204
KMD.61.30.01.B	204
KMD.61.30.02.B	204
KMD.61.30.03.B	204
KMD.61.30.04.B	204
KMD.61.30.05.B	204
KMD.61.30.06.B	204
KMD.61.30.07.B	204
KMD.61.30.08.B	204
KMD.61.45.01.B	204
KMD.61.45.02.B	204
KMD.61.45.03.B	204
KMD.61.45.04.B	204
KMD.61.45.05.B	204
KMD.61.45.06.B	204
KMD.61.45.07.B	204
KMD.61.45.08.B	204
KMD.61.60.01.B	204
KMD.61.60.02.B	204
KMD.61.60.03.B	204
KMD.61.60.04.B	204
KMD.61.60.05.B	204
KMD.61.60.06.B	204
KMD.61.60.07.B	204
KMD.61.60.08.B	204
KMD.61.75.01.B	204
KMD.61.75.02.B	204
KMD.61.75.03.B	204
KMD.61.75.04.B	204
KMD.61.75.05.B	204
KMD.61.75.06.B	204
KMD.61.75.07.B	204
KMD.61.75.08.B	204
KMD.61.90.01.B	204
KMD.61.90.02.B	204
KMD.61.90.03.B	204
KMD.61.90.04.B	204
KMD.61.90.05.B	204
KMD.61.90.06.B	204
KMD.61.90.07.B	204
KMD.61.90.08.B	204
KMD.62.15.01.B	213
KMD.62.15.02.B	213
KMD.62.15.03.B	213
KMD.62.15.04.B	213
KMD.62.15.05.B	213
KMD.62.15.06.B	213
KMD.62.15.07.B	213
KMD.62.15.08.B	213
KMD.62.30.01.B	213
KMD.62.30.02.B	213
KMD.62.30.03.B	213
KMD.62.30.04.B	213
KMD.62.30.05.B	213
KMD.62.30.06.B	213
KMD.62.30.07.B	213
KMD.62.30.08.B	213
KMD.62.45.01.B	213
KMD.62.45.02.B	213
KMD.62.45.03.B	213
KMD.62.45.04.B	213
KMD.62.45.05.B	213
KMD.62.45.06.B	213
KMD.62.45.07.B	213
KMD.62.45.08.B	213
KMD.62.60.01.B	213
KMD.62.60.02.B	213
KMD.62.60.03.B	213
KMD.62.60.04.B	213
KMD.62.60.05.B	213
KMD.62.60.06.B	213
KMD.62.60.07.B	213
KMD.62.60.08.B	213
KMD.62.75.01.B	213
KMD.62.75.02.B	213
KMD.62.75.03.B	213
KMD.62.75.04.B	213
KMD.62.75.05.B	213
KMD.62.75.06.B	213
KMD.62.75.07.B	213
KMD.62.75.08.B	213
KMD.62.90.01.B	213
KMD.62.90.02.B	213
KMD.62.90.03.B	213
KMD.62.90.04.B	213
KMD.62.90.05.B	213
KMD.62.90.06.B	213
KMD.62.90.07.B	213
KMD.62.90.08.B	213
KMD.64.15.01.B	250
KMD.64.15.02.B	250
KMD.64.15.03.B	250
KMD.64.15.04.B	250
KMD.64.30.01.B	250
KMD.64.30.02.B	250
KMD.64.30.03.B	250
KMD.64.30.04.B	250
KMD.64.45.01.B	250
KMD.64.45.02.B	250
KMD.64.45.03.B	250
KMD.64.45.04.B	250
KMD.64.60.01.B	250
KMD.64.60.02.B	250
KMD.64.60.03.B	250
KMD.64.60.04.B	250
KMD.64.75.01.B	250
KMD.64.75.02.B	250
KMD.64.75.03.B	250
KMD.64.75.04.B	250
KMD.64.90.01.B	250
KMD.64.90.02.B	250
KMD.64.90.03.B	250
KMD.64.90.04.B	250
KMD.66.15.01.B	251
KMD.66.15.02.B	251
KMD.66.15.03.B	251
KMD.66.15.04.B	251
KMD.66.30.01.B	251
KMD.66.30.02.B	251
KMD.66.30.03.B	251
KMD.66.30.04.B	251
KMD.66.45.01.B	251
KMD.66.45.02.B	251
KMD.66.45.03.B	251
KMD.66.45.04.B	251
KMD.66.60.01.B	251
KMD.66.60.02.B	251
KMD.66.60.03.B	251
KMD.66.60.04.B	251
KMD.66.75.01.B	251
KMD.66.75.02.B	251
KMD.66.75.03.B	251
KMD.66.75.04.B	251
KMD.66.90.01.B	251
KMD.66.90.02.B	251
KMD.66.90.03.B	251
KMD.66.90.04.B	251
KMD.68.15.01.A	227
KMD.68.15.02.A	227
KMD.68.15.03.A	227
KMD.68.15.04.A	227
KMD.68.15.05.A	227
KMD.68.15.06.A	227
KMD.68.15.07.A	227
KMD.68.15.08.A	227
KMD.68.30.01.A	227
KMD.68.30.02.A	227
KMD.68.30.03.A	227
KMD.68.30.04.A	227
KMD.68.30.05.A	227
KMD.68.30.06.A	227
KMD.68.30.07.A	227
KMD.68.30.08.A	227
KMD.68.45.01.A	227
KMD.68.45.02.A	227
KMD.68.45.03.A	227
KMD.68.45.04.A	227
KMD.68.45.05.A	227
KMD.68.45.06.A	227
KMD.68.45.07.A	227
KMD.68.45.08.A	227
KMD.68.60.01.A	227
KMD.68.60.02.A	227
KMD.68.60.03.A	227
KMD.68.60.04.A	227
KMD.68.60.05.A	227
KMD.68.60.06.A	227
KMD.68.60.07.A	227
KMD.68.60.08.A	227
KMD.68.75.01.A	227
KMD.68.75.02.A	227
KMD.68.75.03.A	227
KMD.68.75.04.A	227
KMD.68.75.05.A	227
KMD.68.75.06.A	227
KMD.68.75.07.A	227
KMD.68.75.08.A	227
KMD.68.90.01.A	227
KMD.68.90.02.A	227
KMD.68.90.03.A	227
KMD.68.90.04.A	227
KMD.68.90.05.A	227
KMD.68.90.06.A	227
KMD.68.90.07.A	227
KMD.68.90.08.A	227
KMD.71.15.01.AC	228
KMD.71.15.02.AC	228
KMD.71.15.03.AC	228
KMD.71.30.01.AC	228
KMD.71.30.02.AC	228
KMD.71.30.03.AC	228
KMD.71.45.01.AC	228
KMD.71.45.02.AC	228
KMD.71.45.03.AC	228
KMD.71.60.01.AC	228
KMD.71.60.02.AC	228
KMD.71.60.03.AC	228
KMD.71.75.01.AC	228
KMD.71.75.02.AC	228
KMD.71.75.03.AC	228
KMD.71.90.01.AC	228
KMD.71.90.02.AC	228
KMD.71.90.03.AC	228
KMD.78.15.01.AC	229
KMD.78.30.01.AC	229
KMD.78.45.01.AC	229
KMD.78.60.01.AC	229
KMD.78.75.01.AC	229
KMD.78.90.01.AC	229
KMD.79.15.01.AC	229
KMD.79.30.01.AC	229
KMD.79.45.01.AC	229
KMD.79.60.01.AC	229
KMD.79.75.01.AC	229
KMD.79.90.01.AC	229
KMD.82.15.01.AC	230
KMD.82.30.01.AC	230
KMD.82.45.01.AC	230
KMD.82.60.01.AC	230
KMD.82.75.01.AC	230
KMD.82.90.01.AC	230
KMD.83.15.01.AC	230
KMD.83.30.01.AC	230
KMD.83.45.01.AC	230
KMD.83.60.01.AC	230
KMD.83.75.01.AC	230
KMD.83.90.01.AC	230
KMD.84.15.01.A	245
KMD.84.15.02.A	245
KMD.84.15.03.A	245
KMD.84.15.04.A	245
KMD.84.15.05.A	245
KMD.84.15.06.A	245
KMD.84.15.07.A	245
KMD.84.15.08.A	245
KMD.84.30.01.A	245
KMD.84.30.02.A	245
KMD.84.30.03.A	245
KMD.84.30.04.A	245
KMD.84.30.05.A	245
KMD.84.30.06.A	245
KMD.84.30.07.A	245
KMD.84.30.08.A	245
KMD.84.45.01.A	245
KMD.84.45.02.A	245
KMD.84.45.03.A	245
KMD.84.45.04.A	245
KMD.84.45.05.A	245
KMD.84.45.06.A	245
KMD.84.45.07.A	245
KMD.84.45.08.A	245
KMD.84.60.01.A	245
KMD.84.60.02.A	245
KMD.84.60.03.A	245
KMD.84.60.04.A	245
KMD.84.60.05.A	245
KMD.84.60.06.A	245
KMD.84.60.07.A	245
KMD.84.60.08.A	245
KMD.84.75.01.A	245
KMD.84.75.02.A	245
KMD.84.75.03.A	245
KMD.84.75.04.A	245
KMD.84.75.05.A	245
KMD.84.75.06.A	245
KMD.84.75.07.A	245
KMD.84.75.08.A	245
KMD.84.90.01.A	245
KMD.84.90.02.A	245
KMD.84.90.03.A	245
KMD.84.90.04.A	245
KMD.84.90.05.A	245
KMD.84.90.06.A	245
KMD.84.90.07.A	245
KMD.84.90.08.A	245
KMD.85.15.01.B	246
KMD.85.15.02.B	246
KMD.85.15.03.B	246
KMD.85.15.04.B	246
KMD.85.15.05.B	246
KMD.85.15.06.B	246
KMD.85.15.07.B	246
KMD.85.15.08.B	246
KMD.85.30.01.B	246
KMD.85.30.02.B	246
KMD.85.30.03.B	246
KMD.85.30.04.B	246
KMD.85.30.05.B	246
KMD.85.30.06.B	246
KMD.85.30.07.B	246
KMD.85.30.08.B	246
KMD.85.45.01.B	246
KMD.85.45.02.B	246
KMD.85.45.03.B	246
KMD.85.45.04.B	246
KMD.85.45.05.B	246
KMD.85.45.06.B	246
KMD.85.45.07.B	246
KMD.85.45.08.B	246
KMD.85.60.01.B	246
KMD.85.60.02.B	246
KMD.85.60.03.B	246
KMD.85.60.04.B	246

INDEX

Code	Page
KMD.85.60.05.B	246
KMD.85.60.06.B	246
KMD.85.60.07.B	246
KMD.85.60.08.B	246
KMD.85.75.01.B	246
KMD.85.75.02.B	246
KMD.85.75.03.B	246
KMD.85.75.04.B	246
KMD.85.75.05.B	246
KMD.85.75.06.B	246
KMD.85.75.07.B	246
KMD.85.75.08.B	246
KMD.85.90.01.B	246
KMD.85.90.02.B	246
KMD.85.90.03.B	246
KMD.85.90.04.B	246
KMD.85.90.05.B	246
KMD.85.90.06.B	246
KMD.85.90.07.B	246
KMD.85.90.08.B	246
KMD.86.15.01.B	247
KMD.86.15.02.B	247
KMD.86.15.03.B	247
KMD.86.15.04.B	247
KMD.86.15.05.B	247
KMD.86.15.06.B	247
KMD.86.15.07.B	247
KMD.86.15.08.B	247
KMD.86.30.01.B	247
KMD.86.30.02.B	247
KMD.86.30.03.B	247
KMD.86.30.04.B	247
KMD.86.30.05.B	247
KMD.86.30.06.B	247
KMD.86.30.07.B	247
KMD.86.30.08.B	247
KMD.86.45.01.B	247
KMD.86.45.02.B	247
KMD.86.45.03.B	247
KMD.86.45.04.B	247
KMD.86.45.05.B	247
KMD.86.45.06.B	247
KMD.86.45.07.B	247
KMD.86.45.08.B	247
KMD.86.60.01.B	247
KMD.86.60.02.B	247
KMD.86.60.03.B	247
KMD.86.60.04.B	247
KMD.86.60.05.B	247
KMD.86.60.06.B	247
KMD.86.60.07.B	247
KMD.86.60.08.B	247
KMD.86.75.01.B	247
KMD.86.75.02.B	247
KMD.86.75.03.B	247
KMD.86.75.04.B	247
KMD.86.75.05.B	247
KMD.86.75.06.B	247
KMD.86.75.07.B	247
KMD.86.75.08.B	247
KMD.86.90.01.B	247
KMD.86.90.02.B	247
KMD.86.90.03.B	247
KMD.86.90.04.B	247
KMD.86.90.05.B	247
KMD.86.90.06.B	247
KMD.86.90.07.B	247
KMD.86.90.08.B	247
KMD.87.15.01.B	248
KMD.87.15.02.B	248
KMD.87.15.03.B	248
KMD.87.15.04.B	248
KMD.87.15.05.B	248
KMD.87.15.06.B	248
KMD.87.15.07.B	248
KMD.87.15.08.B	248
KMD.87.30.01.B	248
KMD.87.30.02.B	248
KMD.87.30.03.B	248
KMD.87.30.04.B	248
KMD.87.30.05.B	248
KMD.87.30.06.B	248
KMD.87.30.07.B	248
KMD.87.30.08.B	248
KMD.87.45.01.B	248
KMD.87.45.02.B	248
KMD.87.45.03.B	248
KMD.87.45.04.B	248
KMD.87.45.05.B	248
KMD.87.45.06.B	248
KMD.87.45.07.B	248
KMD.87.45.08.B	248
KMD.87.60.01.B	248
KMD.87.60.02.B	248
KMD.87.60.03.B	248
KMD.87.60.04.B	248
KMD.87.60.05.B	248
KMD.87.60.06.B	248
KMD.87.60.07.B	248
KMD.87.60.08.B	248
KMD.87.75.01.B	248
KMD.87.75.02.B	248
KMD.87.75.03.B	248
KMD.87.75.04.B	248
KMD.87.75.05.B	248
KMD.87.75.06.B	248
KMD.87.75.07.B	248
KMD.87.75.08.B	248
KMD.87.90.01.B	248
KMD.87.90.02.B	248
KMD.87.90.03.B	248
KMD.87.90.04.B	248
KMD.87.90.05.B	248
KMD.87.90.06.B	248
KMD.87.90.07.B	248
KMD.87.90.08.B	248
KMD.90.15.01.A	238
KMD.90.15.02.A	238
KMD.90.15.03.A	238
KMD.90.15.04.A	238
KMD.90.15.05.A	238
KMD.90.15.06.A	238
KMD.90.15.07.A	238
KMD.90.15.08.A	238
KMD.90.30.01.A	238
KMD.90.30.02.A	238
KMD.90.30.03.A	238
KMD.90.30.04.A	238
KMD.90.30.05.A	238
KMD.90.30.06.A	238
KMD.90.30.07.A	238
KMD.90.30.08.A	238
KMD.90.45.01.A	238
KMD.90.45.02.A	238
KMD.90.45.03.A	238
KMD.90.45.04.A	238
KMD.90.45.05.A	238
KMD.90.45.06.A	238
KMD.90.45.07.A	238
KMD.90.45.08.A	238
KMD.90.60.01.A	238
KMD.90.60.02.A	238
KMD.90.60.03.A	238
KMD.90.60.04.A	238
KMD.90.60.05.A	238
KMD.90.60.06.A	238
KMD.90.60.07.A	238
KMD.90.60.08.A	238
KMD.90.75.01.A	238
KMD.90.75.02.A	238
KMD.90.75.03.A	238
KMD.90.75.04.A	238
KMD.90.75.05.A	238
KMD.90.75.06.A	238
KMD.90.75.07.A	238
KMD.90.75.08.A	238
KMD.90.90.01.A	238
KMD.90.90.02.A	238
KMD.90.90.03.A	238
KMD.90.90.04.A	238
KMD.90.90.05.A	238
KMD.90.90.06.A	238
KMD.90.90.07.A	238
KMD.90.90.08.A	238
KMD.91.15.01.B	239
KMD.91.15.02.B	239
KMD.91.15.03.B	239
KMD.91.15.04.B	239
KMD.91.15.05.B	239
KMD.91.15.06.B	239
KMD.91.15.07.B	239
KMD.91.15.08.B	239
KMD.91.30.01.B	239
KMD.91.30.02.B	239
KMD.91.30.03.B	239
KMD.91.30.04.B	239
KMD.91.30.05.B	239
KMD.91.30.06.B	239
KMD.91.30.07.B	239
KMD.91.30.08.B	239
KMD.91.45.01.B	239
KMD.91.45.02.B	239
KMD.91.45.03.B	239
KMD.91.45.04.B	239
KMD.91.45.05.B	239
KMD.91.45.06.B	239
KMD.91.45.07.B	239
KMD.91.45.08.B	239
KMD.91.60.01.B	239
KMD.91.60.02.B	239
KMD.91.60.03.B	239
KMD.91.60.04.B	239
KMD.91.60.05.B	239
KMD.91.60.06.B	239
KMD.91.60.07.B	239
KMD.91.60.08.B	239
KMD.91.75.01.B	239
KMD.91.75.02.B	239
KMD.91.75.03.B	239
KMD.91.75.04.B	239
KMD.91.75.05.B	239
KMD.91.75.06.B	239
KMD.91.75.07.B	239
KMD.91.75.08.B	239
KMD.91.90.01.B	239
KMD.91.90.02.B	239
KMD.91.90.03.B	239
KMD.91.90.04.B	239
KMD.91.90.05.B	239
KMD.91.90.06.B	239
KMD.91.90.07.B	239
KMD.91.90.08.B	239
KMD.92.15.01.B	240
KMD.92.15.02.B	240
KMD.92.15.03.B	240
KMD.92.15.04.B	240
KMD.92.15.05.B	240
KMD.92.15.06.B	240
KMD.92.15.07.B	240
KMD.92.15.08.B	240
KMD.92.30.01.B	240
KMD.92.30.02.B	240
KMD.92.30.03.B	240
KMD.92.30.04.B	240
KMD.92.30.05.B	240
KMD.92.30.06.B	240
KMD.92.30.07.B	240
KMD.92.30.08.B	240
KMD.92.45.01.B	240
KMD.92.45.02.B	240
KMD.92.45.03.B	240
KMD.92.45.04.B	240
KMD.92.45.05.B	240
KMD.92.45.06.B	240
KMD.92.45.07.B	240
KMD.92.45.08.B	240
KMD.92.60.01.B	240
KMD.92.60.02.B	240
KMD.92.60.03.B	240
KMD.92.60.04.B	240
KMD.92.60.05.B	240
KMD.92.60.06.B	240
KMD.92.60.07.B	240
KMD.92.60.08.B	240
KMD.92.75.01.B	240
KMD.92.75.02.B	240
KMD.92.75.03.B	240
KMD.92.75.04.B	240
KMD.92.75.05.B	240
KMD.92.75.06.B	240
KMD.92.75.07.B	240
KMD.92.75.08.B	240
KMD.92.90.01.B	240
KMD.92.90.02.B	240
KMD.92.90.03.B	240
KMD.92.90.04.B	240
KMD.92.90.05.B	240
KMD.92.90.06.B	240
KMD.92.90.07.B	240
KMD.92.90.08.B	240
KMD.93.15.01.B	241
KMD.93.15.02.B	241
KMD.93.15.03.B	241
KMD.93.15.04.B	241
KMD.93.15.05.B	241
KMD.93.15.06.B	241
KMD.93.15.07.B	241
KMD.93.15.08.B	241
KMD.93.30.01.B	241
KMD.93.30.02.B	241
KMD.93.30.03.B	241
KMD.93.30.04.B	241
KMD.93.30.05.B	241
KMD.93.30.06.B	241
KMD.93.30.07.B	241
KMD.93.30.08.B	241
KMD.93.45.01.B	241
KMD.93.45.02.B	241
KMD.93.45.03.B	241
KMD.93.45.04.B	241
KMD.93.45.05.B	241
KMD.93.45.06.B	241
KMD.93.45.07.B	241
KMD.93.45.08.B	241
KMD.93.60.01.B	241
KMD.93.60.02.B	241
KMD.93.60.03.B	241
KMD.93.60.04.B	241
KMD.93.60.05.B	241
KMD.93.60.06.B	241
KMD.93.60.07.B	241
KMD.93.60.08.B	241
KMD.93.75.01.B	241
KMD.93.75.02.B	241
KMD.93.75.03.B	241
KMD.93.75.04.B	241
KMD.93.75.05.B	241
KMD.93.75.06.B	241
KMD.93.75.07.B	241
KMD.93.75.08.B	241
KMD.93.90.01.B	241
KMD.93.90.02.B	241
KMD.93.90.03.B	241
KMD.93.90.04.B	241
KMD.93.90.05.B	241
KMD.93.90.06.B	241
KMD.93.90.07.B	241
KMD.93.90.08.B	241
KMD.96.15.01.A	242
KMD.96.15.02.A	242
KMD.96.15.03.A	242
KMD.96.15.04.A	242
KMD.96.15.05.A	242
KMD.96.15.06.A	242
KMD.96.15.07.A	242
KMD.96.15.08.A	242
KMD.96.30.01.A	242
KMD.96.30.02.A	242
KMD.96.30.03.A	242
KMD.96.30.04.A	242
KMD.96.30.05.A	242
KMD.96.30.06.A	242
KMD.96.30.07.A	242
KMD.96.30.08.A	242
KMD.96.45.01.A	242
KMD.96.45.02.A	242
KMD.96.45.03.A	242
KMD.96.45.04.A	242
KMD.96.45.05.A	242
KMD.96.45.06.A	242
KMD.96.45.07.A	242
KMD.96.45.08.A	242
KMD.96.60.01.A	242
KMD.96.60.02.A	242
KMD.96.60.03.A	242
KMD.96.60.04.A	242
KMD.96.60.05.A	242
KMD.96.60.06.A	242
KMD.96.60.07.A	242
KMD.96.60.08.A	242
KMD.96.75.01.A	242
KMD.96.75.02.A	242
KMD.96.75.03.A	242
KMD.96.75.04.A	242
KMD.96.75.05.A	242
KMD.96.75.06.A	242
KMD.96.75.07.A	242
KMD.96.75.08.A	242
KMD.96.90.01.A	242
KMD.96.90.02.A	242
KMD.96.90.03.A	242
KMD.96.90.04.A	242
KMD.96.90.05.A	242
KMD.96.90.06.A	242
KMD.96.90.07.A	242
KMD.96.90.08.A	242
KMD.97.15.01.A	249
KMD.97.15.02.A	249
KMD.97.15.03.A	249
KMD.97.15.04.A	249
KMD.97.15.05.A	249
KMD.97.15.06.A	249
KMD.97.15.07.A	249
KMD.97.15.08.A	249
KMD.97.30.01.A	249
KMD.97.30.02.A	249
KMD.97.30.03.A	249
KMD.97.30.04.A	249
KMD.97.30.05.A	249
KMD.97.30.06.A	249
KMD.97.30.07.A	249
KMD.97.30.08.A	249
KMD.97.45.01.A	249
KMD.97.45.02.A	249
KMD.97.45.03.A	249
KMD.97.45.04.A	249
KMD.97.45.05.A	249
KMD.97.45.06.A	249
KMD.97.45.07.A	249
KMD.97.45.08.A	249
KMD.97.60.01.A	249
KMD.97.60.02.A	249
KMD.97.60.03.A	249
KMD.97.60.04.A	249
KMD.97.60.05.A	249
KMD.97.60.06.A	249
KMD.97.60.07.A	249
KMD.97.60.08.A	249
KMD.97.75.01.A	249
KMD.97.75.02.A	249
KMD.97.75.03.A	249
KMD.97.75.04.A	249
KMD.97.75.05.A	249
KMD.97.75.06.A	249
KMD.97.75.07.A	249
KMD.97.75.08.A	249
KMD.97.90.01.A	249
KMD.97.90.02.A	249
KMD.97.90.03.A	249
KMD.97.90.04.A	249
KMD.97.90.05.A	249
KMD.97.90.06.A	249
KMD.97.90.07.A	249
KMD.97.90.08.A	249

 © System Plast S.r.l., 2012 - All Rights Reserved

Catalogues available on request

System Plast

Our complete range of components will cover all your productive needs

Conveyor Chains / Belts




Conveyor Components



Bearing Supports



Leveling Pads



Engineering Manual



Interactive CD ROM



System Plast worldwide!

Local Commitment, Global Presence

System Plast can reach you everywhere with fast shipments of standard or customized products.
Find our agent or representative closest to you.



Emerson Industrial Automation
System Plast S.r.l.

Via Guareschi, 2
24060 Telgate (Bergamo) - ITALY

Customer Service	**+39 035 83 51 301**
Fax	**+39 035 83 51 406**
E-mail	**info@systemplast.com**

Full details regarding your nearest Sales contact and all information about other high quality System Plast products is available at ***www.systemplast.com***

System Plast - USA
Tel. 866 765 8744 - Fax 866 447 6587
CustomerService.PTSolutions@Emerson.com

System Plast - GERMANY
Tel. (03529) 56 15 0 - Fax (03529) 51 13 67
info@fspchains.com

System Plast - GERMANY
Sales Office - Tel. (06204) 9673 0 - Fax (06204) 9673 29
info-de@systemplast.com

System Plast - FRANCE
Tel. (01) 64 66 05 48 - Fax (01) 64 66 05 82
info-fr@systemplast.com

System Plast International - THE NETHERLANDS
Tel. (0186) 63 61 21 - Fax (0186) 63 61 25
info-nl@systemplast.com

System Plast - UK
Tel. (01926) 614 314 - Fax (01926) 614 914
info-uk@systemplast.com

System Plast - MEXICO
Tel. (033) 3284 5629
servicioaclientes@emerson.com

System Plast - BRAZIL
Tel. (011) 3618 6699 - Fax (011) 3618 6633
info-br@systemplast.com

System Plast - SINGAPORE
Tel. (65) 6891 7600 - Fax (65) 6873 7882
systemplast.sg@emerson.com

System Plast - CHINA
Tel. (86) 596 2109921 - Fax (86) 596 2136004
sales.zz@emerson.com

MCC12005E • Form 22503E

APPLICATION CONSIDERATIONS
The proper selection and application of power transmission products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, lubrication requirements, loading supports, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Emerson Power Transmission Corporation and its divisions with respect to the use of products and components is given in good faith and without charge, and Emerson assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, Disclaimers of Warranty, Limitation of Liability and Remedy, please contact Emerson Power Transmission Customer Service at 1-800-626-2120. These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use an Emerson Power Transmission Corporation product referred to herein, including any person who buys from a licensed distributor of these branded products.

Emerson Power Transmission does not warrant the accuracy of the information contained in this document. All interchanges should be compared with actual current specifications and/or manufacturing drawings. For a copy of our standard terms and conditions, contact Emerson Power Transmission at 1-800-626-2120.

Emerson, Emerson. Consider It Solved., Emerson Industrial Automation and System Plast are trademarks of Emerson Electric Co. or one of its affiliated companies.
© 2012 Emerson Power Transmission Corp., All Rights Reserved.
MCC12005E • Form 22503E • Printed in Italy

EMERSON
Industrial Automation